





5200 W. CENTURY BLVD.
LOS ANGELES, CA 90045

GLAZED FIBERGLASS DOORS
SINGLES
w/ or w/o SIDELITES
INSWING / OUTSWING
"NON-IMPACT"

GENERAL NOTES

- This product has been evaluated and is in compliance with the 8th Edition (2023) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
- Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
- When used in areas requiring wind borne debris protection, this product is required to be protected with an impact resistant covering that complies with FBC Sections 1609.1.2 & R301.2.1.2.
- For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
- Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.


TABLE OF CONTENTS	
SHEET#	DESCRIPTION
1	Typical elevations, design pressures & general notes
2	Door & Sidelite panel details
3	Lite frame glazing details
4	Elevations
5	Horizontal cross sections
6	Horizontal & Vertical Cross Sections (2X Buck)
7	Horizontal & Vertical Cross Sections (1X Buck)
8	Horizontal & Vertical Cross Sections (Direct to Masonry)
9	Vertical Cross Sections (Thresholds)
10	Horizontal & Vertical Cross Sections (Direct to Masonry)
11	Buck anchoring
12	Frame anchoring & hardware details
13	Bill of materials and components

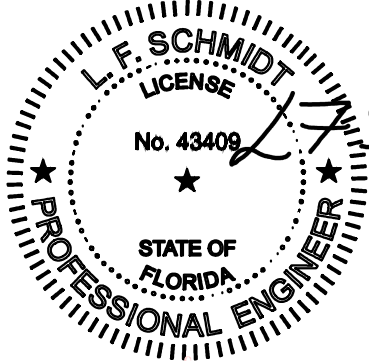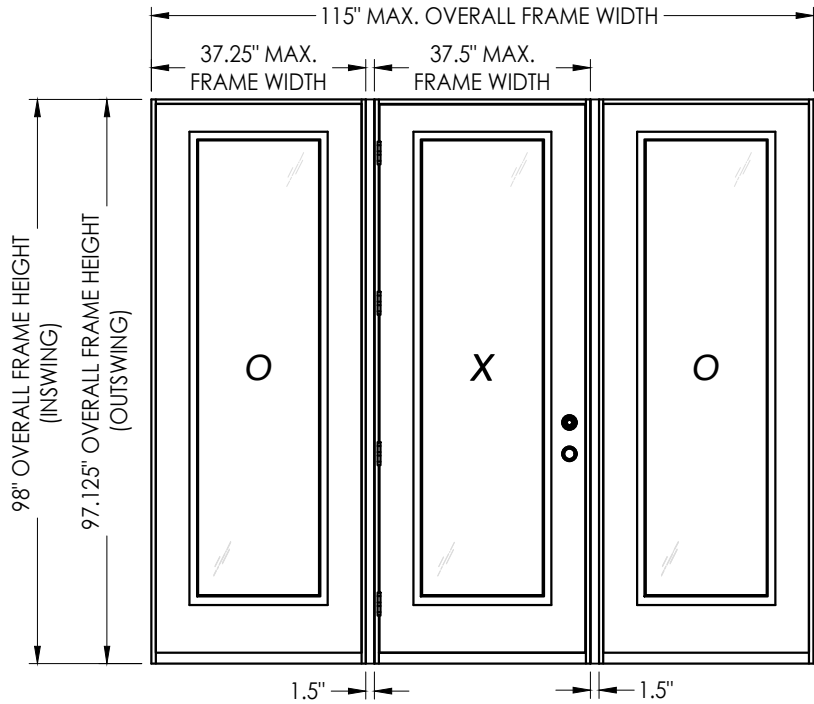

Digitally signed by Lyndon F Schmidt
Date: 2023.08.16 11:36:13 -04'00'

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

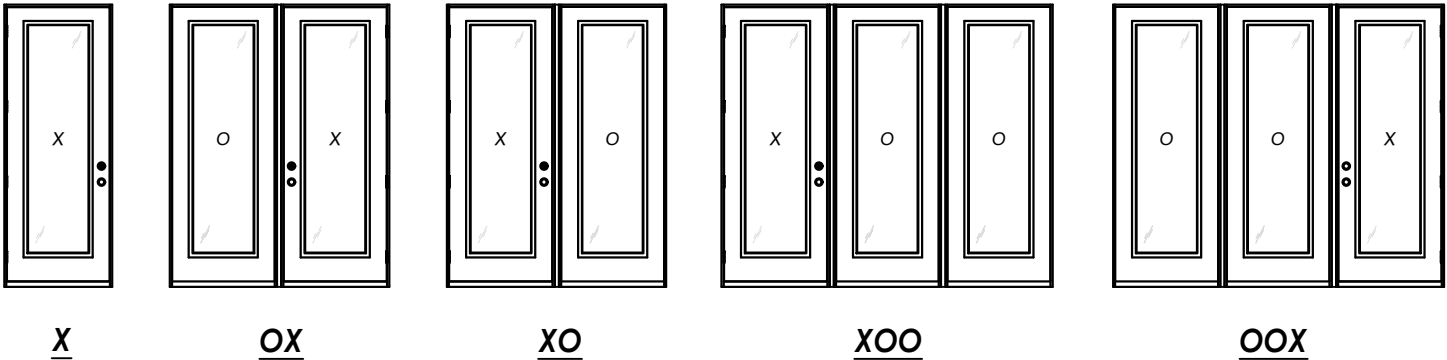

CONFIGURATION	MAX. FRAME DIMENSION	JAMB REINFORCEMENT	LATCH STILE STEEL REINFORCEMENT REQUIRED	DESIGN PRESSURE (PSF) INSWING		DESIGN PRESSURE (PSF) OUTSWING	
				POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
X	37.5" x 98.0"	N/A	YES	+47.0	-47.0	+47.0	-47.0
OX/XO	74.75" x 98.0"	N/A		+40.0	-45.0	+40.0	-40.0
	76.25" x 98.0"	2X		+45.0	-50.0	+45.0	-45.0
OXO, OOX, XOO	112.0" x 98.0"	N/A		+40.0	-45.0	+40.0	-40.0
	115.0" x 98.0"	2X		+45.0	-50.0	+45.0	-45.0
X	37.5" x 98.0"	N/A	NO	+35.0	-40.0	+30.0	-30.0
OX/XO	74.75" x 98.0"	N/A		+35.0	-40.0	+30.0	-30.0
	76.25" x 98.0"	2X		+35.0	-40.0	+30.0	-30.0
OXO, OOX, XOO	112.0" x 98.0"	N/A		+35.0	-40.0	+30.0	-30.0
	115.0" x 98.0"	2X		+35.0	-40.0	+30.0	-30.0

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PLASTPRO INC
FIBERGLASS DOOR


Part or Assembly:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

6	8/10/23	UPDATE TO 8TH ED. (2023) FBC	LFS
5	8/16/22	REVISE DOOR/SIDELITE PANEL	LFS
4	11/16/20	ADD XOO, OOX CONFIGURATIONS	LFS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC	DAC
NO.	DATE		BY

DATE: 10/08/14
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-17347.3
SHEET 1 OF 13

© 2014 R.W. BUILDING CONSULTANTS INC.

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

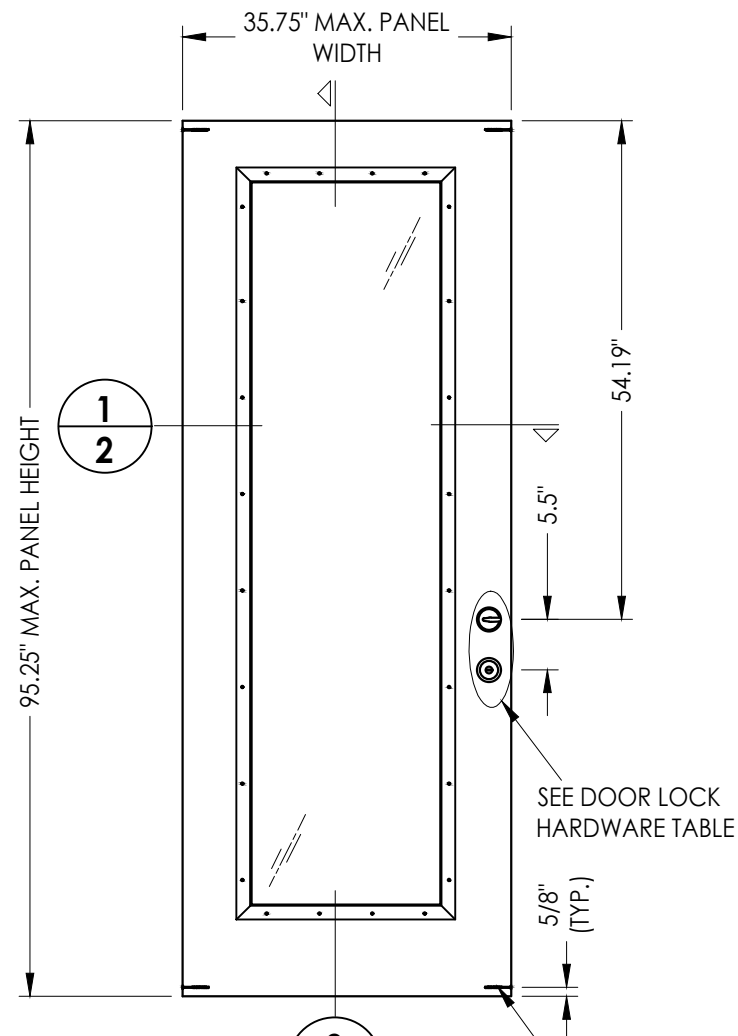


DOOR LOCK HARDWARE TABLE		
MANUFACTURER	MODEL	
KWIKSET	KNOB:	SERIES (400)
	DEADBOLT:	SERIES (660)
YALE	KNOB:	CIRRUS 100 C
	DEADBOLT:	820 SINGLE CYLINDER

#8 X 3" FH WS @ EACH CORNER THROUGH PVC CAP INTO RAIL
(4 TOTAL - REQUIRED FOR DOOR PANEL w/out
LATCH STILE STEEL REINFORCEMENT ONLY)

40 PLASTPRO DOOR PANEL

50 PLASTPRO SIDELITE PANEL

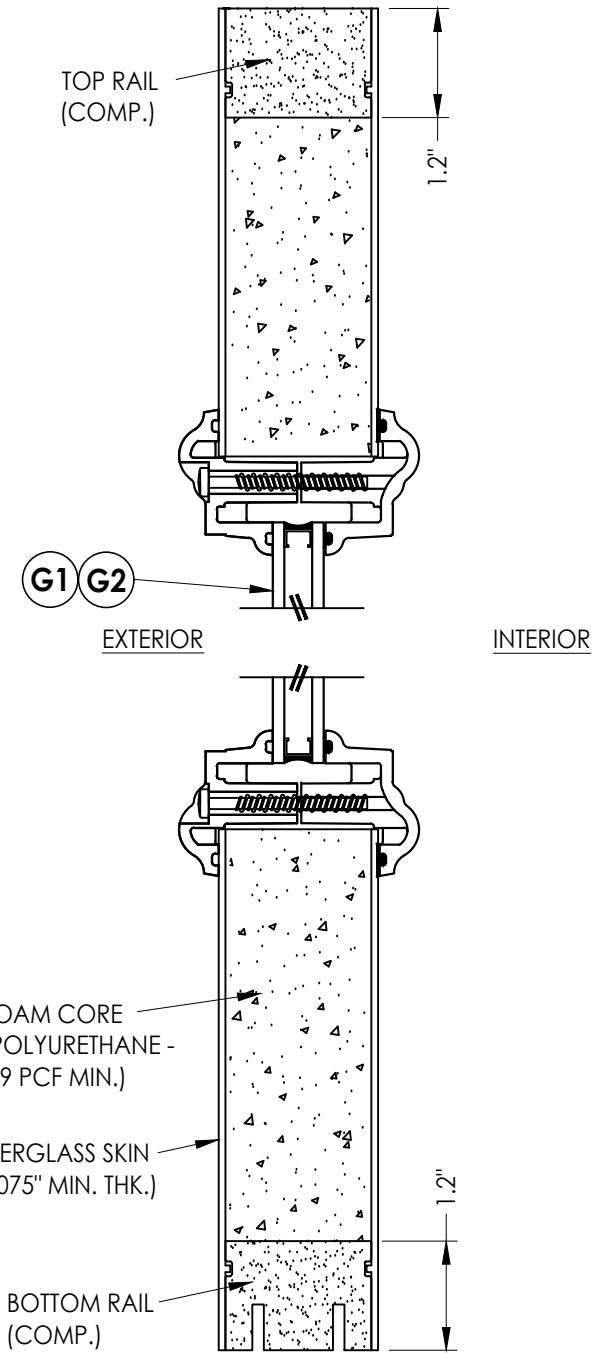

2 VERTICAL CROSS SECTION

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC
FIBERGLASS DOOR

PART OR ASSEMBLY:

**DOOR & SIDELITE
PANEL DETAILS**

6	8/10/23	UPDATE TO 8TH ED. (2023)	FBC	LFS	
5	8/16/22	REVISE DOOR/SIDELITE PANEL		LFS	
4	11/16/20	ADD XOO, OOX CONFIGURATIONS		LFS	
3	8/05/20	UPDATE TO 7TH ED. (2020)	FBC	DAC	
NO.	DATE			BY	
				REVISIONS	

DATE: 10/08/14


SCALE: *N.T.S.*

DWG. BY: JK


CHK. BY: LFS

DRAWING NO.:
FL-17347.3


SHEET 2 OF 13

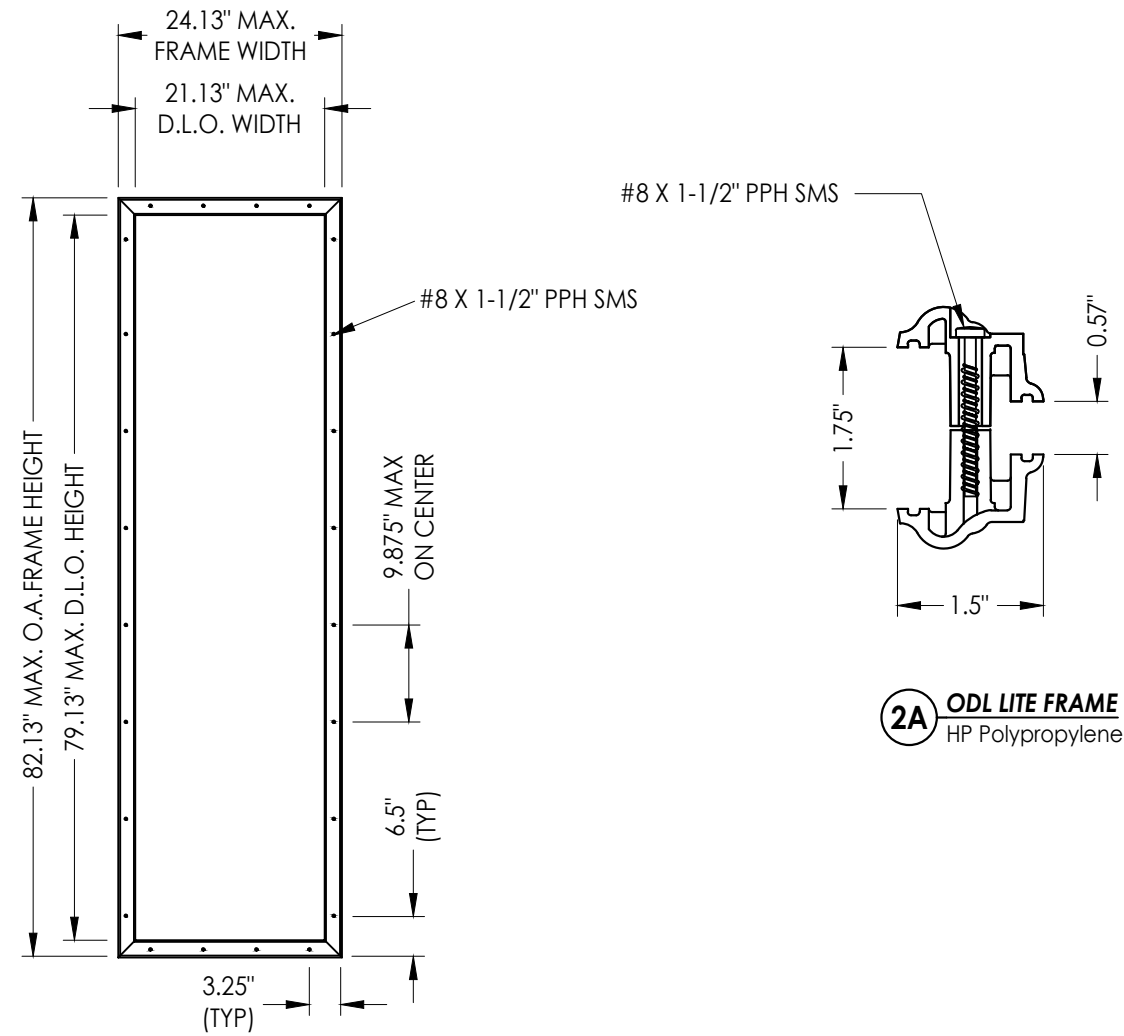


ODL LITE FRAME

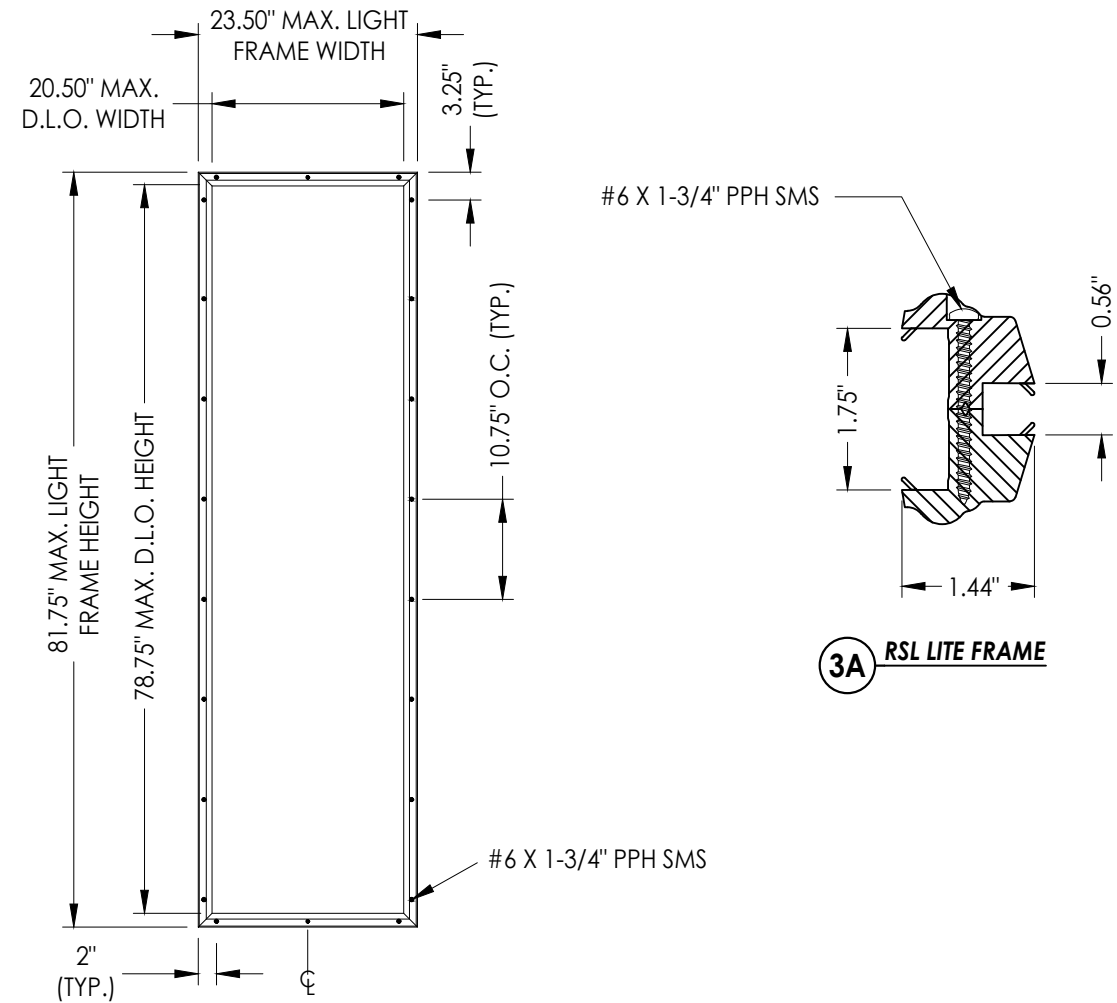

RSL LITE FRAME

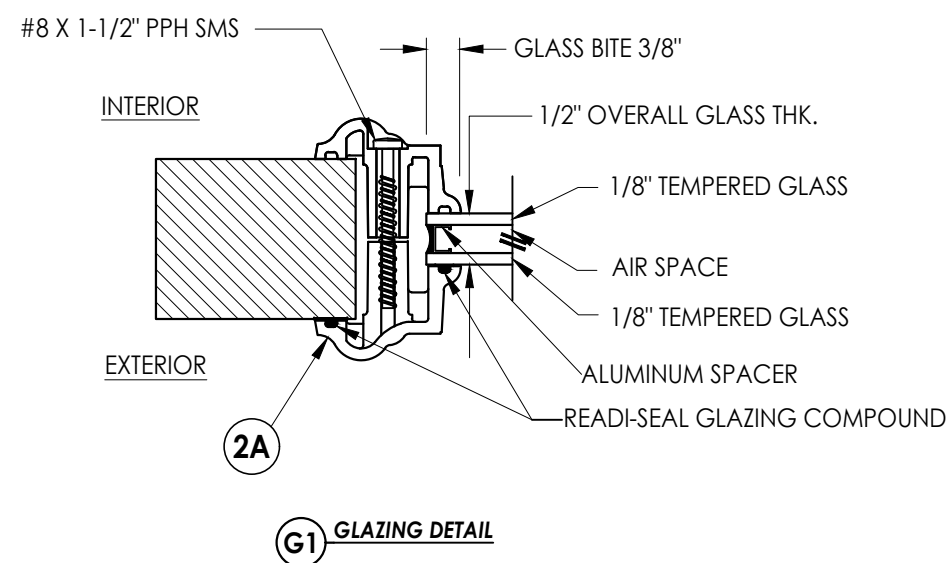

G1 GLAZING DETAIL

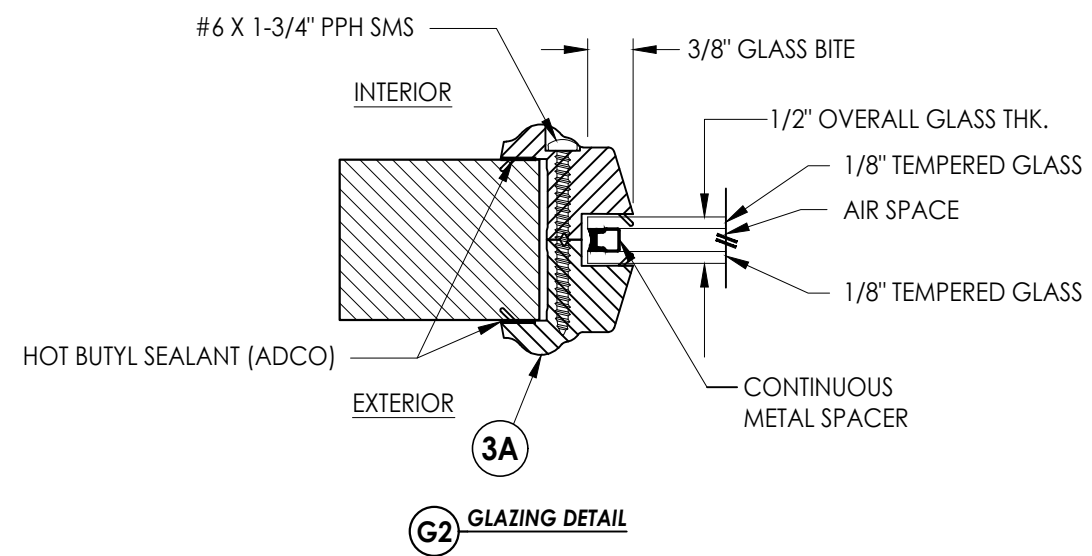





G2 GLAZING DETAIL

6	8/10/23	UPDATE TO 8TH ED. (2023)	FBC	LFS	
5	8/16/22	REVISE DOOR/SIDELITE PANEL		LFS	
4	11/16/20	ADD X00, OOX CONFIGURATIONS		LFS	
3	8/05/20	UPDATE TO 7TH ED. (2020)	FBC	DAC	
NO.	DATE				BY
					REVISIONS
DATE: 10/08/14					
SCALE: N.T.S.					
DWG. BY: JK					
CHK. BY: LFS					
DRAWING NO.: FL-17347.3					
SHEET 3 OF 13					

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Plastpro\FL-17347 R6\FL-17347.3.dwg

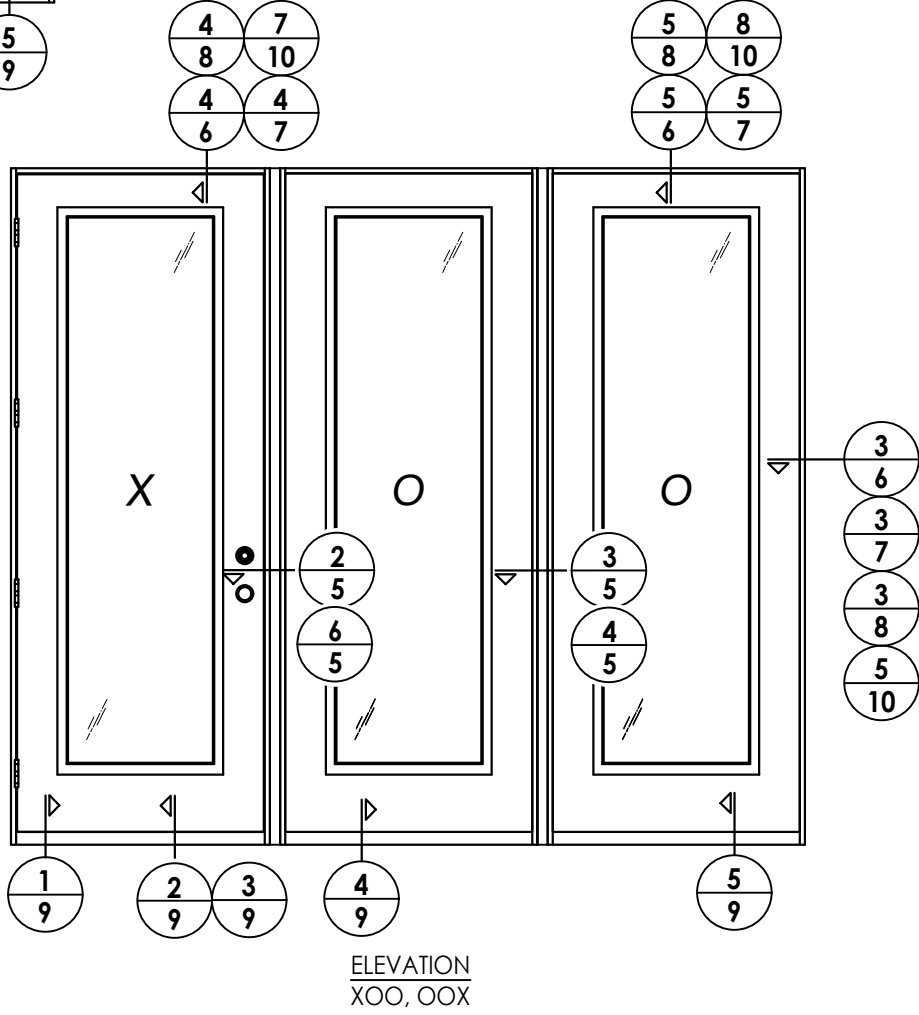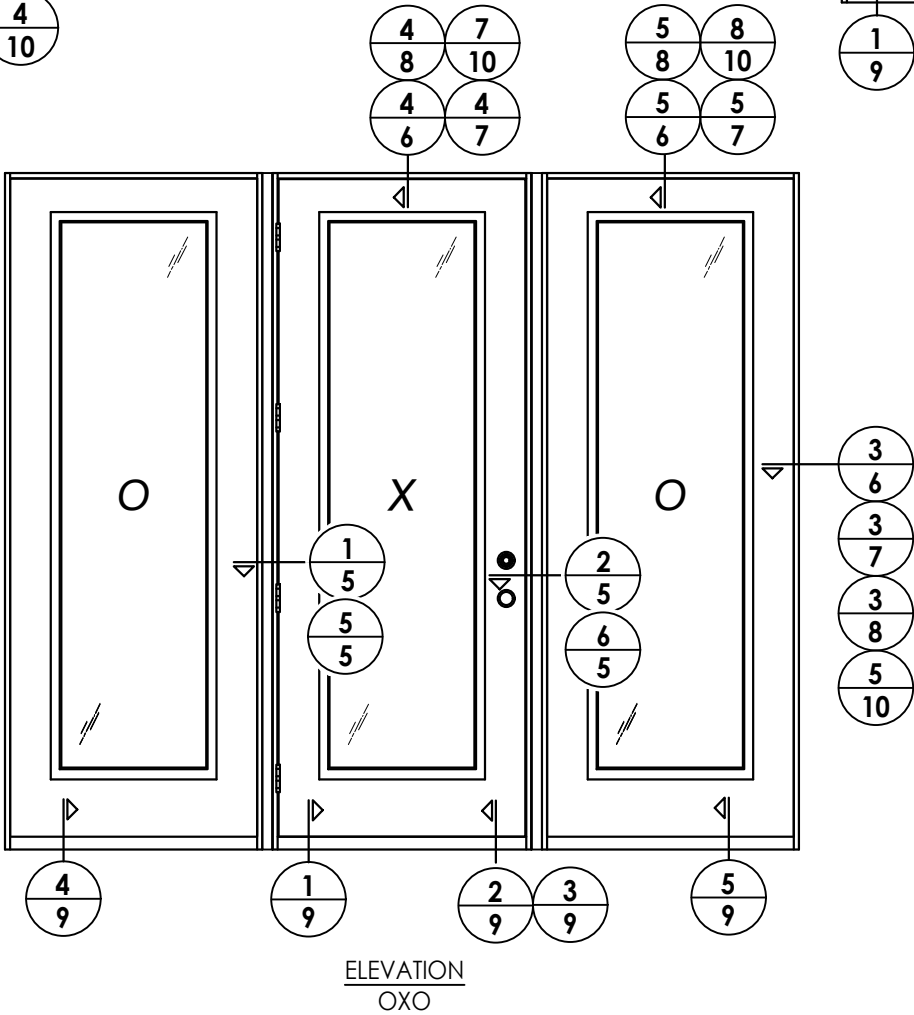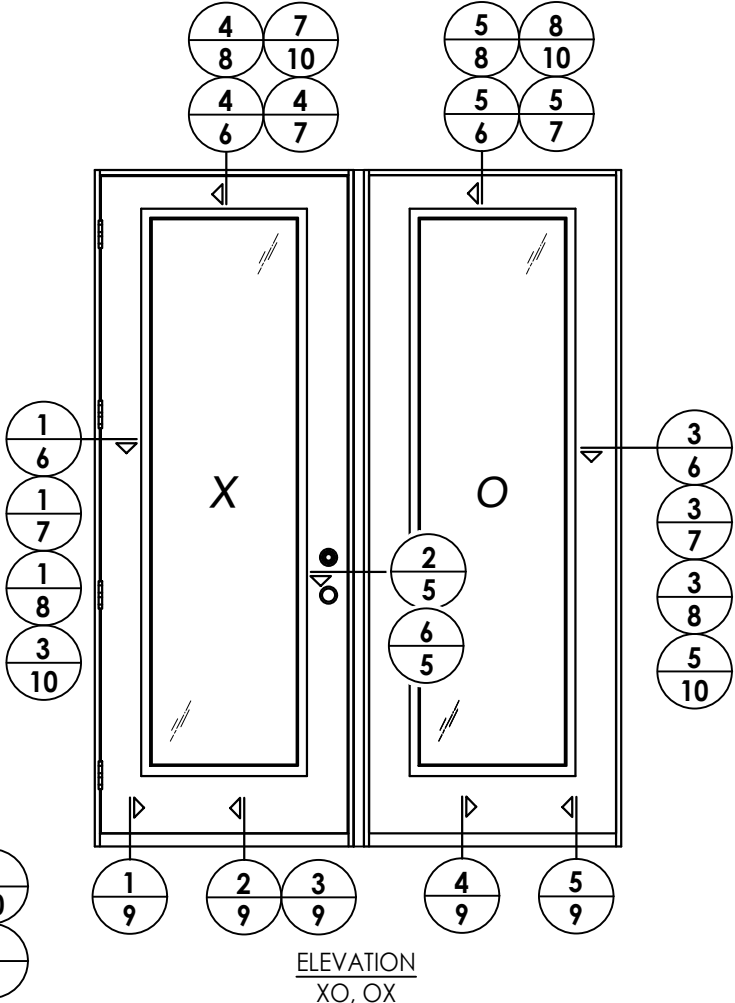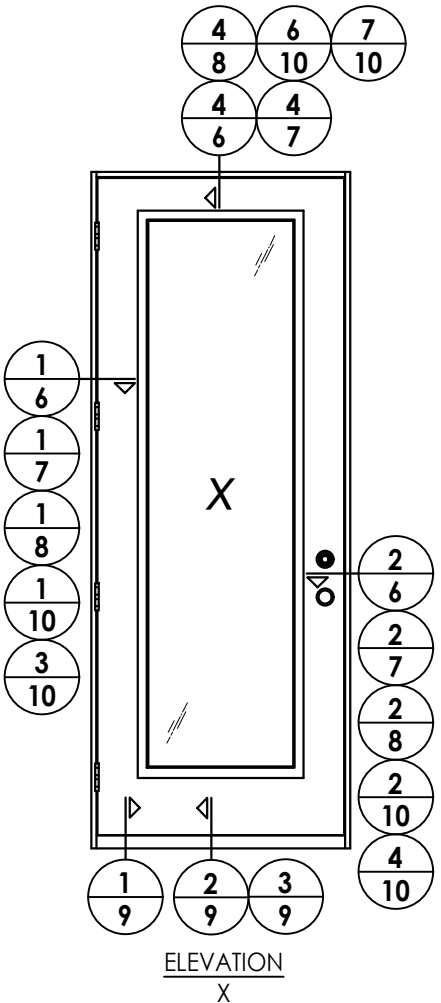


REVISIONS		NO.	DATE	BY	DAC	LFS	FBC	(2020)	CONFIGURATIONS	LFS	(2023)	FBC	UPDATE TO 8TH ED.
		3	8/05/20						UPDATE TO 7TH ED.				
		4	11/16/20						ADD XOO, OOX				
		5	8/16/22						REVISE DOOR/SIDELITE PANEL				
		6	8/10/23						UPDATE TO 8TH ED.				

PRODUCT: PLASTPRO INC FIBERGLASS DOOR	
PART OR ASSEMBLY: ELEVATIONS	


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\Plastpro\FL-17347 R6\FL-17347.3.dwg

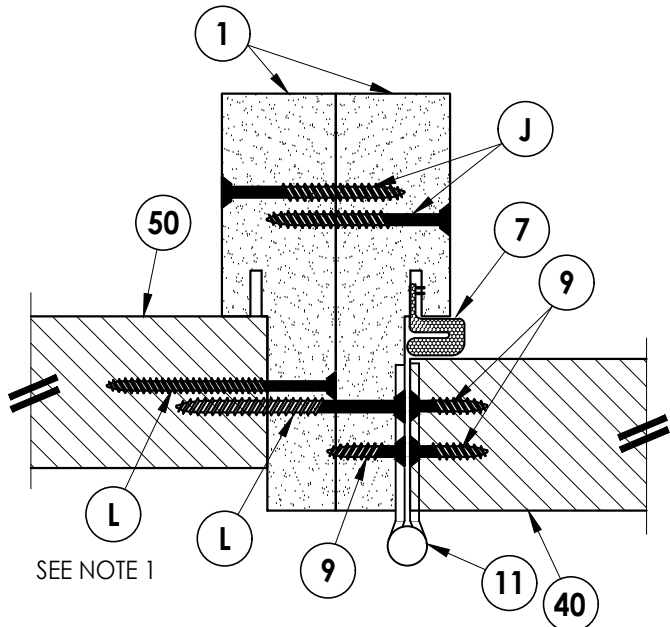

1 HORIZONTAL CROSS SECTION
5 Outswing shown (Inswing similar)
Back to Back Jamb

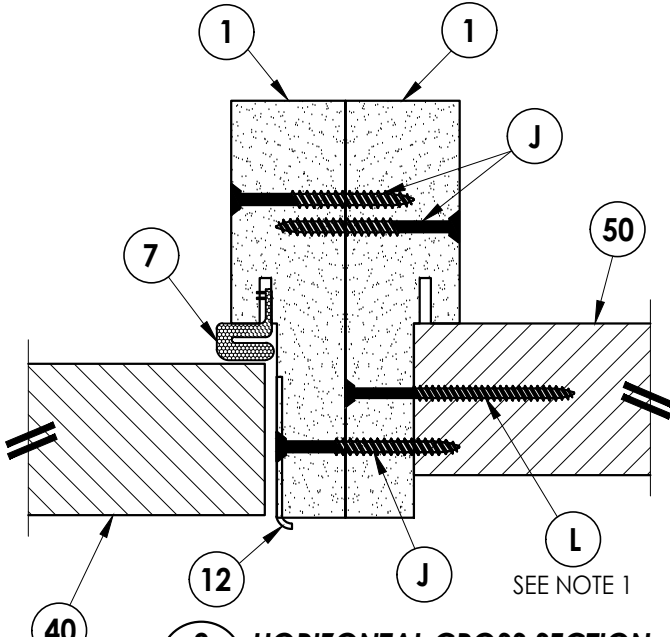


2 HORIZONTAL CROSS SECTION
5 Outswing shown (Inswing similar)
Back to Back Jamb

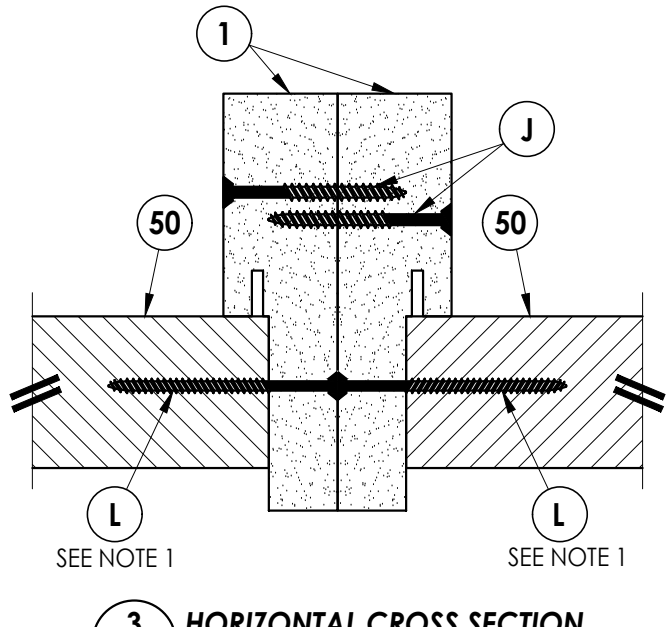


3 HORIZONTAL CROSS SECTION
5 Outswing shown (Inswing similar)
Back to Back Jamb


NOTE:
1. Spacing for item L: 6" from each end and 5 more
equally spaced along sidelite jamb (7 total).

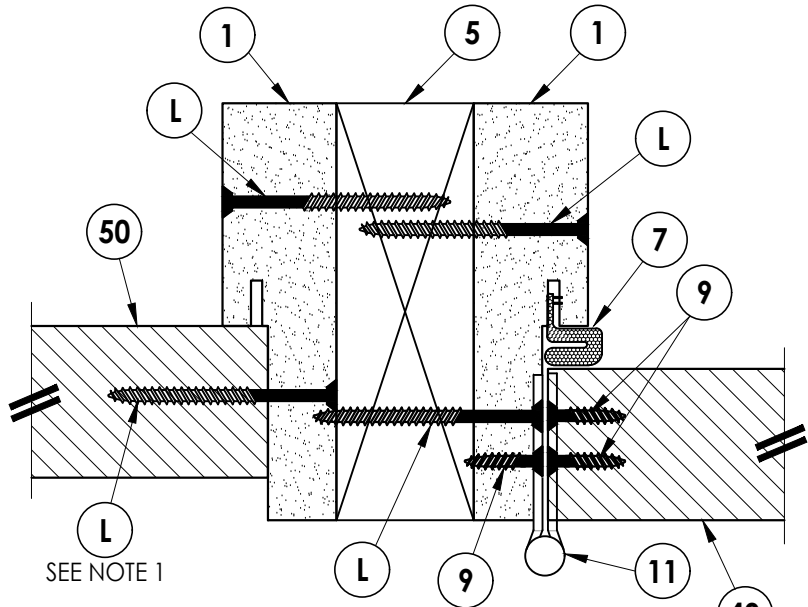

5 HORIZONTAL CROSS SECTION
5 Outswing shown (Inswing similar)
2X Jamb Reinforcement

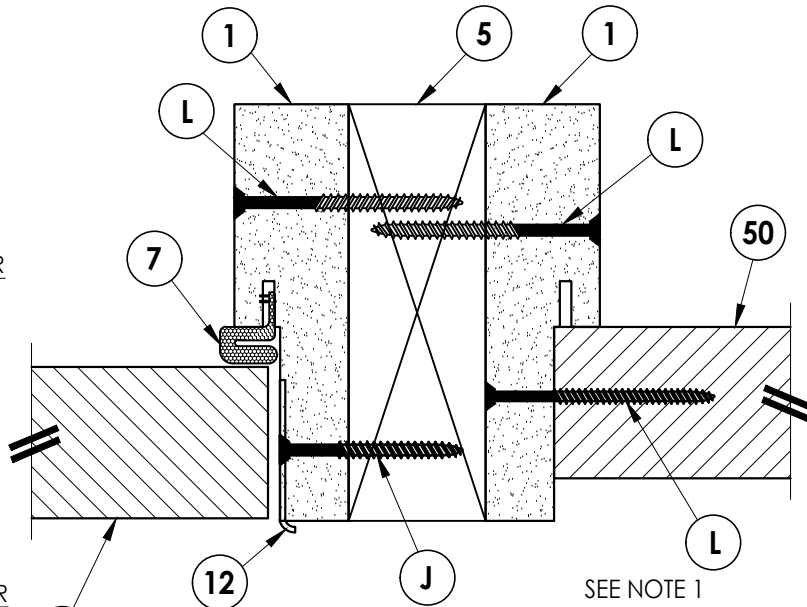

6 HORIZONTAL CROSS SECTION
5 Outswing shown (Inswing similar)
2X Jamb Reinforcement

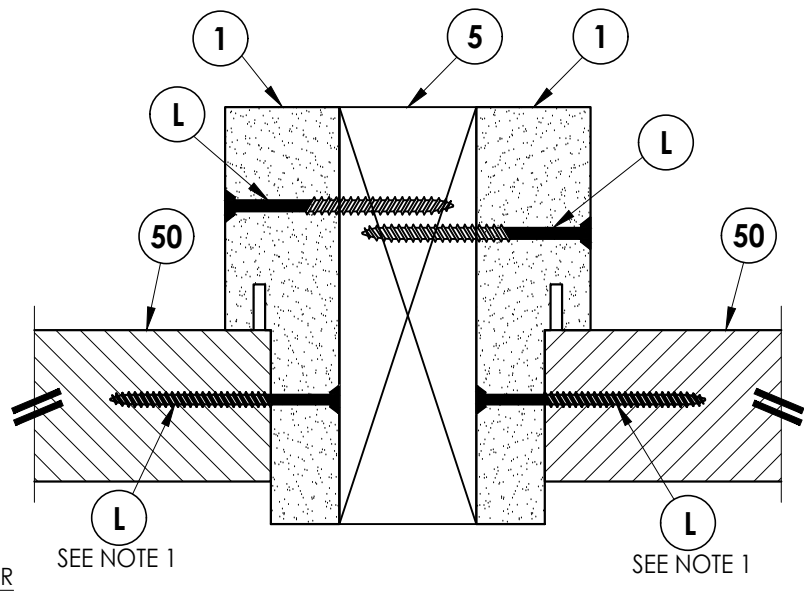

4 HORIZONTAL CROSS SECTION
5 Outswing shown (Inswing similar)
2X Jamb Reinforcement

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL
CROSS SECTIONS

NO.	DATE	REVISIONS
6	8/10/23	UPDATE TO 8TH ED. (2023) FBC
5	8/16/22	REVISE DOOR/SIDELITE PANEL
4	11/16/20	ADD X00, OOX CONFIGURATIONS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC

DATE: 10/08/14

SCALE: N.T.S.

DWG. BY: JK


CHK. BY: LFS

DRAWING NO.:


FL-17347.3

SHEET 5 OF 13

Z:\2023 FBC Drawings\Plastpro\FL-17347 R6\FL-17347.3.dwg

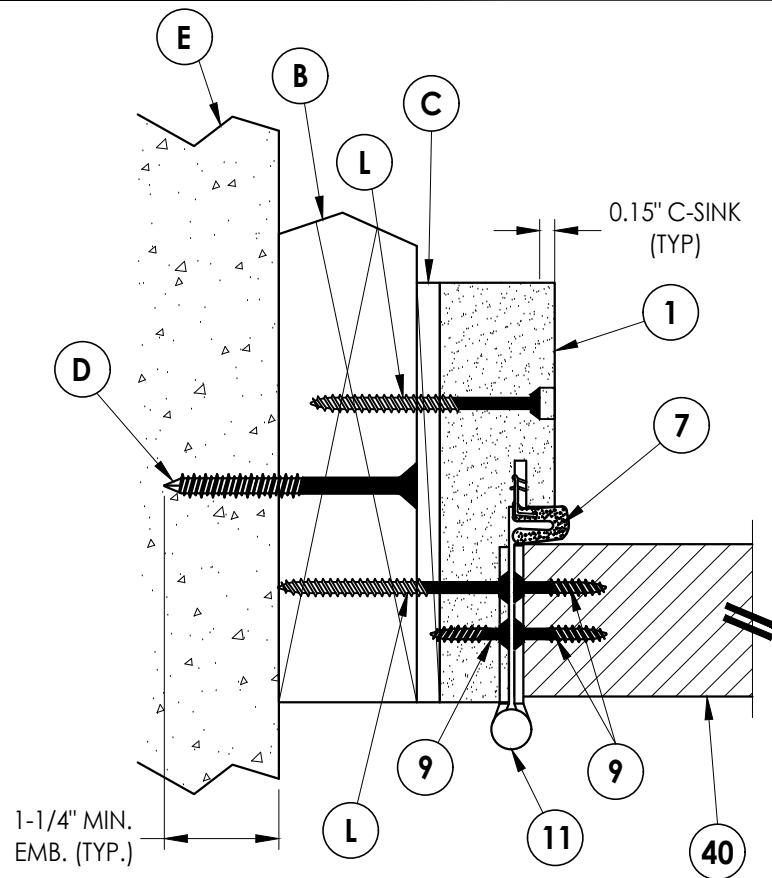


1
6 **HORIZONTAL CROSS SECTION**
Outswing shown (Inswing similar)

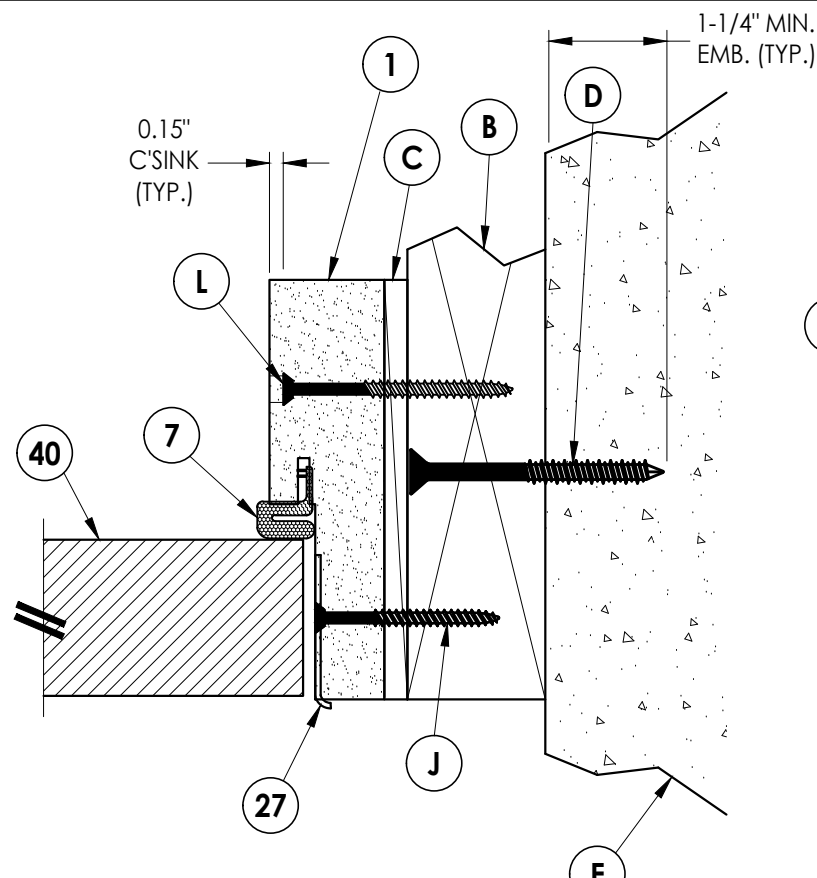


2
6 **HORIZONTAL CROSS SECTION**
Outswing shown (Inswing similar)


- NOTE:**
- Spacing for item L: 6" from each end and 5 more equally spaced along sidelite jamb (7 total).
 - Spacing for item L @ head & sill: 6" from each end, 1 @ centerline, 2 additional at 3" & 4.5" from end adjacent to door.

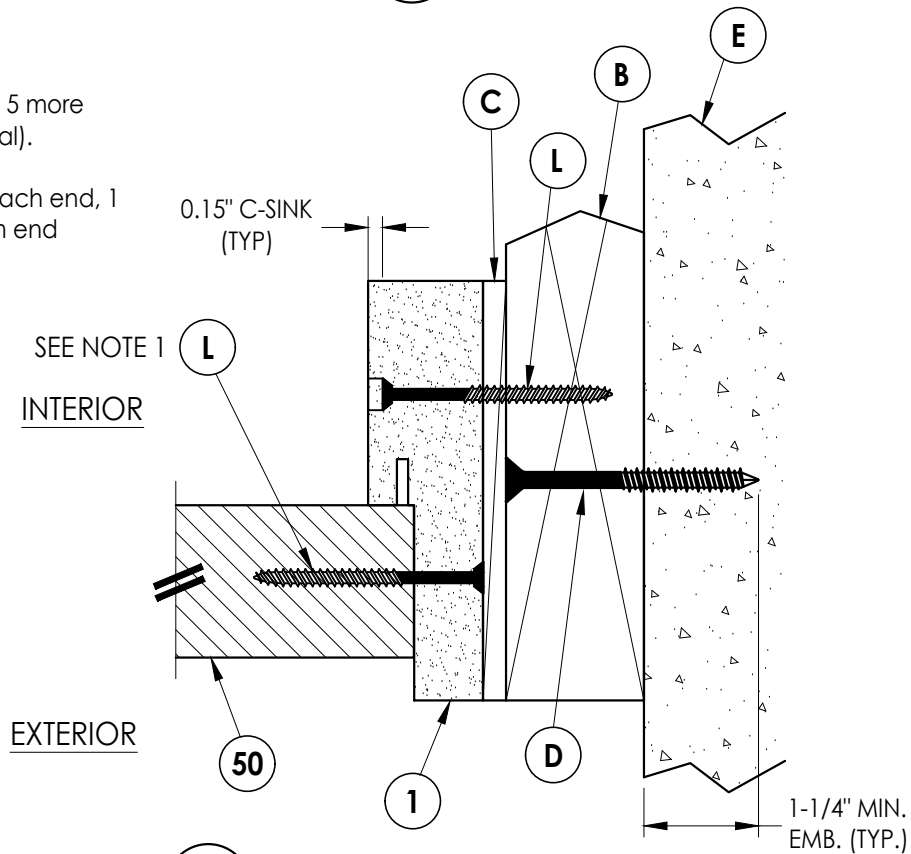

3
6 **HORIZONTAL CROSS SECTION**
Outswing shown (Inswing similar)

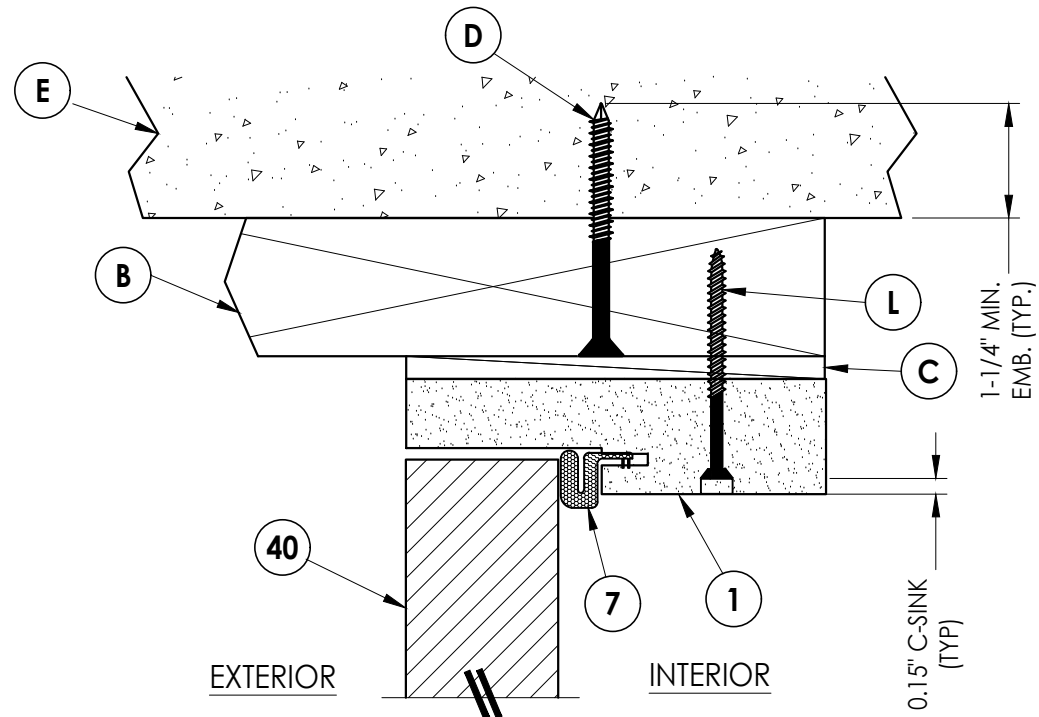

4
6 **VERTICAL CROSS SECTION**
Outswing shown (Inswing similar)

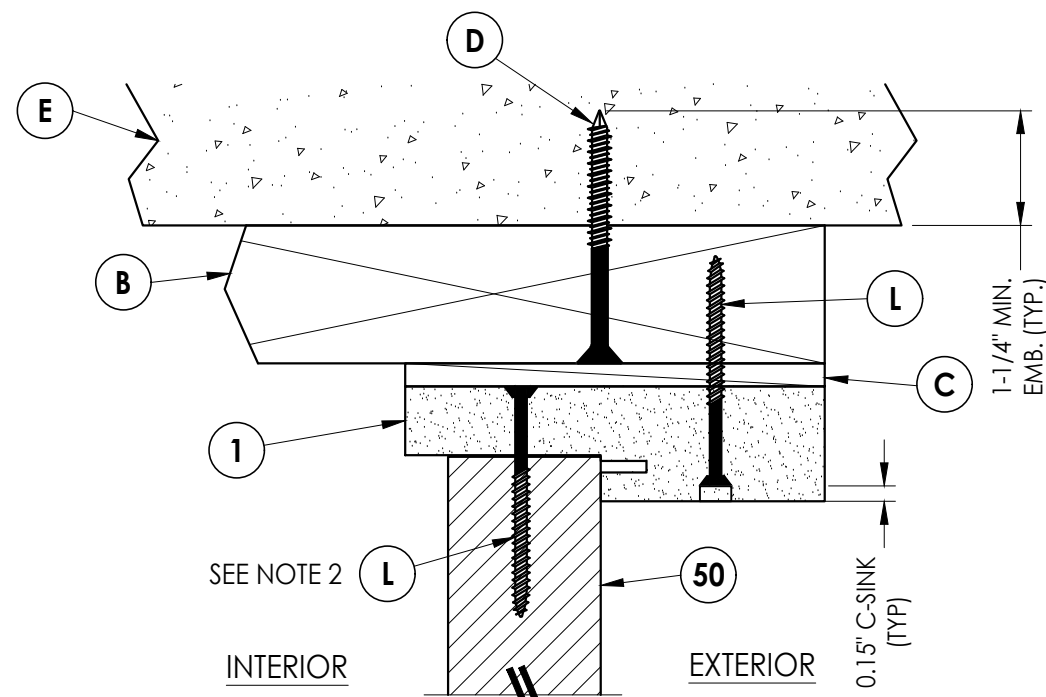

5
6 **VERTICAL CROSS SECTION**
Outswing shown (Inswing similar)

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (2X BUCK)

NO.	DATE	REVISIONS
6	8/10/23	UPDATE TO 8TH ED. (2023) FBC
5	8/16/22	REVISE DOOR/SIDELITE PANEL
4	11/16/20	ADD XOO, OOX CONFIGURATIONS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC

DATE: 10/08/14

SCALE: N.T.S.


DWG. BY: JK

CHK. BY: LFS


DRAWING NO.: FL-17347.3

SHEET 6 OF 13


Z:\2023 FBC Drawings\Plastpro\FL-17347 R6\FL-17347.3.dwg

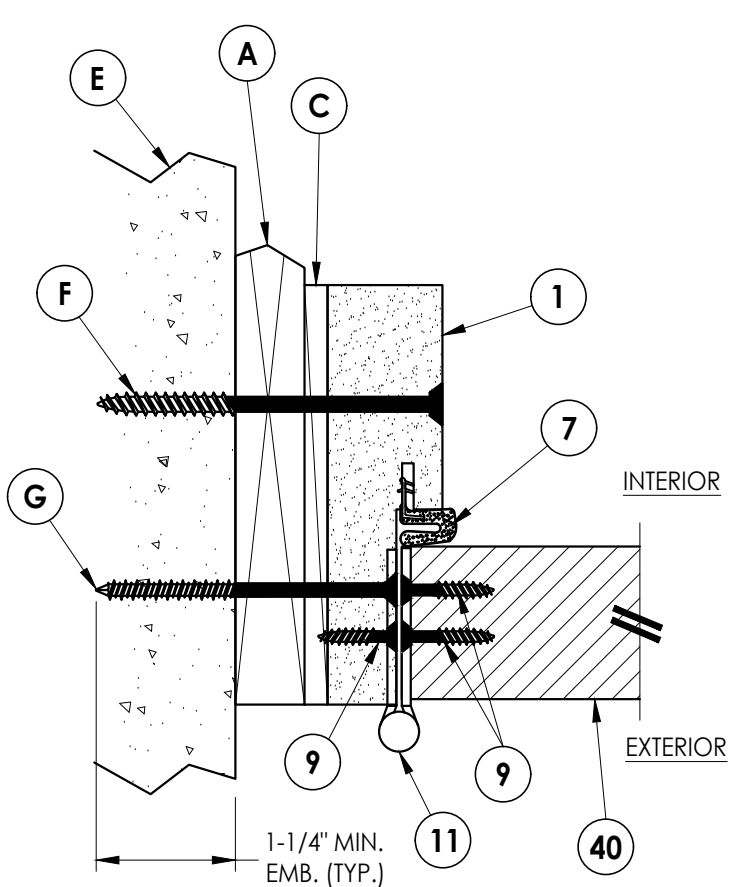


1
7 **HORIZONTAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

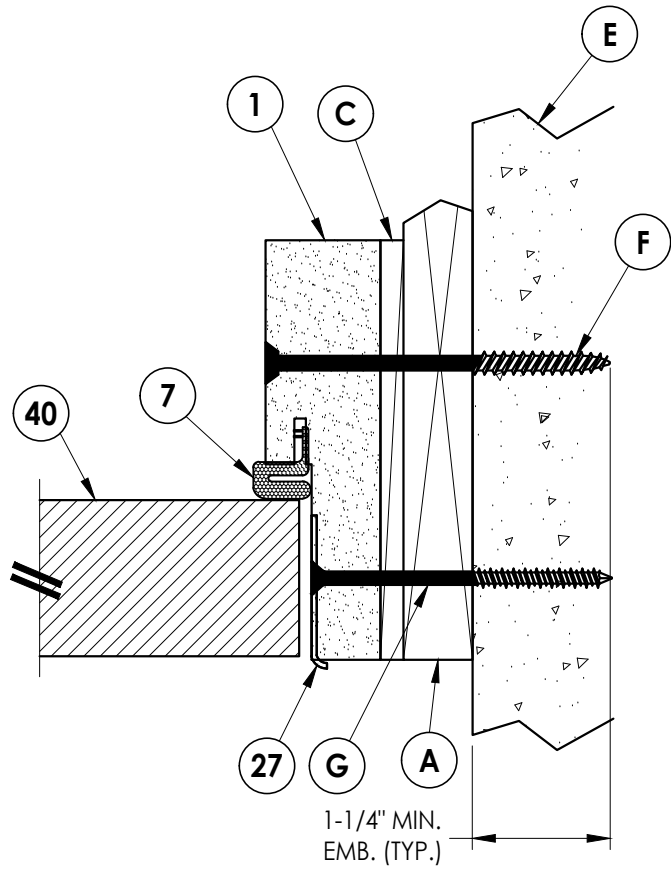


2
7 **HORIZONTAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

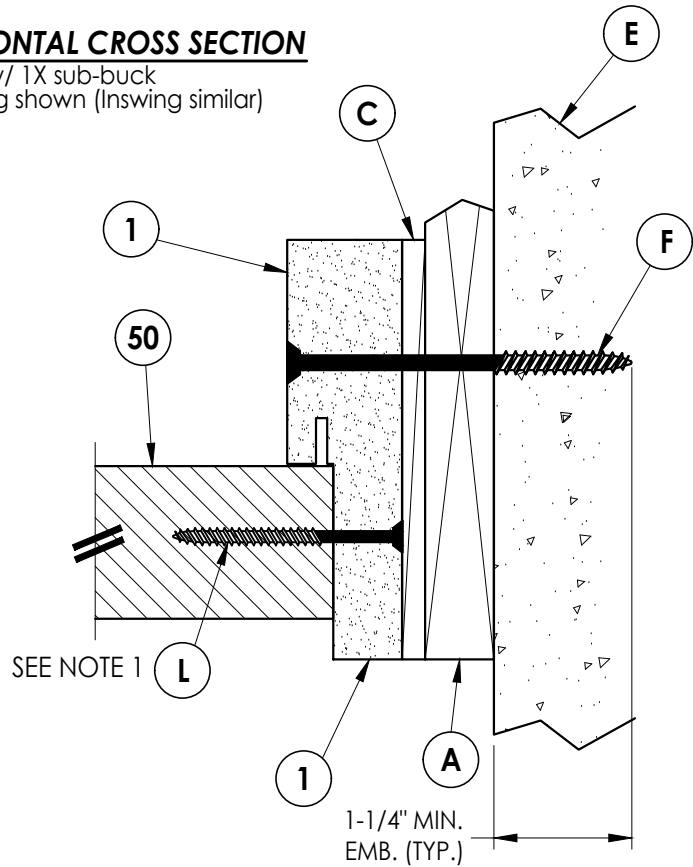

3
7 **HORIZONTAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

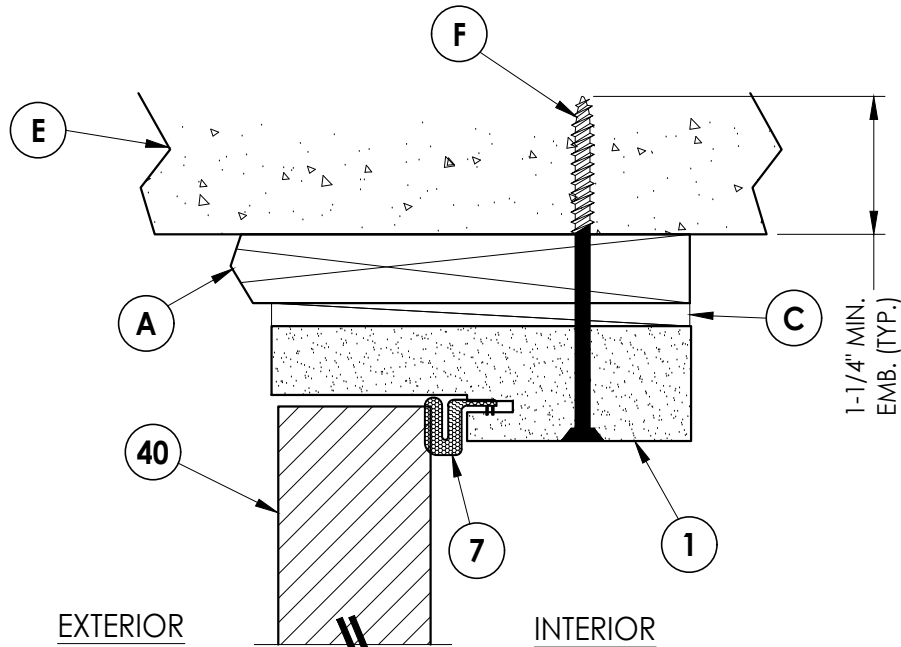

4
7 **VERTICAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

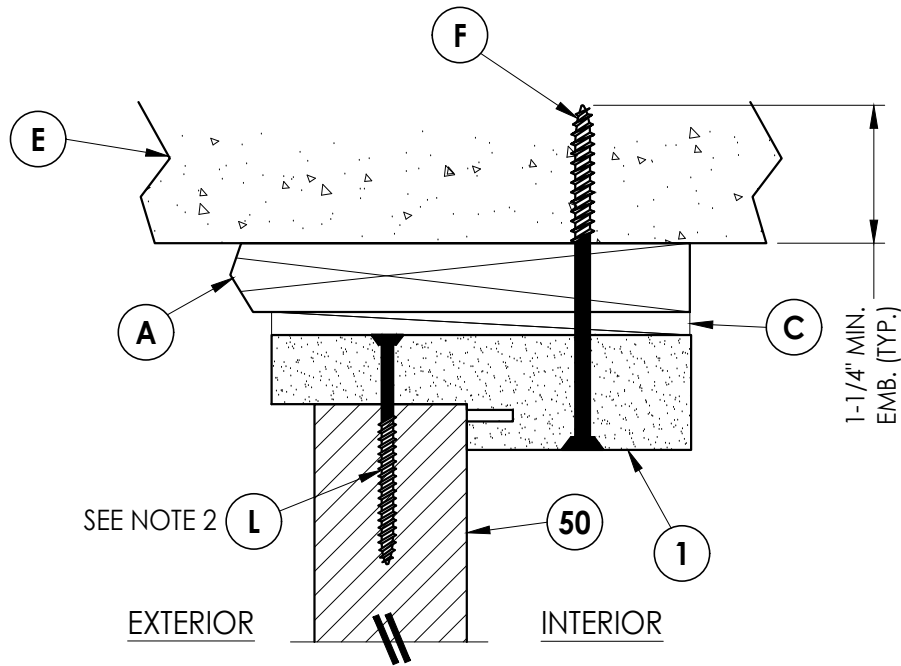

5
7 **VERTICAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

NOTE:

1. Spacing for item L: 6" from each end and 5 more equally spaced along sidelite jamb (7 total).
2. Spacing for item L @ head & sill: 6" from each end, 1 @ centerline, 2 additional at 3" & 4.5" from end adjacent to door.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (1X BUCK)

NO.	DATE	REVISIONS
6	8/10/23	UPDATE TO 8TH ED. (2023) FBC
5	8/16/22	REVISE DOOR/SIDELITE PANEL
4	11/16/20	ADD XOO, OOX CONFIGURATIONS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC
2		
1		

DATE: 10/08/14






SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.: FL-17347.3

SHEET 7 OF 13

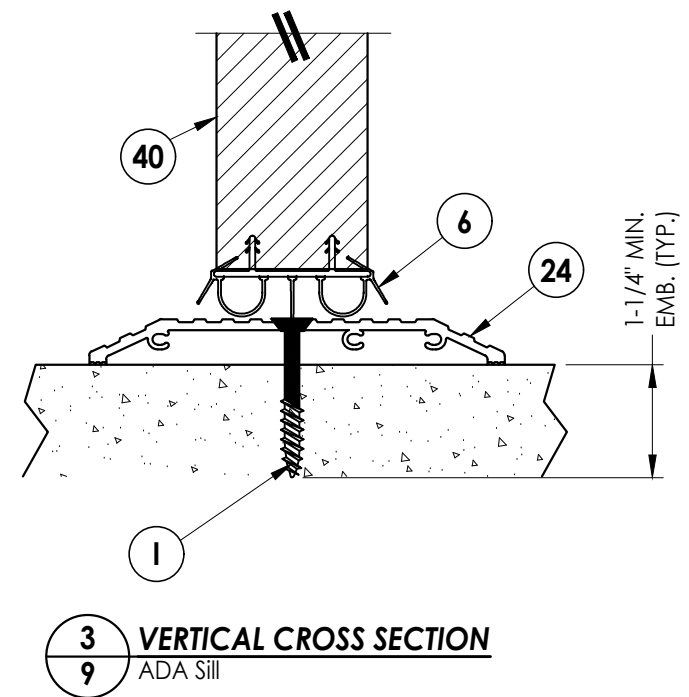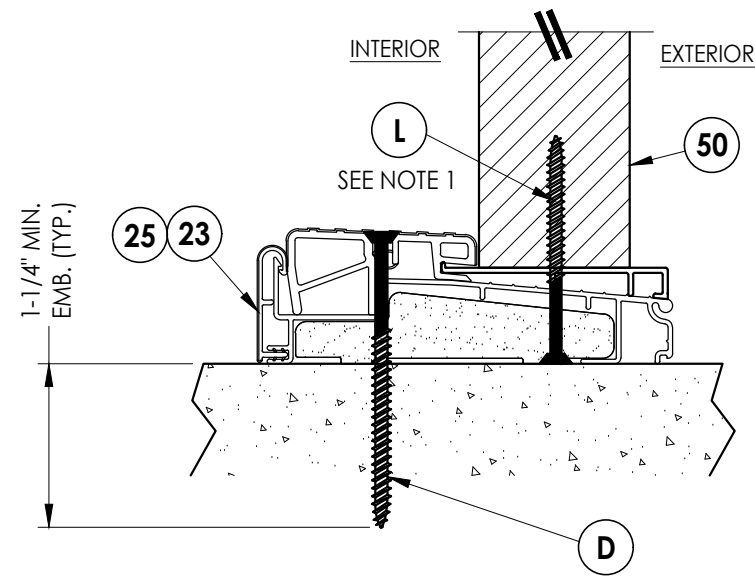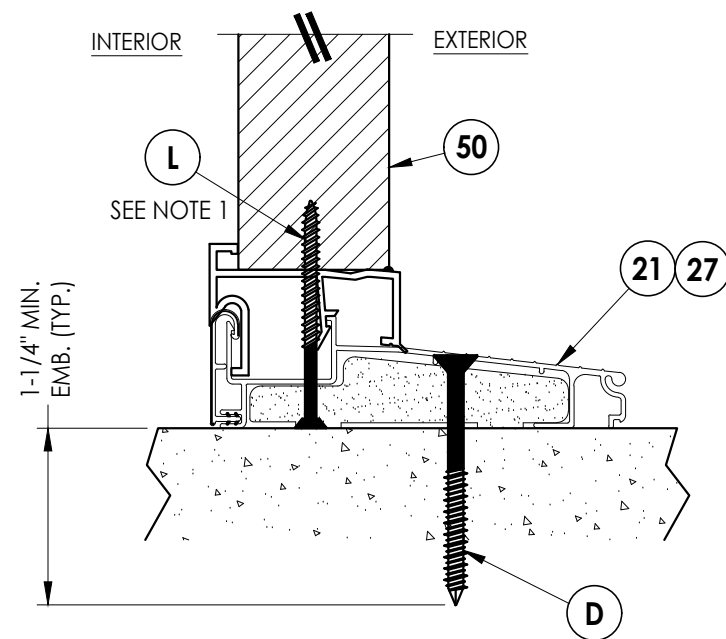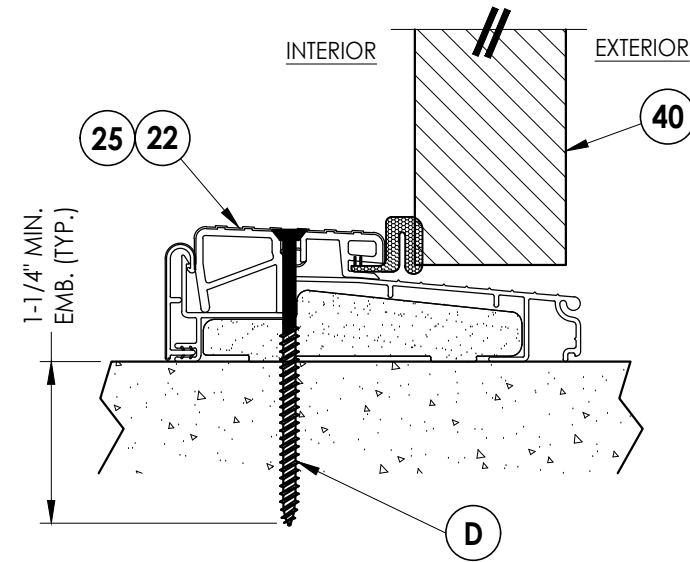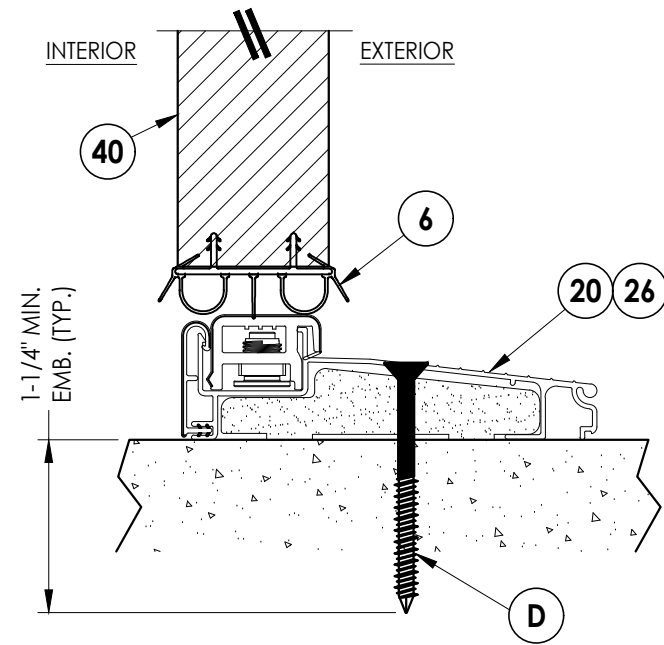

NOTE:

1. Spacing for item L @ head & sill: 6" from each end, 1 @ centerline, 2 additional at 3" & 4.5" from end adjacent to door.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC
FIBERGLASS DOOR

PART OR ASSEMBLY:

**VERTICAL CROSS
SECTIONS (THRESHOLDS)**

6	8/10/23	UPDATE TO 8TH ED. (2023)	FBC	LFS
5	8/16/22	REVISE DOOR/SIDELITE PANEL		LFS
4	11/16/20	ADD XOO, OOX CONFIGURATIONS		LFS
3	8/05/20	UPDATE TO 7TH ED. (2020)	FBC	DAC
NO.	DATE	REVISIONS		

DATE: 10/08/14

SCALE: N.T.S.


DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:
FL-17347.3

SHEET 9 OF 13

Z:\2023 FBC Drawings\Plastpro\FL-17347 R6\FL-17347.3.dwg

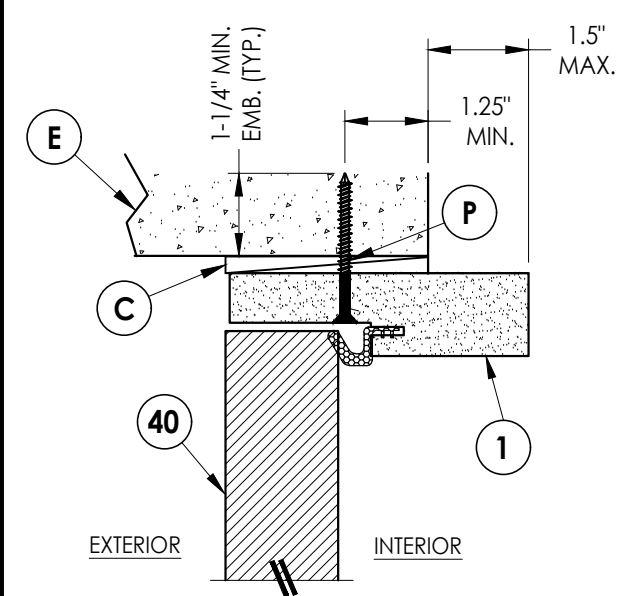


6 **VERTICAL CROSS SECTION**

10 Shown Direct to Masonry
Outswing only w/ 4-9/16" jamb
Single door only (N/A W/ Sidelites)

NOTE:


1. Spacing for item L: 6" from each end and 5 more
equally spaced along sidelite jamb (7 total).

2. Spacing for item L @ head & sill: 6" from each end, 1 @
centerline, 2 additional at 3" & 4.5" from end adjacent
to door.

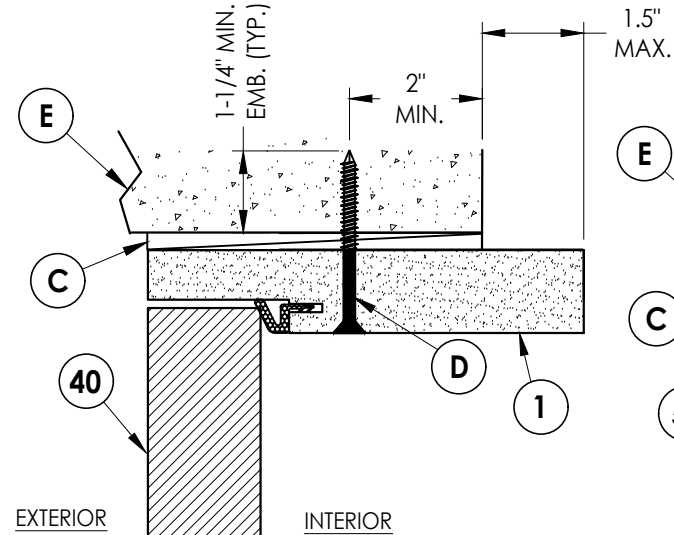


7 **VERTICAL CROSS SECTION**

10 Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

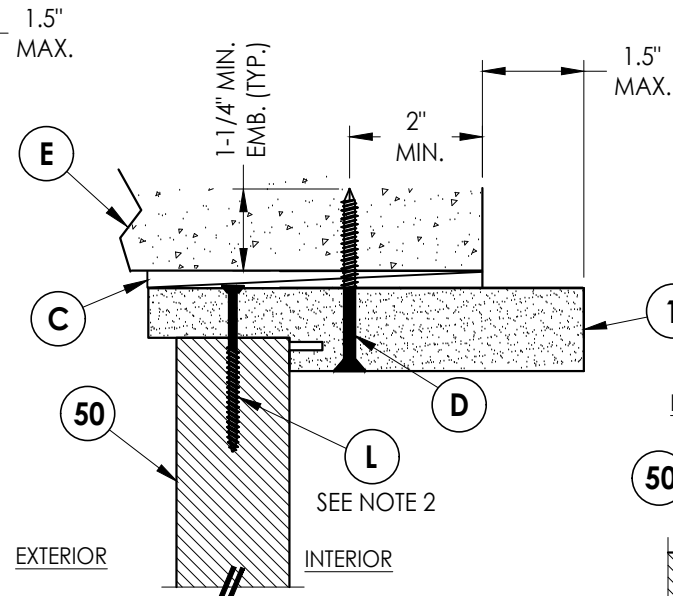


8 **VERTICAL CROSS SECTION**

10 Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

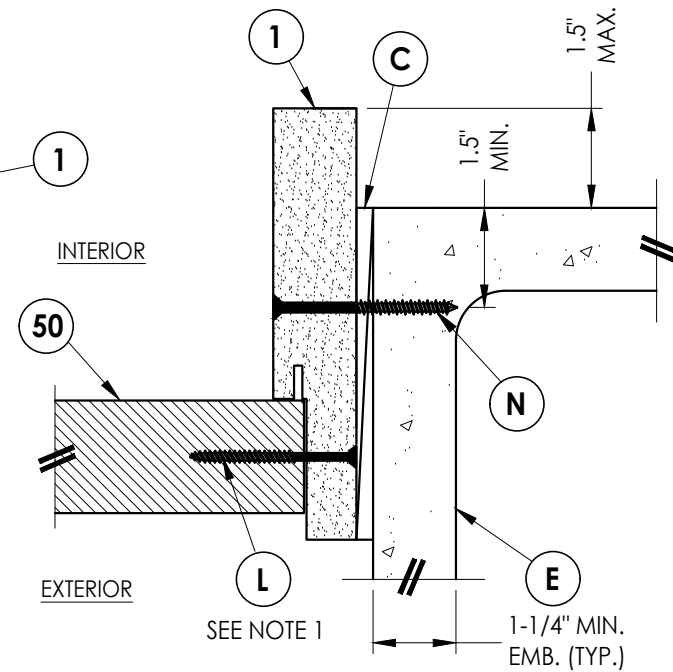


5 **HORIZONTAL CROSS SECTION**

10 Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

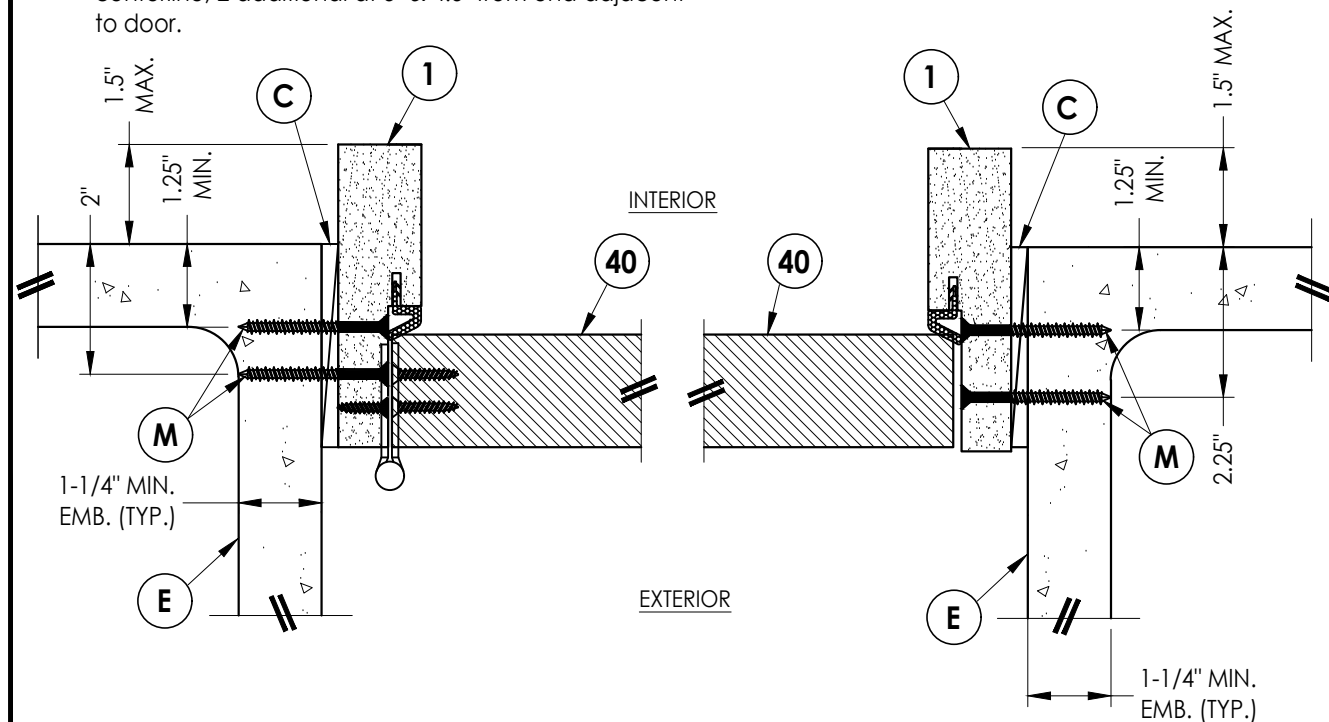


1 **HORIZONTAL CROSS SECTION**

10 Shown Direct to Masonry
Outswing only w/ 4-9/16" jamb
Single door only (N/A W/ Sidelites)

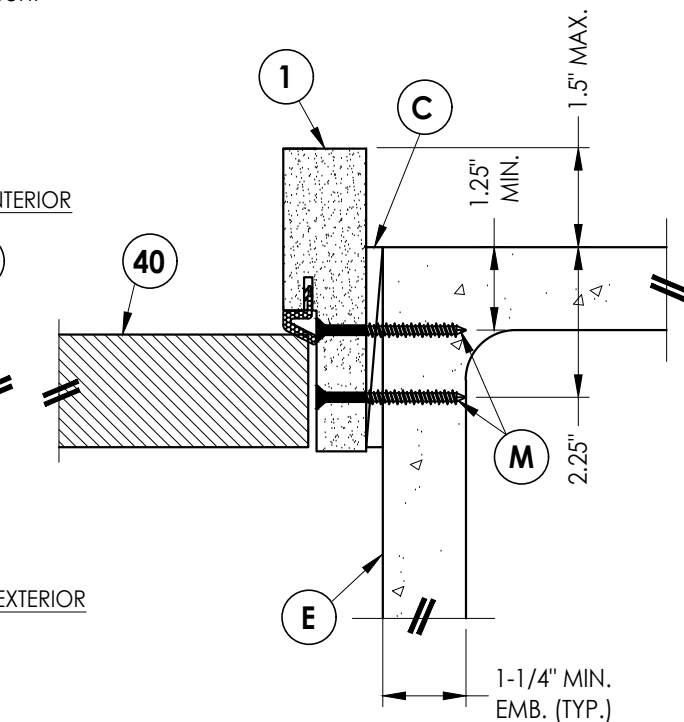


2 **HORIZONTAL CROSS SECTION**

10 Shown Direct to Masonry
Outswing only w/ 4-9/16" jamb
Single door only (N/A W/ Sidelites)

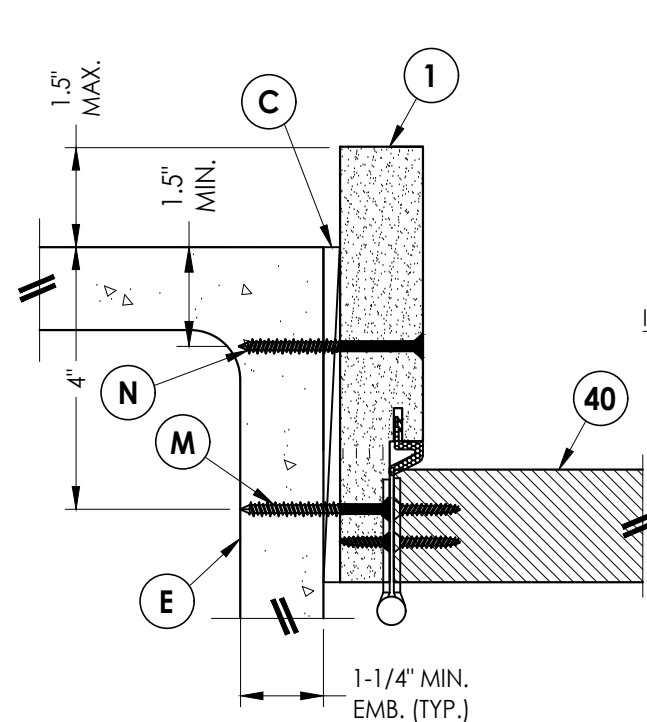

3 **HORIZONTAL CROSS SECTION**

10 Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

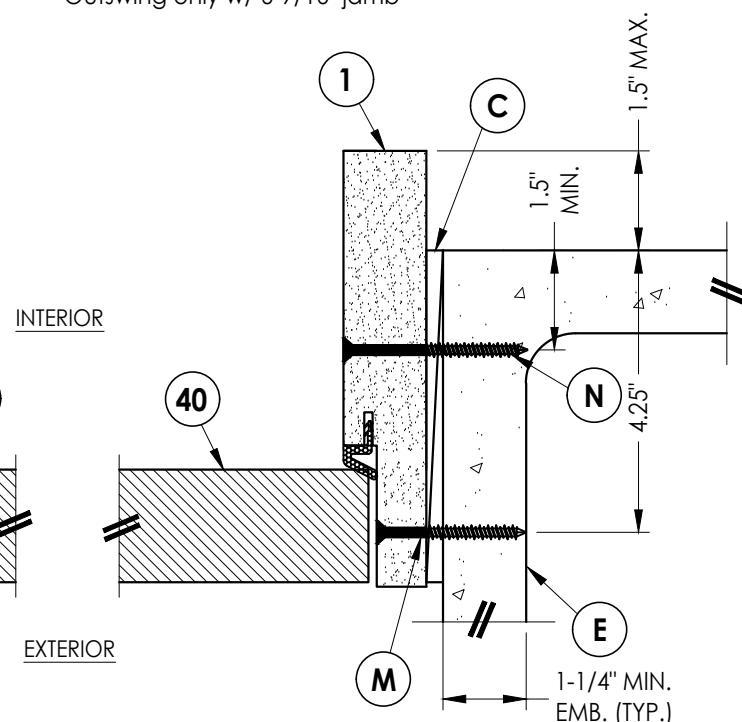

4 **HORIZONTAL CROSS SECTION**

10 Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb




Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO INC
FIBERGLASS DOOR

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
SECTIONS (DIRECT TO MASONRY)

NO.	DATE	REVISIONS
6	8/10/23	UPDATE TO 8TH ED. (2023) FBC
5	8/16/22	REVISE DOOR/SIDELITE PANEL
4	11/16/20	ADD XOO, OOX CONFIGURATIONS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC
NO.	DATE	REVISIONS
DATE: 10/08/14		
SCALE: N.T.S.		
DWG. BY: JK		
CHK. BY: LFS		
DRAWING NO.: FL-17347.3		
SHEET 10 OF 13		

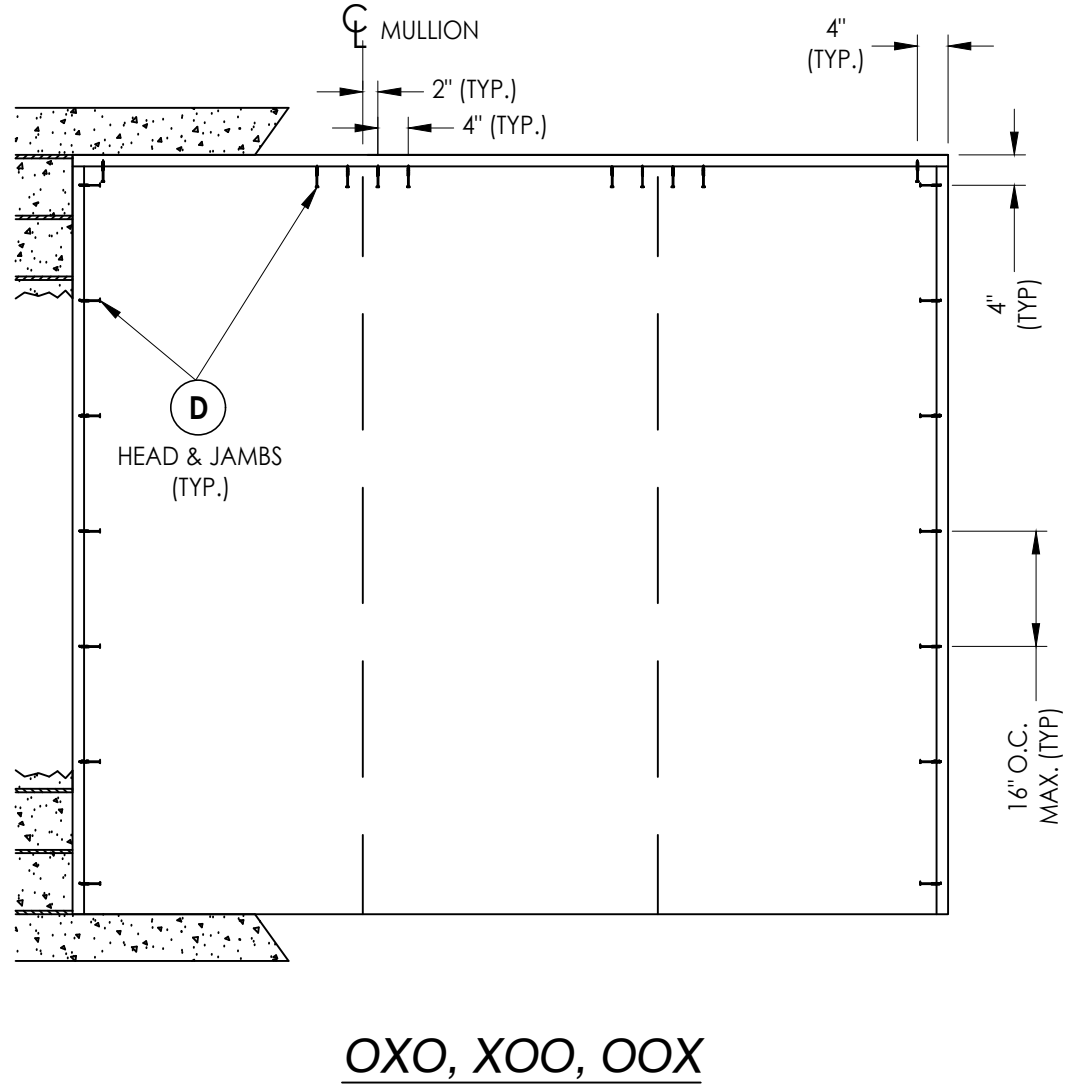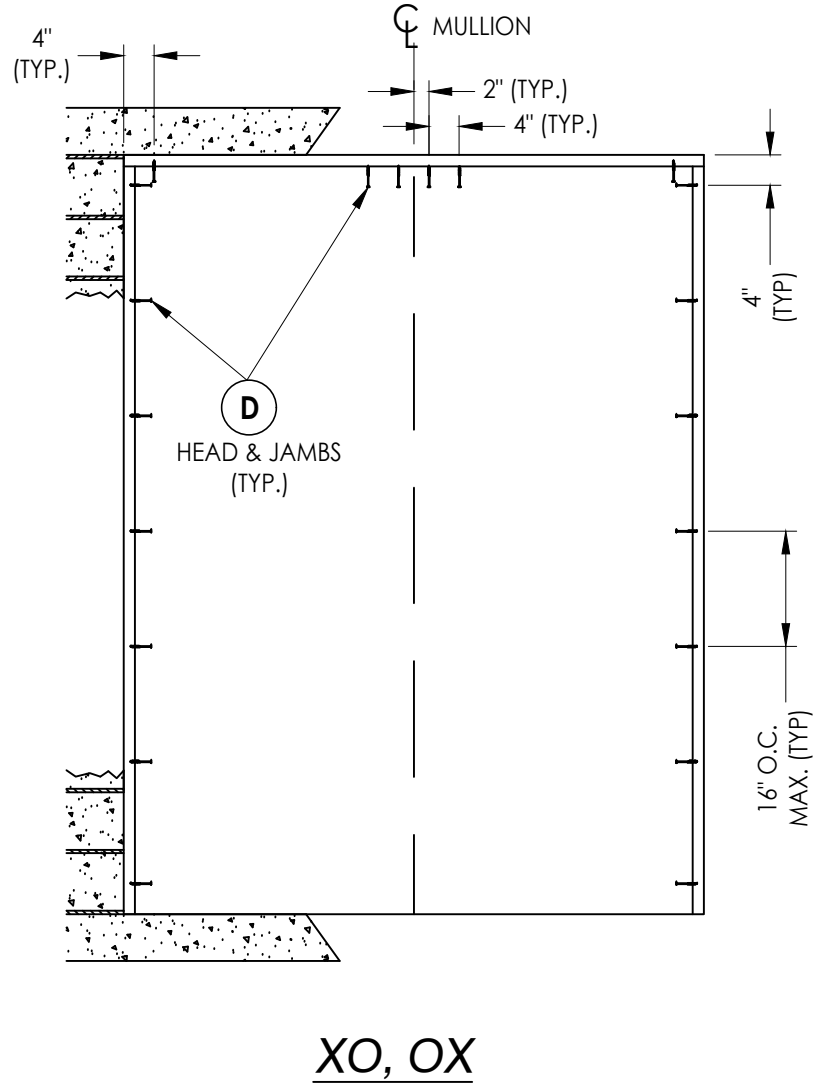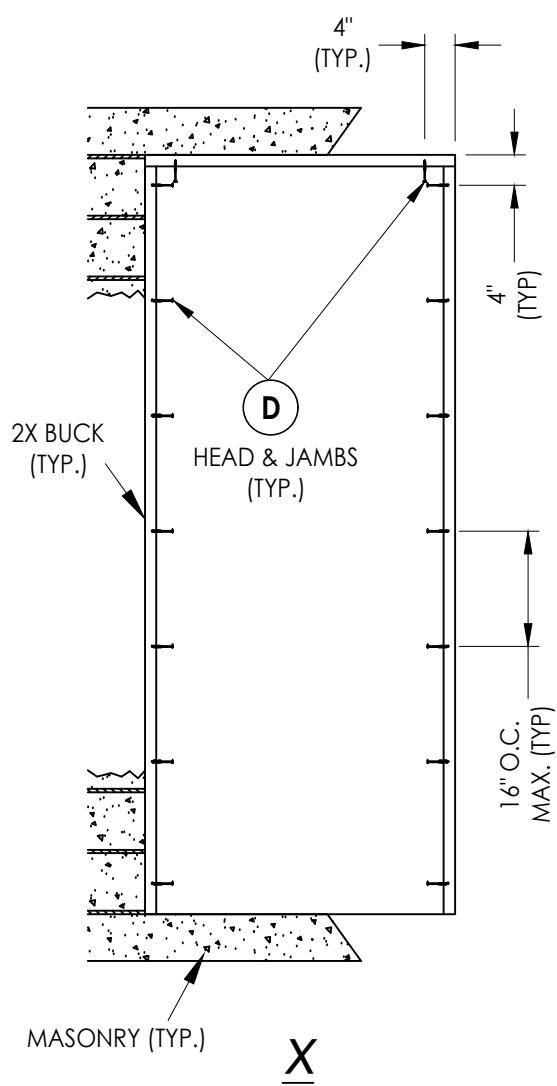

2X BUCK ANCHORING

DATE: 10/08/14

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.: FL-17347.3

SHEET 11 OF 13

PRODUCT: PLASTPRO INC
FIBERGLASS DOOR


PART OR ASSEMBLY:
BUCK ANCHORING

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

NO.	DATE	REVISIONS
6	8/10/23	UPDATE TO 8TH ED. (2023) FBC
5	8/16/22	REVISE DOOR/SIDELITE PANEL
4	11/16/20	ADD XOO, OOX CONFIGURATIONS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC
NO.	DATE	BY


Z:\2023 FBC Drawings\Plastpro\FL-17347 R6\FL-17347.3.dwg

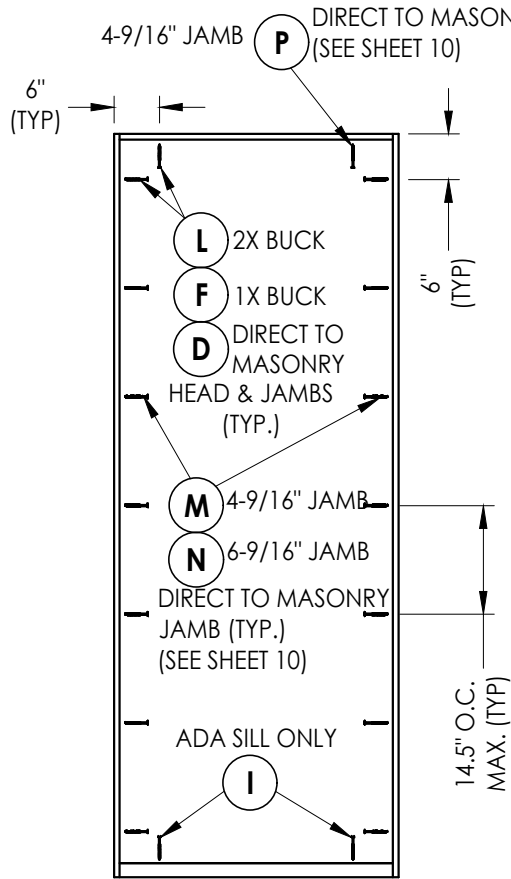


X

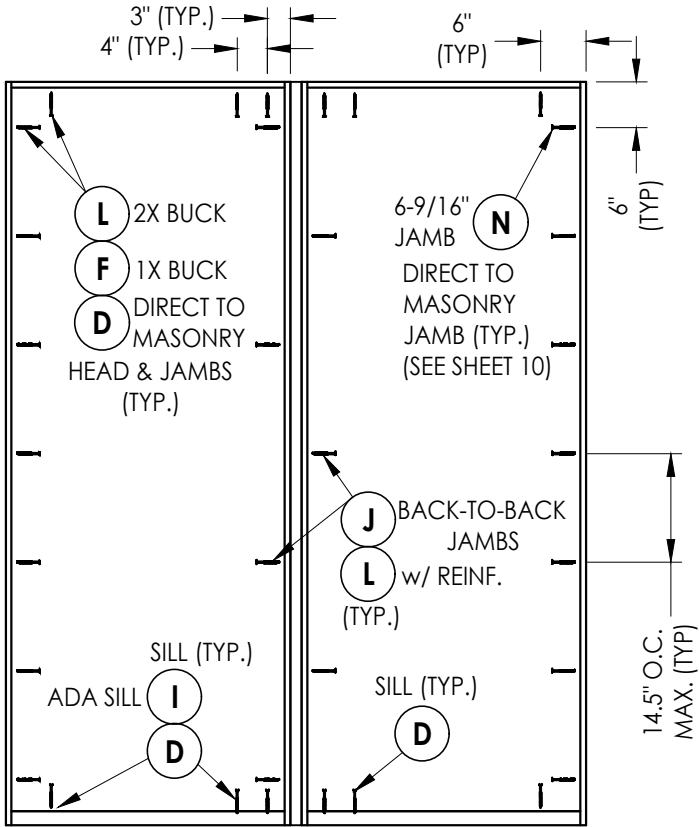


XO, OX

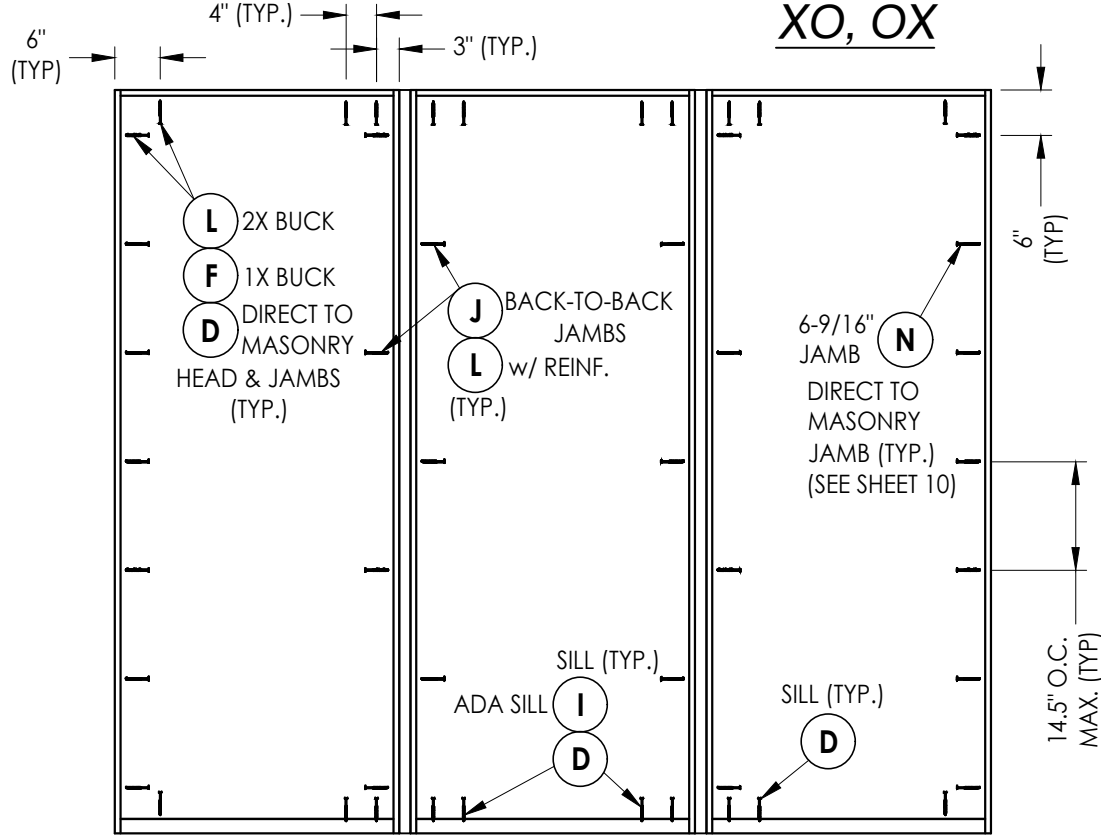


OXO, XO, OOX
FRAME ANCHORING

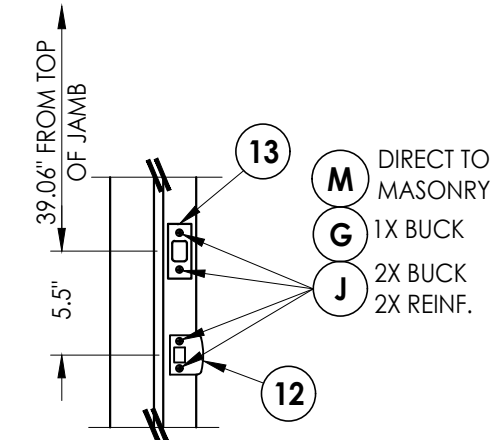


LATCH AND DEADBOLT DETAILS

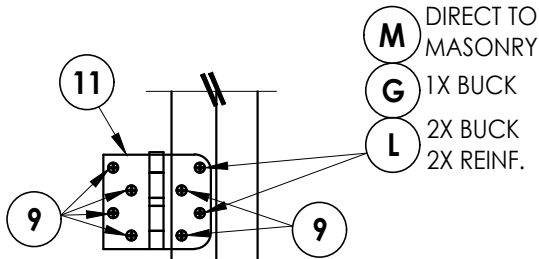

HINGE DETAIL 1

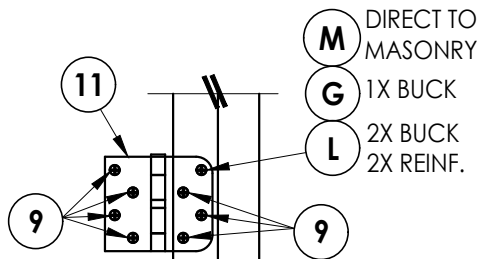

HINGE DETAIL 2

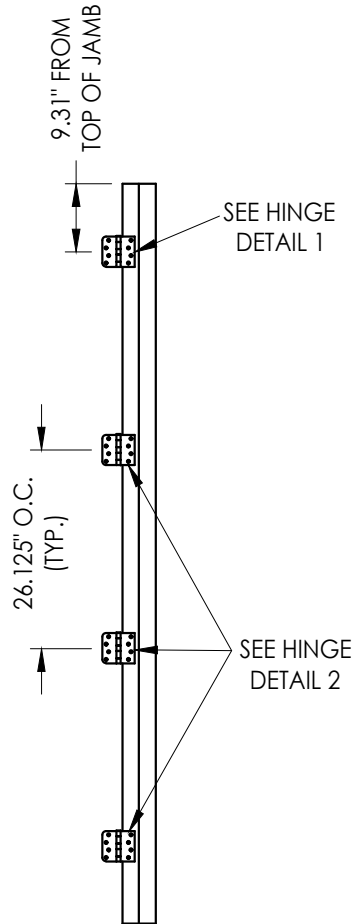

HINGE JAMB

HARDWARE DETAILS

Documents Prepared By:

Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
FRAME ANCHORING
& HARDWARE DETAILS

NO.	DATE	REVISIONS
6	8/10/23	UPDATE TO 8TH ED. (2023) FBC
5	8/16/22	REVISE DOOR/SIDELITE PANEL
4	11/16/20	ADD XO, OOX CONFIGURATIONS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC
2		
1		

DATE: 10/08/14

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:

FL-17347.3

SHEET 12 OF 13

Z:\2023 FBC Drawings\Plastpro\FL-17347 R6\FL-17347.3.dwg

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (G >= 0.42)	WOOD
B	2X BUCK (G >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
G	3/16" x 3-1/4" PFH ITW CONCRETE SCREW	STEEL
I	1/4" X 1-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
J	#10 X 2" PFH WOOD SCREW	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMB.)	STEEL
M	3/16" X 2-1/4" ITW CONCRETE SCREW	STEEL
N	3/16" X 2-3/4" ITW CONCRETE SCREW	STEEL
P	1/4" X 2-1/4" PFH DeWALT CONCRETE SCREW	STEEL
1	POLY FIBER JAMB	COMP.
4	1X REINFORCEMENT (G >= 0.55)	WOOD
5	2X REINFORCEMENT (G >= 0.55)	WOOD
6	DOOR SWEEP	PVC
7	WEATHERSTRIP (ENDURA FORCE 5)	FOAM
9	#9 x 3/4" PFH WOOD SCREW	STEEL
11	4" X 4" HINGE	STEEL
12	LATCH STRIKE PLATE	STEEL
13	DEADBOLT STRIKE PLATE	STEEL
20	INSWING THRESHOLD	ALUM/COMP
21	INSWING THRESHOLD w/ SIDELITE ADAPTER	ALUM/COMP
22	OUTSWING THRESHOLD	ALUM/COMP
23	OUTSWING THRESHOLD w/ SIDELITE ADAPTER	ALUM/COMP
24	ADA THRESHOLD	ALUM
25	OUTSWING THRESHOLD	ALUM/COMP
26	INSWING THRESHOLD	ALUM/COMP
40	DOOR PANEL	-
50	SIDELITE PANEL	-



CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW BUILDEX TAPCON®	3/16"	1-1/4"	3"	1-1/2"
	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

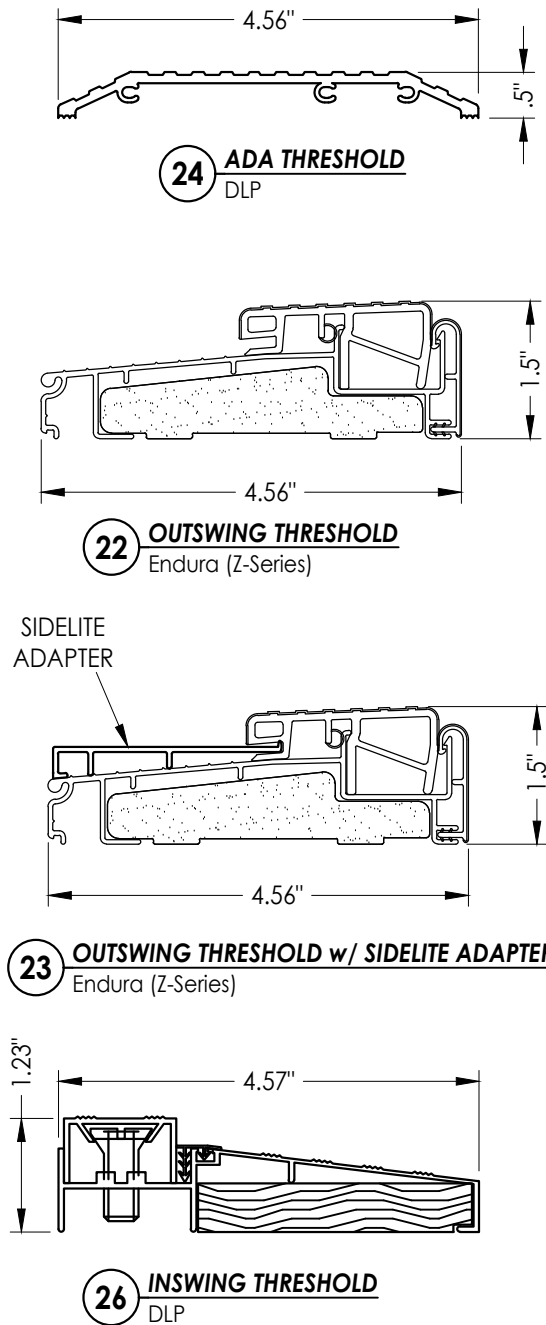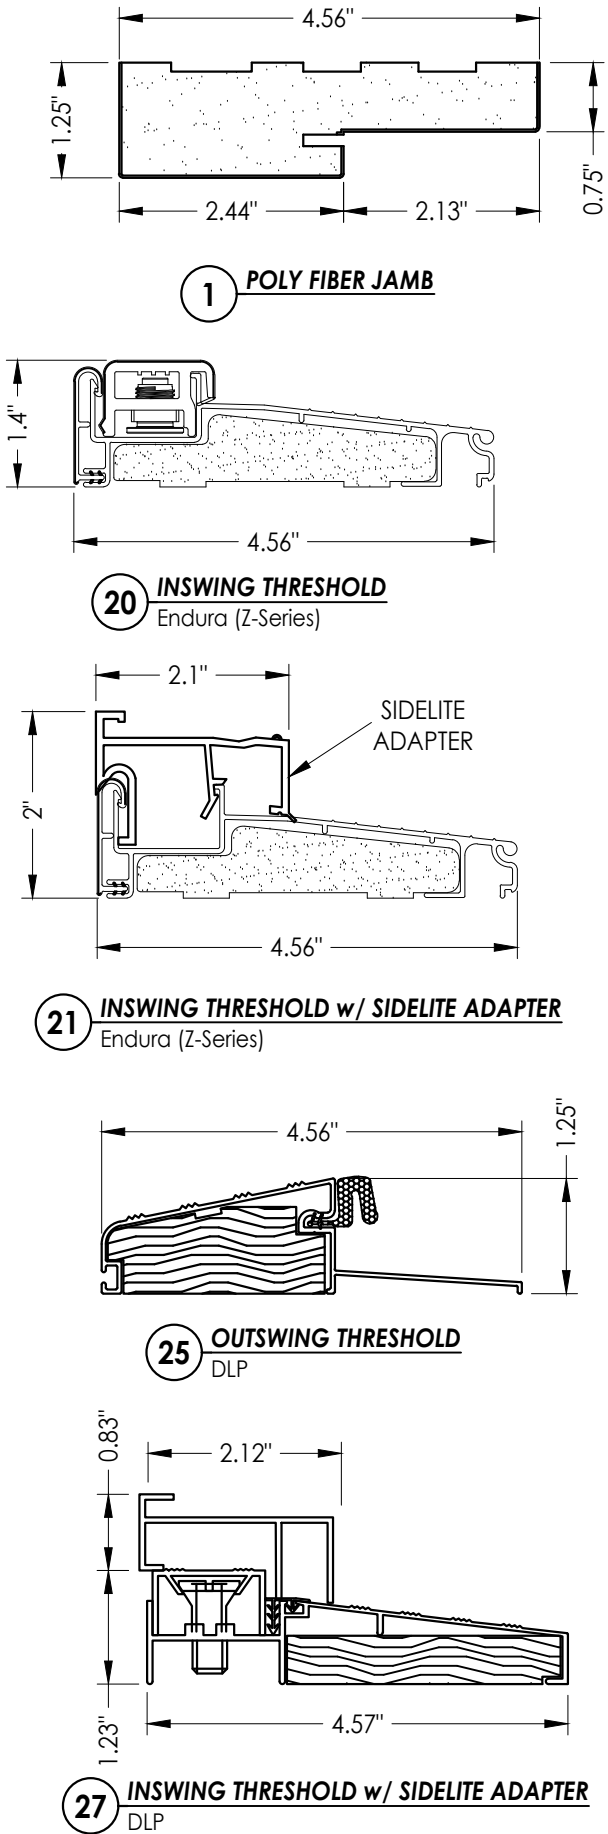

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 4-3409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
BILL OF MATERIALS
& COMPONENTS

			LFS	LFS	LFS	DAC	BY	REVISIONS	
		6	8/10/23	UPDATE TO 8TH ED. (2023)	FBC				
		5	8/16/22	REVISE DOOR/SIDELITE PANEL					
		4	11/16/20	ADD XOO, OOX CONFIGURATIONS					
		3	8/05/20	UPDATE TO 7TH ED. (2020)	FBC				
		NO.	DATE						
DATE: 10/08/14									
SCALE: N.T.S.									
DWG. BY: JK									
CHK. BY: LFS									
DRAWING NO.: FL-17347.3									
SHEET 13 OF 13									