


SERIES 6714 IMPACT VINYL TILT SINGLE HUNG WINDOW INSTALLATION ANCHORAGE DETAILS

NOTES:

1. THE PRODUCT SHOWN HEREIN IS TESTED AND DESIGNED TO COMPLY WITH REQUIREMENTS OF THE 9TH EDITION (2026) FLORIDA BUILDING CODE, BUILDING AND RESIDENTIAL VOLUMES EXCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ).
2. WOOD FRAMING, 2X WOOD BUCK, METAL FRAMING AND CONCRETE/MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND CONCRETE/MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER CONCRETE/MASONRY IS OPTIONAL. WHERE 1X BUCKS ARE USED, INSTALLATION ANCHORS WILL PASS THROUGH WINDOW FRAME AND 1X BUCK INTO CONCRETE/MASONRY SUBSTRATE. WHERE 1X BUCK IS NOT USED, INSTALLATION ANCHORS WILL PASS THROUGH WINDOW FRAME INTO CONCRETE/MASONRY SUBSTRATE. DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
4. THE PRODUCT SHOWN HEREIN HAS BEEN TESTED TO THE FOLLOWING BY NATIONAL CERTIFIED TESTING LABORATORIES, YORK, PA:
 - 4.1. NCTL-110-17043-1, DATED 9/30/14 TO AAMA/WDMA/CSA 101/I.S.2/A440-05/08/11.
 - 4.2. NCTL-110-17043-2, DATED 9/30/14 TO ASTM E1886-02/04/05/13A AND ASTM E1996-02/04/06/09/12A.
5. MATERIAL:
 - 5.1. FRAME: EXTRUDED RIGID PVC BY VISION EXTRUSIONS GROUP LIMITED PER CURRENT MIAMI-DADE NOA.
 - 5.2. LAMINATED GLAZING INTERLAYER: KURARAY AMERICA TROSIFOL PVB INTERLAYER PER CURRENT MIAMI-DADE NOA.
 - 5.3. REINFORCEMENT: GALVANIZED STEEL TUBE - ALL SASH RAIL MEMBERS. GALVANIZED STEEL BAR - ALL SASH STILE MEMBERS.
6. GLAZING:
 - 6.1. GLAZING DETAIL AS TESTED: 7/8" NOMINAL O.A. IGU COMPRISED OF FROM EXTERIOR TO INTERIOR - LAMI LITE OF 1/8" ANNEALED GLASS x 0.090" KURARAY AMERICA TROSIFOL PVB INTERLAYER x 1/8" ANNEALED GLASS, CARDINAL XL EDGE STAINLESS STEEL SPACER (TYPE SS-D), 1/8" TEMPERED SACRIFICIAL LITE. BOTTOM SASH INTERIOR GLAZED WITH SIKA SIKAFLEX 552 BACK-BEDDING (OR EQUIVALENT), TWO (2) LEAF DUAL DUROMETER BACK-BEDDING AND A SNAP-IN TWO (2) LEAF DUAL DUROMETER GLAZING BEAD WITH 7/16" GLASS BITE. TOP FIXED LITE INTERIOR GLAZED WITH A SNAP-IN TWO (2) LEAF DUAL DUROMETER RIGID VINYL GLAZING BEAD AND SIKA SIKAFLEX 552 BACK-BEDDING (OR EQUIVALENT) WITH 7/16" GLASS BITE.
 - 6.2. AS TESTED GLAZING MEETS ASTM E1300-24 FOR THE DESIGN CONDITIONS SHOWN IN THIS PRODUCT APPROVAL DOCUMENT.
 - 6.3. ALTERNATE GLAZING MEETING THE REQUIREMENTS OF AAMA/WDMA/CSA 101/I.S.2/A440 SHALL BE ALLOWED PER ASTM E1300.
7. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
8. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
9. FOR ANCHORING INTO CONCRETE/MASONRY USE 3/16" HEX HEAD TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/2" MINIMUM EMBEDMENT INTO CONCRETE WITH 1 1/8" MINIMUM EDGE DISTANCE AND 1" MINIMUM EMBEDMENT INTO MASONRY WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS. ANCHOR LOCATIONS HAVE +/- 1" TOLERANCE.
10. FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #10 PAN HEAD WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/8" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 3/4" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS. ANCHOR LOCATIONS HAVE +/- 1" TOLERANCE.
11. FOR ANCHORING INTO METAL STRUCTURE USE #10 PAN OR HEX HEAD SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL WITH 3/4" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS. ANCHOR LOCATIONS HAVE +/- 1" TOLERANCE.
12. ALL FASTENERS TO BE CORROSION RESISTANT, AND/OR HAVE A CORROSION RESISTANT COATING, OR MEET THE REQUIREMENTS OF SECTION 1711, 9TH EDITION (2026) FBC AND SECTION R332, 9TH EDITION (2026) FRC WHEN APPLICABLE.
13. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - 13.2. WOOD - MINIMUM SPECIFIC GRAVITY (G) OF 0.42 (NON-HVHZ)
 - 13.3. CONCRETE - MINIMUM COMPRESSIVE STRENGTH OF 2500 PSI
 - 13.4. MASONRY - STRENGTH CONFORMANCE TO ASTM C-90, MEDIUM WEIGHT WITH DENSITY > 117 PCF
 - 13.5. METAL STRUCTURE: STEEL 18GA (0.0428"), 33KSI OR ALUMINUM 6063-T5 0.048" THICK MINIMUM

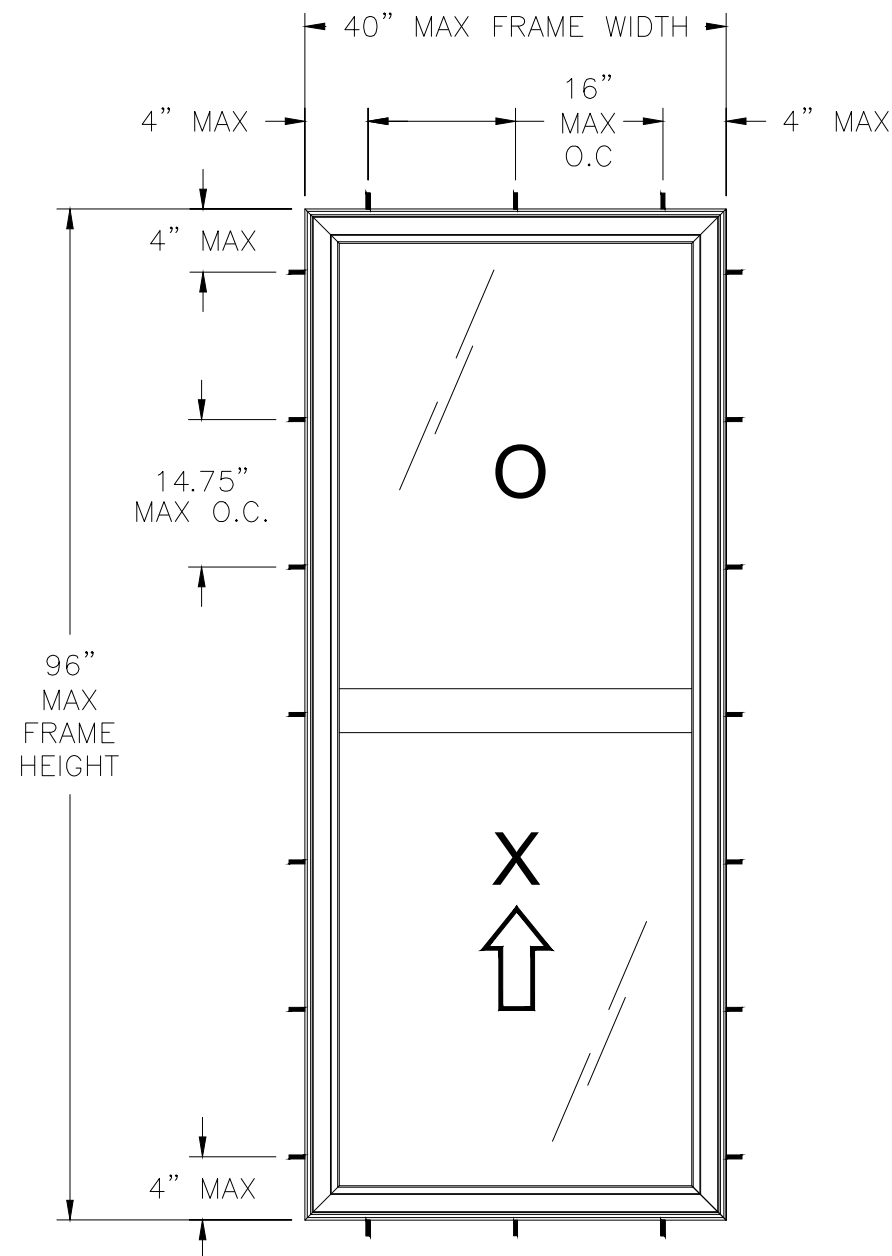

ELEVATION
EXTERIOR VIEW

NOTES:

1. MAXIMUM TOP FIXED LITE D.L.O.: 34-5/8" X 43-3/4".
2. MAXIMUM BOTTOM SASH SIZE: 37-3/16" X 46-15/16" WITH D.L.O. 33-7/8" X 43".
3. 1" x 1/4" WEEP HOLES LOCATED AT SILL FACE 1-1/2" FROM EACH END.
4. 1-1/4" x 5/16" WEEP HOLE WITH PLASTIC COVER LOCATED AT EXTERIOR SILL FACE 3-1/2" FROM EACH END.

HARDWARE SCHEDULE	
A.	(1) METAL CAM-TYPE SWEEP LOCK 8 1/2" FROM EACH END ACTIVE MEETING RAIL
B.	(1) METAL KEEPER IN EXTERIOR MEETING RAIL AT LOCK POSITIONS
C.	(1) 4-COIL SPRING BALANCE SYSTEM AT EACH JAMB TRACK
D.	(1) DIE-CAST PIVOT BAR AT EACH END OF BOTTOM RAIL
E.	(1) STEEL BAR REINFORCEMENT AT STILES
F.	(1) GALVANIZED STEEL TUBE AT MEETING RAIL AND TOP AND BOTTOM SASH RAILS

TABLE OF CONTENT	
SHEET	DESCRIPTION
1	ELEVATION, ANCHORING AND NOTES
2	INSTALLATION DETAILS

DESIGN PRESSURE RATING (PSF)	IMPACT RATING
+50.0/-50.0	LARGE AND SMALL MISSILE IMPACT

WIND ZONE 4, MISSILE LEVEL D

PROJECT No. ACE-2025-131

REGENCY PLUS, INC.

2000 LOCUST GAP HIGHWAY
MT. CARMEL, PA 17851

AMOBILISO CONSULTING ENG	DRAWN BY:	DATE:
--------------------------	-----------	-------


DATE: 1/11/10

DRAWN BY:

CONSULTING ENG., LLC

AMORUSO CO

Robert J. Amoruso, P.E.
Florida P.E. No. 49752


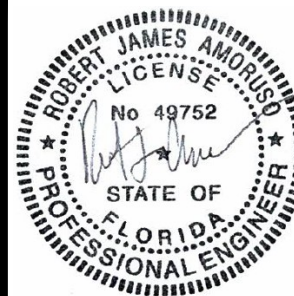


Digitally signed
by Robert J
Amoruso

Date:

2026.08.25

10:16:02 -04'00'

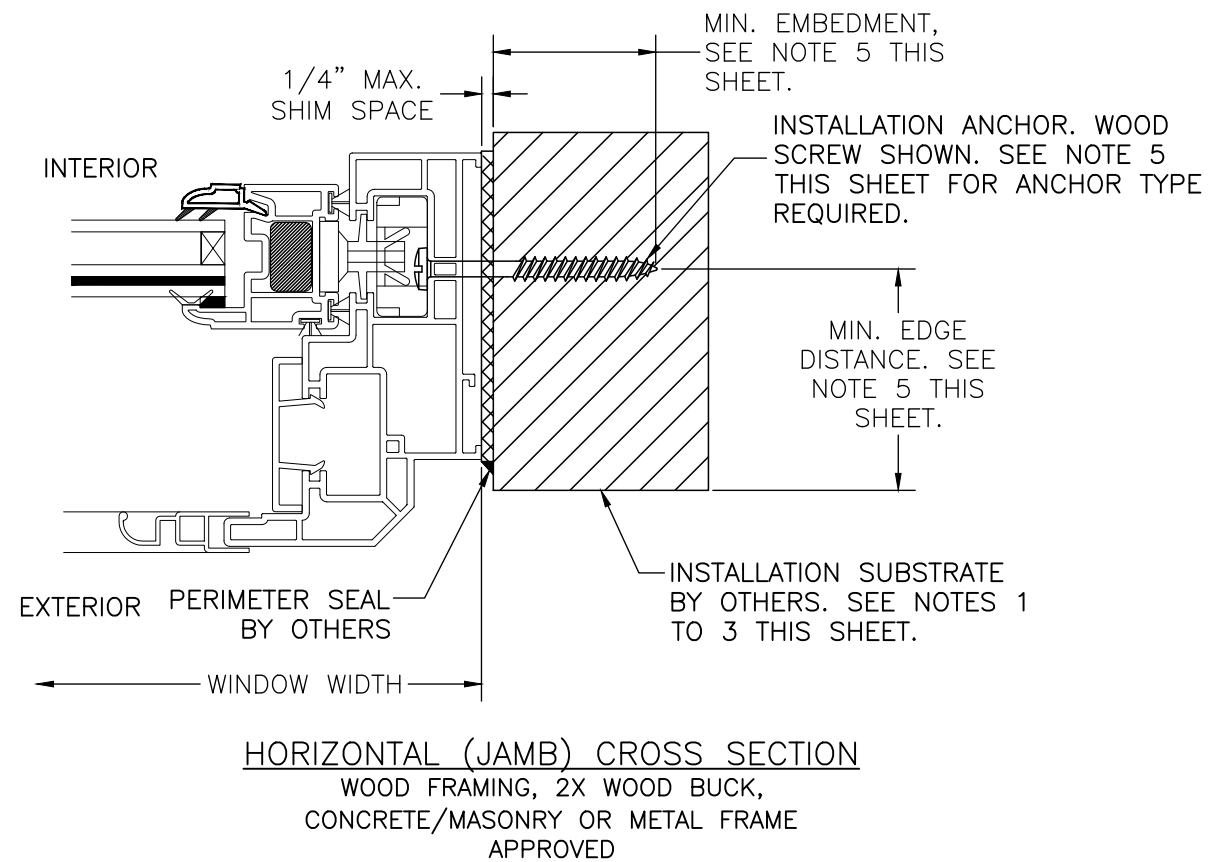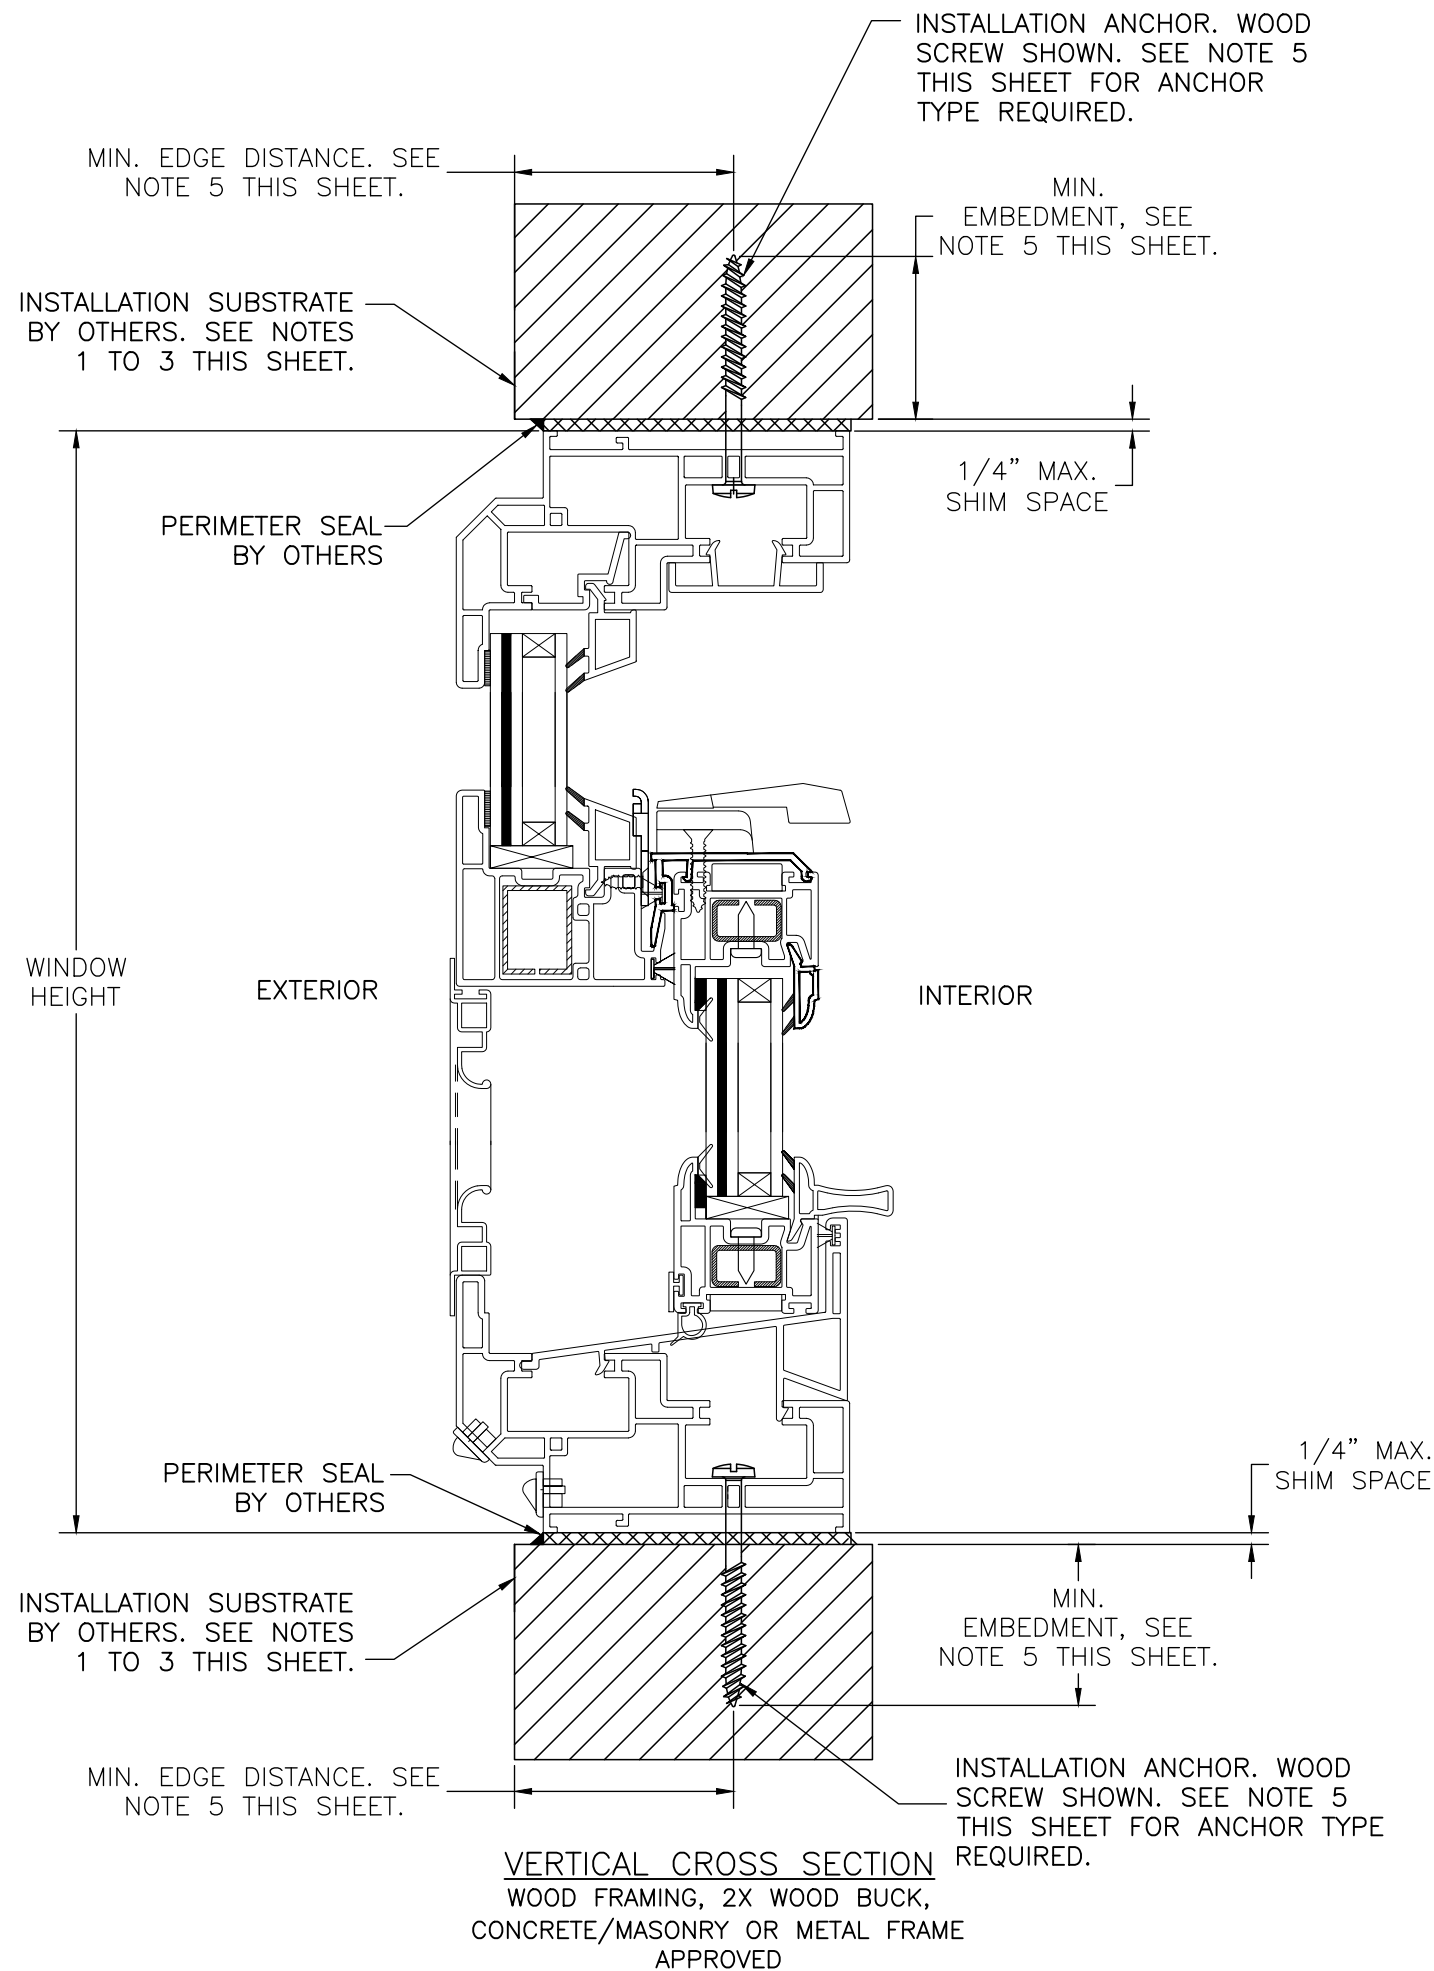

INSTALLATION NOTES:

- APPROVED INSTALLATION SUBSTRATES INCLUDE THE FOLLOWING:
 - WOOD FRAMING
 - STEEL STUD FRAMING AND
 - CONCRETE AND/OR MASONRY
- SUBSTRATE OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND CONCRETE/MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
- 1X BUCK OVER CONCRETE/MASONRY IS OPTIONAL. WHERE 1X BUCK IS NOT USED, DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
- SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
- SUBSTRATE ANCHORING METHODS:
 - FOR ANCHORING INTO CONCRETE/MASONRY USE 3/16" HEX HEAD TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/2" MINIMUM EMBEDMENT INTO CONCRETE WITH 1 1/8" MINIMUM EDGE DISTANCE AND 1" MINIMUM EMBEDMENT INTO MASONRY WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS. ANCHOR LOCATIONS HAVE +/- 1" TOLERANCE.
 - FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #10 PAN HEAD WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/8" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 3/4" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS. ANCHOR LOCATIONS HAVE +/- 1" TOLERANCE.
 - FOR ANCHORING INTO METAL STRUCTURE USE #10 PAN OR HEX HEAD SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL WITH 3/4" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS. ANCHOR LOCATIONS HAVE +/- 1" TOLERANCE.
- INTERIOR AND EXTERIOR FINISHES BY OTHERS. NOT SHOWN FOR CLARITY.
- PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED AND/OR SPECIFIED IN ACCORDANCE WITH ASTM E2112.

PROJECT No. ACE-2025-131

REGENCY PLUS, INC.
2000 LOCUST GAP HIGHWAY
MT. CARMEL, PA 17851

TITLE: SERIES 6714 IMPACT VINYL TILT SINGLE HUNG WINDOW
INSTALLATION DETAILS

DRAWN BY: RJA
DATE: 1/11/18
SCALE: N.T.S.
REV: A
SHEET: 2 OF 2
AMORUSO CONSULTING ENG., LLC
FBPE REGISTRATION NO. 38327
226 N NOVA RD, NO. 142
ORMOND BEACH, FL 32174
RJAENGPE@GMAIL.COM

Robert J. Amoruso, P.E.
Florida P.E. No. 49752



Digitally signed
by Robert J
Amoruso
Date:
2026.08.25
10:16:17 -04'00'