


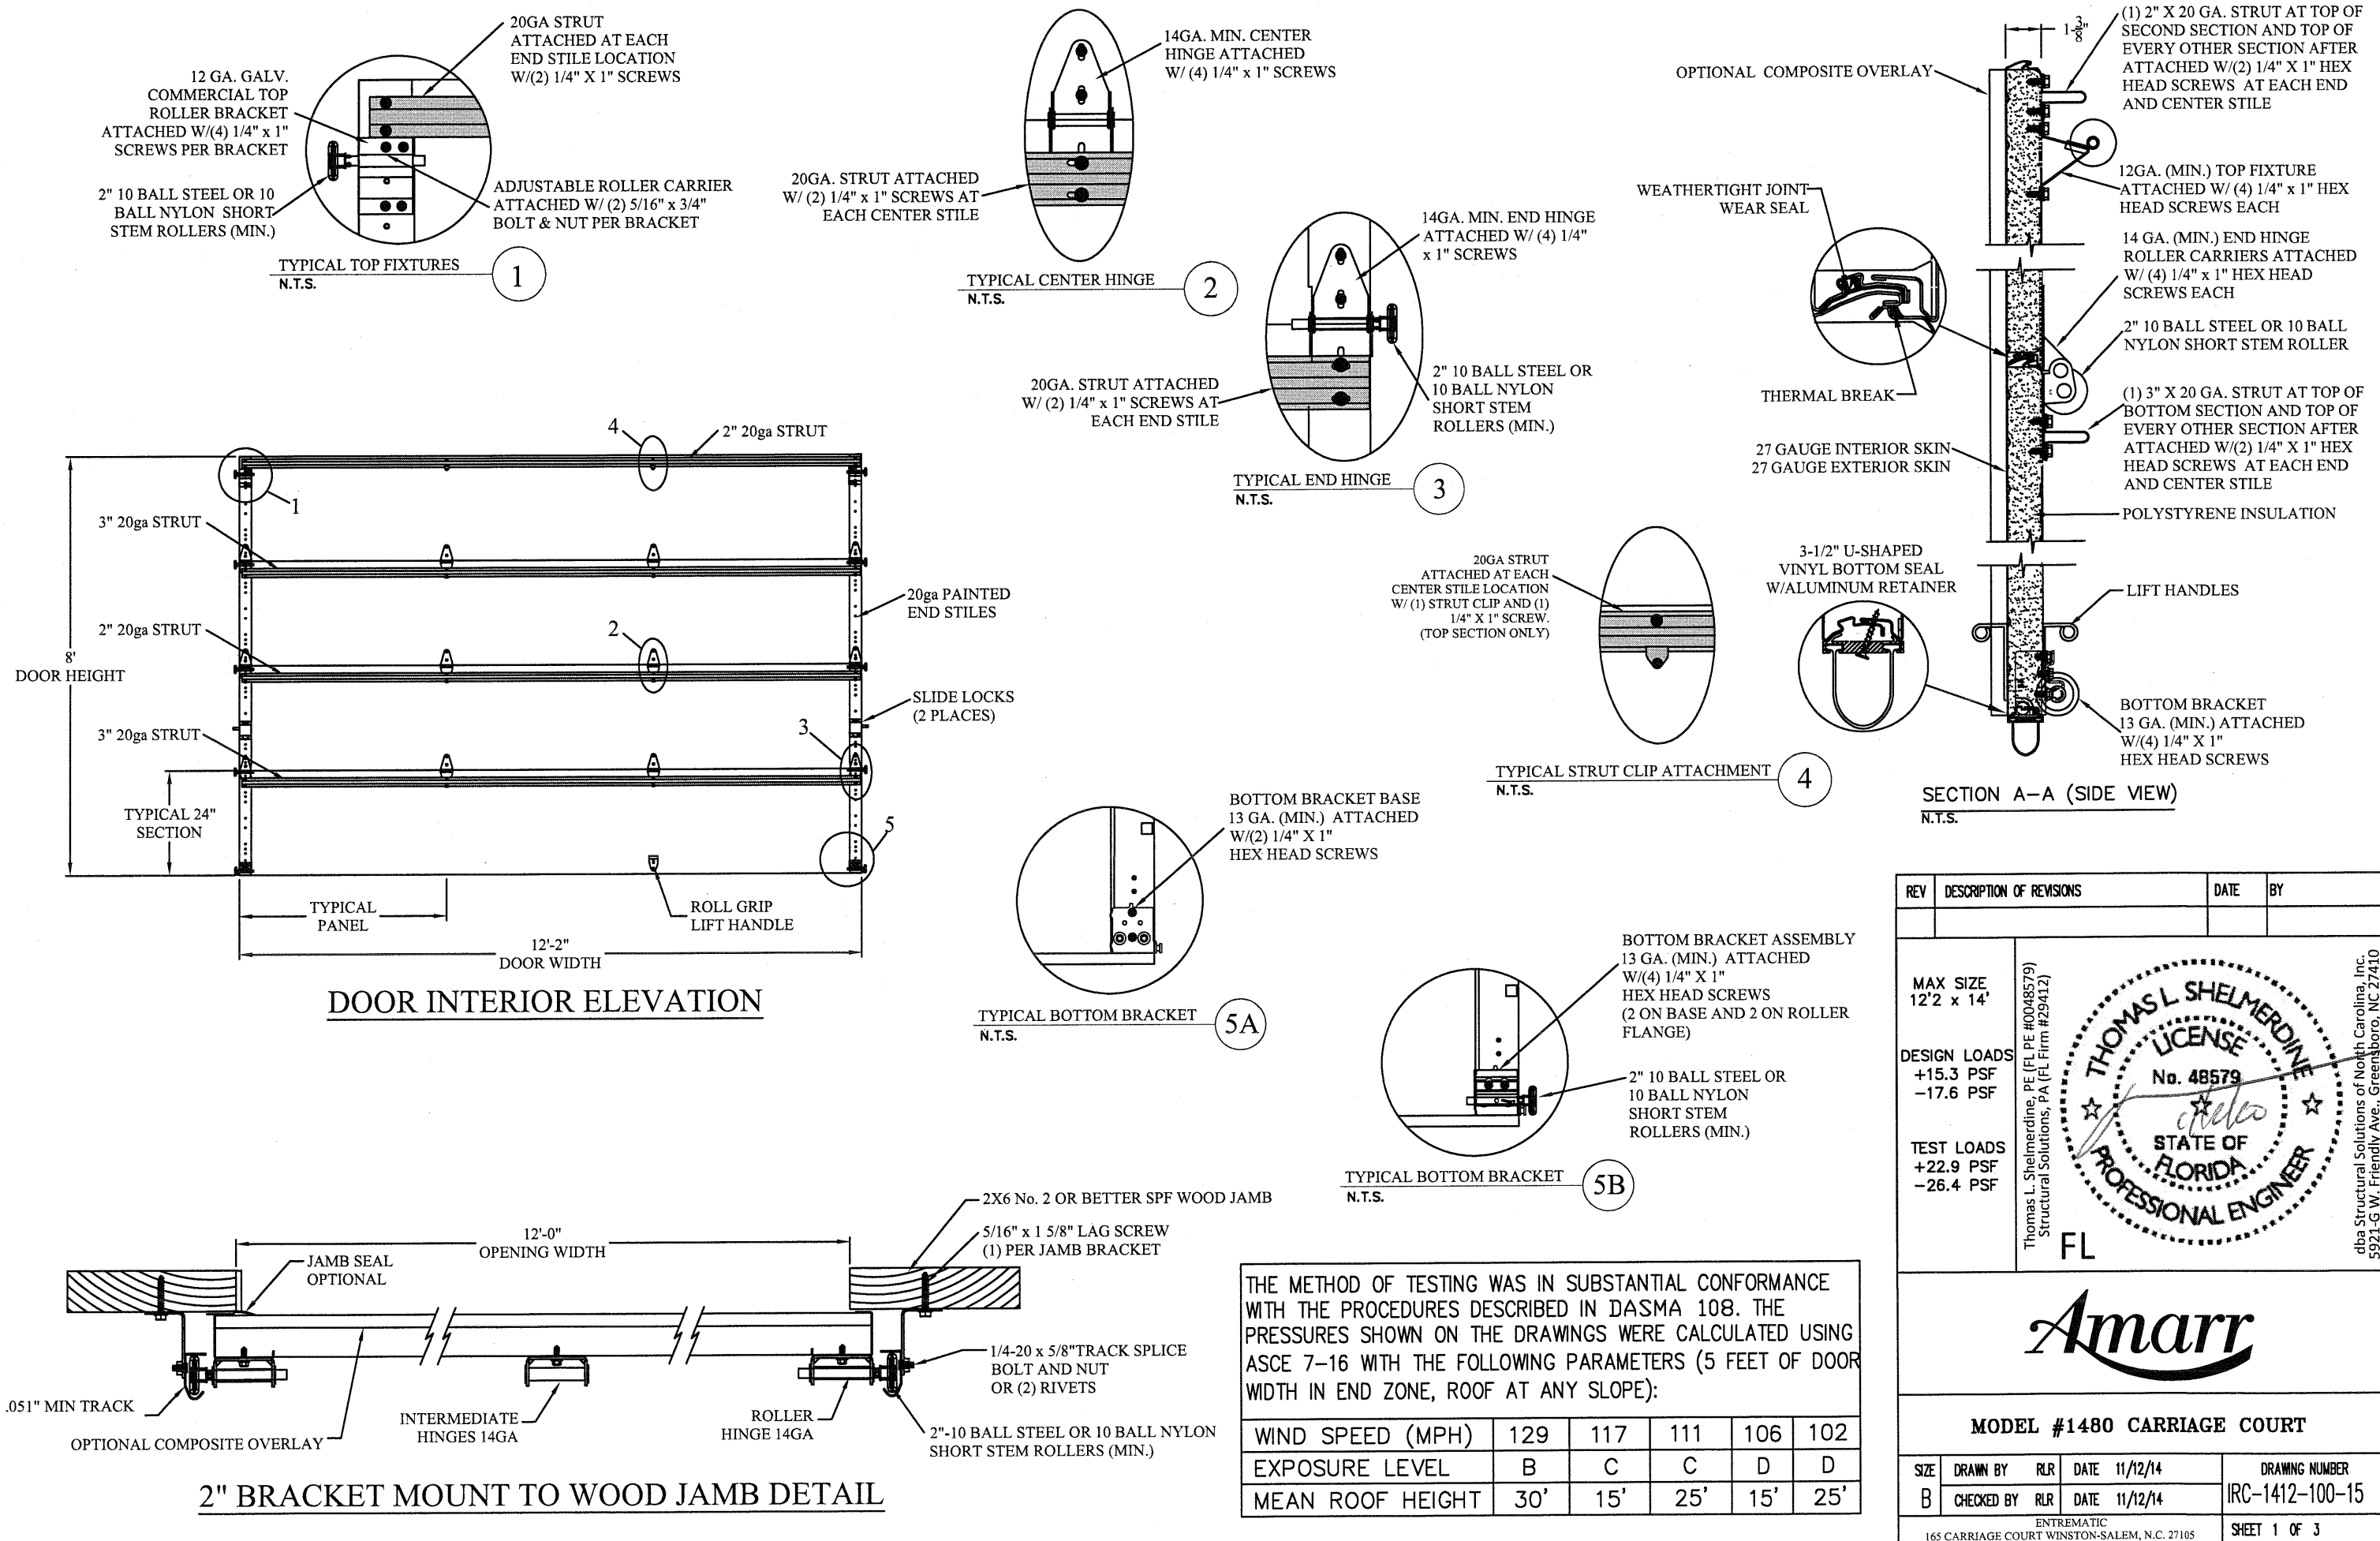

SPECIFICATIONS AND NOTES

1. ALL THE LOAD FROM THE DOOR IS TRANSFERRED TO THE VERTICAL TRACK, FROM THE TRACK THE LOAD IS TRANSFERRED TO THE VERTICAL JAMBS. THE HORIZONTAL JAMB OR HEADER RECEIVES NO PORTION OF THE LOAD TRANSFERRED FROM THE DOOR.
2. EACH VERTICAL JAMBS RECEIVES MAXIMUM DESIGN LOADS OF: +93.1 LBS/FT & -107.1 LBS/FT
3. DOOR AND HARDWARE WILL BE DESIGNED, MANUFACTURED AND INSTALLED WITH STANDARDS AS SET FORTH BY DASMA.
4. DOOR SECTIONS SHALL BE 27 GA. (.015) MIN. EXTERIOR SKIN ROLLED FORMED, W/ BAKED ON POLYESTER FINISH
5. DOORS UP TO 24'0" HIGH ALTERNATE BETWEEN (1) 3" 20GA STRUT & (1) 2" 20GA STRUT PER SECTION
6. SUPPORTING STRUCTURAL ELEMENTS SHALL BE DESIGNED BY A REGISTERED PROFESSIONAL ENGINEER FOR WIND LOADS INDICATED ON THIS DRAWING IN ADDITION TO OTHER LOADINGS.

WOOD JAMB ATTACHMENT TO STRUCTURE (OPTIONAL)

2 X 6 VERTICAL JAMB ATTACHMENT TO WOOD FRAME STRUCTURE

5/16" X 3" LAG SCREWS STARTING 6" FROM ENDS THEN 24" O.C. (1 1/2" EMBEDMENT)

2 X 6 VERTICAL JAMB ATTACHMENT TO 2,000 PSI CONCRETE

HILTI KWIK BOLT 3/8" X 4" STARTING 6" FROM ENDS

THEN 24" O.C. (2 1/2" EMBEDMENT)

HILTI SLEEVE ANCHOR 3/8" X 2-3/4" STARTING 6" FROM ENDS

THEN 24" O.C. (1 1/4" EMBEDMENT)

ITW/RAMSET REDHEAD (TRU-BOLT) 3/8" X 4" STARTING 6" FROM ENDS

THEN 24" O.C. (2 1/2" EMBEDMENT)

2 X 6 VERTICAL JAMB ATTACHMENT TO HOLLOW C-90 BLOCK

SIMPSON 1/4" X 3" TITEN SCREWS STARTING 6" FROM ENDS,

USE PAIRS OF FASTENERS (3" APART)

AT 24" O.C. (1 1/2" EMBEDMENT)

HILTI 1/4" X 2-3/4" KWIK-CON II+ SCREWS STARTING 6" FROM ENDS,

USE PAIRS OF FASTENERS (3" APART) AT 24" O.C. (1 1/4" EMBEDMENT)

2 X 6 VERTICAL JAMB ATTACHMENT TO GROUTED C-90 BLOCK (2000 PSI GROUT)





HILTI SLEEVE ANCHOR 3/8" X 2-3/4" STARTING 6" FROM ENDS

THEN 24" O.C. (1 1/4" EMBEDMENT)

(OR, USE FASTENERS FOR HOLLOW C-90 BLOCK)

*LAGS AND BOLTS CAN BE COUNTERSUNK TO PROVIDE A FLUSH MOUNTING SURFACE.

*PREPARATION OF WOOD JAMBS BY OTHERS

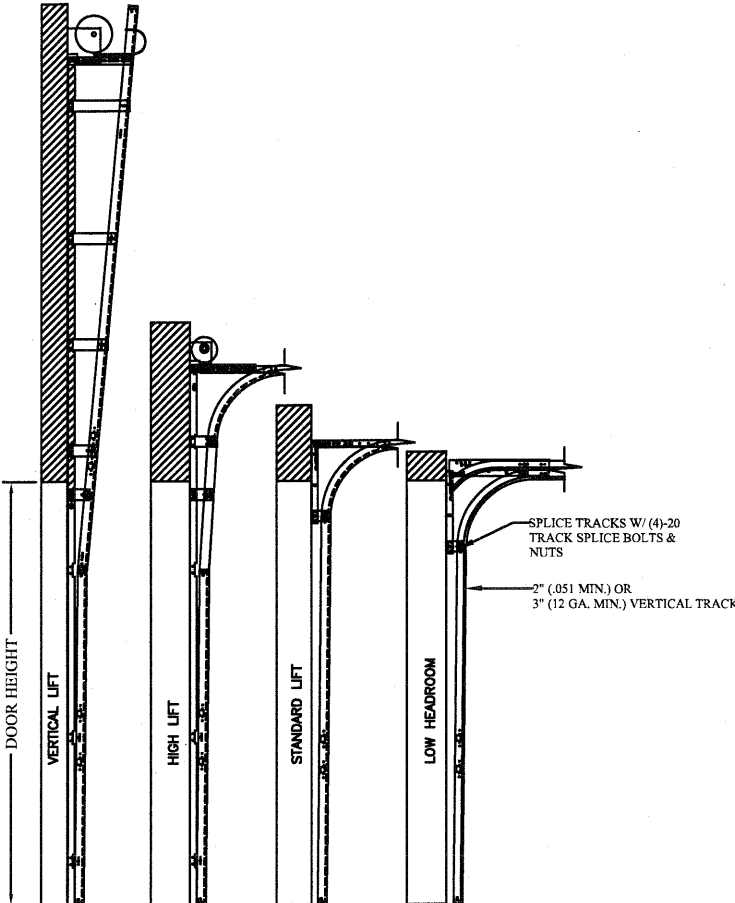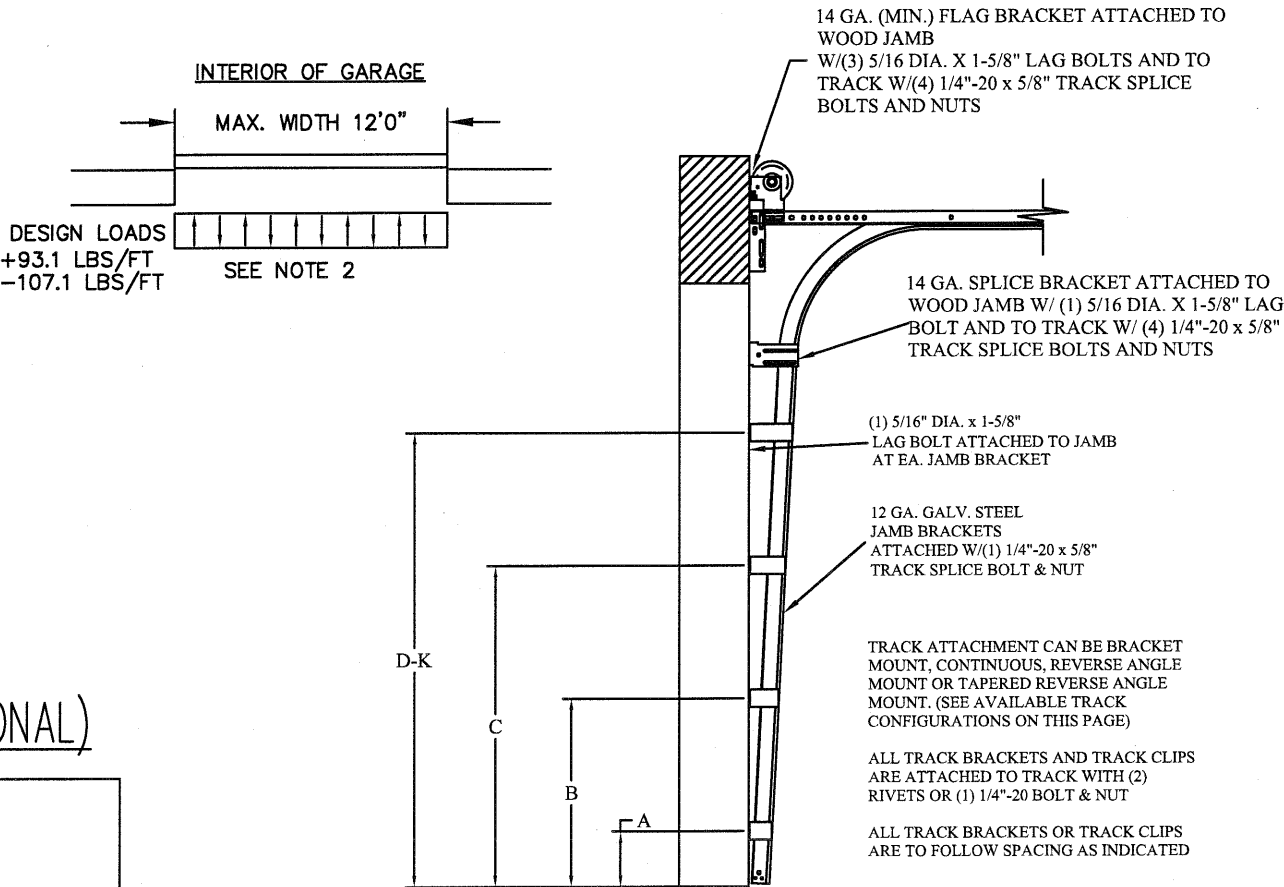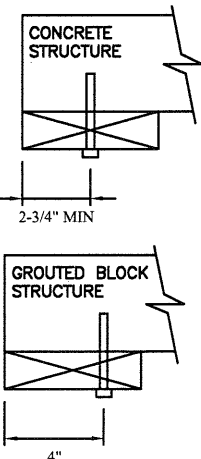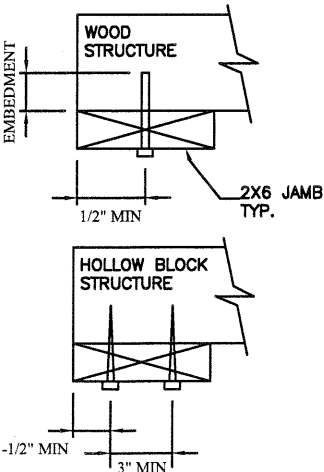

AVAILABLE TRACK CONFIGURATIONS
N.T.S.

TRACK CONFIGURATION FOR UP TO 24' TALL DOORS
SEE TABLE 1

TABLE 1

DOOR HEIGHT		TRACK ATTACHMENT										TYPICAL SPLICE	
		A	B	C	D	E	F	G	H	I	J	K	
7'	0"	10.0"	34"	58"									76"
7'	6"	10.0"	34"	58"									82"
8'	0"	10.0"	34"	58"									88"
9'	0"	10.0"	34"	58"	82"								100"
9'	6"	10.0"	34"	58"	82"								106"
10'	0"	10.0"	34"	58"	82"								112"
11'	0"	10.0"	34"	58"	82"	106"							124"
12'	0"	10.0"	34"	58"	82"	106"							136"
13'	0"	10.0"	34"	58"	82"	106"	130"						148"
14'	0"	10.0"	34"	58"	82"	106"	130"						160"

ALL TRACK ATTACHMENTS +/- 2" ALLOWED USING SYP OR SPF NO.2 OR BETTER ONLY

REV	DESCRIPTION OF REVISIONS	DATE	BY

MAX SIZE
12'2 x 14'

DESIGN LOADS
+15.3 PSF
-17.6 PSF

TEST LOADS
+22.9 PSF
-26.4 PSF

Thomas L. Shelmerdine, PE (FL PE #0048579)
Structural Solutions, PA (FL Firm #29412)

THOMAS L. SHELMERDINE
LICENSE
No. 48579
STATE OF
FLORIDA
PROFESSIONAL ENGINEER
FL


dba Structural Solutions of North Carolina, Inc.
5921-G W. Friendly Ave., Greensboro, NC 27410

Amarr


MODEL #1480 CARRIAGE COURT

SIZE B	DRAWN BY RLR	DATE 11/12/14	DRAWING NUMBER IRC-1412-100-15
CHECKED BY RLR	DATE 11/12/14	SHEET 2 OF 3	


ENTREMATIC
165 CARRIAGE COURT WINSTON-SALEM, N.C. 27105

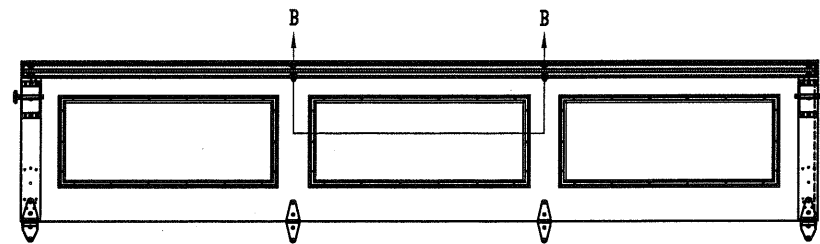


OPTIONAL GLAZED TOP SECTION W/ LONG PANEL 1480 (Carriage Court) WINDOWS AND STRUT LAYOUT
N.T.S.

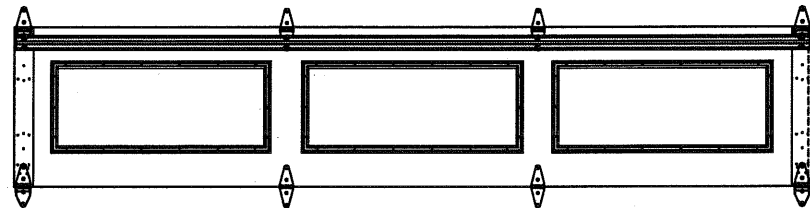

OPTIONAL GLAZED INTERMEDIATE SECTION W/ LONG PANEL 1480 (Carriage Court) WINDOWS AND STRUT LAYOUT
N.T.S.

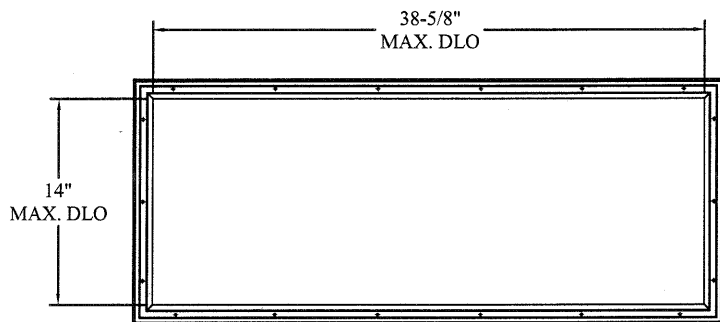

LONG PANEL 1480 (Carriage Court) GLAZING FASTENER DETAIL
N.T.S.

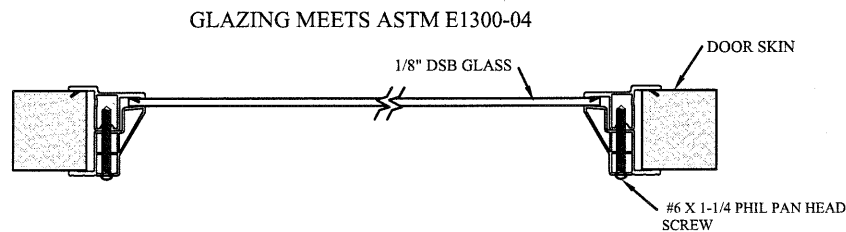

SECTION B-B LONG PANEL 1480 (Carriage Court) WINDOW DETAIL
N.T.S.

TABLE 2

Section Width (ft)		Center Stile Locations		Max Design Loads Allowed	
		1st (in)	2nd (in)	Positive (PSF)	Negative (PSF)
6'	0"	36"	-	20.6	23.7
6'	2"	37"	-	20.0	23.0
6'	4"	38"	-	19.5	22.4
6'	6"	39"	-	19.0	21.8
6'	8"	40"	-	18.5	21.3
6'	10"	41"	-	18.0	20.8
7'	0"	42"	-	17.6	20.3
7'	2"	43"	-	17.2	19.8
7'	4"	44"	-	16.8	19.4
7'	6"	45"	-	16.4	18.9
7'	8"	46"	-	16.1	18.5
7'	10"	47"	-	15.7	18.1
8'	0"	48"	-	15.4	17.7
8'	2"	49"	-	15.1	17.4
8'	4"	50"	-	14.8	17.0
8'	6"	51"	-	14.5	16.7
8'	8"	52"	-	14.2	16.4
8'	10"	53"	-	14.0	16.1
9'	0"	54"	-	13.7	15.8
9'	2"	37"	73"	20.3	23.3
9'	4"	36"	76"	19.4	22.3
9'	6"	37"	77"	19.1	22.0
9'	8"	38"	78"	18.9	21.7
9'	10"	39"	79"	18.6	21.5
10'	0"	40"	80"	18.4	21.2
10'	2"	41"	81"	18.2	20.9
10'	4"	42"	82"	17.9	20.6
10'	6"	43"	83"	17.6	20.2
10'	8"	44"	84"	17.3	19.9
10'	10"	45"	85"	17.0	19.6
11'	0"	46"	86"	16.8	19.3
11'	2"	47"	87"	16.5	19.0
11'	4"	48"	88"	16.3	18.7
11'	6"	49"	89"	16.1	18.5
11'	8"	50"	90"	15.8	18.2
11'	10"	51"	91"	15.6	18.0
12'	0"	48"	96"	15.3	17.6
12'	2"	49"	97"	15.3	17.6

REV	DESCRIPTION OF REVISIONS	DATE	BY

MAX SIZE
12'2" x 14'

DESIGN LOADS
+15.3 PSF
-17.6 PSF

TEST LOADS
+22.9 PSF
-26.4 PSF

Thomas L. Shelmerdine, PE (FL PE #0048579)
Structural Solutions, PA (FL Firm #29412)

FL

dba Structural Solutions of North Carolina, Inc.
5921-G W. Friendly Ave., Greensboro, NC 27410

MODEL #1480 CARRIAGE COURT

SIZE	DRAWN BY	RLR	DATE	11/12/14	DRAWING NUMBER
B	CHECKED BY	RLR	DATE	11/12/14	IRC-1412-100-15
ENTREMATIC 165 CARRIAGE COURT WINSTON-SALEM, N.C. 27105					SHEET 3 OF 3