





IRTM HEAD JAMB/JAMB

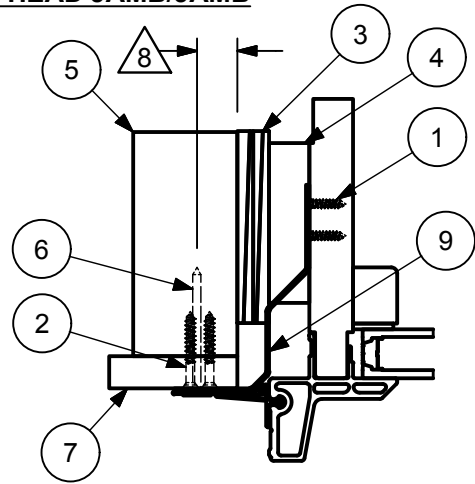

LOWER UNIT JAMB

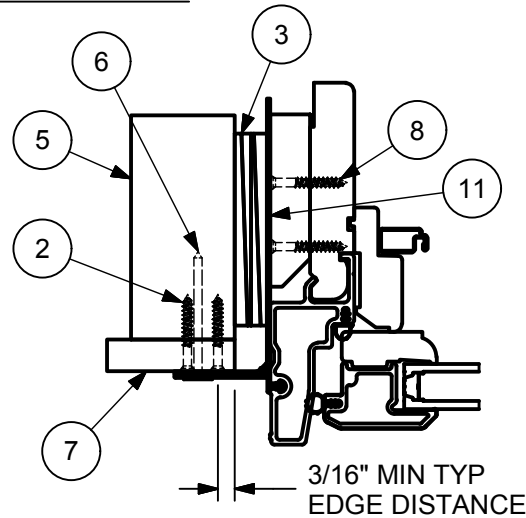

SILL

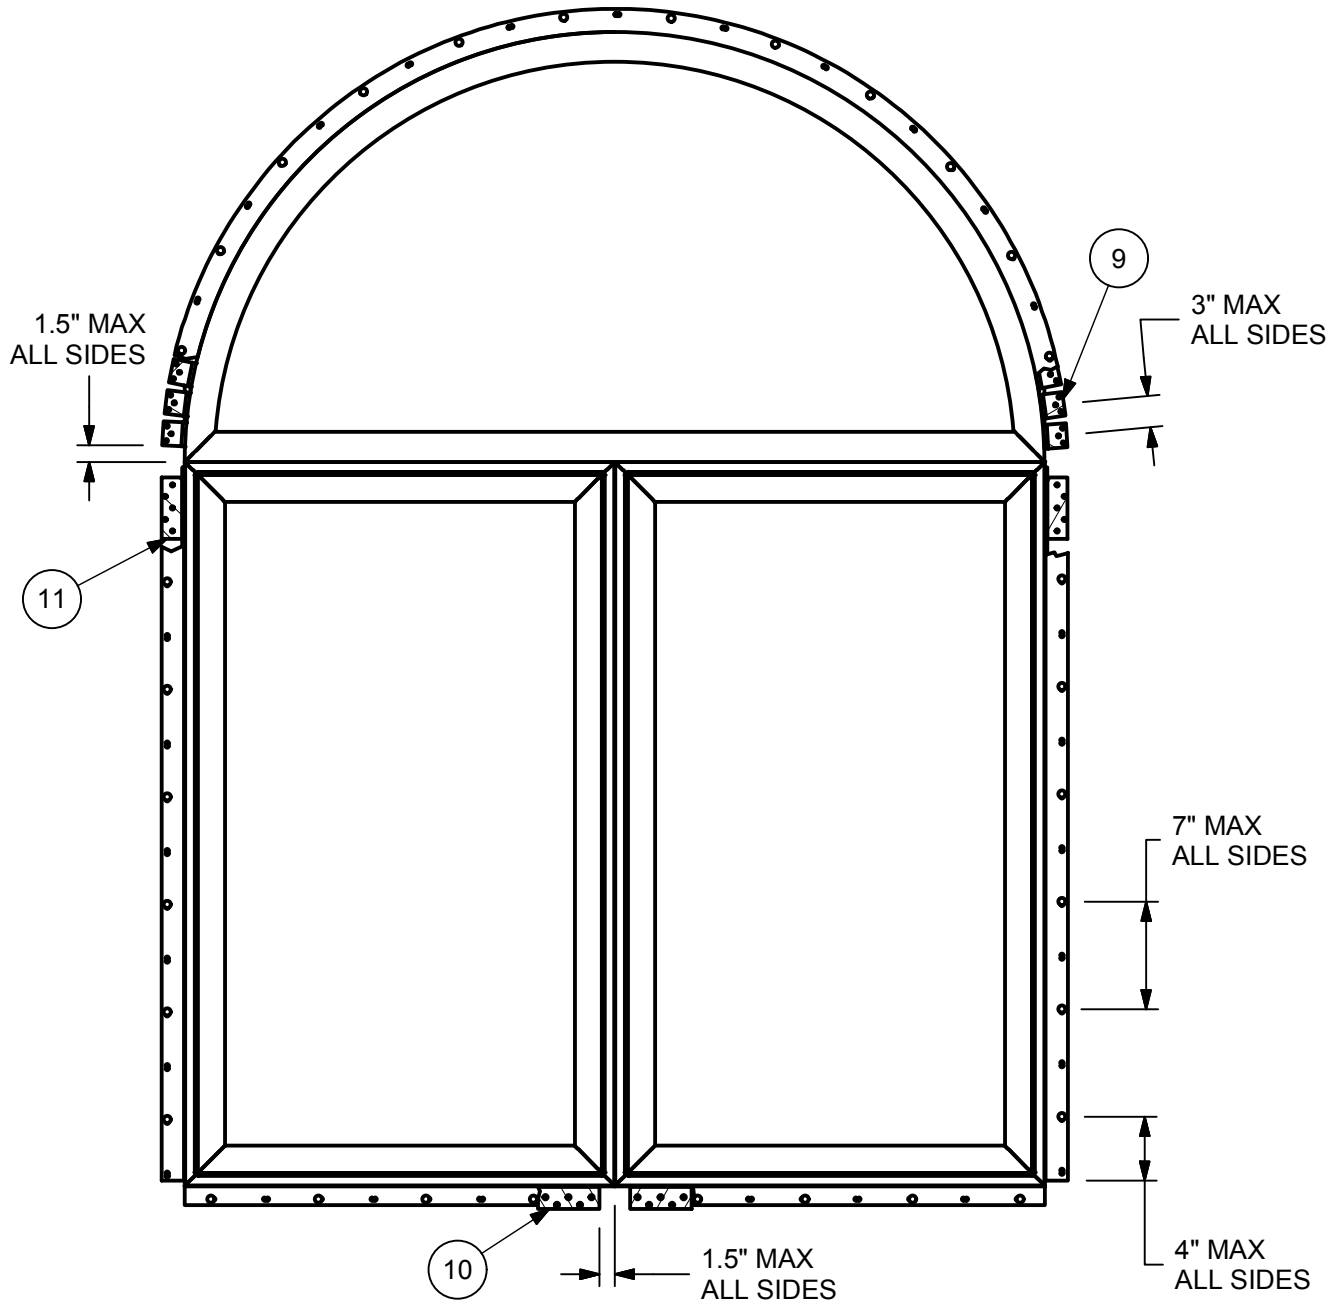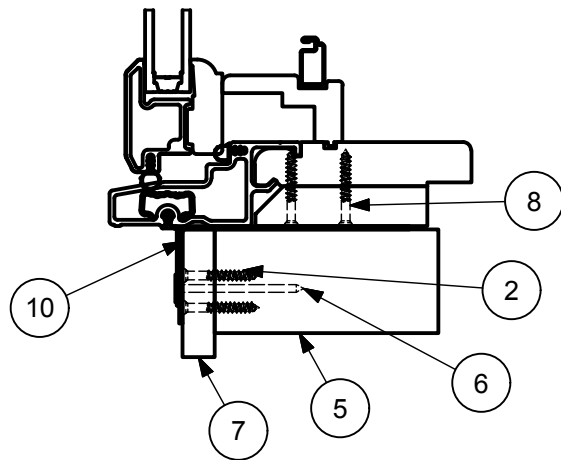

- NOTES:**
1. FOR GENERAL SPECIFICATIONS, REFER TO DOC 00003952
 2. THIS PRINT IS FOR STRUCTURAL PERFORMANCE ONLY.
FOR FLASHING & SEALING INSTRUCTIONS, REFER TO THE
INSTALLATION INSTRUCTIONS
 3. SHIMS:
- PLACE SHIMS WITHIN 4" - 6" OF EACH CORNER AND
SPACE ALL OTHERS EVENLY, A MAXIMUM OF 15" APART
 4. IF CHEMICALLY TREATED LUMBER IS USED FOR FRAMING
MATERIAL, FASTENERS INTO THE FRAMING MUST BE A
MINIMUM OF 0.90 OZ/FT^2 ZINC HOT DIPPED GALVANIZED OR
STAINLESS STEEL TYPE 304 OR 316
 5. #8 X 1 1/4" PAN HEAD OR WAFFLE HEAD SCREWS MAY BE
SUBSTITUTED FOR 2" ROOFING NAILS
 6. MINIMUM NAIL EMBEDMENT DEPTH OF 1-15/16"
 7. MINIMUM SCREW EMBEDMENT DEPTH OF 1-3-16"
 - △ 8. MINIMUM EDGE DISTANCE: 1/2"
 9. APPROVED PRODUCTS: FL 14133

11	00104030	MULL CLIP, JAMB
10	00104023	MULL CLIP, SILL
9	00050381	STATIONARY INSTALLATION CLIP
8	00046846	#8 X 1.250 PH, BH, COARSE PB 2/3 THREAD SCREW
7	NA	SHEATHING
6	NA	2.00" GALVANIZED ROOFING NAIL
5	NA	FRAMING MATERIAL
4	NA	FILLER BY CONTRACTOR
3	NA	SHIMS
2	NA	1.25" DRYWALL SCREW
1	00003212	#7-19 X .625" TYPE AB-17, FULL THREAD
ITEM	DWG NO	DESCRIPTION

PARTS LIST



RESEARCH & DEVELOPMENT
WARROAD, MN, USA, (218) 386-4021

PRODUCT INTEGRITY WOOD ULTREX
CATEGORY:
UNIT TYPE: IAWN, ICA, ICAP, IDGCA, IRTMCA

DWG TYPE: INSTALLATION
DESCRIPTION: ELEVATION/METHODS, NAILFIN, CERTMULL, IRTMCA

CHK: SAL 10/30/17	SIZE: B	CLASS: ASSY	DWG NO: 00105268
APP: JJJ 10/30/17	SCALE: NA	DATE: 03/23/17	DWG BY: ANDERSON, RYAN
			SHEET: 1 OF 1

- NAILING FIN INSTALLATION**
- APPLY INSTALLATION CLIPS TO ROUND TOP UNIT ALONG HEAD JAMB AND JAMBS. FASTEN WITH THREE #7 X .625 WOOD SCREWS. SPACE PER ELEVATION
 - APPLY INSTALLATION CLIPS TO LOWER UNITS ALONG JAMB AND SILL. FASTEN WITH EIGHT #8 X 1.250 WOOD SCREWS. SPACE PER ELEVATION
 - ATTACH INSTALLATION CLIPS TO FRAMING WITH 1.25" DRYWALL SCREWS
 - SECURE NAILING FIN WITH 2" GALVANIZED ROOFING NAILS, MINIMUM OF TWO PER SIDE. SPACE PER ELEVATION

1.0	REVISED NOTES PERTAINING TO FLORIDA USEAGE	21704	10/30/17	RMR
0.1	UPDATED FASTENER EDGE DISTANCE AND EMBEDMENT REQUIREMENTS	21163	04/21/17	RJA
0.0	ORIGINAL ISSUE	21163	3/24/17	RJA
REV	DESCRIPTION / REQUESTOR	ECN NO	DATE	REV BY