

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER MASONRY/CONCRETE IS OPTIONAL.
4. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2” WINDOW UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
5. WHERE WOOD BUCK THICKNESS IS 1–1/2” OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. WINDOW UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS.
6. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
7. BUCKS SHALL EXTEND BEYOND WINDOW INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
8. FOR FIN INSTALLATION SHIM AS NEEDED. FOR FRAME INSTALLATION SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.
9. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
10. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
11. FRAME MATERIAL: EXTRUDED RIGID PVC.
12. UNITS MUST BE GLAZED PER ASTM E1300–04/09, SEE SHEET 2 FOR GLASS DETAILS.
13. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
14. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #6 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/2” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

15. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/8” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2 1/2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. ALL FASTENERS TO BE CORROSION RESISTANT.
19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

A. WOOD – MINIMUM SPECIFIC GRAVITY OF G=0.42

B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.

C. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.

D. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI OR ALUMINUM 6063–T5 FU=30KSI .048” THICK MINIMUM

SIGNED: 08/05/2016

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3 – 6	INSTALLATION DETAILS

VIWINCO, INC.

MORGANTOWN BUSINESS PARK, P.O. BOX 499

MORGANTOWN, PA 19543

OCEANVIEW IMPACT CASEMENT

36” X 72”

NOTES

DRAWN:

N.G.

DWG NO.

08–02940

REV

–

SCALE

NTS

DATE

08/04/16

SHEET


1

OF


6




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

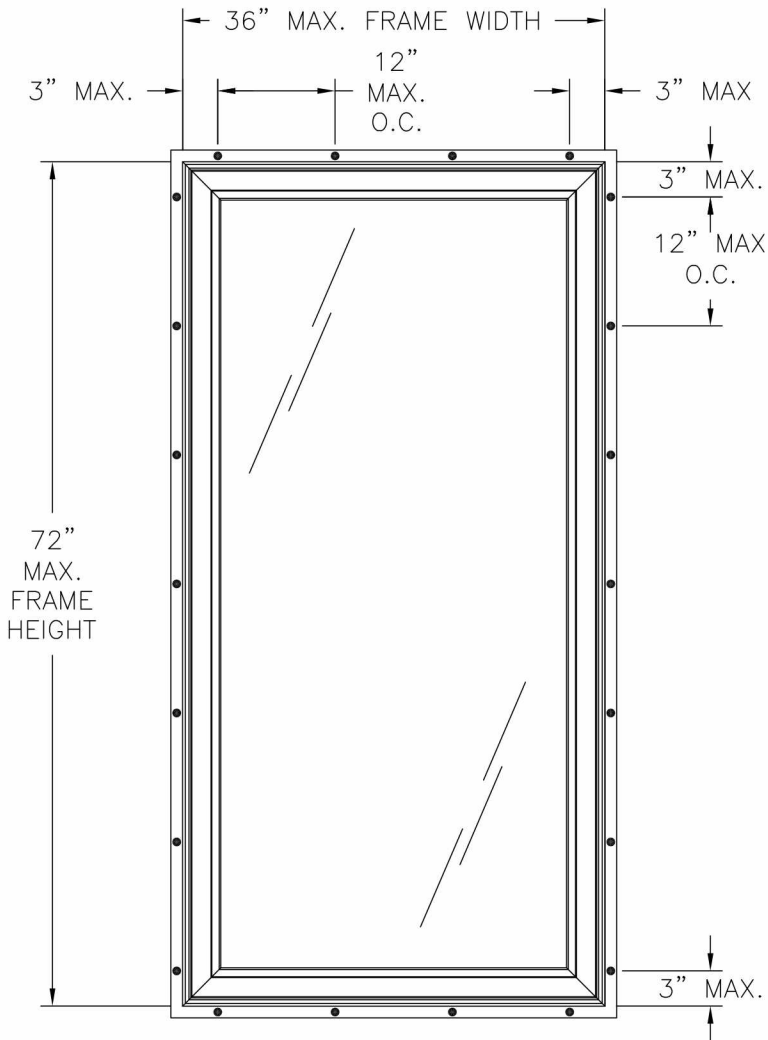

S-SERIES OCEANVIEW CASEMENT
 EXTERIOR VIEW
 FIN INSTALLATION

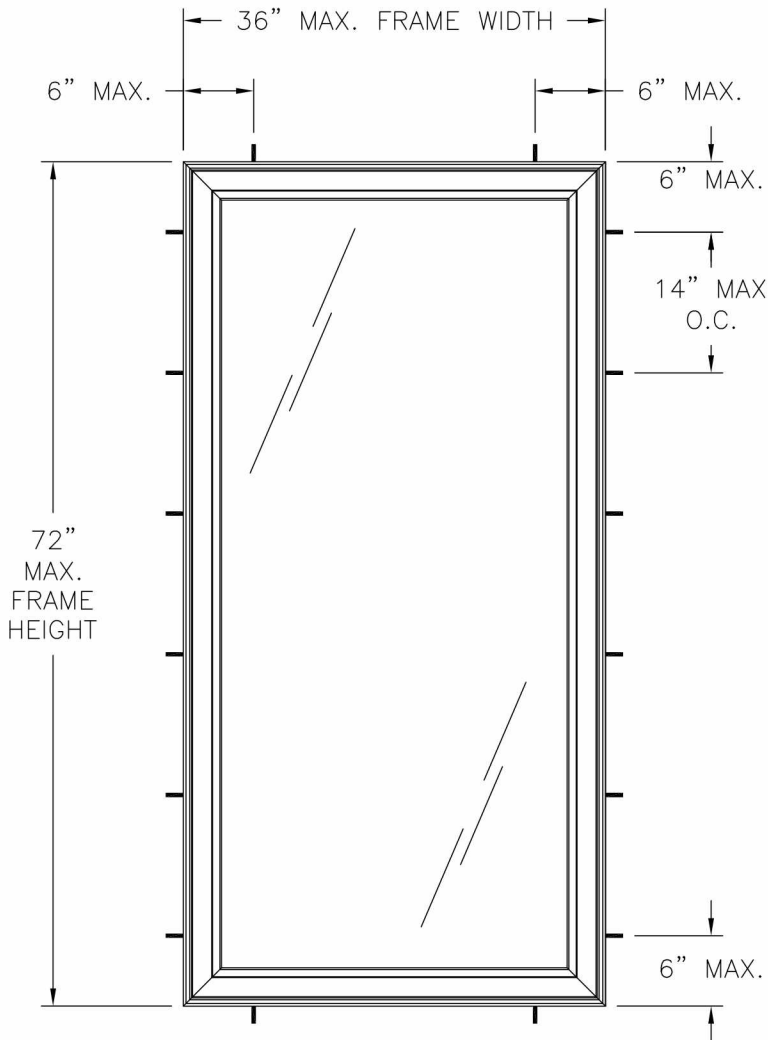

S-SERIES OCEANVIEW CASEMENT
 EXTERIOR VIEW
 FRAME INSTALLATION

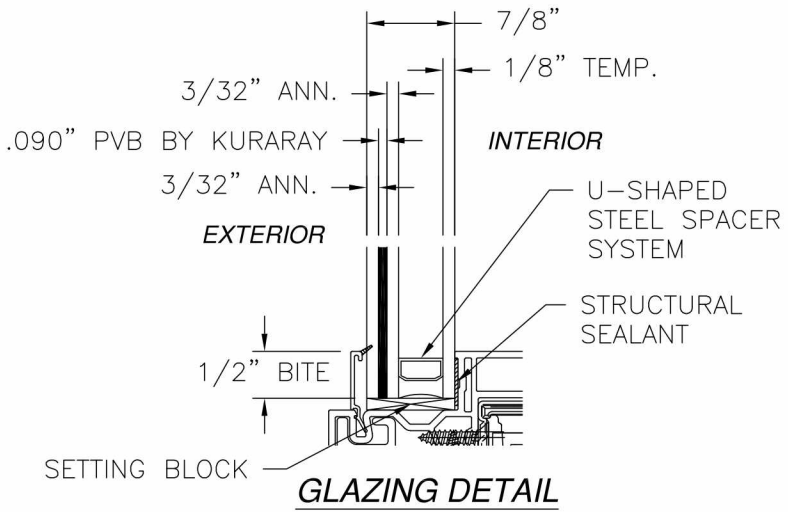

DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	LARGE MISSILE IMPACT

MISSILE LEVEL D, WIND ZONE 3

- NOTES:
- SASH MAXIMUM SIZE: 33" X 69"
 - SASH MAXIMUM D.L.O." 29 1/2" X 65 3/4"
 - (2) 1/4" DIAMETER WEEP HOLE AT 3" FROM EACH END OF BOTTOM RAIL.


HARDWARE SCHEDULE	
A.	(1) ROTO CRANK OPERATOR AT SILL 11" FROM JAMB
B.	(1) MULTI-POINT LOCK AT LOCK JAMB 9 1/2" FROM SILL
C.	(2) DOUBLE BAR HINGE AT VENT TOP AND BOTTOM RAILS
D.	(2) SNUBBER AT HINGE STILE 24" FROM EACH END
E.	EXTRUDED ALUMINUM REINFORCEMENT (10300091) AT VENT STILES
F.	EXTRUDED ALUMINUM REINFORCEMENT (4220) AT VENT STILE AND RAILS
G.	EXTRUDED ALUMINUM REINFORCEMENT (10202004) AT FRAME HEAD AND SILL
H.	EXTRUDED ALUMINUM REINFORCEMENT (4303) AT FRAME JAMBS AND SILL

VIWINCO, INC. MORGANTOWN BUSINESS PARK, P.O. BOX 499 MORGANTOWN, PA 19543		
OCEANVIEW IMPACT CASEMENT 36" X 72" ELEVATIONS		
DRAWN: N.G.	DWG NO. 08-02940	REV -
SCALE NTS	DATE 08/04/16	SHEET 2 OF 6

SIGNED: 08/05/2016




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

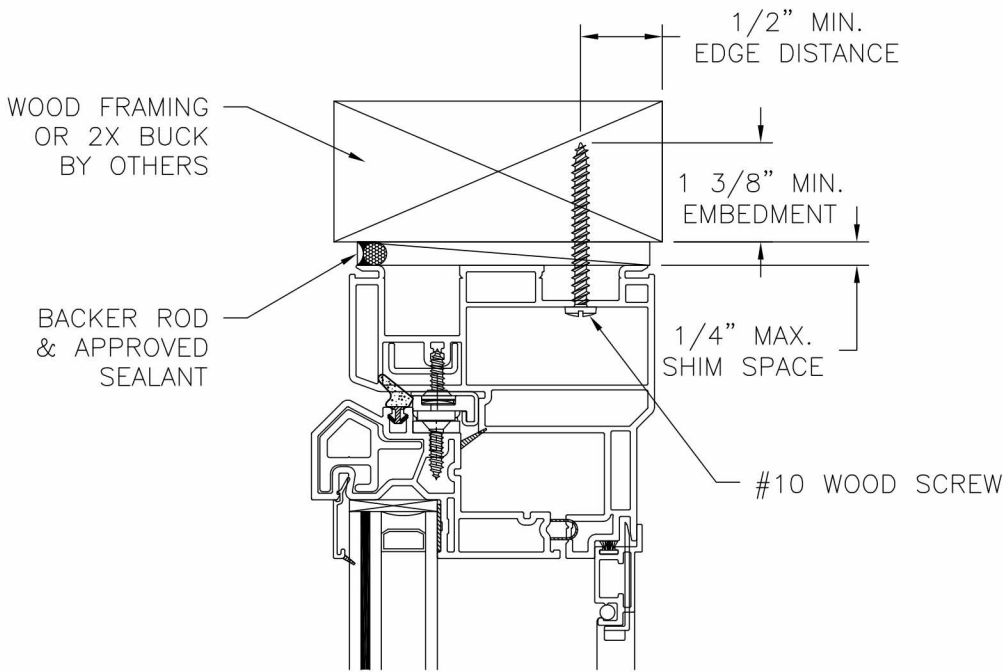


EXTERIOR

INTERIOR

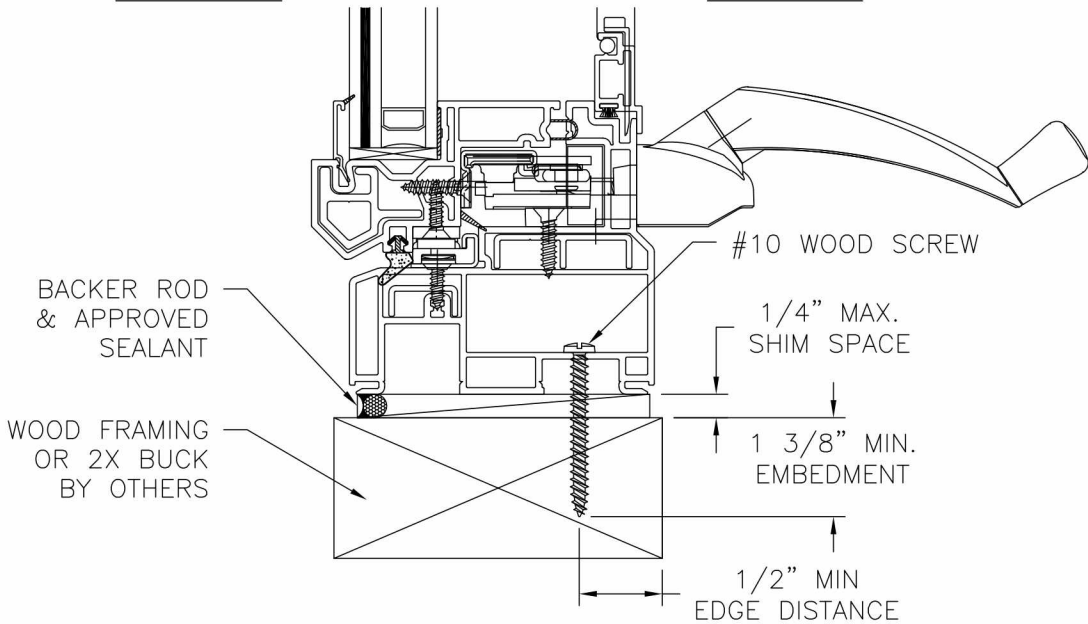

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

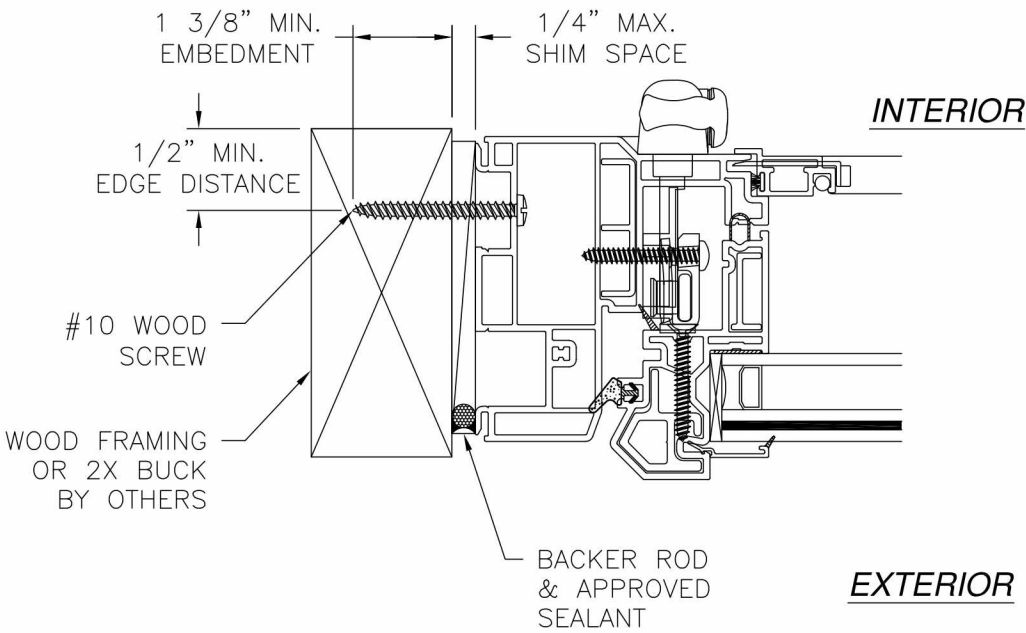


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

VIWINCO, INC. MORGANTOWN BUSINESS PARK, P.O. BOX 499 MORGANTOWN, PA 19543		
OCEANVIEW IMPACT CASEMENT 36" X 72" FRAME INSTALLATION DETAILS		
DRAWN: N.G.	DWG NO. 08-02940	REV -
SCALE NTS	DATE 08/04/16	SHEET 3 OF 6


SIGNED: 08/05/2016




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

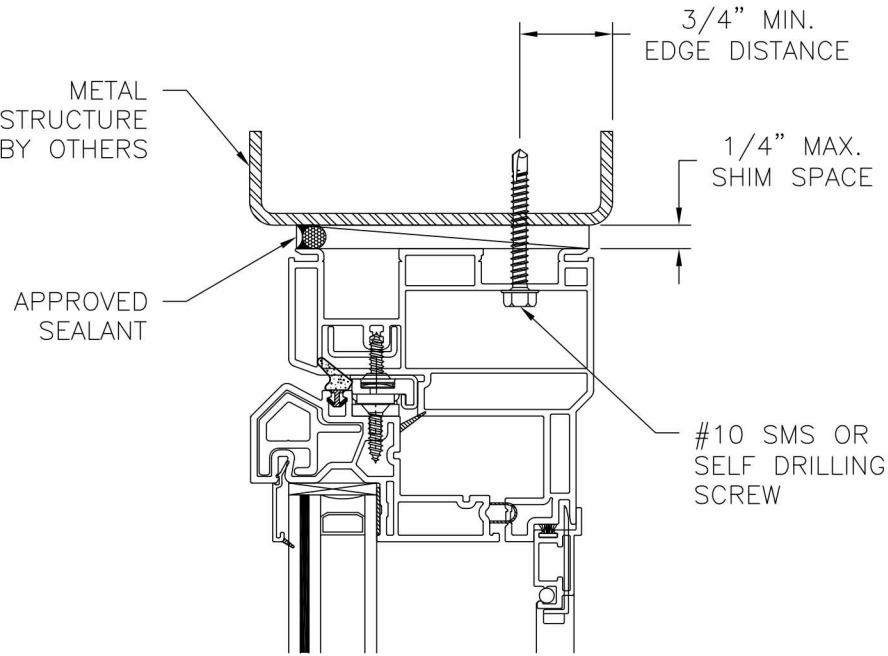

EXTERIOR INTERIOR

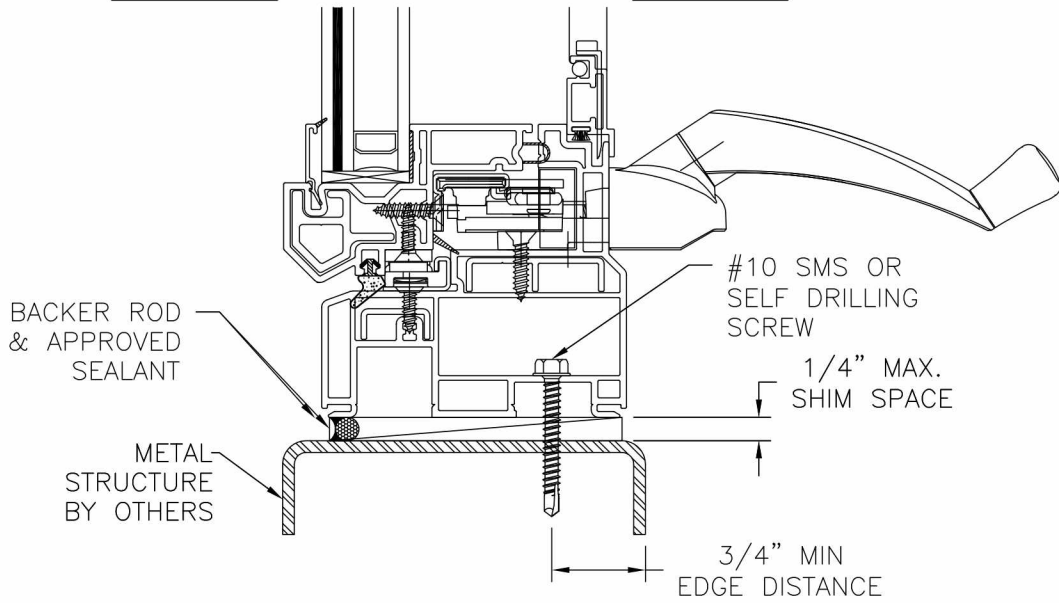

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

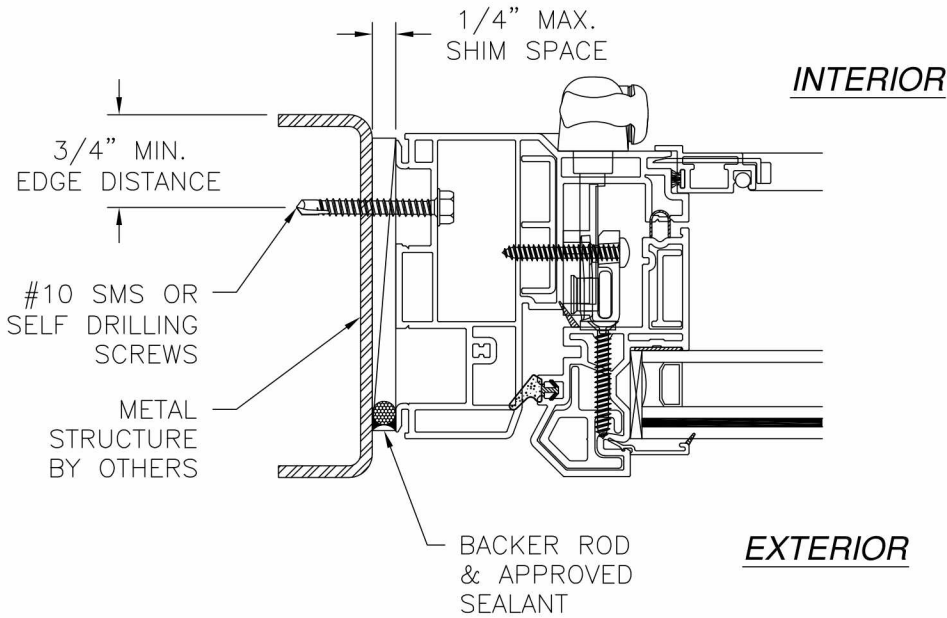

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION




NOTES:
 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

VIWINCO, INC. MORGANTOWN BUSINESS PARK, P.O. BOX 499 MORGANTOWN, PA 19543		
OCEANVIEW IMPACT CASEMENT 36" X 72" FRAME INSTALLATION DETAILS		
DRAWN: N.G.	DWG NO. 08-02940	REV —
SCALE NTS	DATE 08/04/16	SHEET 4 OF 6

SIGNED: 08/05/2016



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

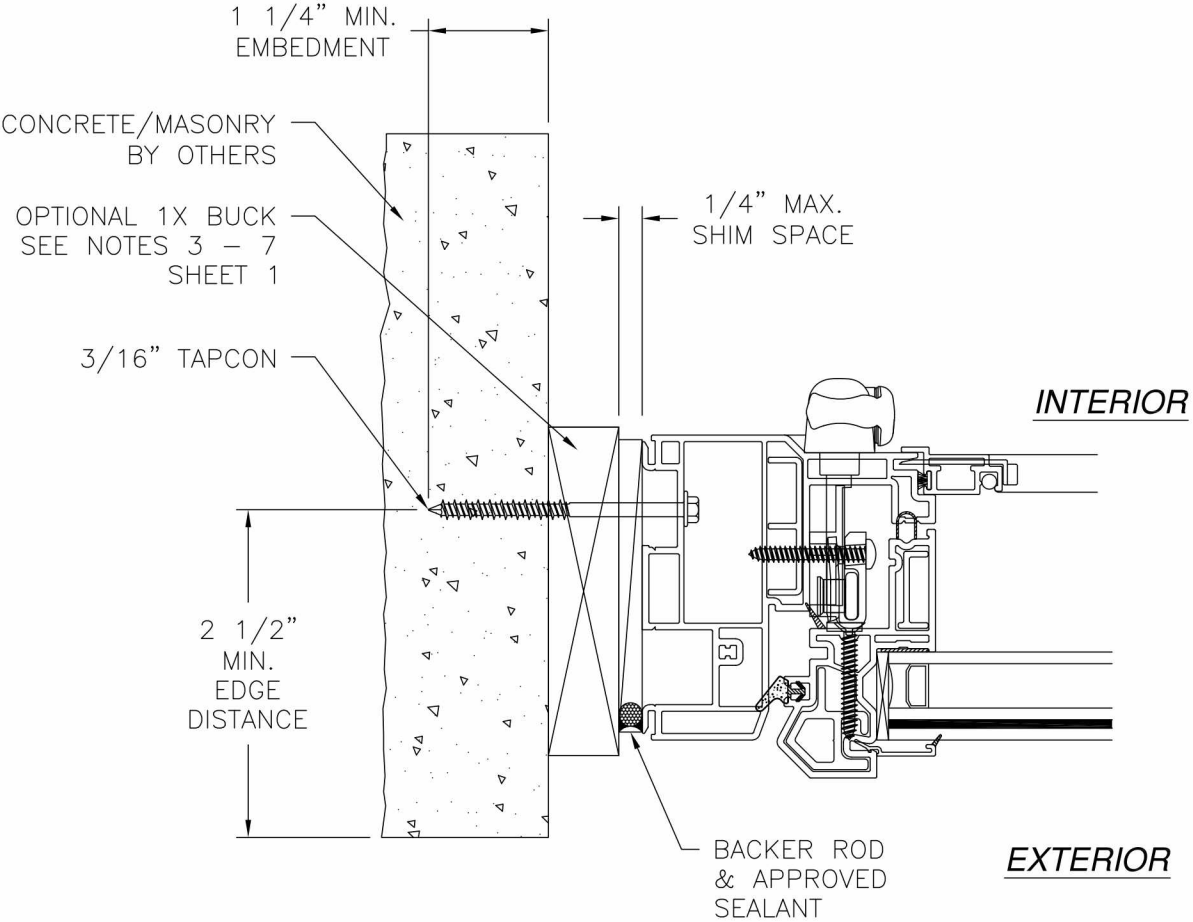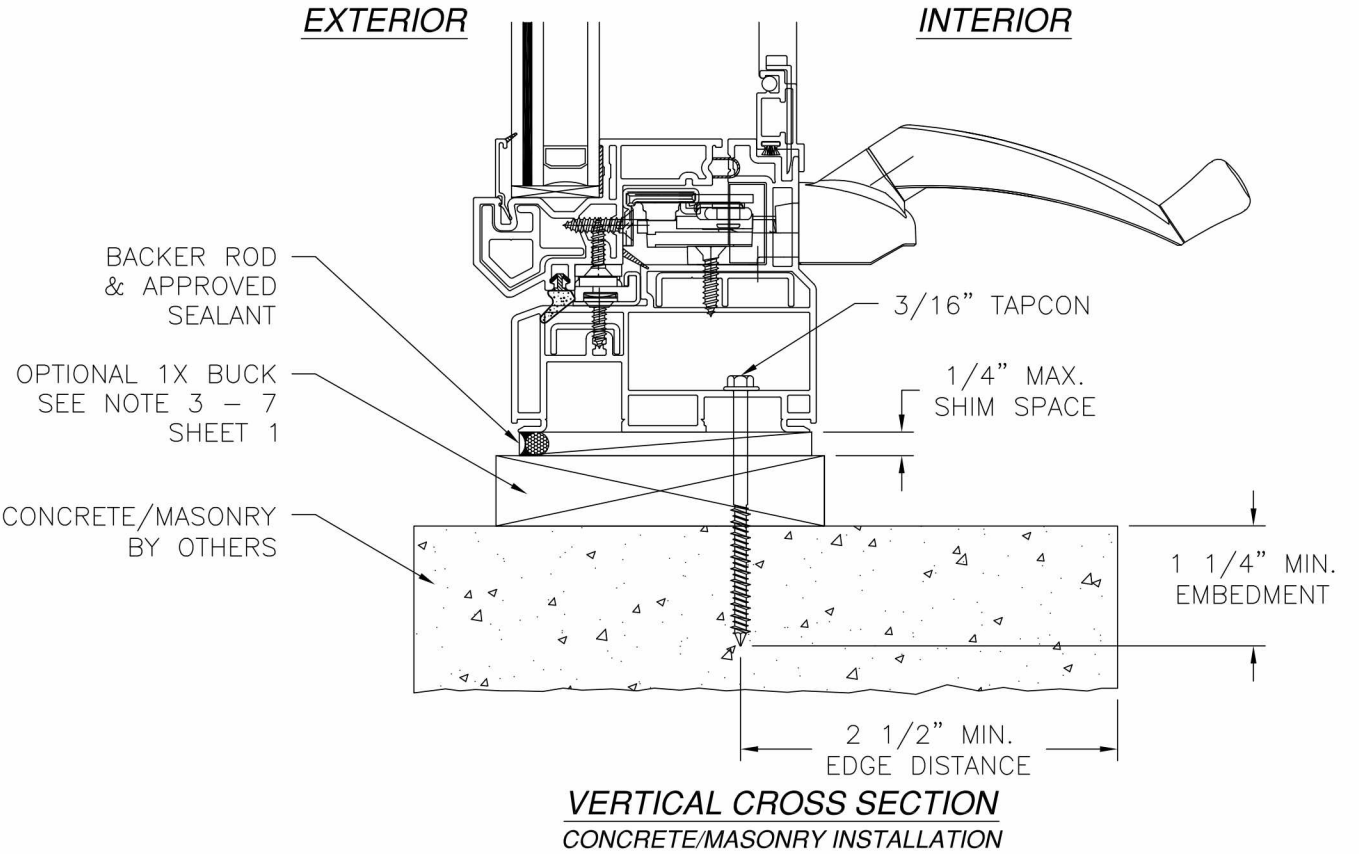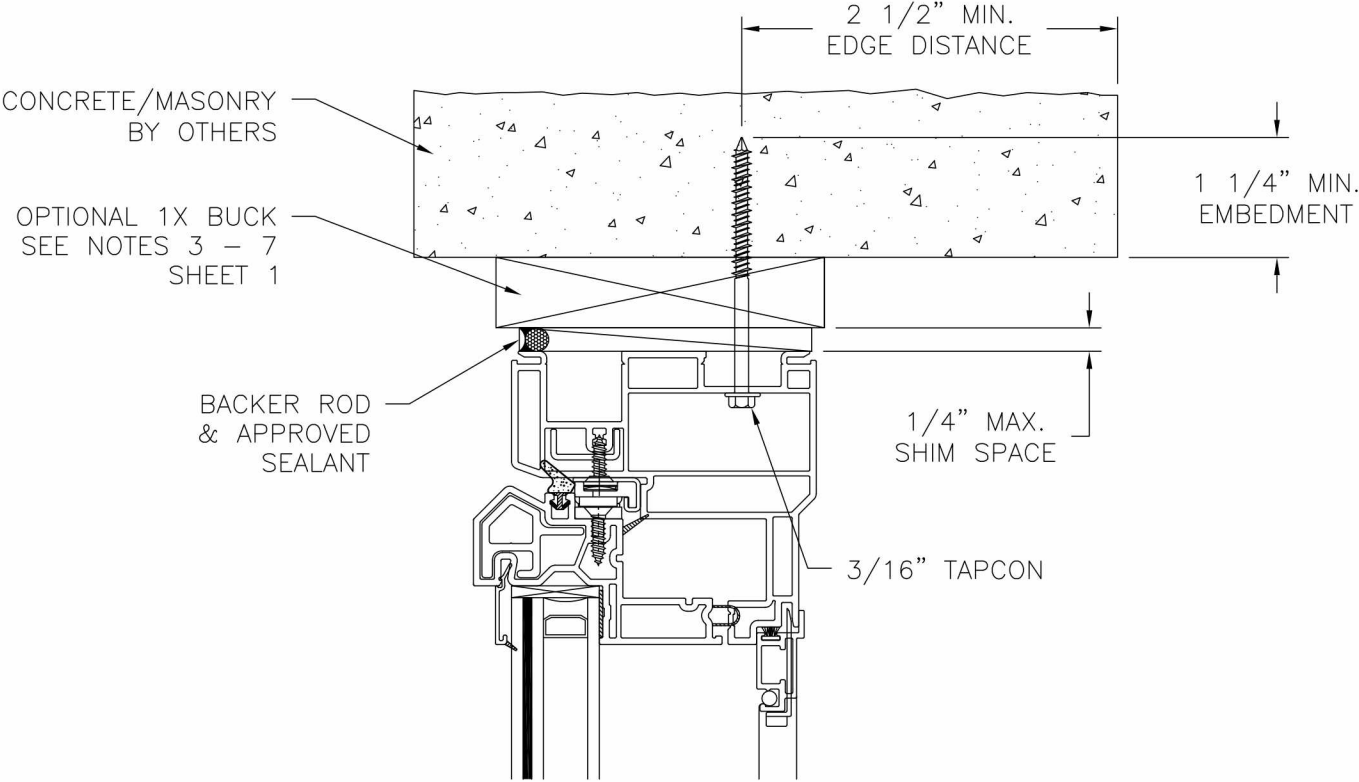

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY INSTALLATION


- NOTES:**
 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 08/05/2016

VIWINCO, INC. MORGANTOWN BUSINESS PARK, P.O. BOX 499 MORGANTOWN, PA 19543		
OCEANVIEW IMPACT CASEMENT 36" X 72" FRAME INSTALLATION DETAILS		
DRAWN: N.G.	DWG NO. 08-02940	REV -
SCALE NTS	DATE 08/04/16	SHEET 5 OF 6




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

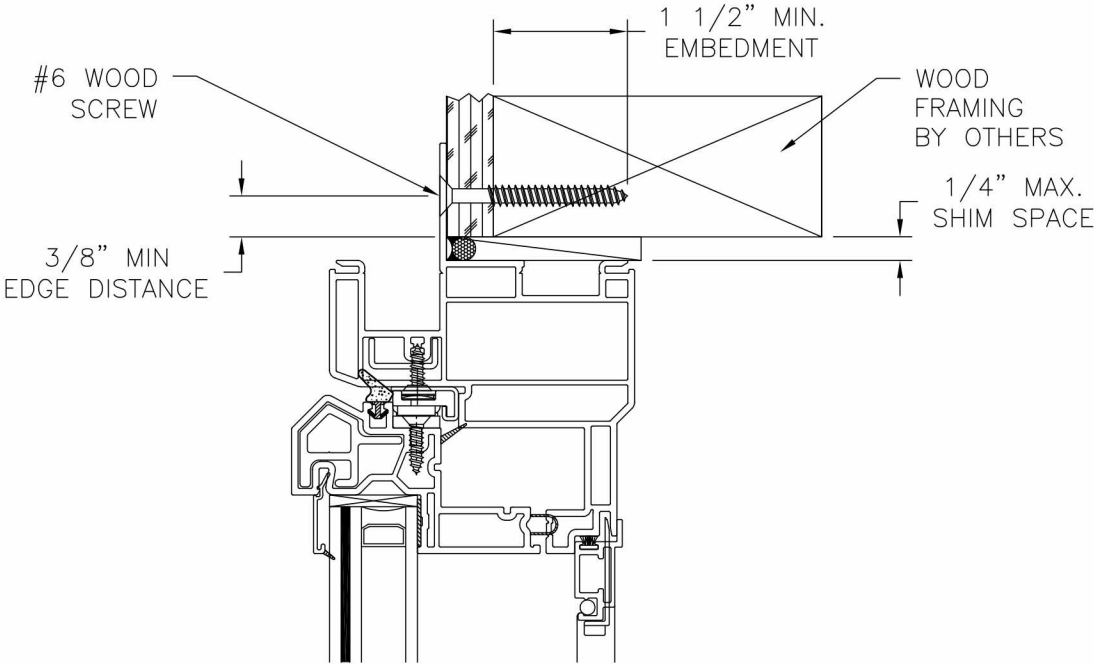


EXTERIOR

INTERIOR

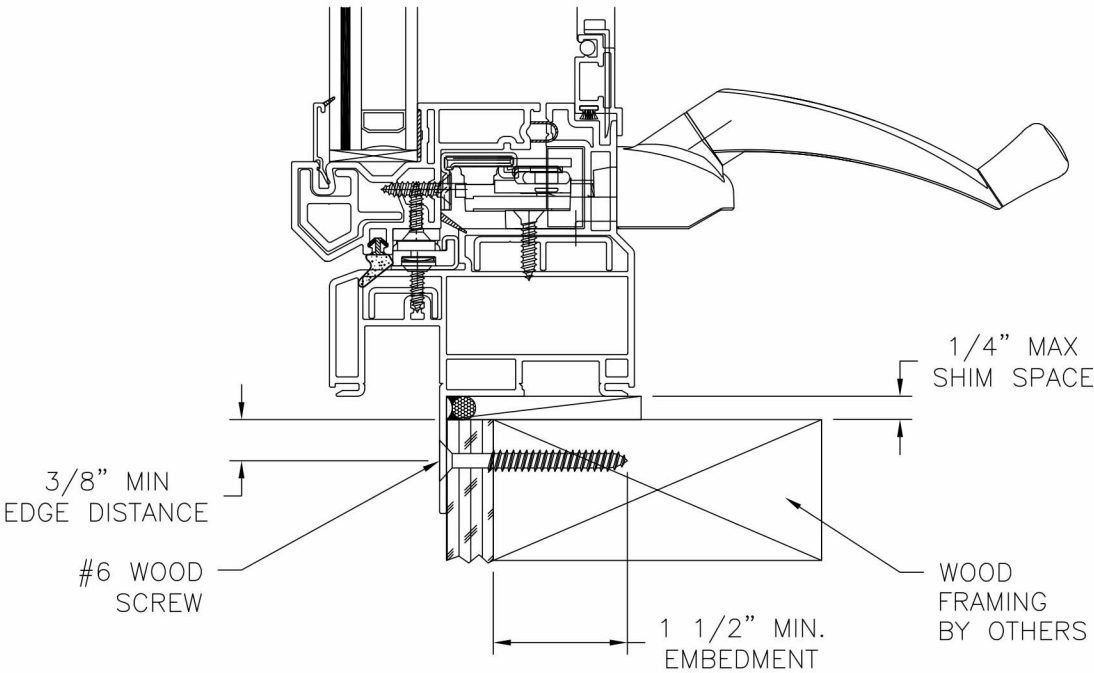

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

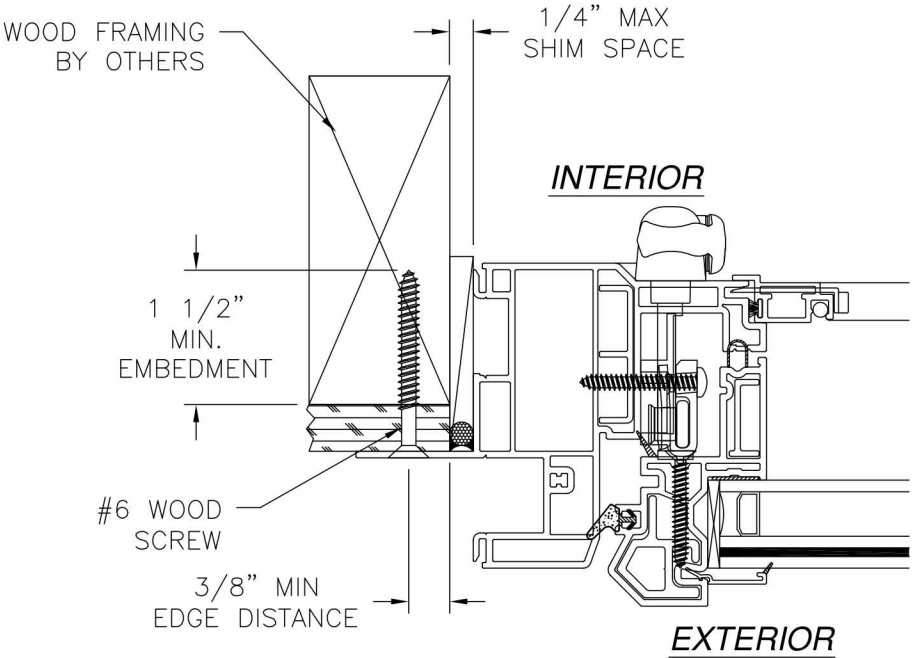

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 08/05/2016

VIWINCO, INC. MORGANTOWN BUSINESS PARK, P.O. BOX 499 MORGANTOWN, PA 19543		
OCEANVIEW IMPACT CASEMENT 36" X 72" FIN INSTALLATION DETAILS		
DRAWN: N.G.	DWG NO. 08-02940	REV -
SCALE NTS	DATE 08/04/16	SHEET 6 OF 6

