


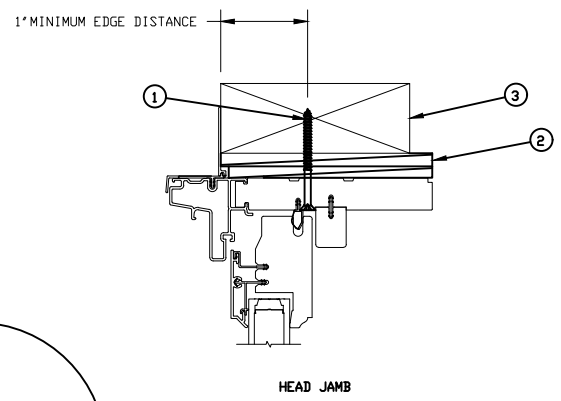
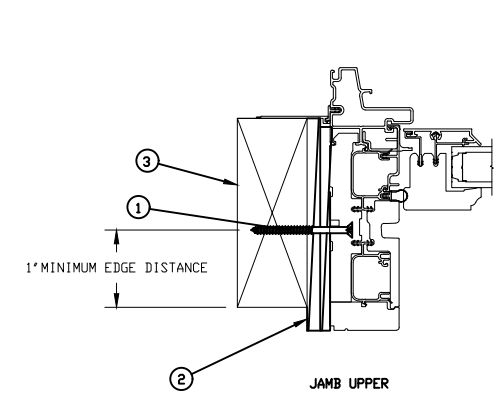



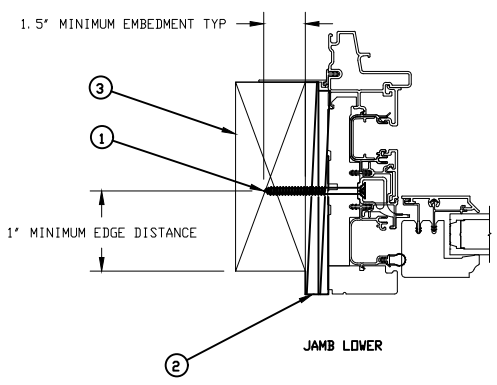

THROUGH JAMB INSTALLATION

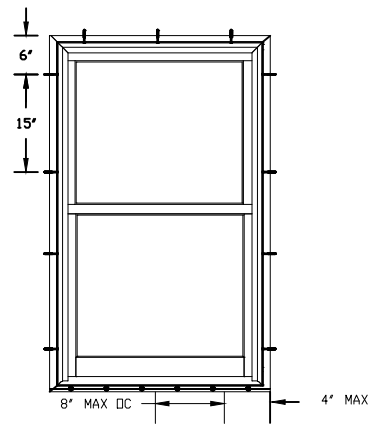

GLAZING DETAIL:
MEETS ASTM E1300

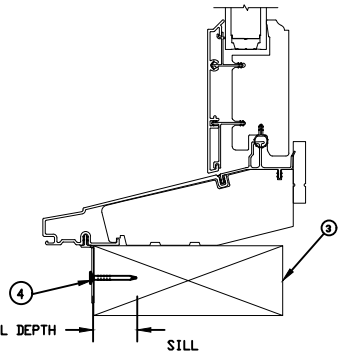

UNIT	MAX FRAME SIZE	DP RATING
UDHG2	55 1/4 X 95 1/2	+35/-35

THROUGH JAMB INSTALLATION METHOD:

- NAIL FIN REQUIRED ON SILL. OPTIONAL ON HEAD JAMB AND JAMBS. SPACED 4\"/>

NOTES:

1. THIS PRINT IS FOR STRUCTURAL PERFORMANCE ONLY. FOR FLASHING & SEALING REQUIREMENTS, REFER TO THE INSTALLATION INSTRUCTIONS.
2. SHIMS:
 - A SHIM MUST BE PLACED AT EACH SCREW LOCATION.
3. UNIT MUST NOT BE IN DIRECT CONTACT WITH EITHER CONCRETE OR TREATED BUCK MATERIAL.
4. IF SHIM SPACE IS LESS THEN 1/4\", WRAP THE UNIT ON ALL 4 SIDES WITH WINDOW FLASHING TAPE AS REQUIRED FOR A BARRIER BETWEEN THE UNIT AND CONCRETE OR TREATED LUMBER.
5. IF CHEMICALLY TREATED LUMBER IS USED FOR BUCK MATERIAL, FASTENERS INTO THE BUCK MUST BE A MINIMUM OF 0.90 OZ/FT*2 ZINC HOT DIPPED GALVANIZED OR STAINLESS STEEL TYPE 304 OR 316.

CATEGORY:
DOUBLE HUNG

UNIT TYPE:
UDHG2

UNSPECIFIED TOLERANCES

DECIMALS: XX ± .03 XXX ± .012	ANGLE DEG: ± .5
LINEAL: + .125 - .000	FAB LINEAL: ± .125

MATERIAL:
NA

ITEM NO	REF NO	DESCRIPTION
4	-----	2\"/>
3	-----	2X WOOD BUCK BY OTHERS
2	-----	SHIM
1	-----	#8 X 3.000 WOOD SCREW

NOTICE - CONFIDENTIAL INFORMATION

The information in this document is privileged and strictly confidential. The information contained herein shall be used only by Marvin Windows and Doors employees and by those agents or suppliers granted official written permission. If the reader of this document is not the intended recipient, or the employee or agent of