





GENERAL NOTES

1. This product anchoring drawing has been developed in compliance with the 7th Edition (2020) Florida Building Code (FBC) excluding the "High Velocity Hurricane Zone". See the Certification Agency Certificate for sizes, specifications and ratings.
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection, this product is required to be protected with an impact resistant covering that complies with FBC Sections 1609.1.2 & R301.2.1.2.
4. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.


TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical elevation, design pressures & general notes
2	Elevations
3	Horizontal cross section
4	Vertical cross sections
5	Buck anchoring
6	Frame anchoring
7	Bill of materials, components and glazing detail

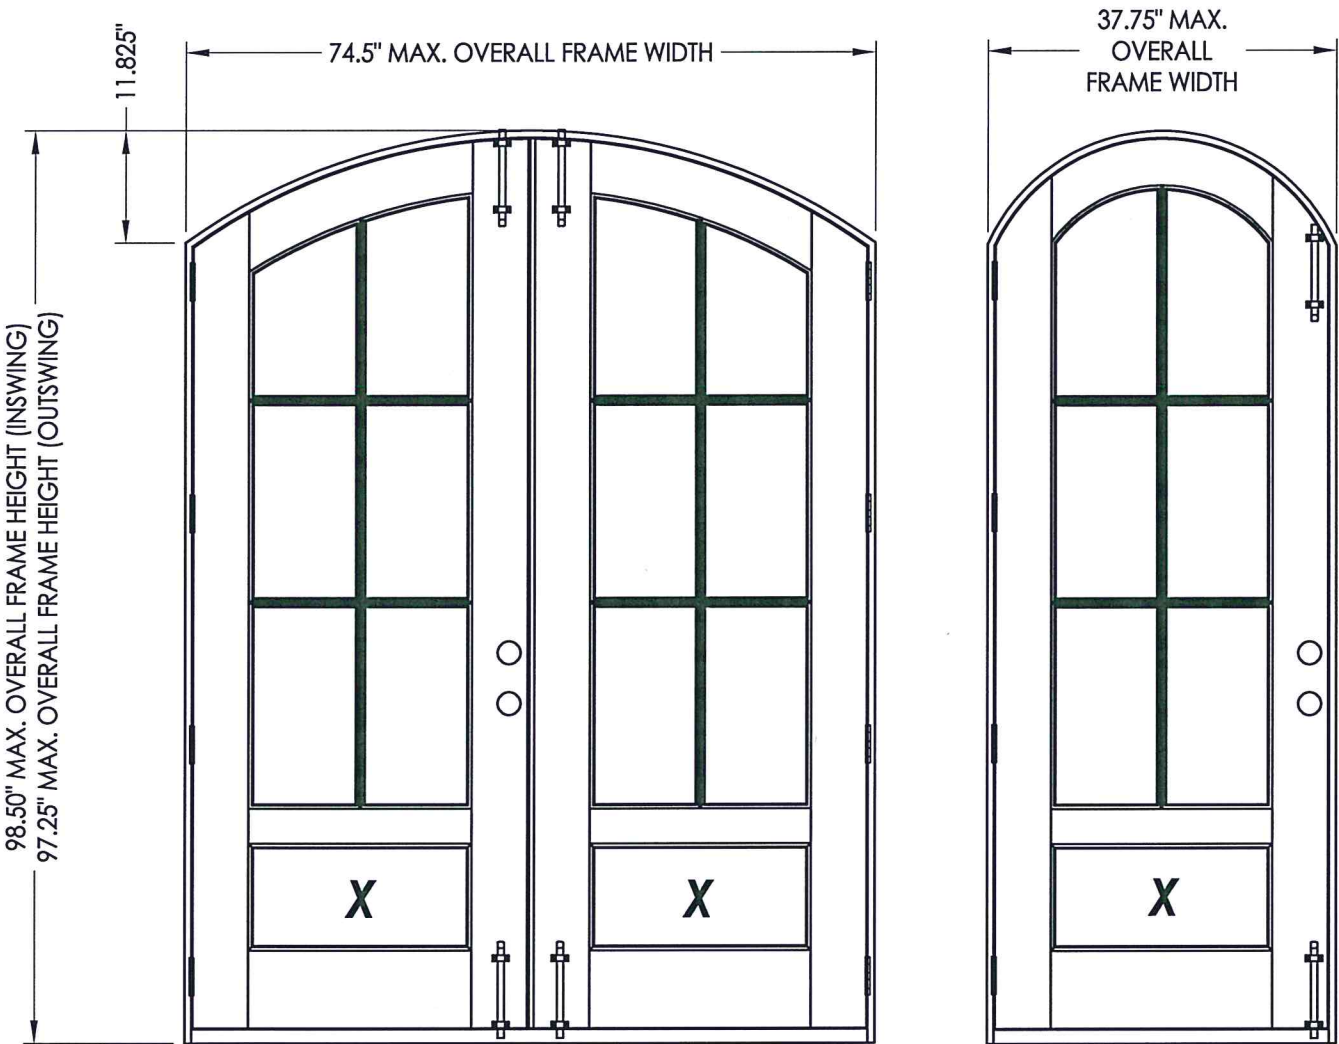


CONFIGURATION	OVERALL FRAME DIMENSION	GLASS TYPE	DESIGN PRESSURE (PSF) INSWING		DESIGN PRESSURE (PSF) OUTSWING	
			POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
X	37.5" x 98.5"	G1	+50.0	-50.0	+50.0	-50.0
XX	74.5" x 98.5"	G1	+50.0	-50.0	+50.0	-50.0

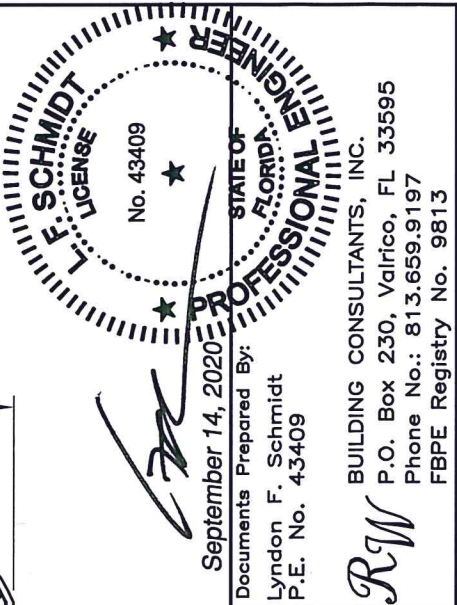

PRODUCT:		STEVES AND SONS WOOD DOOR	
PART OR ASSEMBLY:		TYPICAL ELEVATION, DESIGN PRESSURES & GENERAL NOTES	
DATE:	6/2/15		
SCALE:	N.T.S.		
DWG. BY:	JK		
CHK. BY:	LFS		
DRAWING NO.:	FL-17772.1		
SHEET	1	OF	7

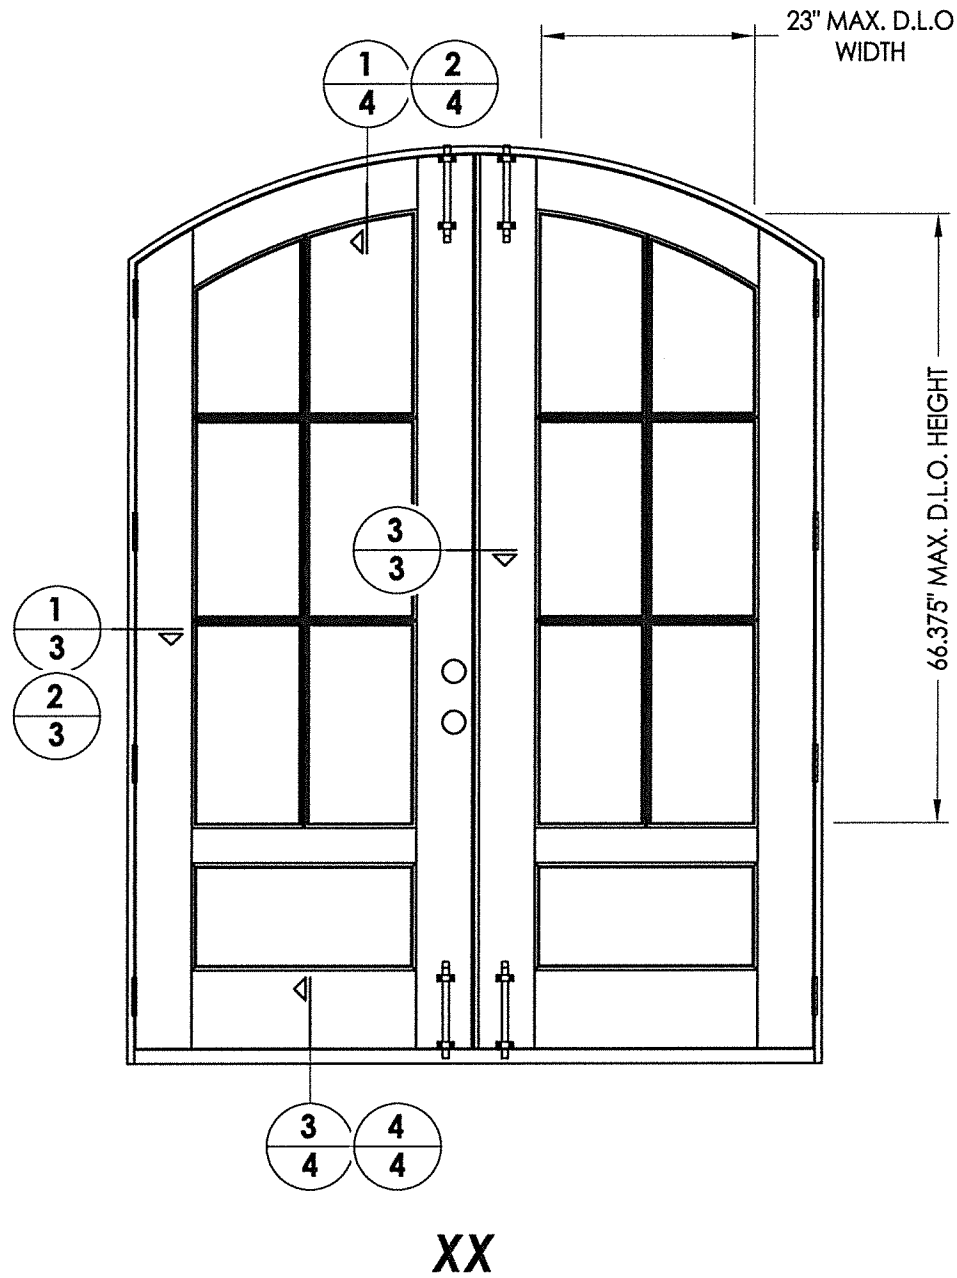

Hardware Table	
Manufacturer	Model
Dexter	Knob: "J" Series Deadbolt: "J" Series

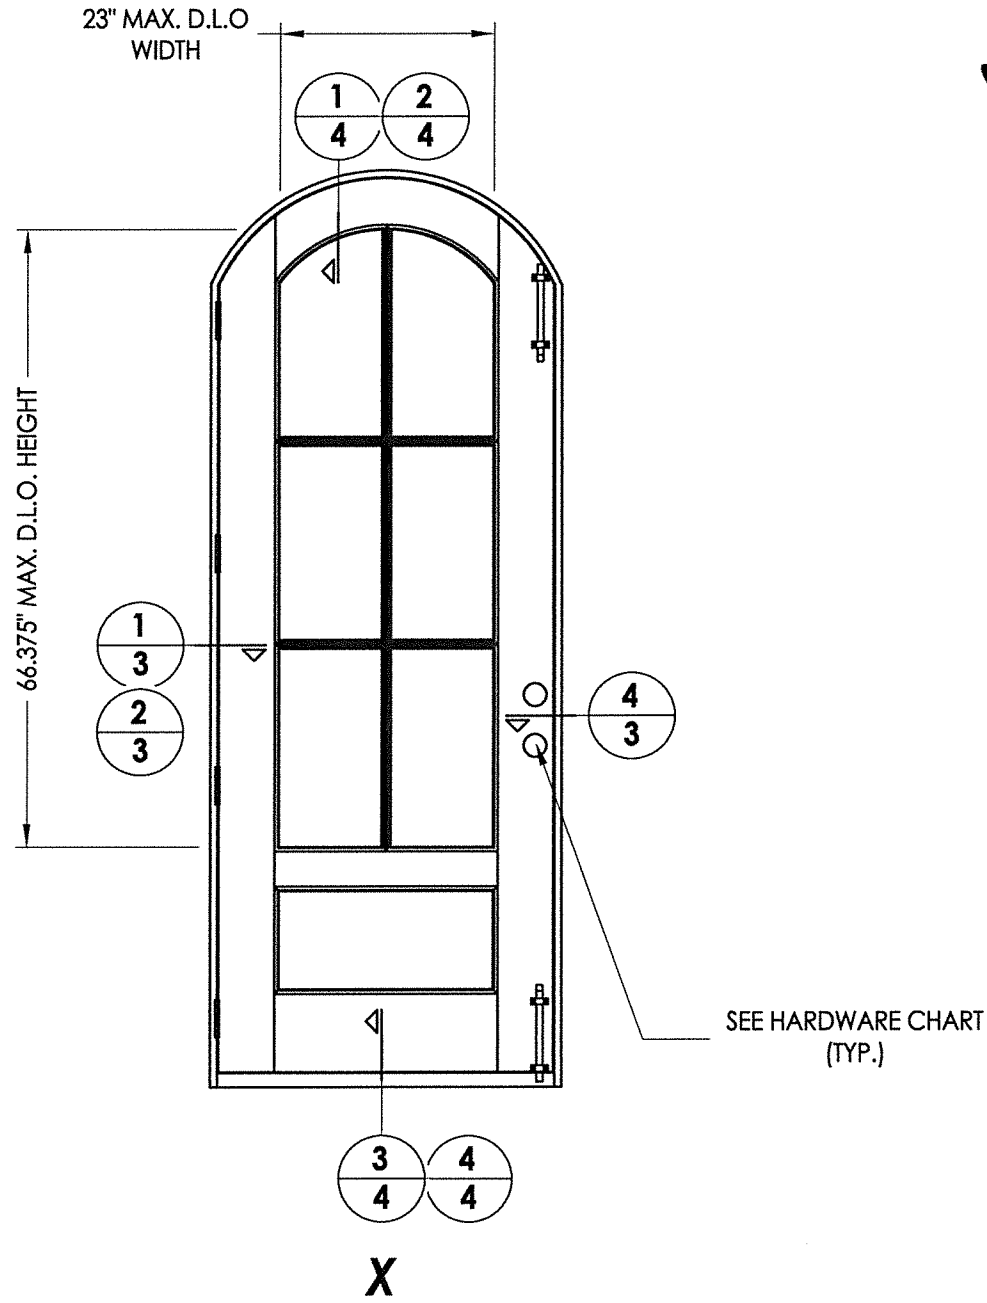

F. SCHMIDT

LICENSE

No. 43409

STATE OF FLORIDA

PROFESSIONAL ENGINEER


September 14, 2020
Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW


BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:		STEVE'S AND SONS WOOD DOOR	
PART OR ASSEMBLY:		ELEVATIONS	
NO.	DATE	REVISIONS	
		LFS	JK
2	9/10/20	UPDATE TO 7TH ED. (2020)	FBC
1	10/08/17	UPDATE TO 6TH ED. (2017)	FBC
DATE		DATE	BY
DATE: 6/2/15		DATE	BY
SCALE: N.T.S.		DATE	BY
DWG. BY: JK		DATE	BY
CHK. BY: LFS		DATE	BY
DRAWING NO.: FL-17772.1		DATE	BY
SHEET 2 OF 7		DATE	BY


© 2015 R.W. BUILDING CONSULTANTS INC.

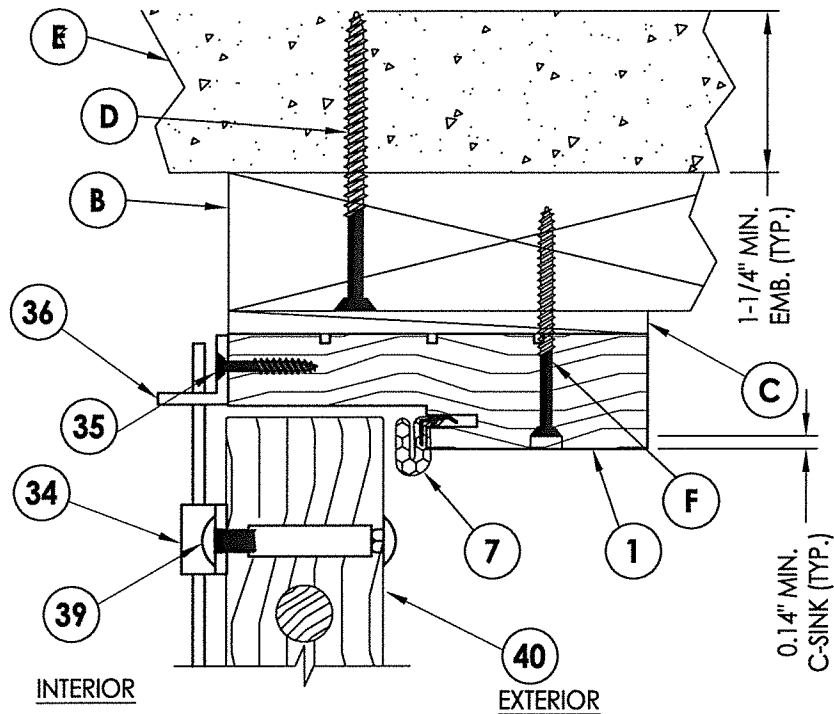


1 VERTICAL CROSS SECTION
4 Inswing shown

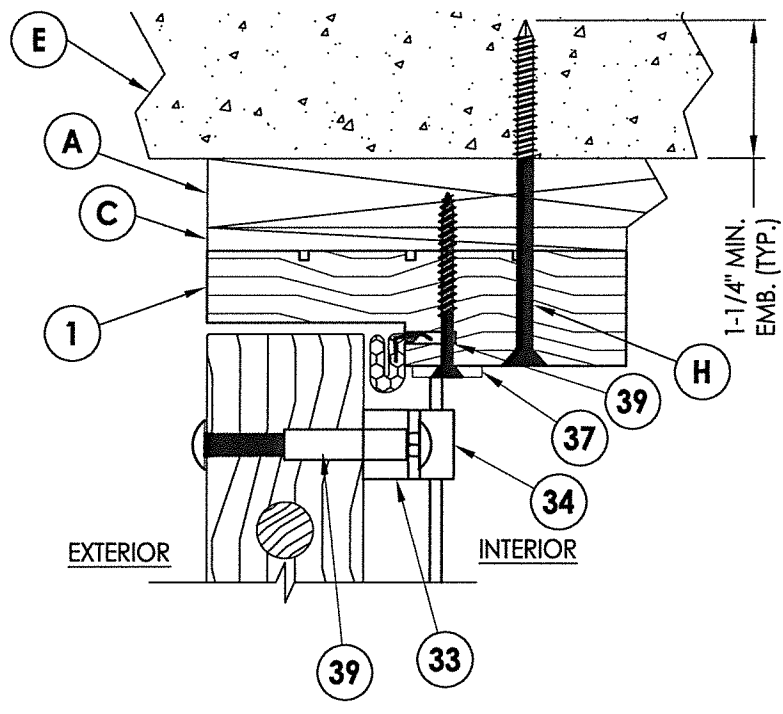


2 VERTICAL CROSS SECTION
4 Outswing shown w/1X sub-buck

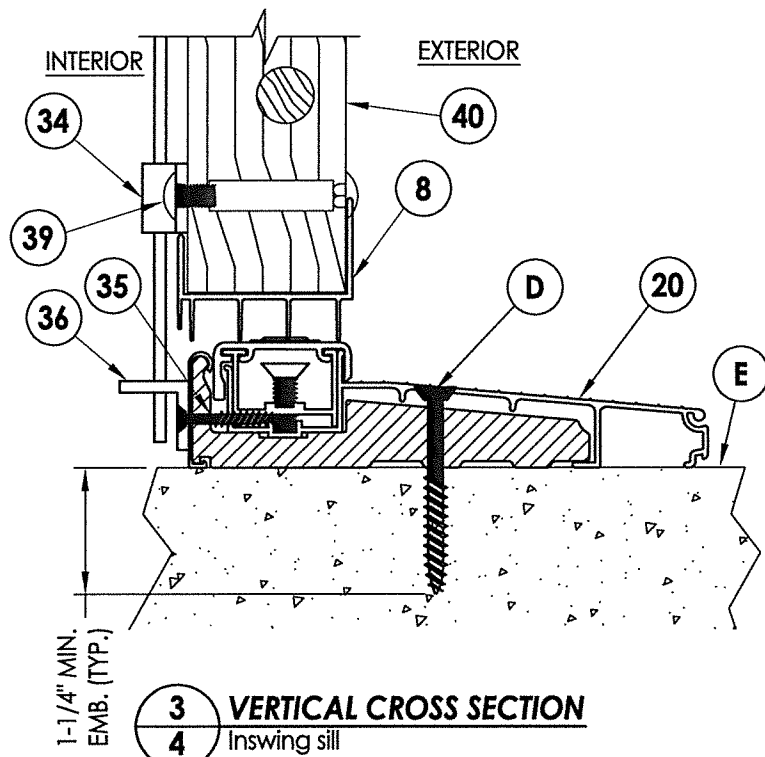

3 VERTICAL CROSS SECTION
4 Inswing sill

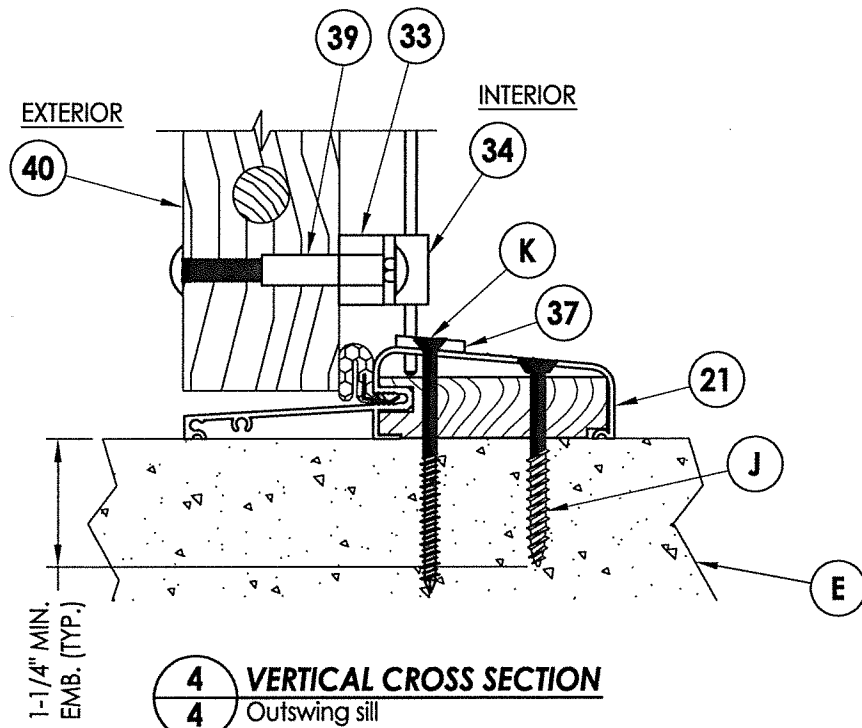

4 VERTICAL CROSS SECTION
4 Outswing sill

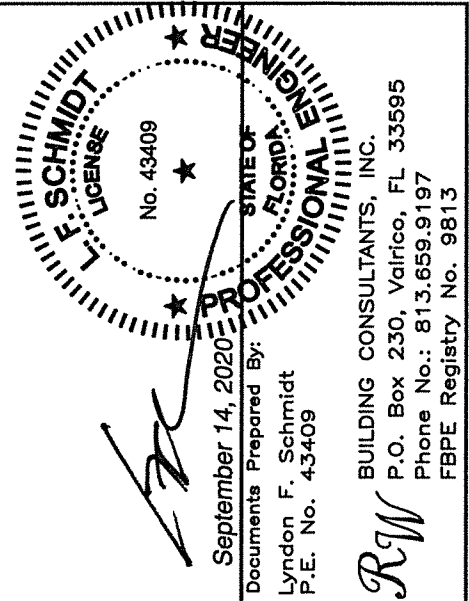


September 14, 2020
Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409
BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
STEVES AND SONS
WOOD DOOR

PART OR ASSEMBLY:
VERTICAL
CROSS SECTIONS

NO.	DATE	REVISIONS
2	9/10/20	UPDATE TO 7TH ED. (2020) FBC LFS
1	10/08/17	UPDATE TO 6TH ED. (2017) FBC JK

DATE: 6/2/15
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-17772.1
SHEET 4 OF 7

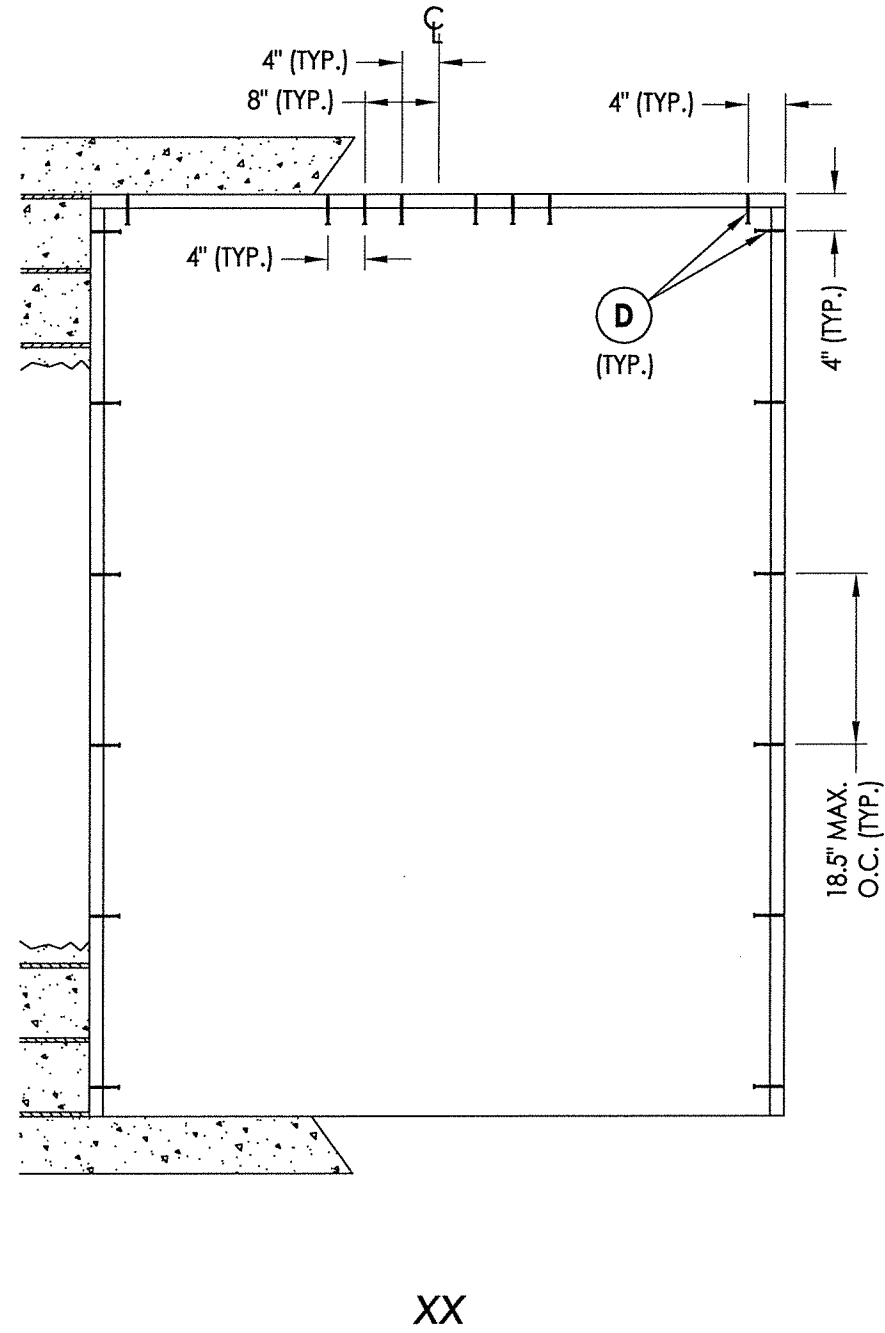
[illegible]

PRODUCT: STEVES AND SONS
WOOD DOOR





PART OR ASSEMBLY:
BUCK ANCHORING

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW
BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

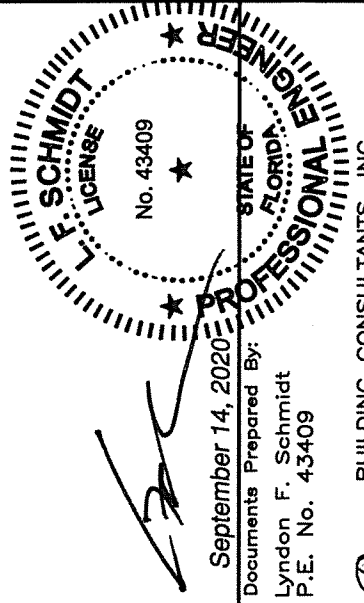

R:\Clients\Steves and Sons - Permanent\A - Florida Product Approvals\FL-17772 Wood Doors Non-Impact\A - Drawings\FL 17772 (2020)\FL-17772.1-4.dwg, 7.1

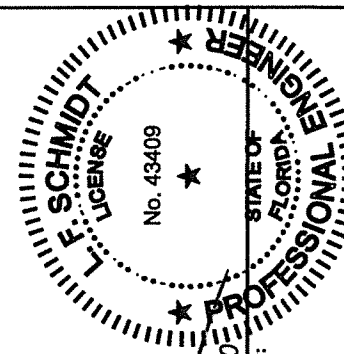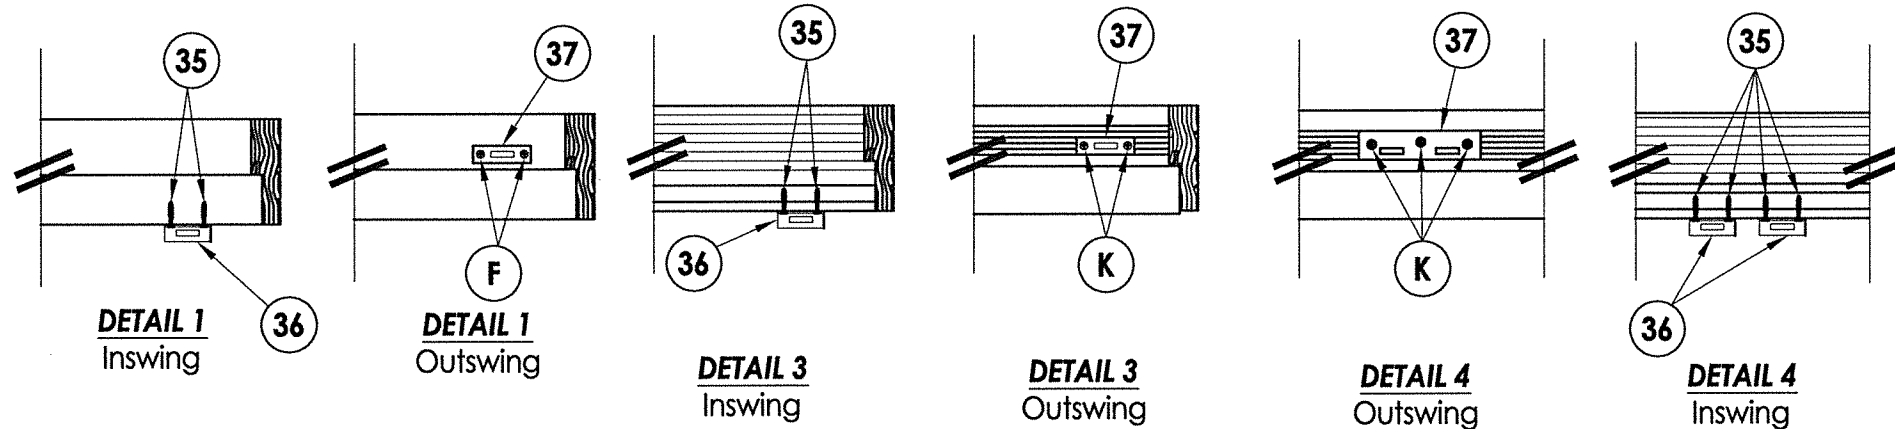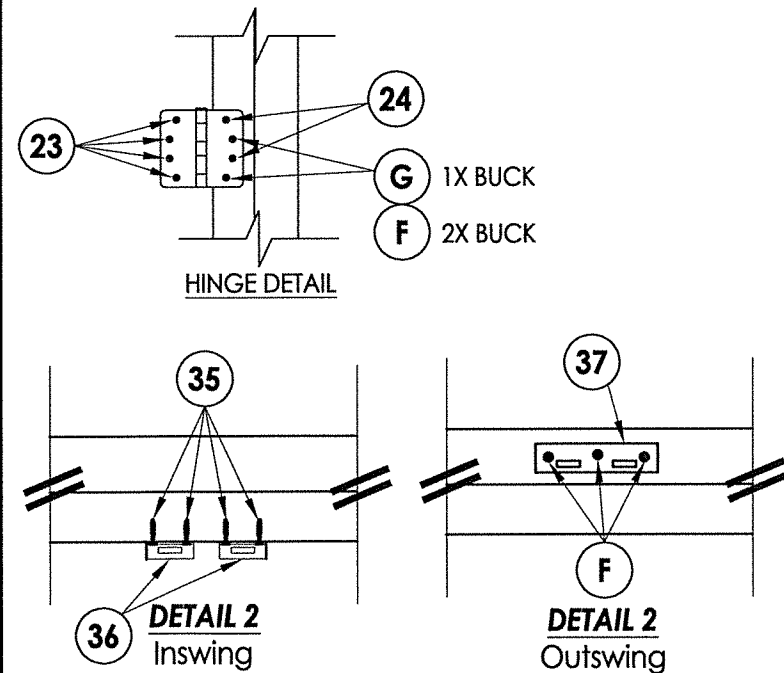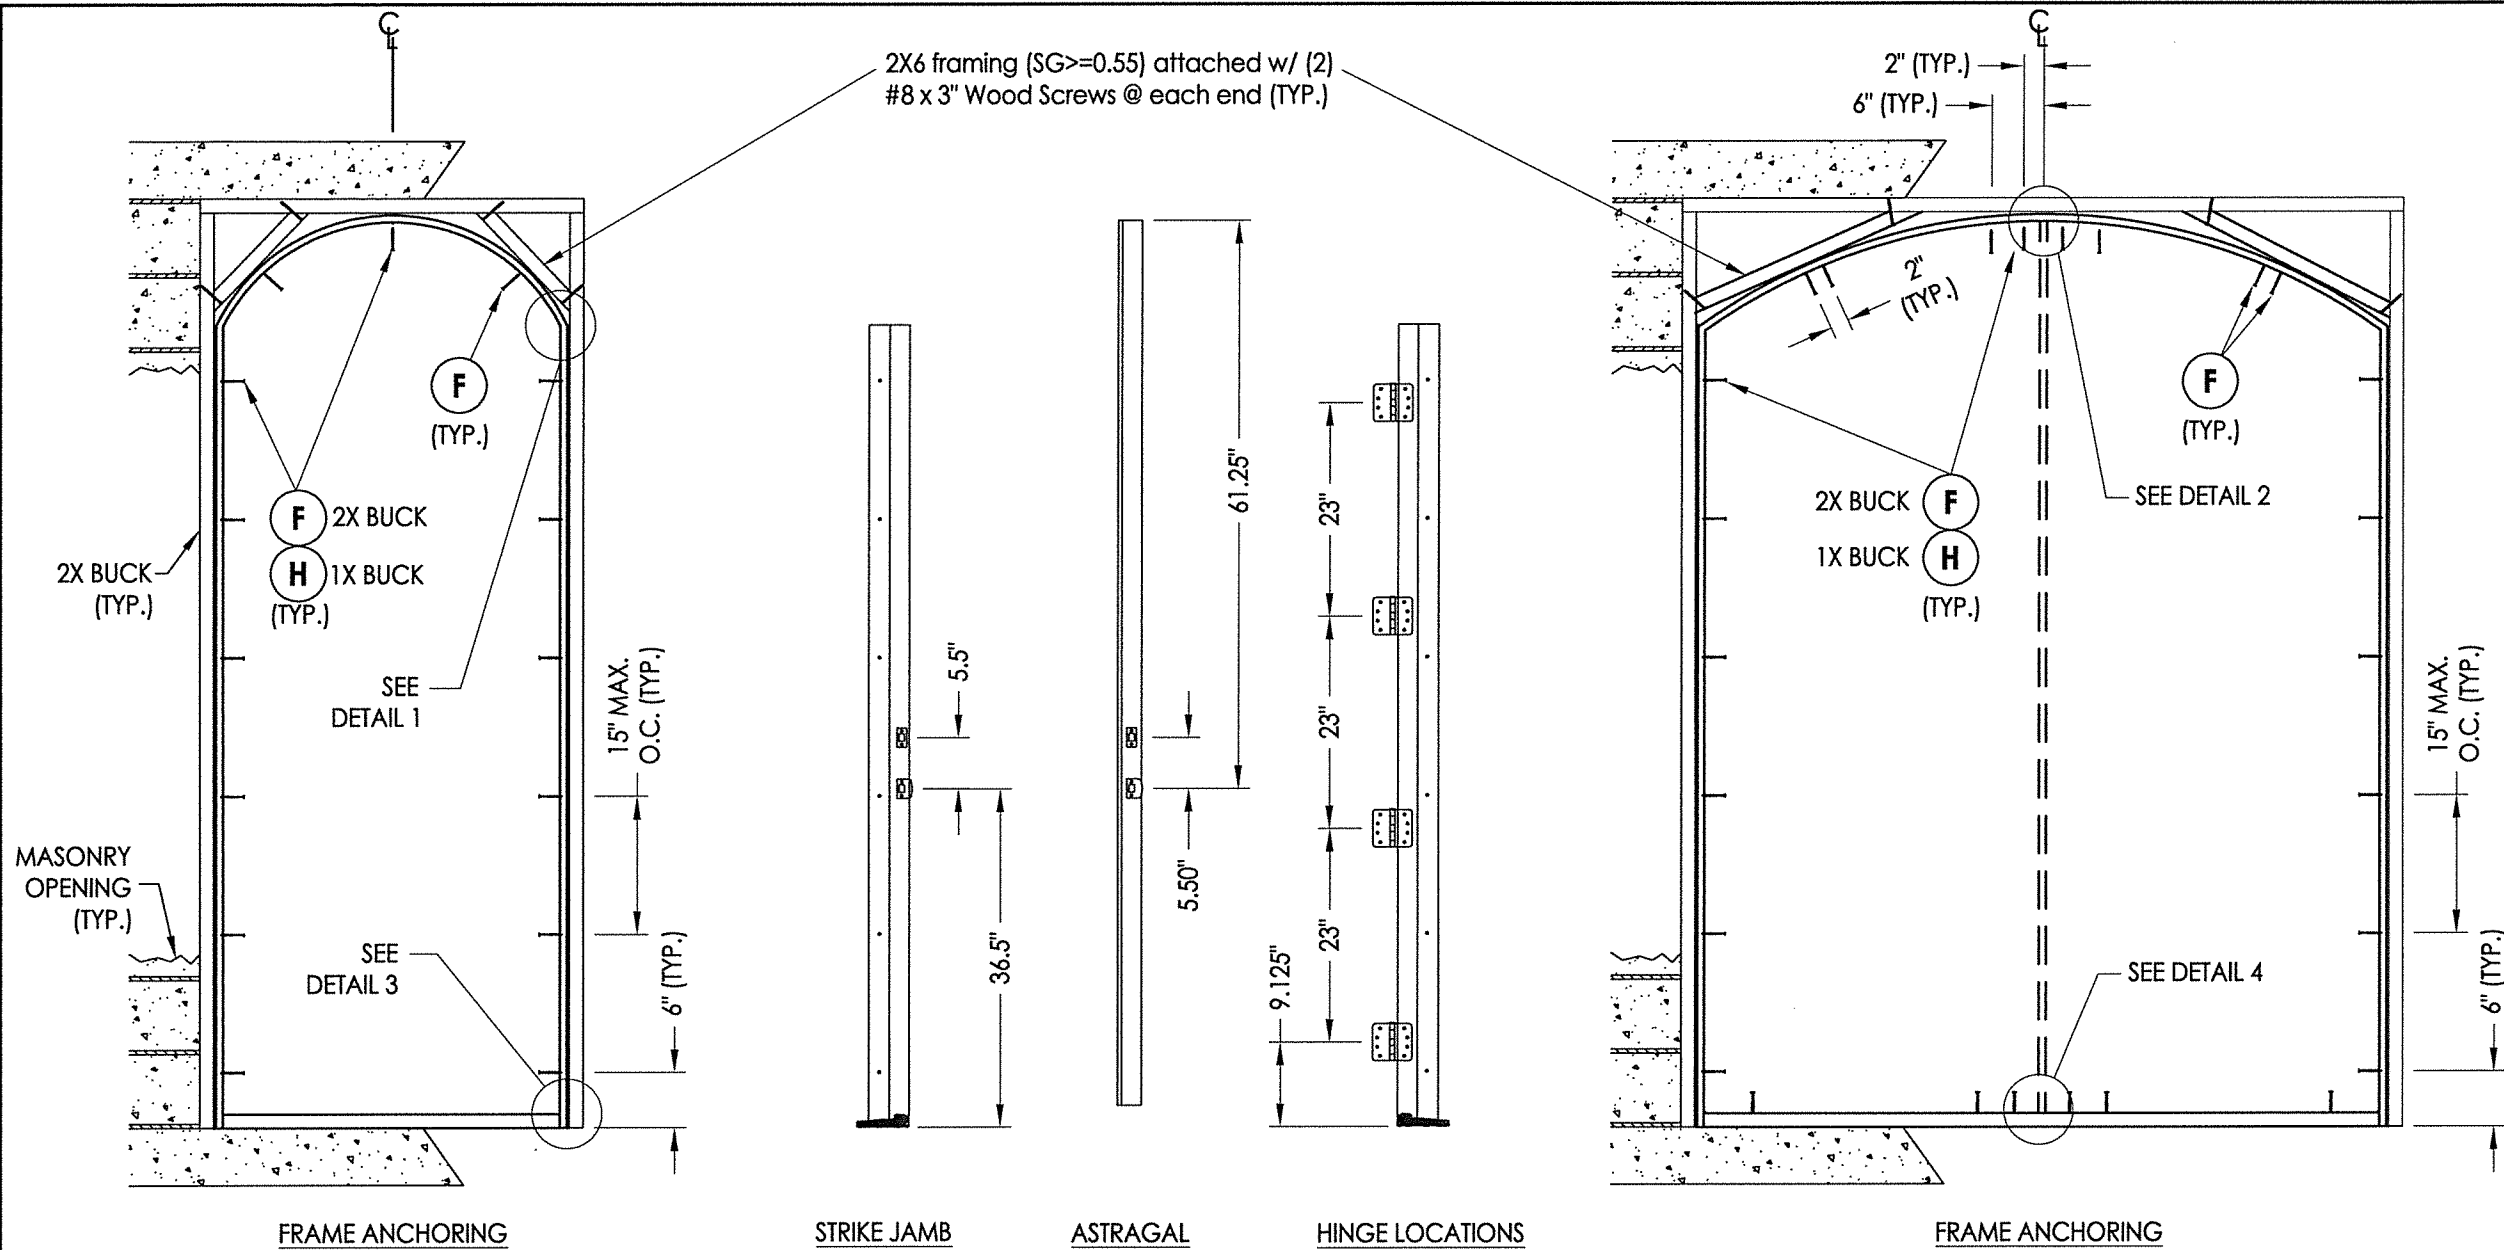

September 14, 2020
Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

R.W. BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:		STEVE'S AND SONS WOOD DOOR	
PART OR ASSEMBLY:		FRAME ANCHORING	
NO.	DATE	REVISIONS	
		2	9/10/20 UPDATE TO 7TH ED. (2020) FBC LFS
1	10/08/17	UPDATE TO 6TH ED. (2017) FBC JK	BY
DATE: 6/2/15			
SCALE: N.T.S.			
DWG. BY: JK			
CHK. BY: LFS			
DRAWING NO.: FL-17772.1			
SHEET 6 OF 7			

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK G >= 0.55	WOOD
B	2X BUCK G >= 0.55	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	#8 X 2-1/2" PFH WOOD SCREW (1-1/8" MIN. EMBEDMENT)	STEEL
G	3/16" X 3-3/4" PFH ITW CONCRETE SCREW	STEEL
H	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
J	1/4" X 2-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
K	3/16" X 2-3/4" PFH ITW CONCRETE SCREW	STEEL
1	HEAD AND SIDE JAMB	WOOD
7	WEATHERSTRIP	FOAM
8	DOOR SWEEP	WOOD
20	INSWING SILL	WOOD
21	OUTSWING SILL	WOOD
22	4" x 4" HINGE	STEEL
23	#9 X 3/4" PFH WOOD SCREW	STEEL
24	#8 X 3/4" PFH WOOD SCREW	STEEL
27	LATCH STRIKE PLATE	STEEL
28	DEADBOLT STRIKE PLATE	STEEL
33	SURFACE BOLT SPACER	-
34	SURFACE BOLT (IVES 454 8" LONG)	STEEL
35	#8 X 1" PFH WOOD SCREW	STEEL
36	SURFACE BOLT GUIDE PLATE	STEEL
37	SURFACE BOLT STRIKE	STEEL
39	#10 X 2" SEX BOLT	STEEL
40	WOOD DOOR PANEL	-
45	ASTRAGAL	WOOD

NOTE: WOOD DOOR COMPONENTS: MAHOGANY (G >= 0.60)


CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:


ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	3"	1-1/2"

WOOD SCREW INSTALLATION NOTES:


1. Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

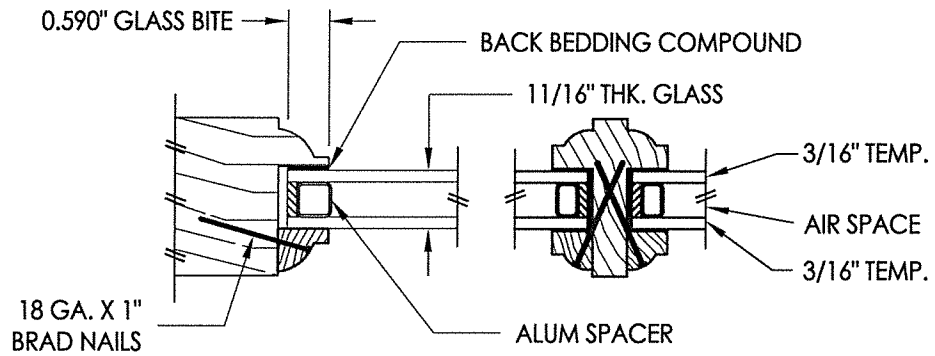


G1 **GLAZING DETAIL**
True Divided Lite

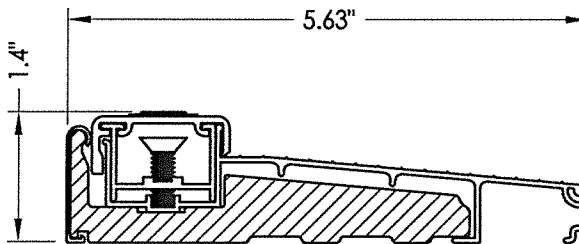


20 INSWING THRESHOLD

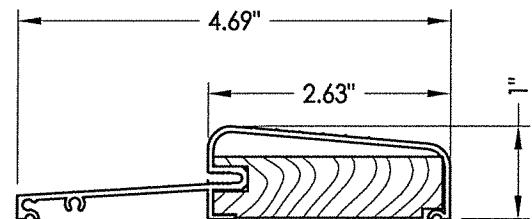

21 OUTSWING THRESHOLD

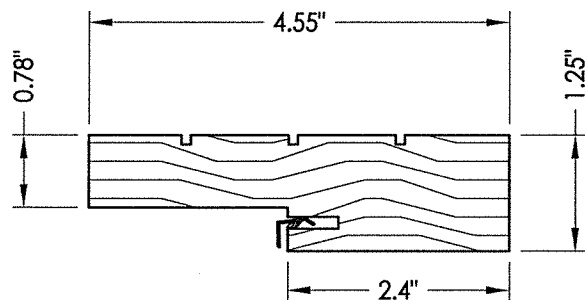

1 FRAME

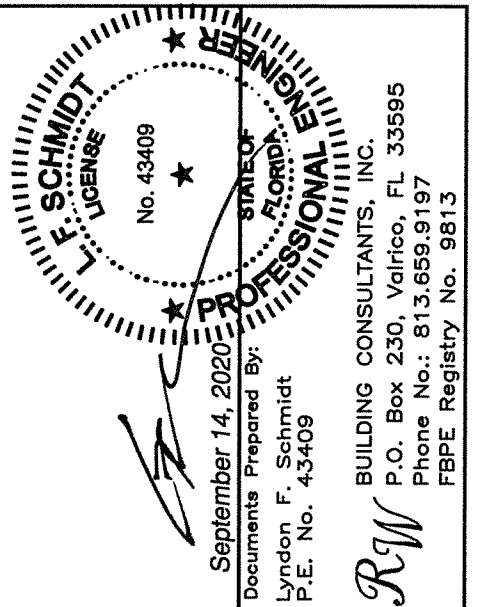[illegible]