

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER MASONRY/CONCRETE IS OPTIONAL.
4. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2” UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
5. WHERE WOOD BUCK THICKNESS IS 1–1/2” OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS.
6. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
7. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
8. FOR FIN INSTALLATION SHIM AS NEEDED. FOR FRAME INSTALLATION SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.
9. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
10. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
11. FRAME MATERIAL: EXTRUDED RIGID PVC.
12. UNITS MUST BE GLAZED PER ASTM E1300.
13. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
14. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

15. FOR ANCHORING THROUGH FIN INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATER ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
19. ALL FASTENERS TO BE CORROSION RESISTANT.
20. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - C. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
 - D. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI OR ALUMINUM 6063–T5 FU=30KSI .125” THICK MINIMUM

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3 – 7	INSTALLATION DETAILS
8	COMPONENTS

LEGACY VINYL WINDOW, L.P.
1813 KELLY BLVD.
CARROLLTON, TX 75006

SERIES 450 SINGLE HUNG WINDOW
44” X 72” NON-IMPACT
NOTES

DRAWN:
A.R.

DWG NO.
08-03670

REV
-

SCALE NTS

DATE 01/04/21

SHEET 1 OF 8


L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 01/14/2021



Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

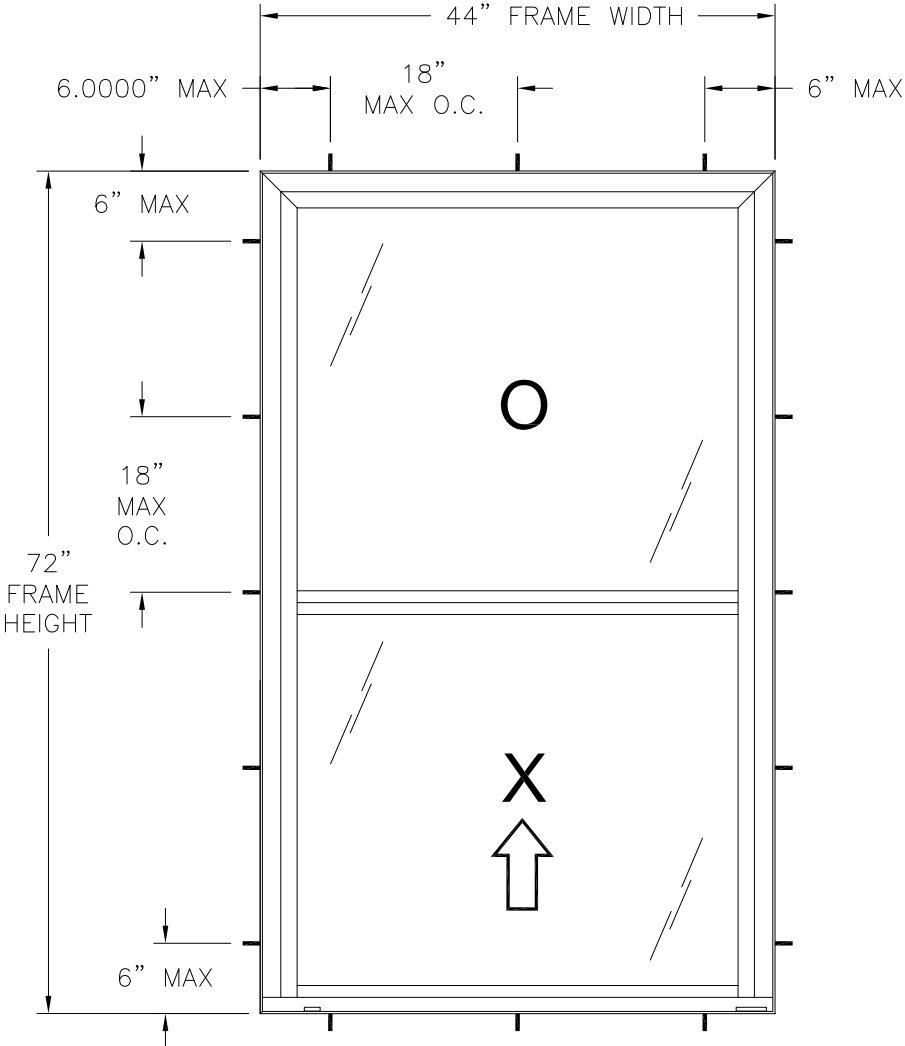

SERIES 450 SINGLE HUNG WINDOW
EXTERIOR VIEW
FRAME INSTALLATION

DESIGN PRESSURE RATING	IMPACT RATING
+30.0/-40.0PSF	NONE

WITH STANDARD SILL

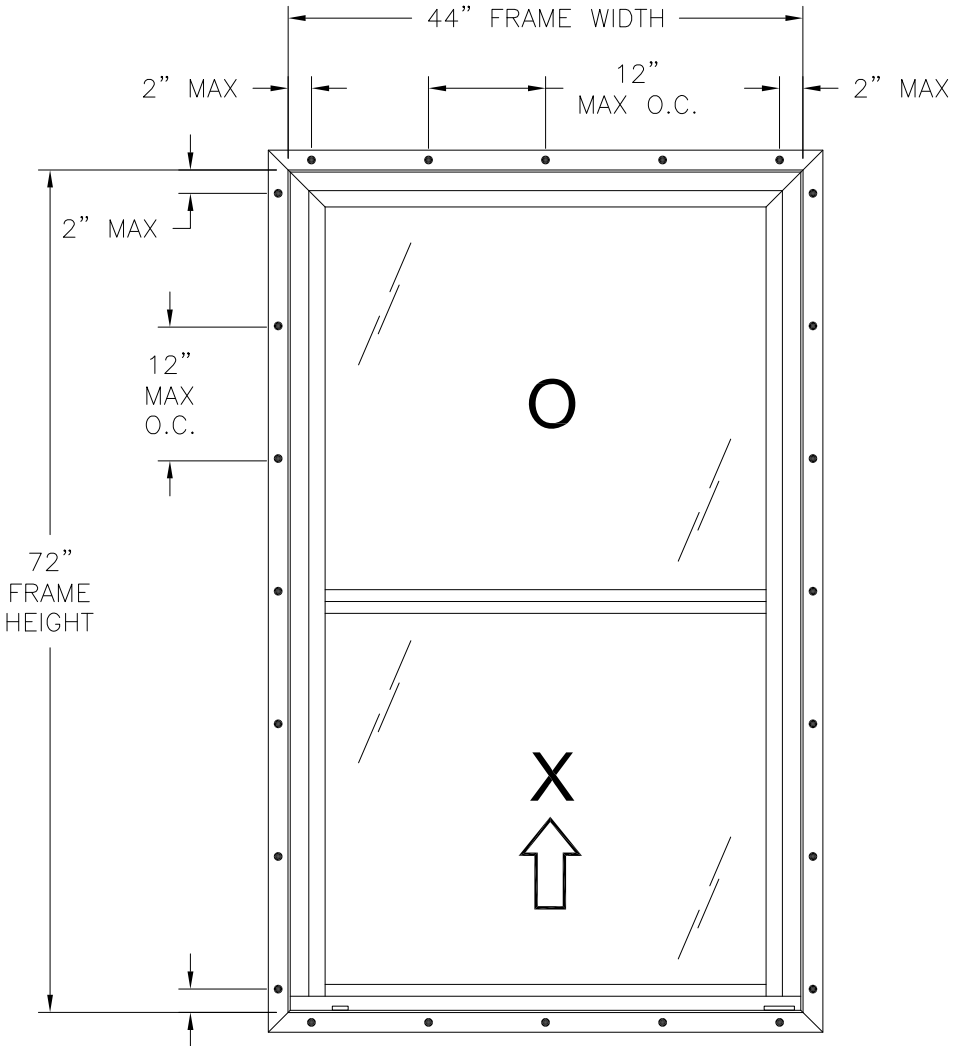

SERIES 450 SINGLE HUNG WINDOW
EXTERIOR VIEW
FIN INSTALLATION

DESIGN PRESSURE RATING	IMPACT RATING
±40.0PSF	NONE

WITH VINYL SILL EXTENDER

44" X 72" UNIT SHOWN. OTHER SIZES APPROVED AS LONG AS
FRAME AREA DOES NOT EXCEED 22.0 FT²

- NOTES:**
- SASH SIZE: 41 1/4" X 34 3/8"
 - SASH D.L.O.: 39" X 32 3/8"
 - FIXED D.L.O.: 38 7/8" X 32 1/4"

HARDWARE SCHEDULE	
A.	PIVOT BARS ATTACHED TO BOTTOM RAIL
B.	(1) CAM ACTION LOCK, 9 1/2" FROM EACH END OF SASH LOCK RAIL
C.	(1) BLOCK AND TACKLE TYPE BALANCE PER JAMB
D.	PVC SNAP-IN TILT LATCH AT EACH END OF SASH TOP RAIL
E.	ALUMINUM REINFORCEMENT (S-046) AT FIXED MEETING RAIL
F.	ALUMINUM REINFORCEMENT (S-047) IN SASH STILES AND TOP RAIL


LEGACY VINYL WINDOW, L.P. 1813 KELLY BLVD. CARROLLTON, TX 75006		
SERIES 450 SINGLE HUNG WINDOW 44" X 72" NON-IMPACT ELEVATION FRAME INSTALLATION		
DRAWN: A.R.	DWG NO. 08-03670	REV -
SCALE NTS	DATE 01/04/21	SHEET 2 OF 8
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 01/14/2021




Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

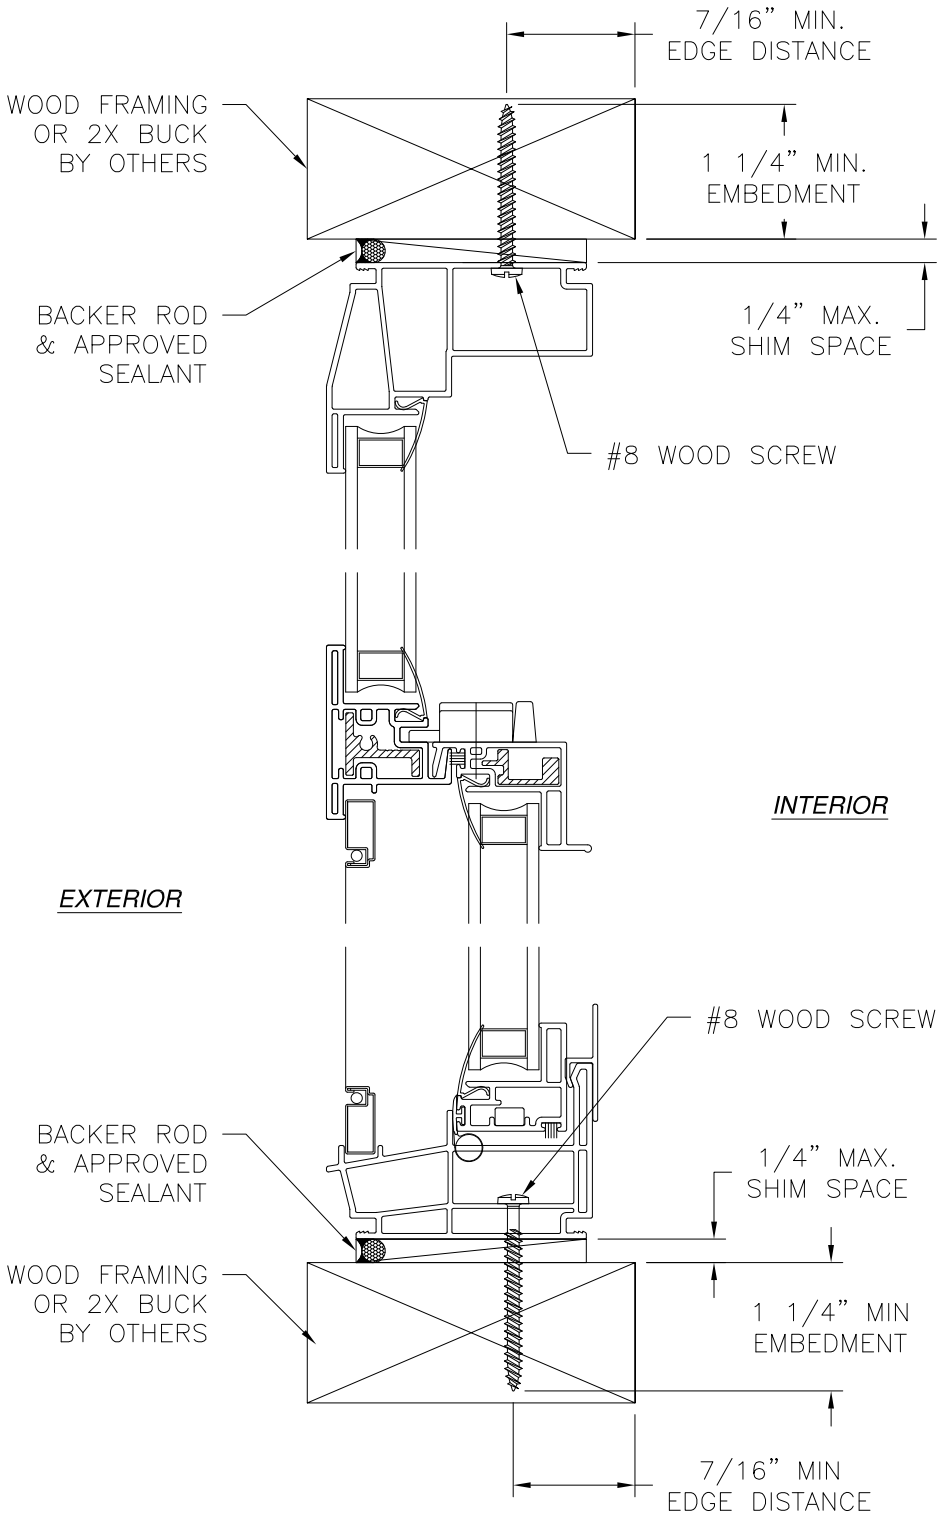

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

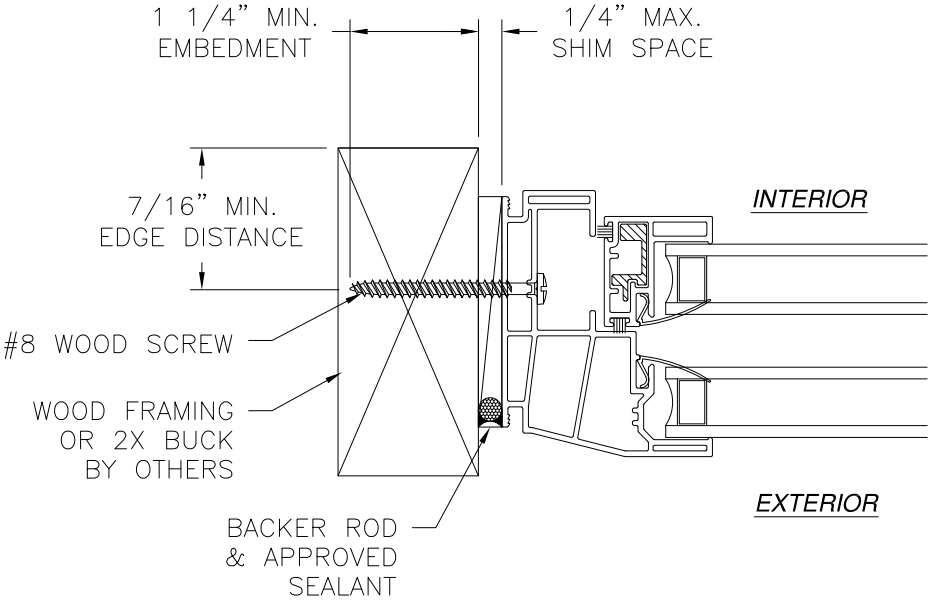

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 01/14/2021

LEGACY VINYL WINDOW, L.P.
1813 KELLY BLVD.
CARROLLTON, TX 75006

SERIES 450 SINGLE HUNG WINDOW
44" X 72" NON-IMPACT
INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-03670

REV
-

SCALE
NTS

DATE
01/04/21


SHEET
3 OF 8

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com




Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

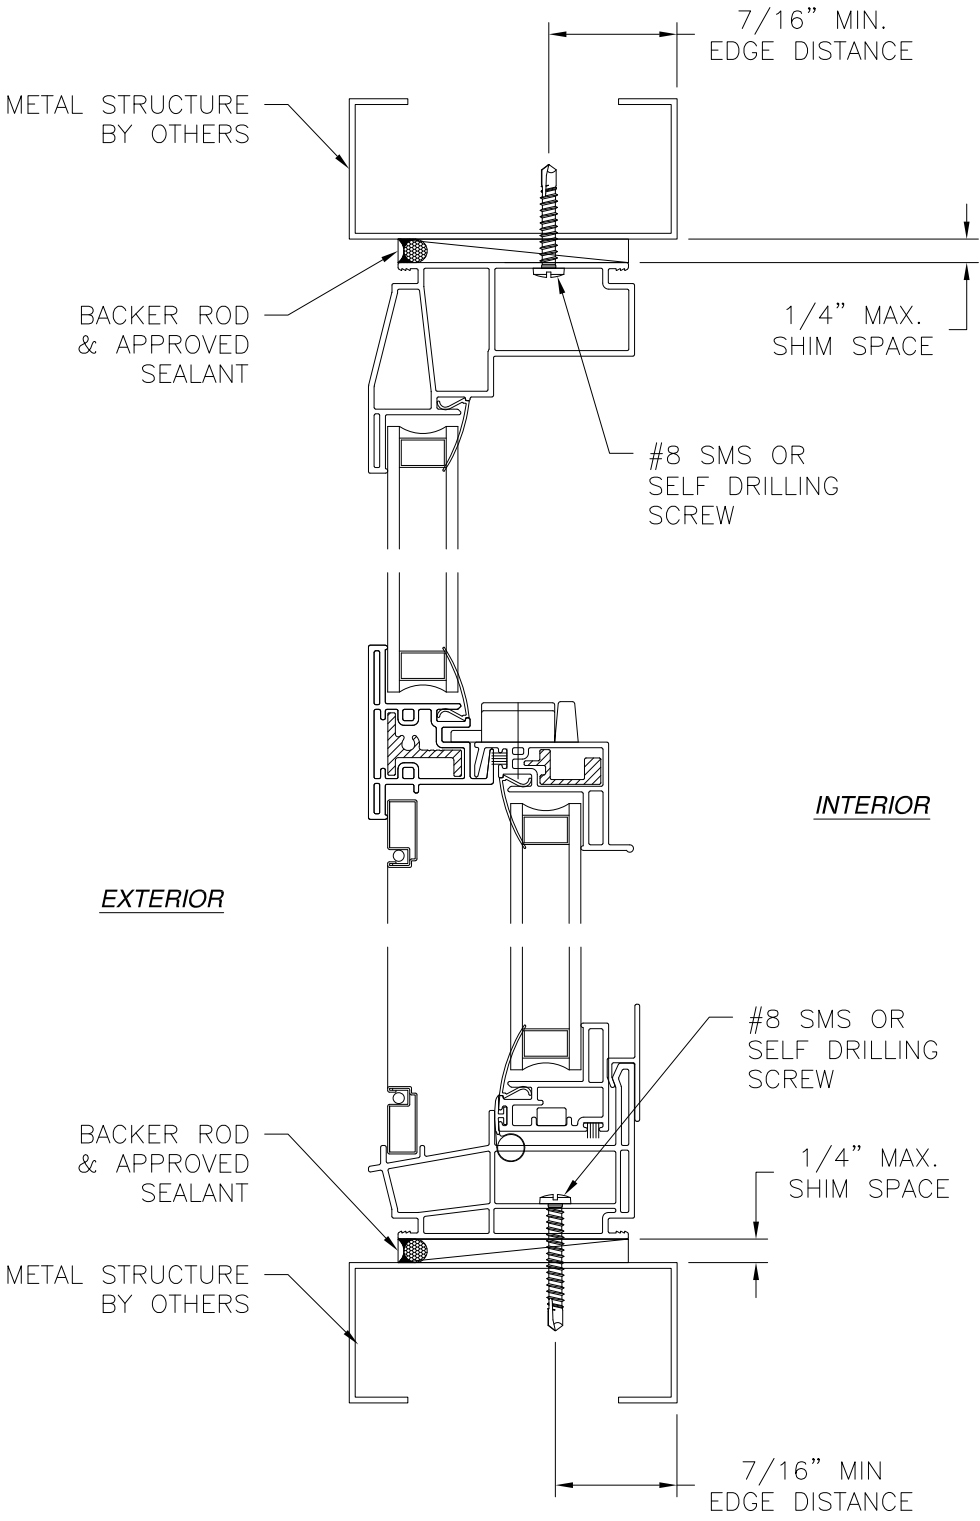

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

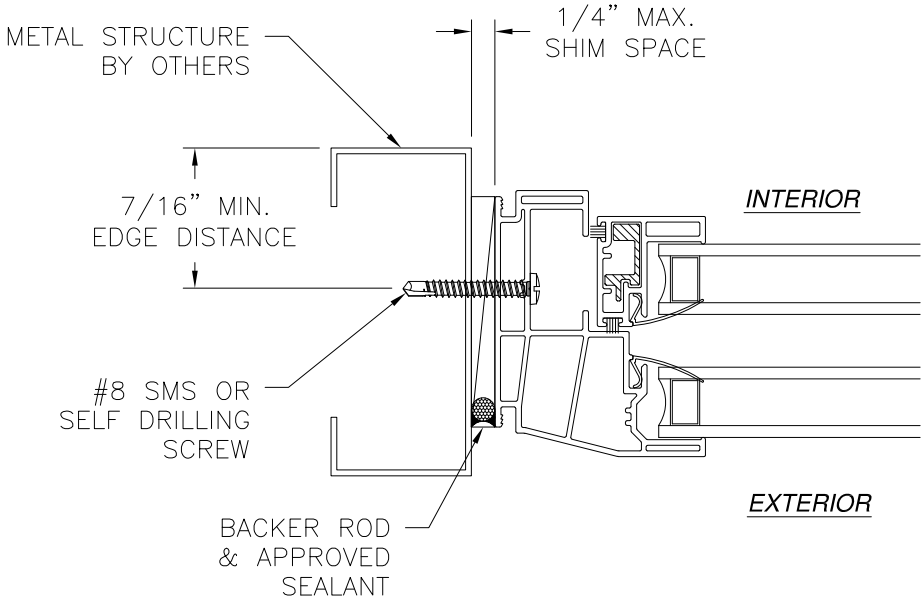


JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112



SIGNED: 01/14/2021

LEGACY VINYL WINDOW, L.P. 1813 KELLY BLVD. CARROLLTON, TX 75006		
SERIES 450 SINGLE HUNG WINDOW 44" X 72" NON-IMPACT INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03670	REV -
SCALE NTS	DATE 01/04/21	SHEET 4 OF 8
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		

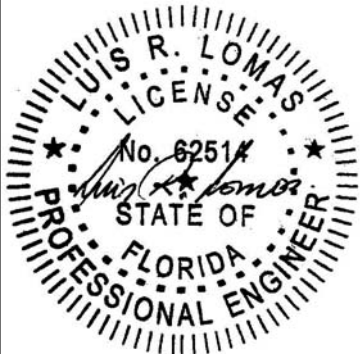


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

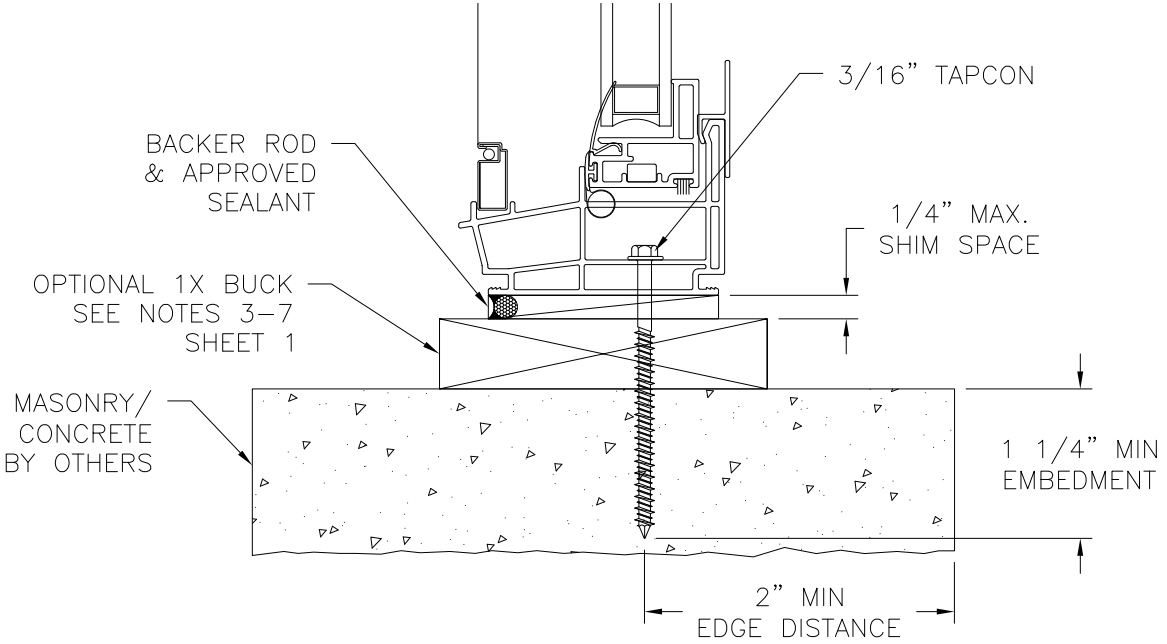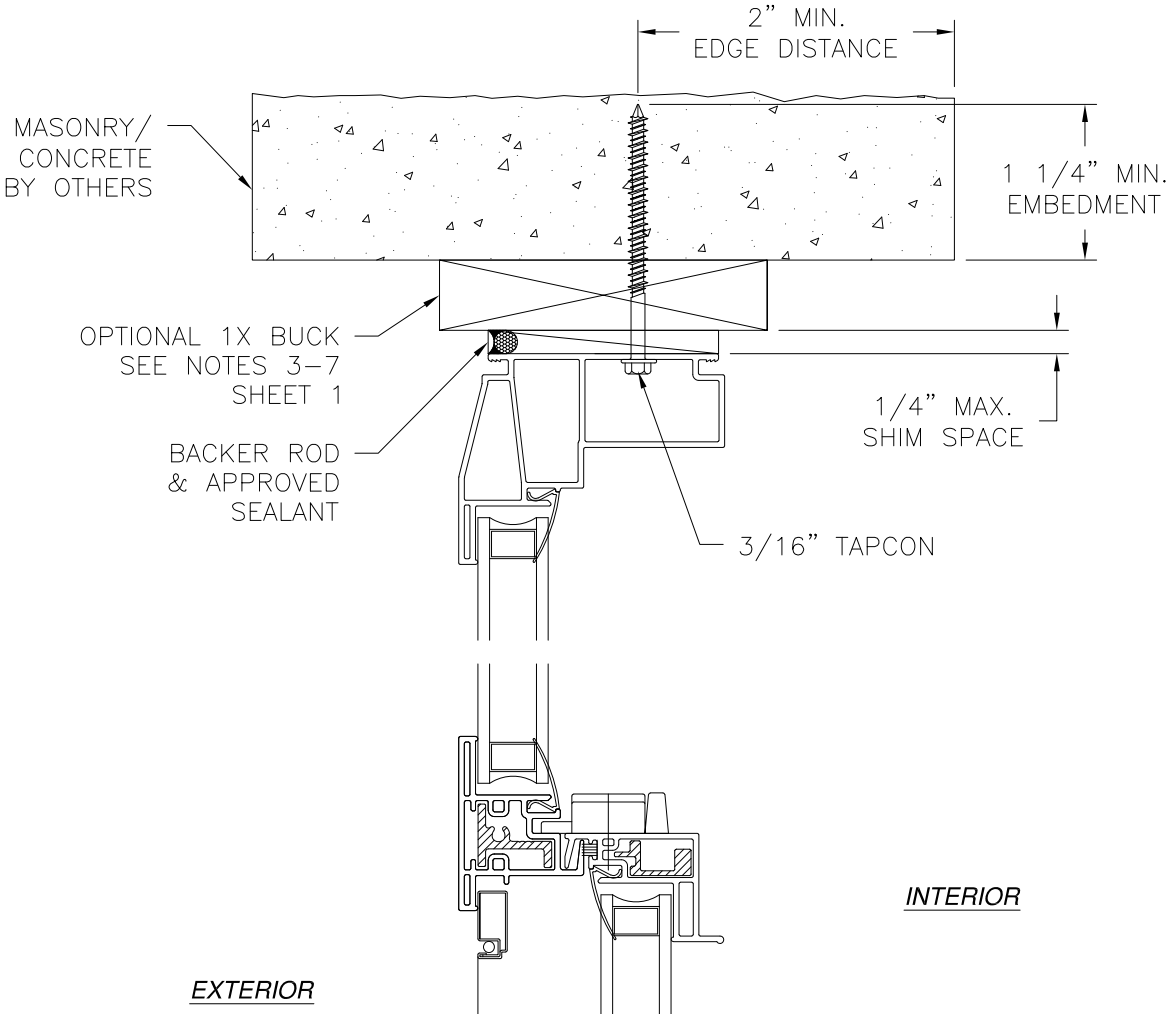

VERTICAL CROSS SECTION
MASONRY/CONCRETE INSTALLATION

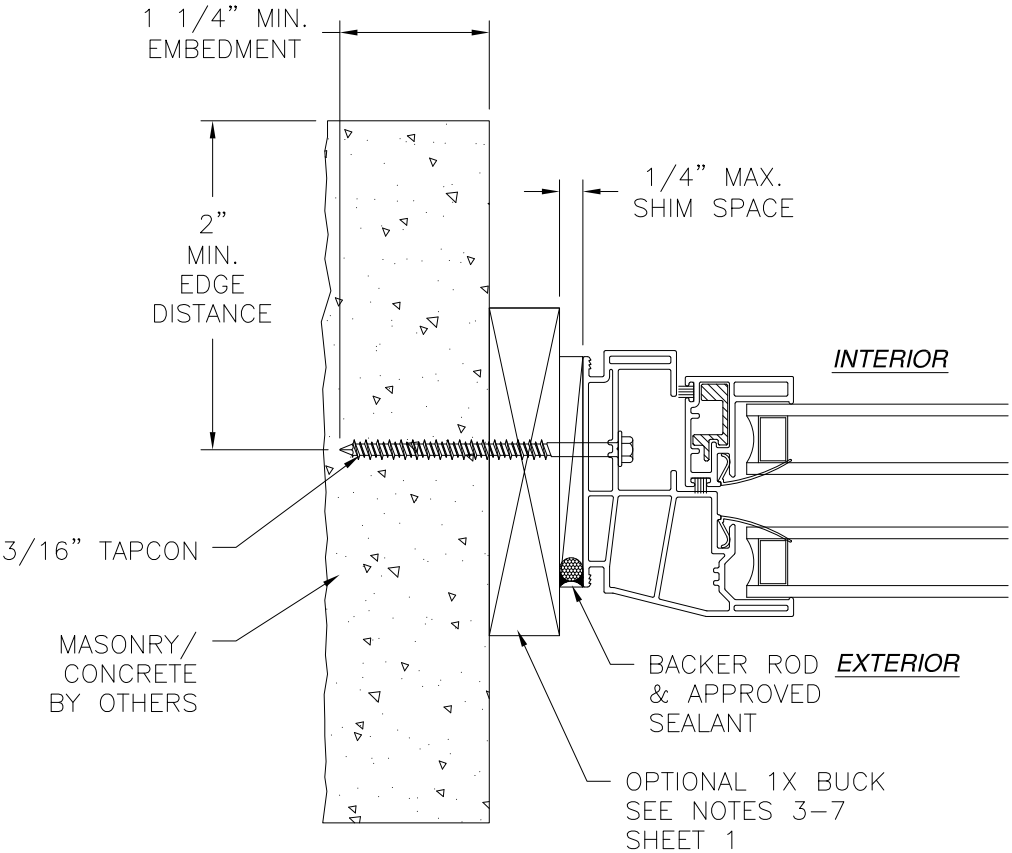

JAMB INSTALLATION DETAIL
MASONRY/CONCRETE INSTALLATION

- NOTES:**
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

LEGACY VINYL WINDOW, L.P.
1813 KELLY BLVD.
CARROLLTON, TX 75006

SERIES 450 SINGLE HUNG WINDOW
44" X 72" NON-IMPACT
INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-03670

REV
-


SCALE
NTS

DATE
01/04/21


SHEET
5 OF 8

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com


SIGNED: 01/14/2021

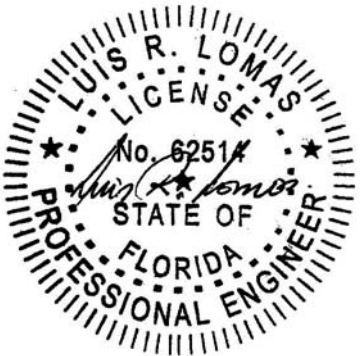

Luis R. Lomas P.E.
FL No.: 62514

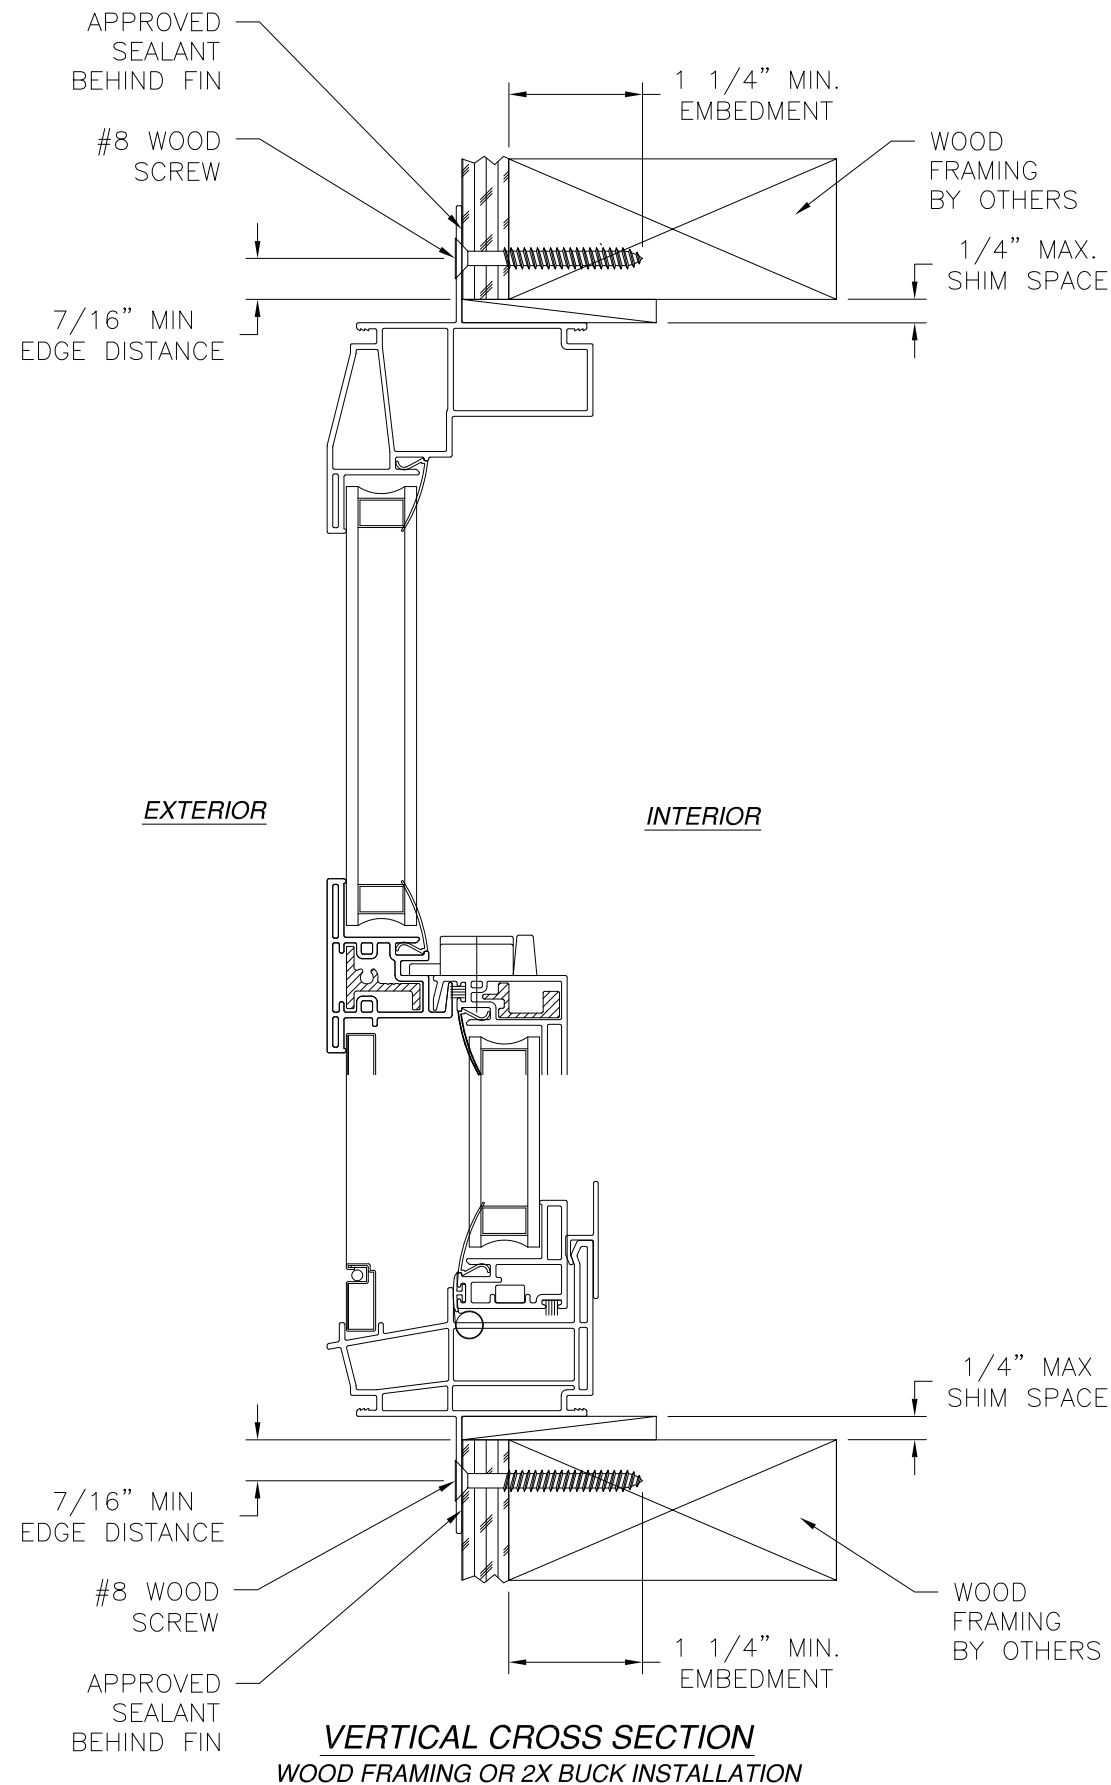

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

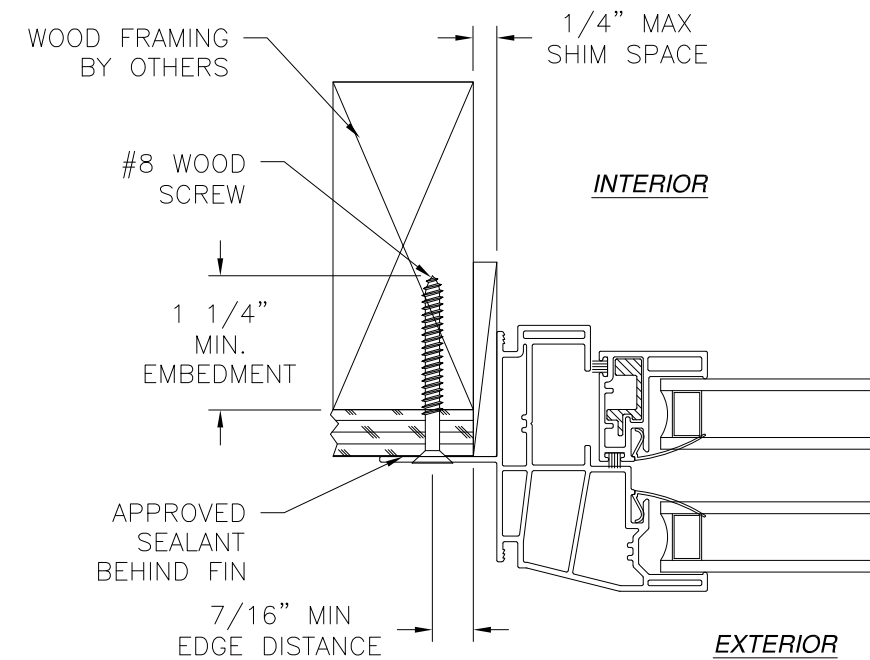


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:



1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

LEGACY VINYL WINDOW, L.P.		
1813 KELLY BLVD. CARROLLTON, TX 75006		
SERIES 450 SINGLE HUNG WINDOW 44" X 72" NON-IMPACT FIN INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03670	REV -
SCALE NTS	DATE 01/04/21	SHEET 6 OF 8
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		

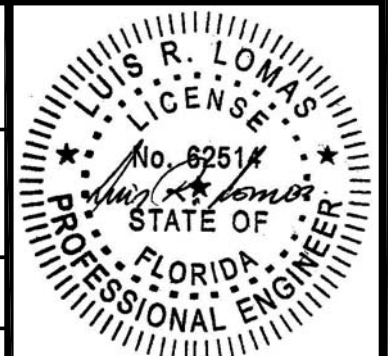

Luis R. Lomas P.E.
FL No.: 62514

SIGNED: 01/14/2021

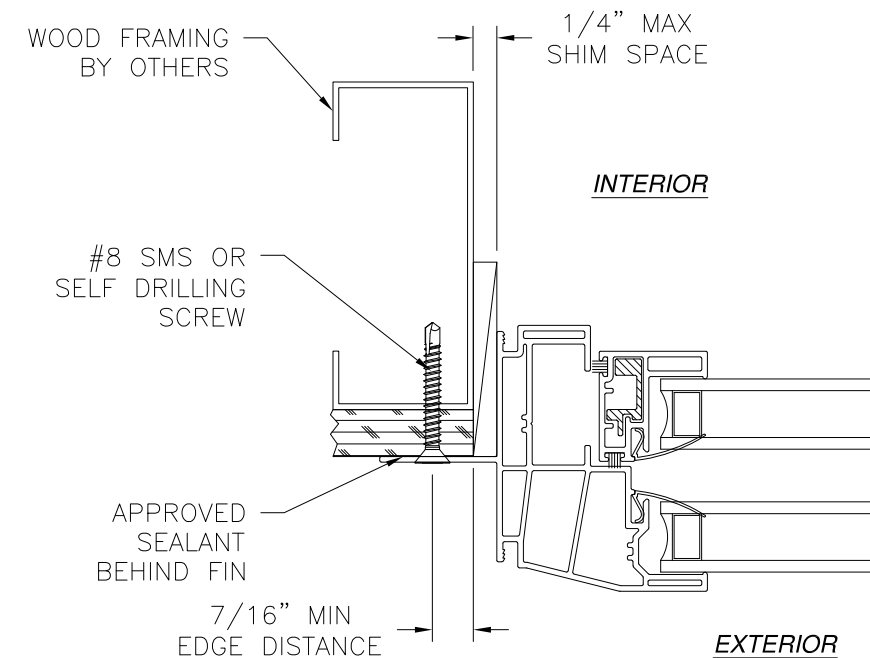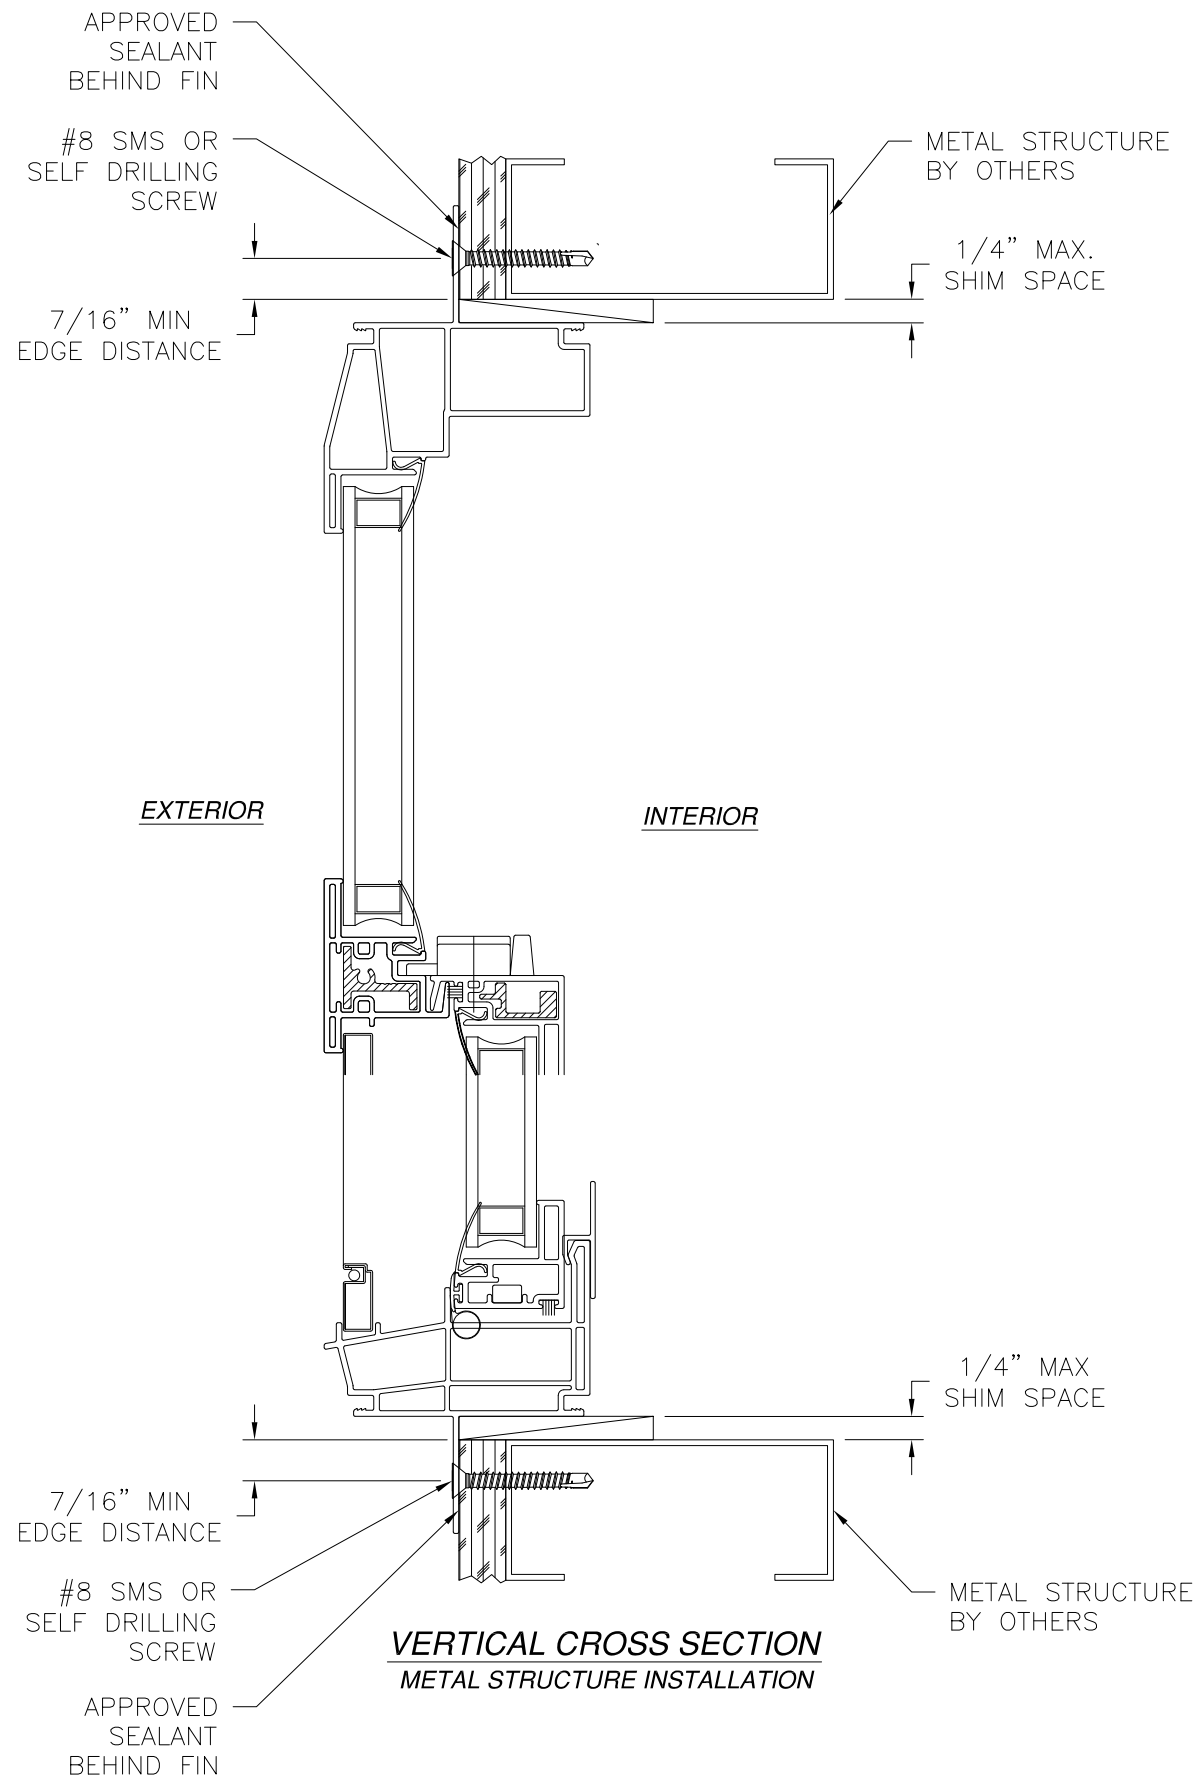

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

NOTES:

1. *INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.*
2. *PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112*

SIGNED: 01/14/2021


LEGACY VINYL WINDOW, L.P.

1813 KELLY BLVD.
CARROLLTON, TX 75006

SERIES 450 SINGLE HUNG WINDOW
44" X 72" NON-IMPACT
FIN INSTALLATION DETAILS


DRAWN: A.R.	DWG NO. 08-03670	REV -
SCALE NTS	DATE 01/04/21	SHEET 7 OF 8

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com

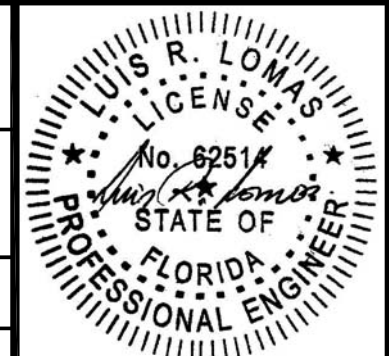


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

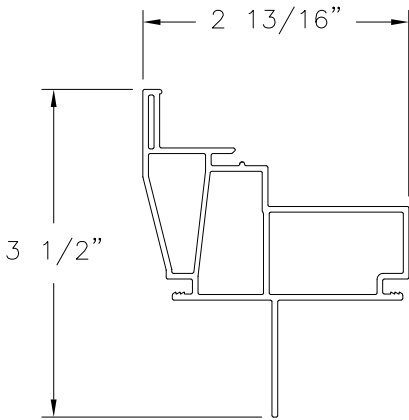


HEAD FRAME (V-770)
FIN INSTALLATION
EXTRUDED RIGID PVC

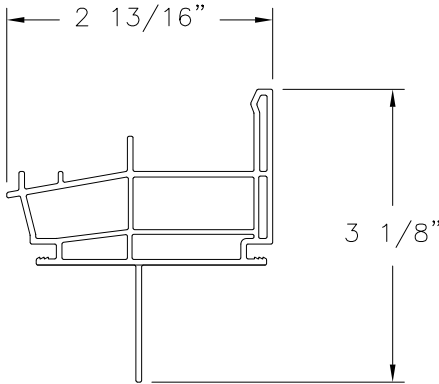


SILL FRAME (V-871)
FIN INSTALLATION
EXTRUDED RIGID PVC

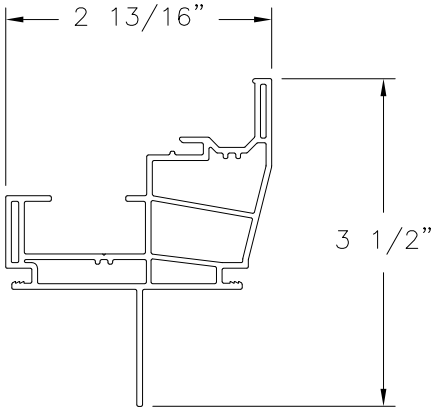


JAMB FRAME (V-769)
FIN INSTALLATION
EXTRUDED RIGID PVC

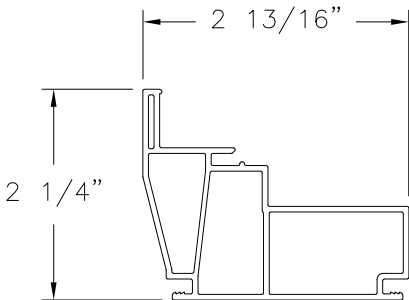


HEAD FRAME (V-770)
EXTRUDED RIGID PVC

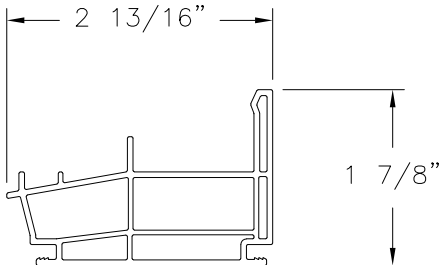


SILL FRAME (V-871)
EXTRUDED RIGID PVC

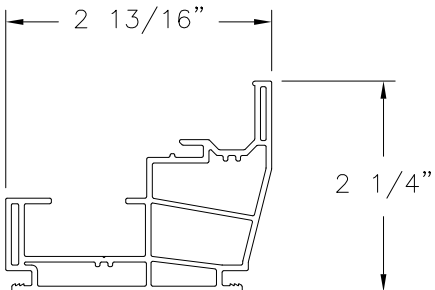


JAMB FRAME (V-769)
EXTRUDED RIGID PVC

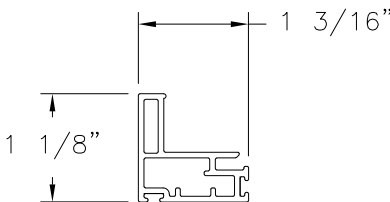


SASH STILE (V-705)
EXTRUDED RIGID PVC

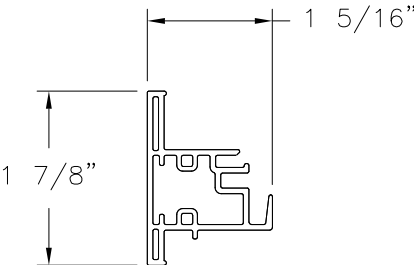


MEETING RAIL (V-706)
EXTRUDED RIGID PVC

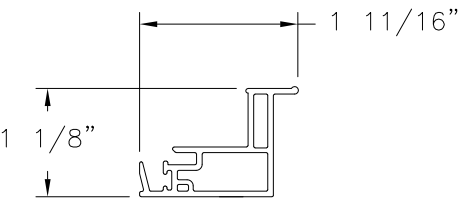


SASH LOCK RAIL (V-704)
EXTRUDED RIGID PVC

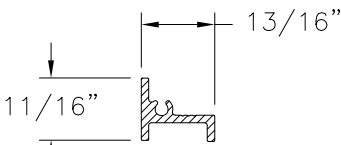

REINFORCEMENT (S-046)
ALUMINUM 6061-T6



REINFORCEMENT (S-047)
ALUMINUM 6061-T6

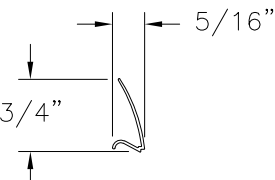

GLAZING BEAD (1718R)
EXTRUDED RIGID PVC


LEGACY VINYL WINDOW, L.P.
1813 KELLY BLVD.
CARROLLTON, TX 75006

SERIES 450 SINGLE HUNG WINDOW
44" X 72" NON-IMPACT
COMPONENTS

DRAWN: A.R.	DWG NO. 08-03670	REV -
SCALE NTS	DATE 01/04/21	SHEET 8 OF 8

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 01/14/2021

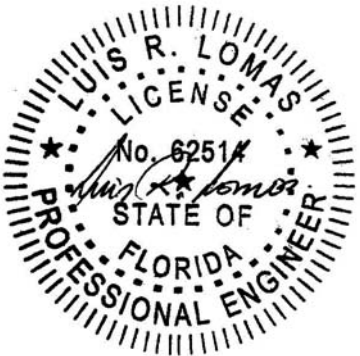

Luis R. Lomas P.E.
FL No.: 62514