


Diagram illustrating the dimensions and labels for a window frame:

- Label A:** Points to the outer frame structure.
- Label B:** Points to the inner frame structure.
- Dimensions:**
  - 8"-10" O.C. TYP (On Center Typical) for the width of the inner frame.
  - 3" FROM EACH CORNER TYP (Typical) for the distance from the corner to the inner frame.

8117, 1110, 1111 DOUBLE HUNG TRANSOM  
8116, 1108, 1109 DOUBLE HUNG PICTURE  
NAILING FIN INSTALLATION

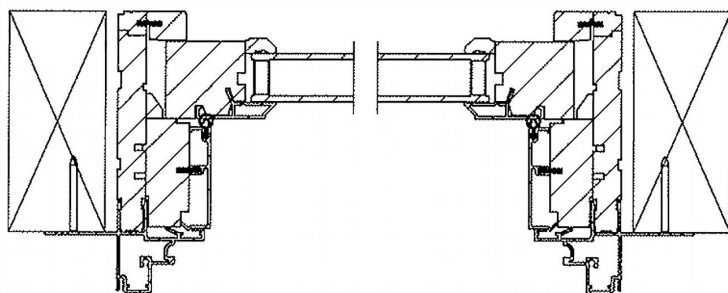

5/8" MINIMUM  
EDGE DISTANCE  
TYP

THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE WINDOW(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

| TOLERANCES UNLESS SPECIFIED: |                     |
|------------------------------|---------------------|
| <u>INCHES</u>                | <u>ANGLE</u>        |
| x ± .1"                      | xx ± 1°             |
| .xx ± .03"                   | xx.x ± .5° (1/2°)   |
| .xxx ± .015"                 | xx.xx ± .25° (1/4°) |

# Weather Shield

## *Windows & Doors*

REF

SHEET 1 OF 1

DO NOT SCALE DRAWING



| REV | DATE | DESCRIPTION | PCR NO. | ENG | PDR #:                                            | PROFILE #: |
|-----|------|-------------|---------|-----|---------------------------------------------------|------------|
|     |      |             |         |     | TYP. WALL THICKNESS:<br>WT/FT:<br>MAT:<br>FINISH: |            |

HEAD AND JAMB SCREWS:  
 OPENING TYPE (SUBSTRATE) = 2X\_WOOD FRAME OR BUCK  
 MINIMUM EMBED 1-1/2"  
 SIDE JAMB SCREW = #8X5/8"  
 (1-1/2" MIN. EMBEDMENT)

NOTE:  
 Stainless Steel fasteners are recommended.

## Weather Shield Windows & Doors

### 8120, 1104, 1105 Double Hung Tilt IMPACT NAIL FIN INSTALLATION

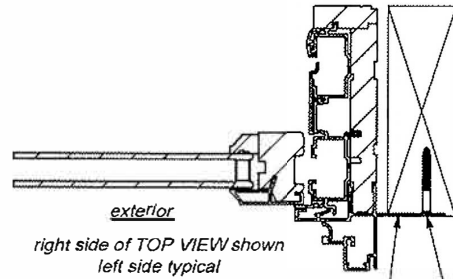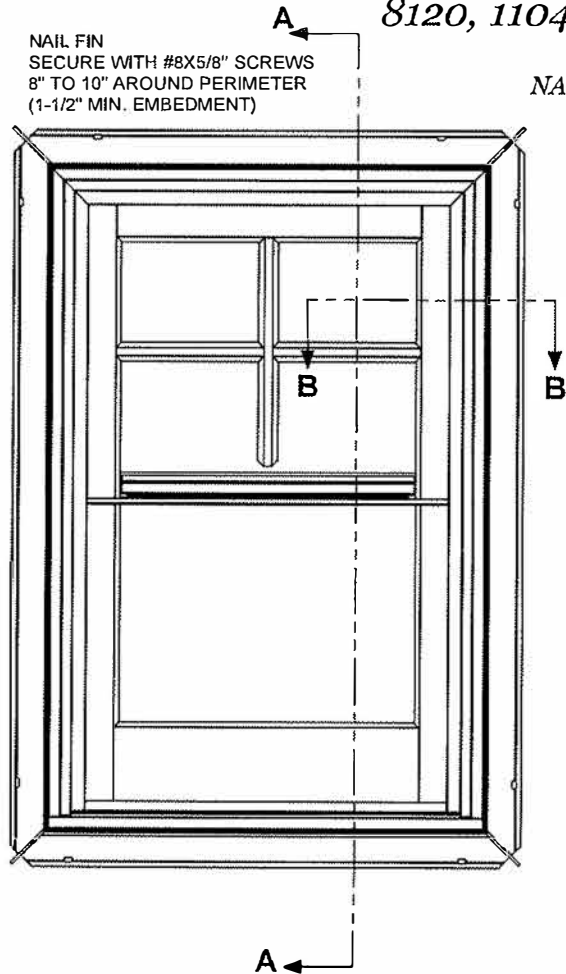

SECURED TO BUCK WITH  
 #8X1-5/8" NON-CORROSIVE  
 SCREWS 8" TO 10" ON CENTER  
 THROUGH NAILING FIN  
 AROUND THE UNITS  
 ENTIRE PERIMETER TYP.  
 (1-1/2" MIN. EMBEDMENT)

PERIMETER CAULK  
 BY OTHERS

WOOD BUCK  
 BY OTHERS TYP.

WOOD BUCK  
 BY OTHERS TYP.

SIDE VIEW  
 interior

SECURED TO BUCK WITH  
 #8X1-5/8" NON-CORROSIVE  
 SCREWS 8" TO 10" ON CENTER  
 THROUGH NAILING FIN  
 AROUND THE UNITS  
 ENTIRE PERIMETER TYP.  
 (1-1/2" MIN. EMBEDMENT)

PERIMETER CAULK  
 BY OTHERS

WOOD BUCK  
 BY OTHERS TYP.

THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE WINDOW(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

DRAWING NOT TO SCALE

| TOLERANCES UNLESS SPECIFIED: |                     |
|------------------------------|---------------------|
| INCHES                       | ANGLE               |
| X ± .1"                      | XX ± 1°             |
| .XX ± .03"                   | XX.X ± .5° (1/2")   |
| .XXX ± .015"                 | XX.XX ± .25° (1/4") |

## Weather Shield Windows & Doors

PRODUCTS:  
 1104, 1105

DRAWN BY:

DATE:

TITLE:

INSTALLATION INSTRUCTION -

DWG NO.:

45-01387

SCALE: 1:8 SHEET NAME: Sheet1

SHEET 1 OF 1

DO NOT SCALE DRAWING

| REV | DATE | DESCRIPTION | PCR NO. | ENG | PDR #: | TYP. WALL THICKNESS: | WT/FT: | AREA: | MAT: | FINISH: | PROFILE #: |
|-----|------|-------------|---------|-----|--------|----------------------|--------|-------|------|---------|------------|
|     |      |             |         |     | 10022  |                      |        |       |      |         |            |