



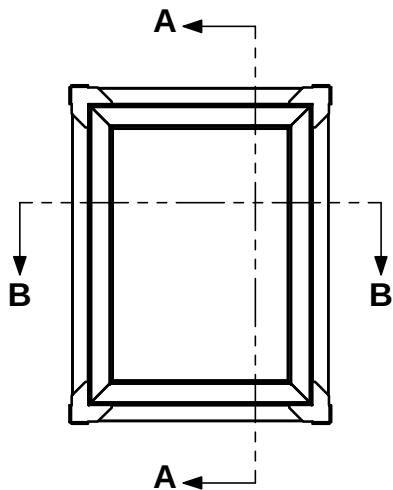

WEATHER SHIELD WINDOWS & DOORS

8312 DIRECT SET NAILING FIN INSTALLATION

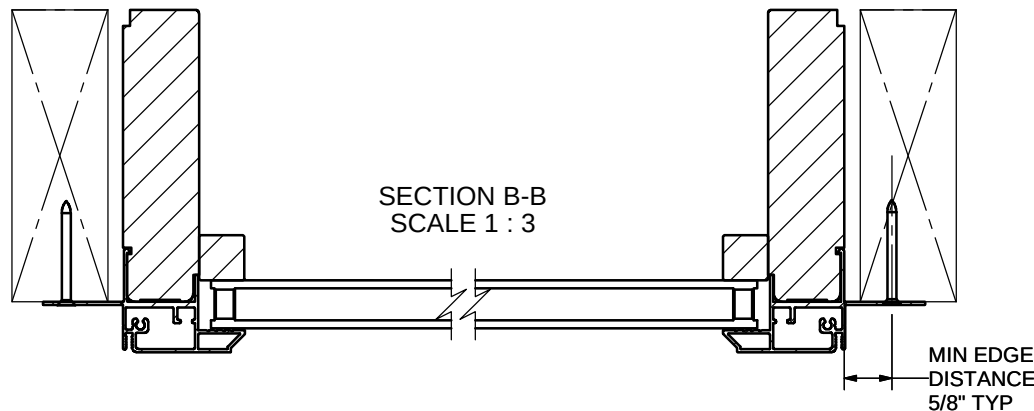


SECTION B-B
SCALE 1 : 3

MIN EDGE
DISTANCE
5/8" TYP

#6 X (1-5/8") NON-CORROSIVE SCREW
1-1/2" MIN PENETRATION INTO FRAMING MEMBER
8-10" ON CENTER THROUGH NAILING FIN
AROUND THE UNITS ENTIRE PERIMETER TYP

USE SILICONE SEALANT
AROUND ENTIRE PERIMETER
BETWEEN NAILING FIN &
WOOD BUCK BY OTHERS TYP

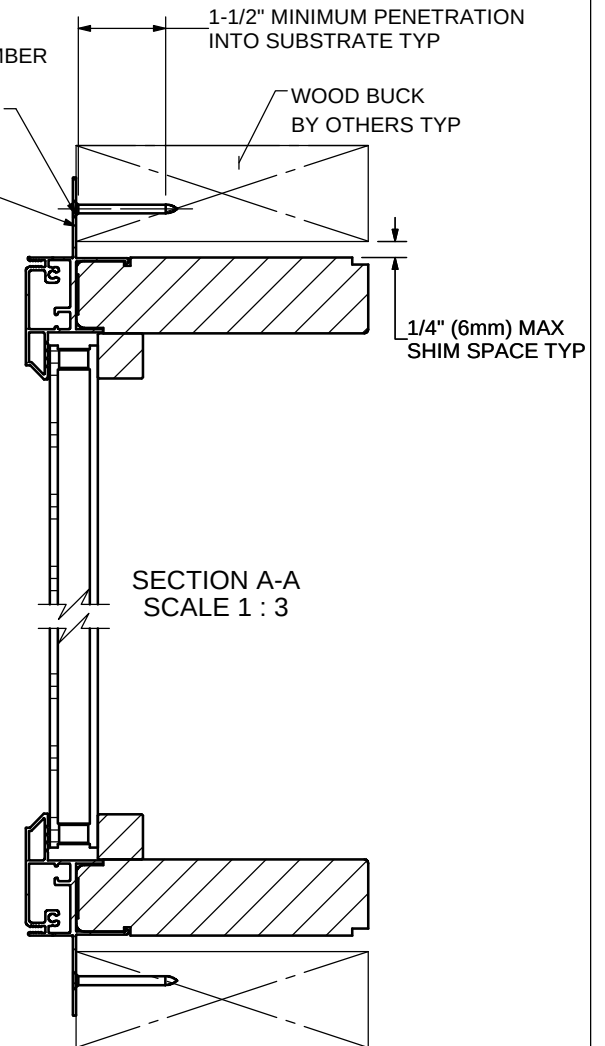

SECTION A-A
SCALE 1 : 3

THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE WINDOW(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

TOLERANCES UNLESS SPECIFIED:	
INCHES	ANGLE
.X ± .1"	XX ± 1°
.XX ± .03"	XX.X ± .5° (1/2°)
.XXX ± .015"	XX.XX ± .25° (1/4°)

Weather Shield
Windows & Doors

PRODUCTS:
8312

DRAWN BY:

DATE:

TITLE:

INSTALLATION

DWG NO.:

45-02505

REV

SCALE: 1:1

SHEET NAME: Sheet1

SHEET 1 OF 1

DO NOT SCALE DRAWING

REV	DATE	DESCRIPTION	PCR NO.	ENG	PDR #:	PROFILE #:

TYP. WALL THICKNESS:

WT/FT:

AREA:

MAT:

FINISH: