

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	REVISED PER NEW CODE	10/31/2023	R.L.

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2” UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1–1/2” OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. SHIM AS NEEDED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: EXTRUDED RIGID PVC.
11. UNITS MUST BE GLAZED PER ASTM E1300.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.

13. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 7/8” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING FIN INTO STEEL STUDS USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 1 1/2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. ALL FASTENERS TO BE CORROSION RESISTANT.
19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

19.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42

19.2. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.

19.3. MASONRY: GROUT/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.

19.4. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI OR ALUMINUM 6063–T5 FU=30KSI 1/8” THICK MINIMUM
20. UNITS MAY BE INSTALLED HORIZONTALLY OR VERTICALLY.

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATION
3	NUMBER OF ANCHORS CHARTS
4 – 9	INSTALLATION DETAILS
10	COMPONENTS

MI WINDOWS & DOORS, LLC.
650 WEST MARKET STREET
GRATZ, PA 17030–0370

SERIES 3500 HP, HPPW, HPSDLITES, HPSP, HPT,
1255 HPPW PVC FIXED WINDOW NON–IMPACT
NOTES

DRAWN:
V.L.

DWG NO.
08–01772

REV
C

SCALE NTS

DATE 09/12/12

SHEET 1 OF 10


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 10/31/2023




Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	REVISED PER NEW CODE	10/31/2023	R.L.

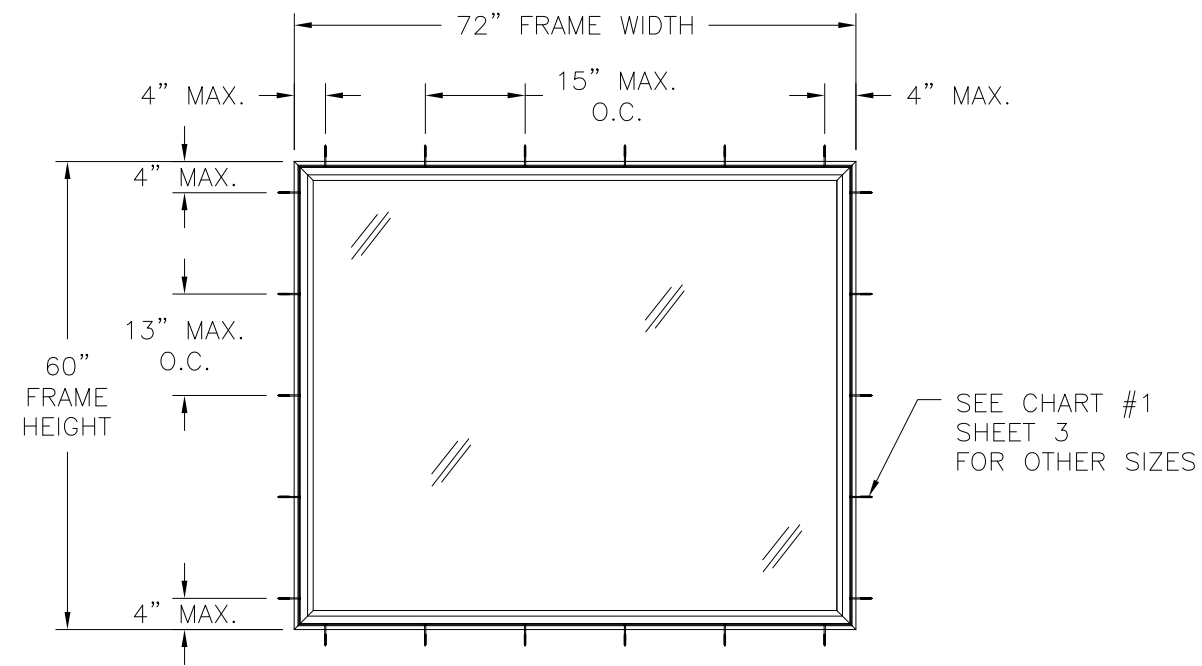

**SERIES 3500 HP, 3500 HPPW, 3500 HPSDLITES,
3500 HPSP, 3500 HPT, 1255 HPPW
PVC FIXED WINDOW
FLANGE INSTALLATION**

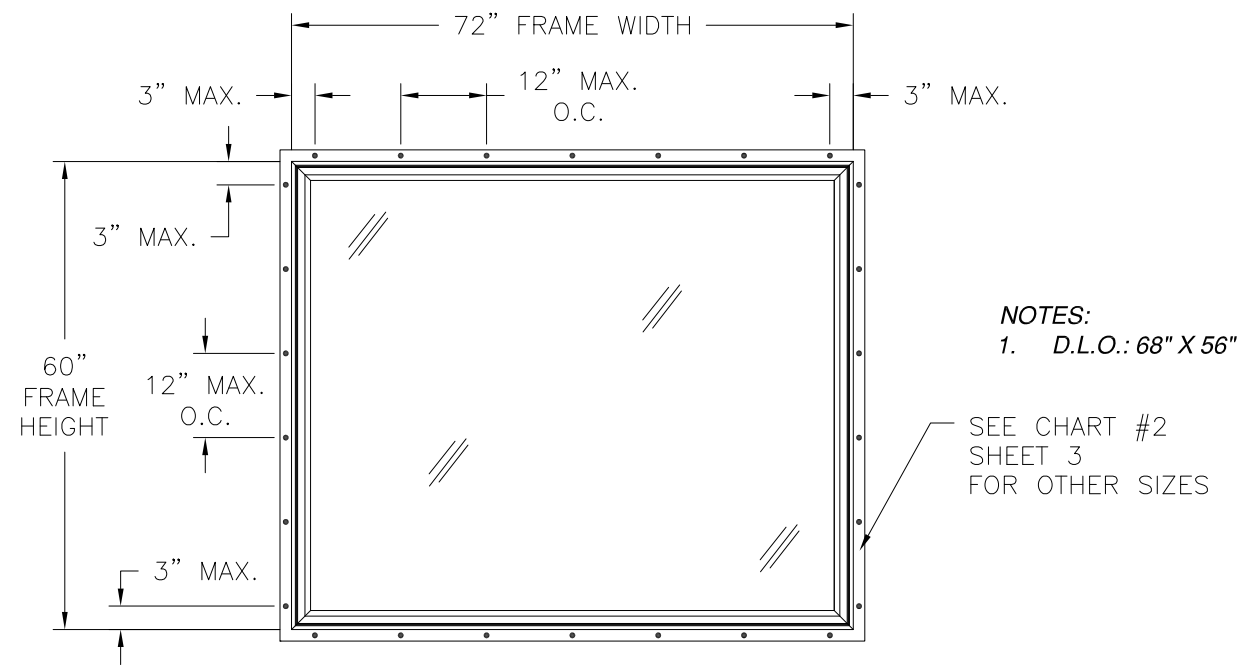

**SERIES 3500 HP, 3500 HPPW, 3500 HPSDLITES,
3500 HPSP, 3500 HPT, 1255 HPPW
PVC FIXED WINDOW
FIN INSTALLATION**

DESIGN PRESSURE RATING	IMPACT RATING
+70.0/-75.0PSF	NONE

72" x 60" FRAME SIZE SHOWN. OTHER SIZES ARE APPROVED AS LONG
AS INDIVIDUAL FRAME AREA DOES NOT EXCEED 30.0 FT²

NOTES:
1. D.L.O.: 68" X 56"

SEE CHART #2
SHEET 3
FOR OTHER SIZES

SIGNED: 10/31/2023

MI WINDOWS & DOORS, LLC. 650 WEST MARKET STREET GRATZ, PA 17030-0370		
SERIES 3500 HP, HPPW, HPSDLITES, HPSP, HPT, 1255 HPPW PVC FIXED WINDOW NON-IMPACT ELEVATIONS		
DRAWN: V.L.	DWG NO. 08-01772	REV C
SCALE NTS	DATE 09/12/12	SHEET 2 OF 10
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	REVISED PER NEW CODE	10/31/2023	R.L.

CHART #1

Number of anchor locations required																		
Frame Height (in)	Frame width (in)																	
	24.00		30.00		36.00		42.00		48.00		54.00		60.00		66.00		72.00	
	H&S	Jamb	H&S	Jamb	H&S	Jamb	H&S	Jamb	H&S	Jamb	H&S	Jamb	H&S	Jamb	H&S	Jamb	H&S	Jamb
24.00	3	3	3	3	3	3	4	3	4	3	5	3	5	3	5	3	6	3
30.00	3	3	3	3	3	3	4	3	4	3	5	3	5	3	5	3	6	3
36.00	3	4	3	4	3	4	4	4	4	4	5	4	5	4	5	4	6	4
42.00	3	4	3	4	3	4	4	4	4	4	5	4	5	4	5	4	6	4
48.00	3	5	3	5	3	5	4	5	4	5	5	5	5	5	5	5	6	5
54.00	3	5	3	5	3	5	4	5	4	5	5	5	5	5	5	5	6	5
60.00	3	5	3	5	3	5	4	5	4	5	5	5	5	5	5	5	6	5

CHART #2

Number of anchor locations required																		
Frame Height (in)	Frame width (in)																	
	24.00		30.00		36.00		42.00		48.00		54.00		60.00		66.00		72.00	
	H&S	Jamb	H&S	Jamb	H&S	Jamb	H&S	Jamb	H&S	Jamb	H&S	Jamb	H&S	Jamb	H&S	Jamb	H&S	Jamb
24.00	3	3	3	3	4	3	4	3	5	3	5	3	6	3	6	3	7	3
30.00	3	3	3	3	4	3	4	3	5	3	5	3	6	3	6	3	7	3
36.00	3	4	3	4	4	4	4	4	5	4	5	4	6	4	6	4	7	4
42.00	3	4	3	4	4	4	4	4	5	4	5	4	6	4	6	4	7	4
48.00	3	5	3	5	4	5	4	5	5	5	5	5	6	5	6	5	7	5
54.00	3	5	3	5	4	5	4	5	5	5	5	5	6	5	6	5	7	5
60.00	3	6	3	6	4	6	4	6	5	6	5	6	6	6	6	6	7	6

SIGNED: 10/31/2023

MI WINDOWS & DOORS, LLC.
650 WEST MARKET STREET
GRATZ, PA 17030-0370

SERIES 3500 HP, HPPW, HPSDLITES, HPSP, HPT,
1255 HPPW PVC FIXED WINDOW NON-IMPACT
NUMBER OF ANCHORS CHARTS

DRAWN:
V.L.

DWG NO.
08-01772


REV
C

SCALE NTS

DATE 09/12/12


SHEET 3 OF 10

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

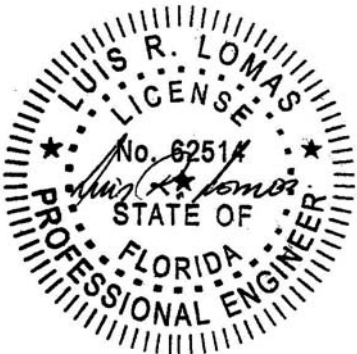


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	REVISED PER NEW CODE	10/31/2023	R.L.

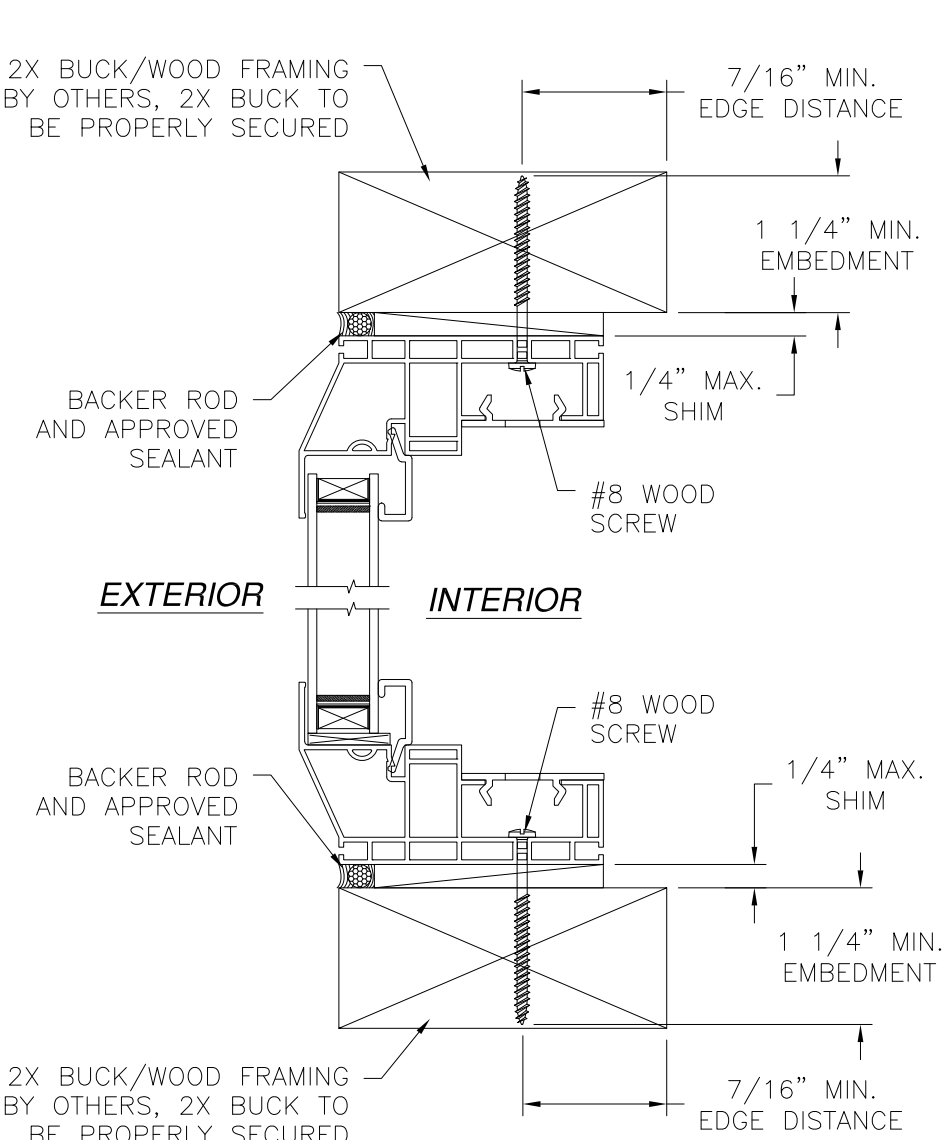

VERTICAL CROSS SECTION
2X BUCK/WOOD INSTALLATION
HEAD AND SILL SHOWN, JAMBS SIMILAR

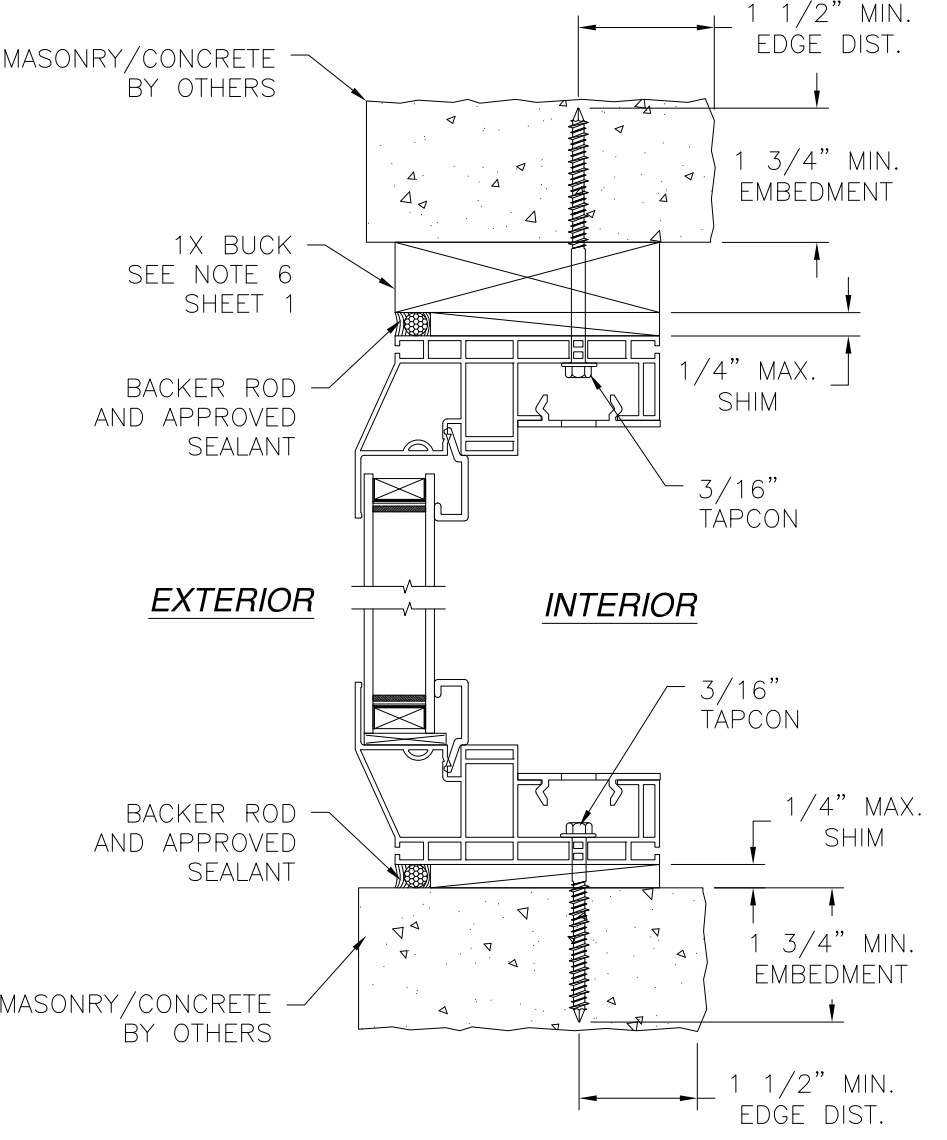

VERTICAL CROSS SECTION
MASONRY/CONCRETE WITH 1X BUCK INSTALLATION AT HEAD
FOR MASONRY/CONCRETE WITHOUT 1X BUCK REFER TO SILL
JAMBS SIMILAR

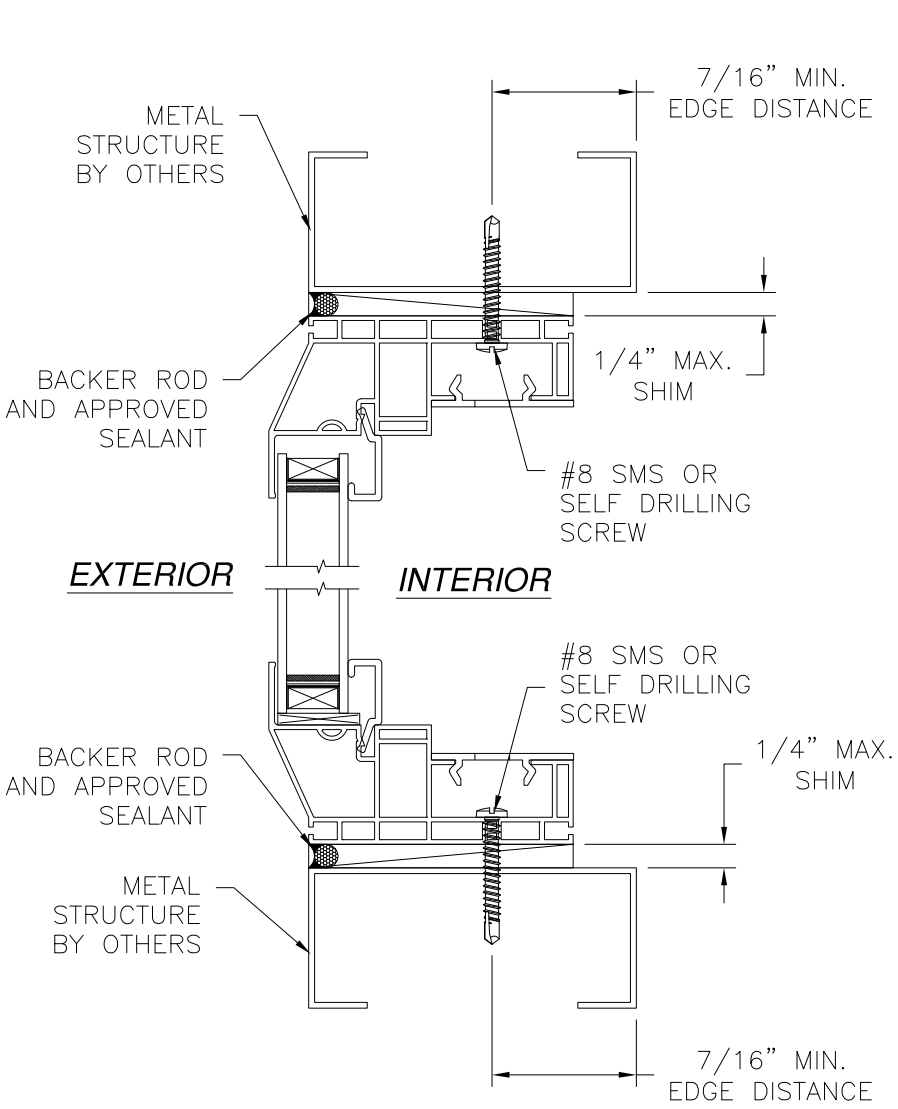

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION
HEAD AND SILL SHOWN, JAMBS SIMILAR

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

MI WINDOWS & DOORS, LLC.
650 WEST MARKET STREET
GRATZ, PA 17030-0370

SERIES 3500 HP, HPPW, HPSDLITES, HPSP, HPT,
1255 HPPW PVC FIXED WINDOW NON-IMPACT
INSTALLATION DETAILS


DRAWN: V.L. DWG NO. 08-01772 REV C

SCALE NTS DATE 09/12/12 SHEET 4 OF 10


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 10/31/2023


Luis R. Lomas P.E.
FL No.: 62514

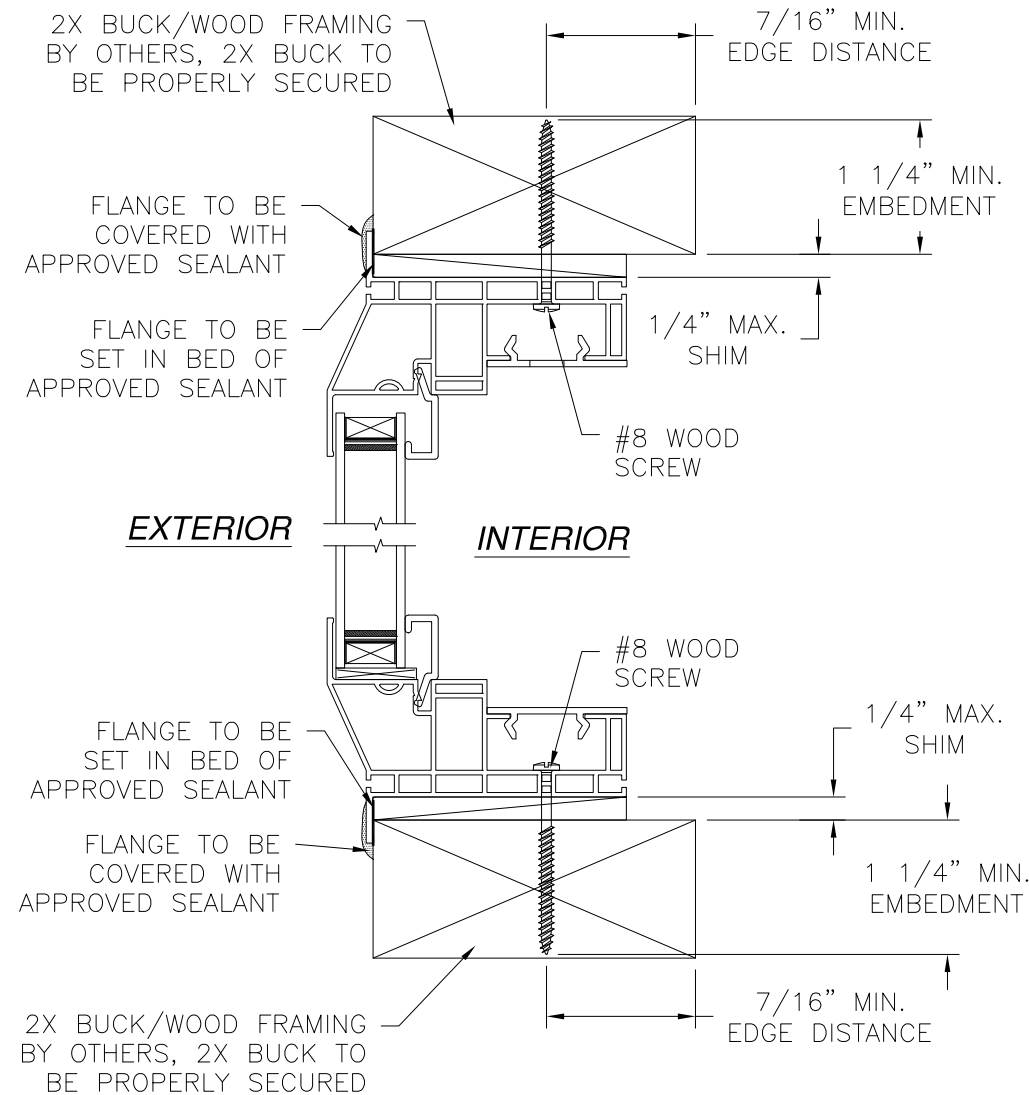

VERTICAL CROSS SECTION
2X BUCK/WOOD INSTALLATION
HEAD AND SILL SHOWN, JAMBS SIMILAR

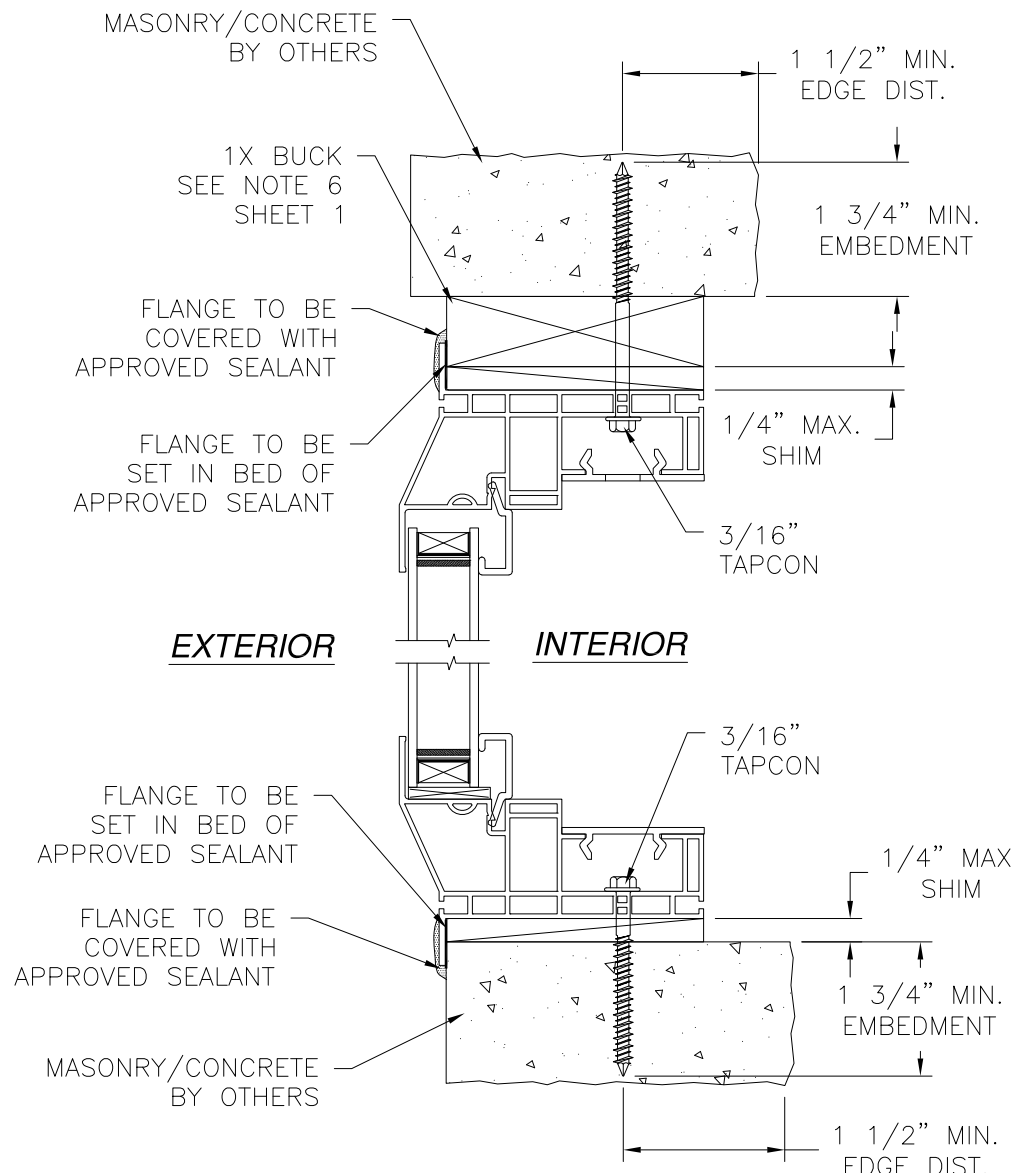

VERTICAL CROSS SECTION
MASONRY/CONCRETE WITH 1X BUCK INSTALLATION AT HEAD
FOR MASONRY/CONCRETE WITHOUT 1X BUCK REFER TO SILL
JAMBS SIMILAR

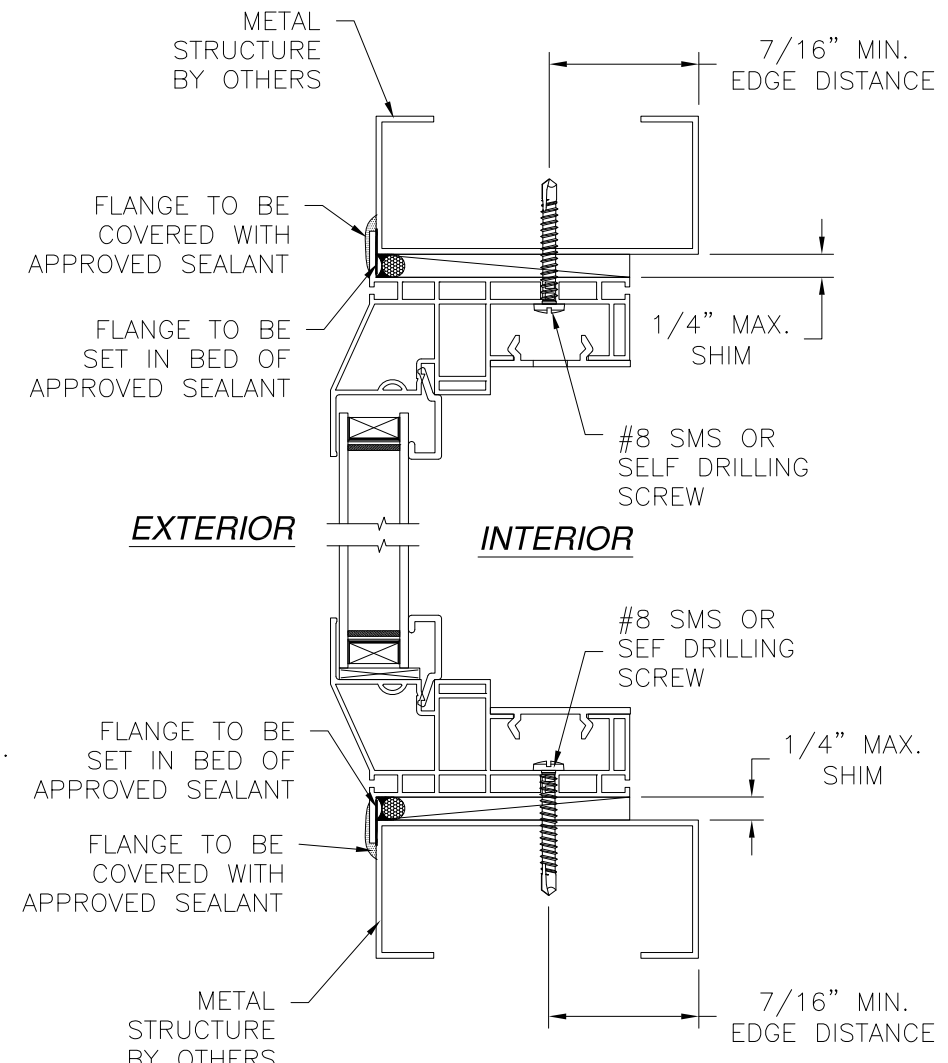

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION
HEAD AND SILL SHOWN, JAMBS SIMILAR

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	REVISED PER NEW CODE	10/31/2023	R.L.

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

MI WINDOWS & DOORS, LLC.
650 WEST MARKET STREET
GRATZ, PA 17030-0370




SERIES 3500 HP, HPPW, HPSDLITES, HPSP, HPT,
1255 HPPW PVC FIXED WINDOW NON-IMPACT
INSTALLATION DETAILS WITH FLANGE

DRAWN: V.L.	DWG NO. 08-01772	REV C
SCALE NTS	DATE 09/12/12	SHEET 5 OF 10

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 10/31/2023

Luis R. Lomas P.E.
FL No.: 62514

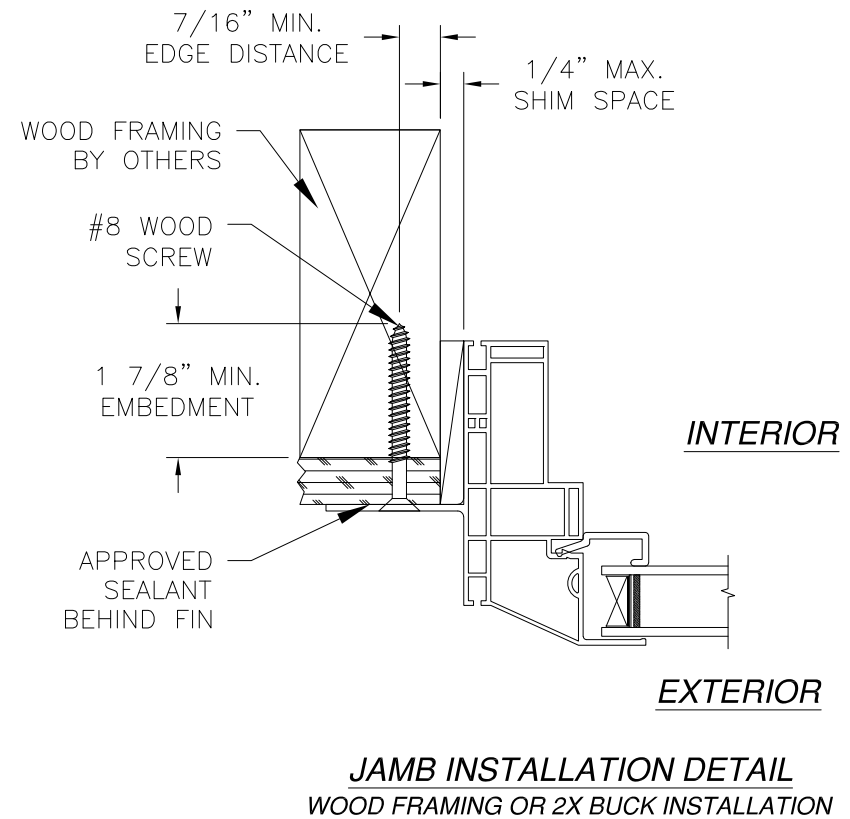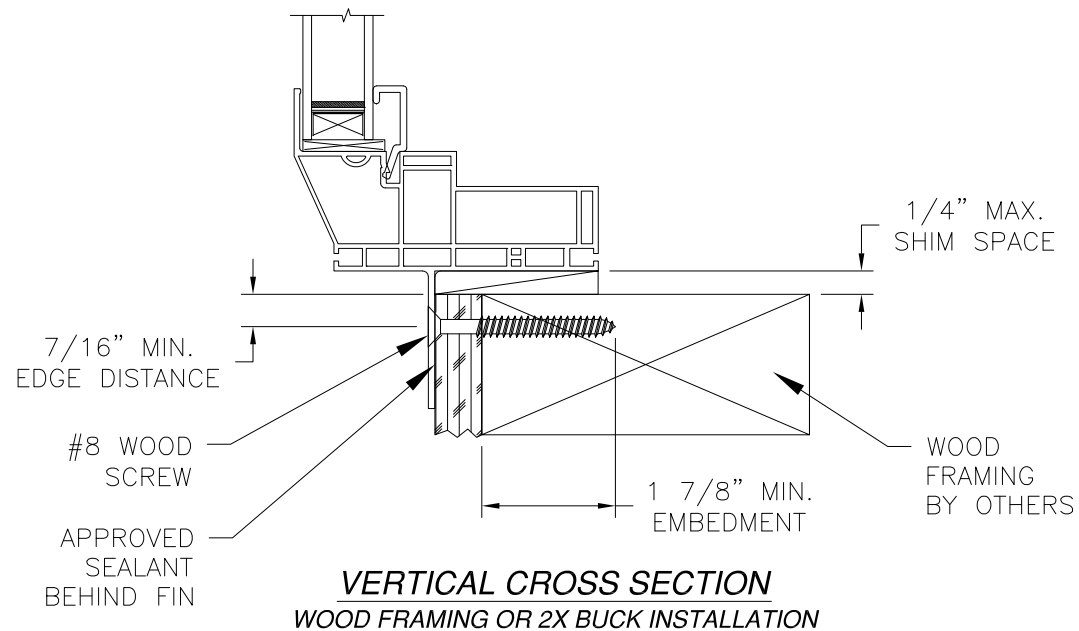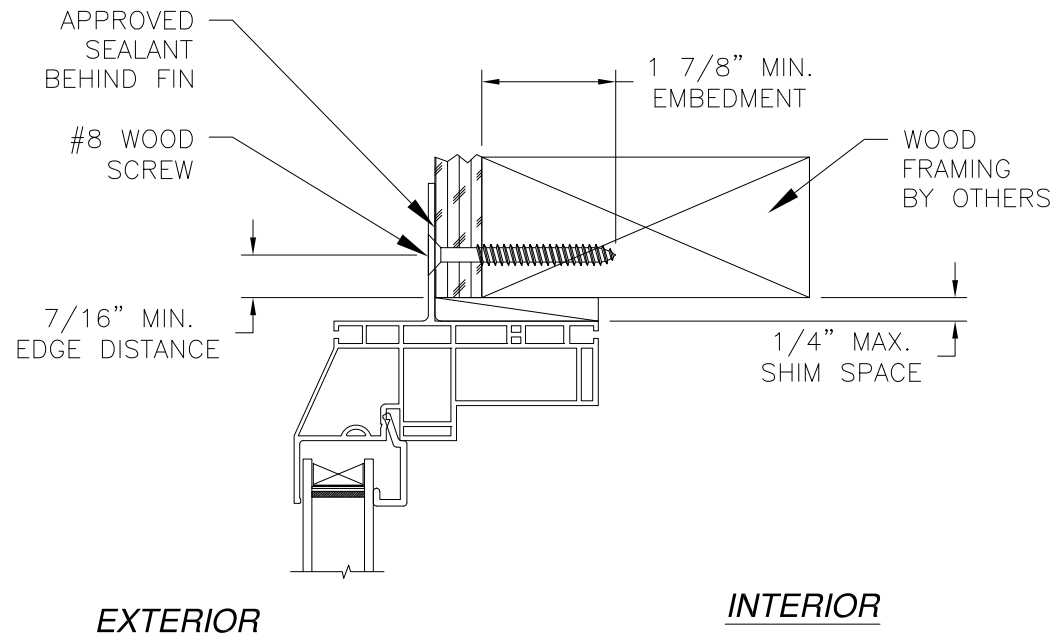




- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	REVISED PER NEW CODE	10/31/2023	R.L.

MI WINDOWS & DOORS, LLC. 650 WEST MARKET STREET GRATZ, PA 17030-0370		
SERIES 3500 HP, HPPW, HPSDLITES, HPSP, HPT, 1255 HPPW PVC FIXED WINDOW NON-IMPACT FIN INSTALLATION DETAILS		
DRAWN: V.L.	DWG NO. 08-01772	REV C
SCALE NTS	DATE 09/12/12	SHEET 6 OF 10
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 10/31/2023

Luis R. Lomas P.E.
FL No.: 62514

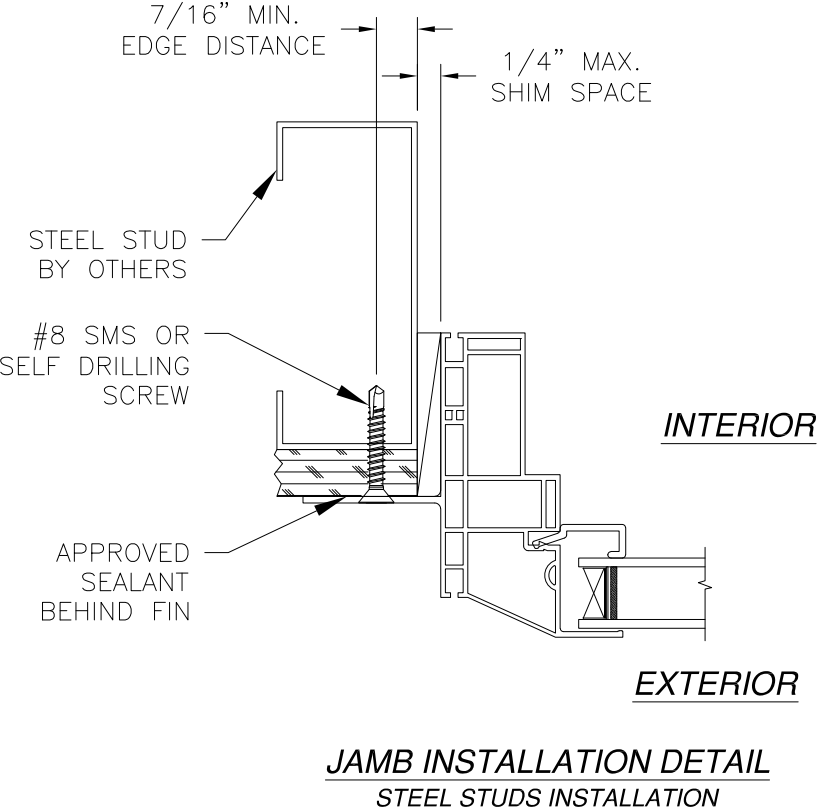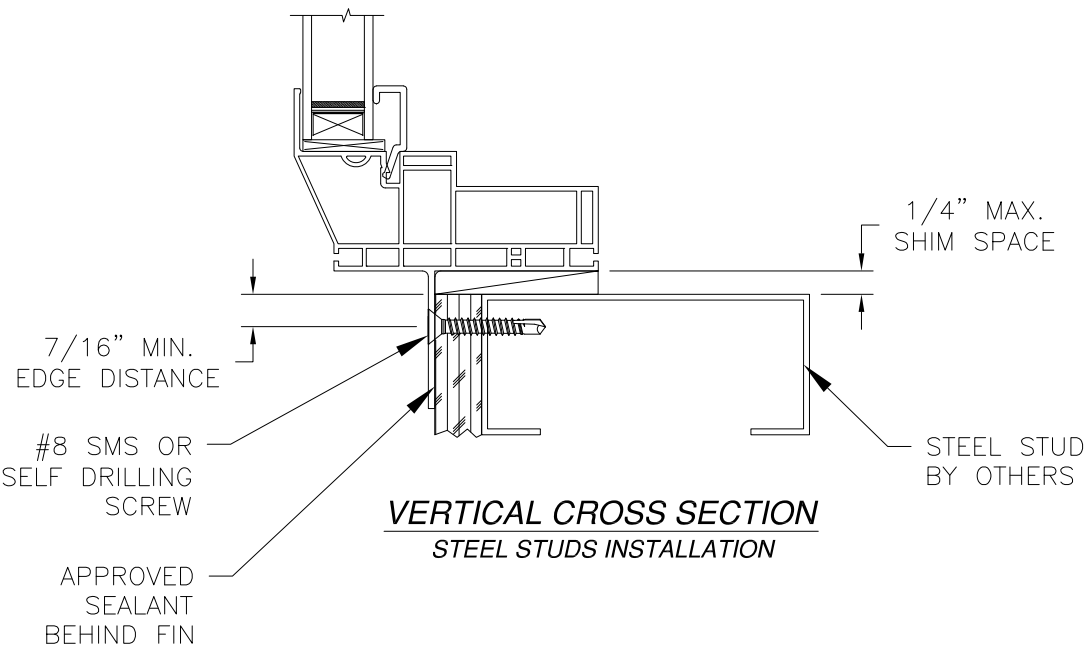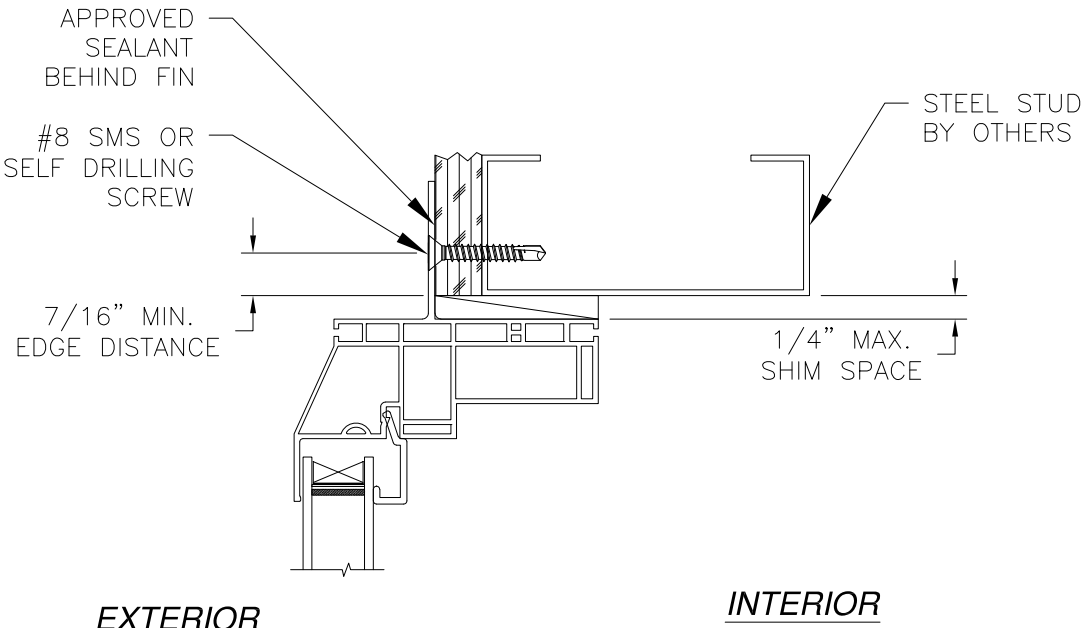

NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

MI WINDOWS & DOORS, LLC.
650 WEST MARKET STREET
GRATZ, PA 17030-0370

SERIES 3500 HP, HPPW, HPSDLITES, HPSP, HPT,
1255 HPPW PVC FIXED WINDOW NON-IMPACT
FIN INSTALLATION DETAILS

DRAWN:
V.L.

DWG NO.
08-01772

REV
C

SCALE NTS

DATE 09/12/12


SHEET 7 OF 10

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 10/31/2023


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	REVISED PER NEW CODE	10/31/2023	R.L.

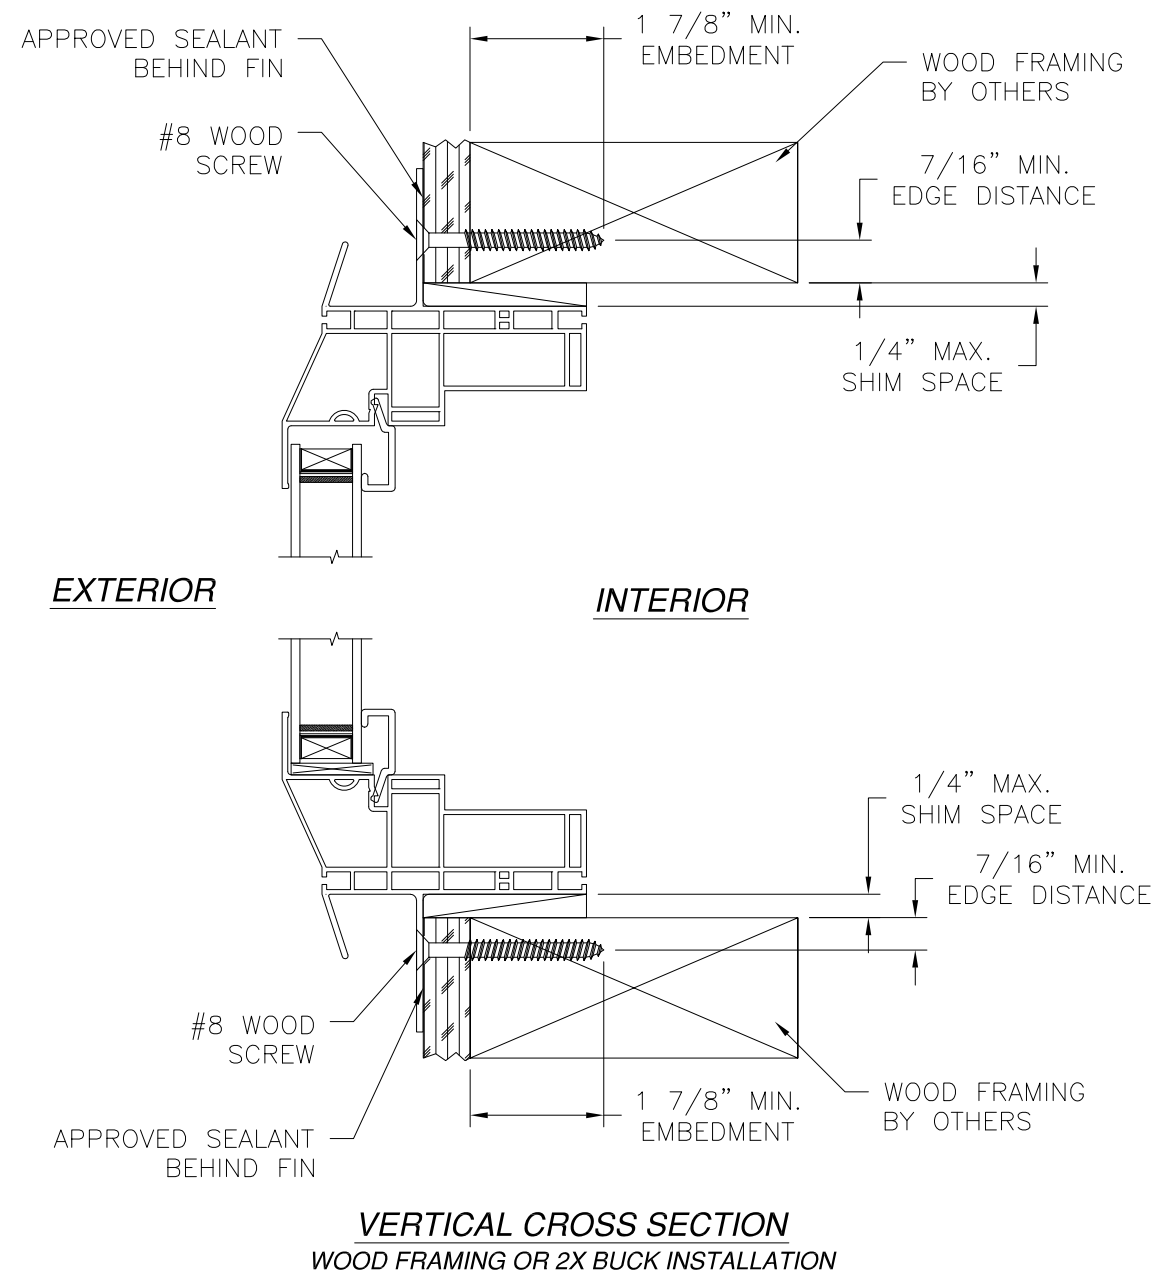


NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

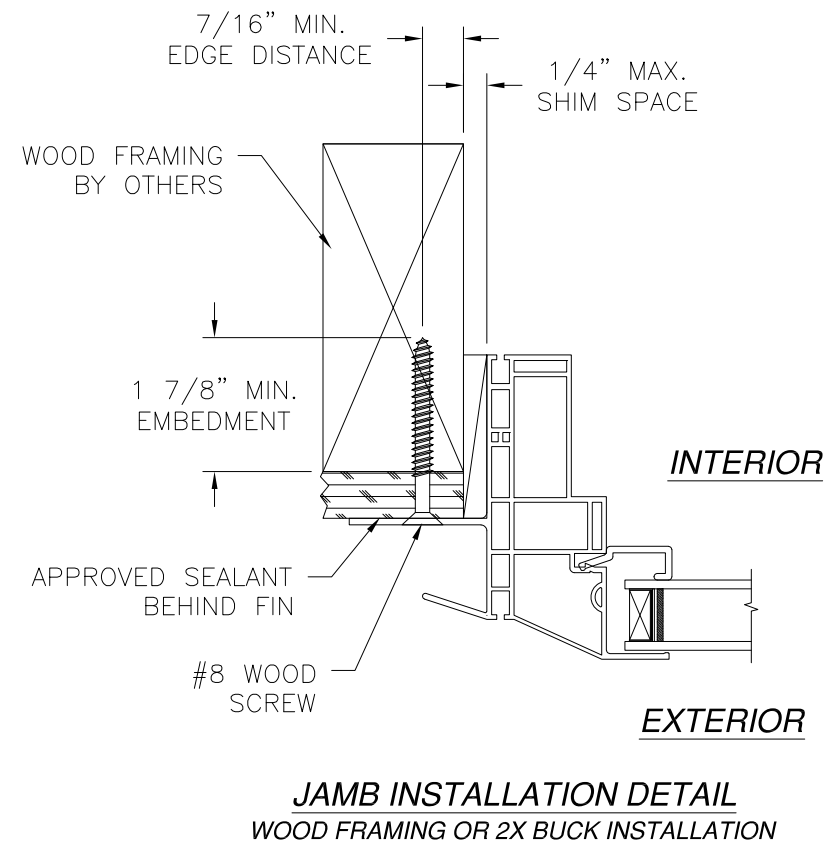



SIGNED: 10/31/2023

MI WINDOWS & DOORS, LLC. 650 WEST MARKET STREET GRATZ, PA 17030-0370		
SERIES 3500 HP, HPPW, HPSDLITES, HPSP, HPT, 1255 HPPW PVC FIXED WINDOW NON-IMPACT FIN INSTALLATION DETAILS W/J-CHANNEL		
DRAWN: V.L.	DWG NO. 08-01772	REV C
SCALE NTS	DATE 09/12/12	SHEET 8 OF 10
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

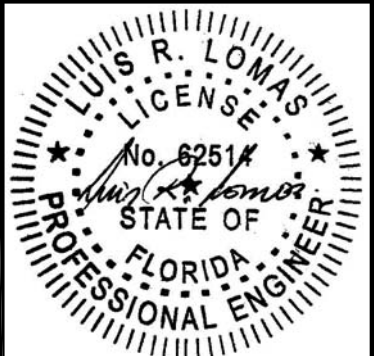

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	REVISED PER NEW CODE	10/31/2023	R.L.

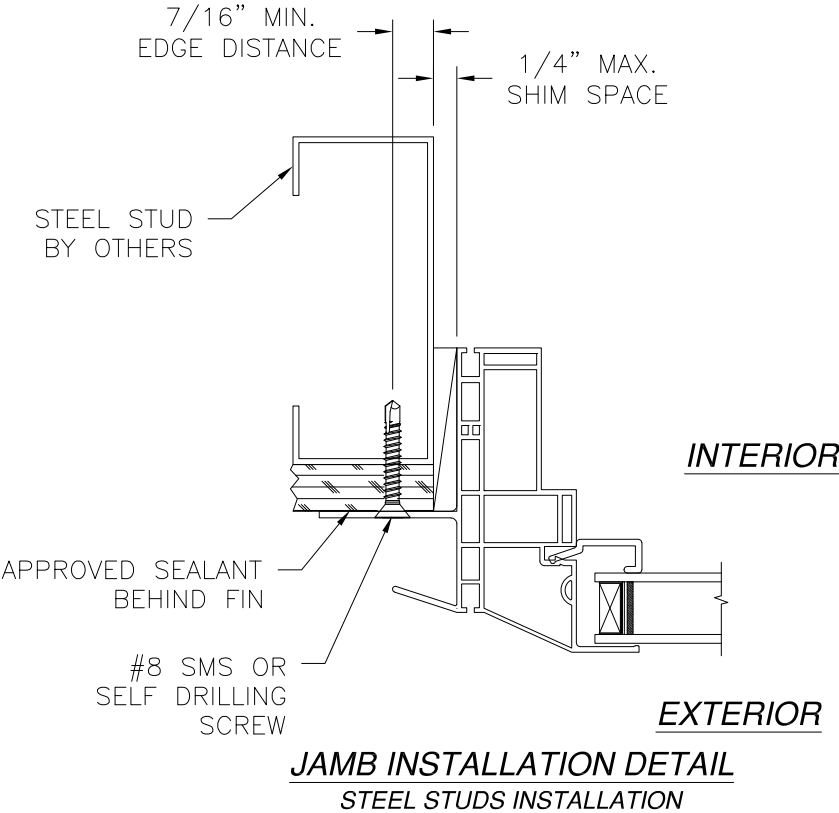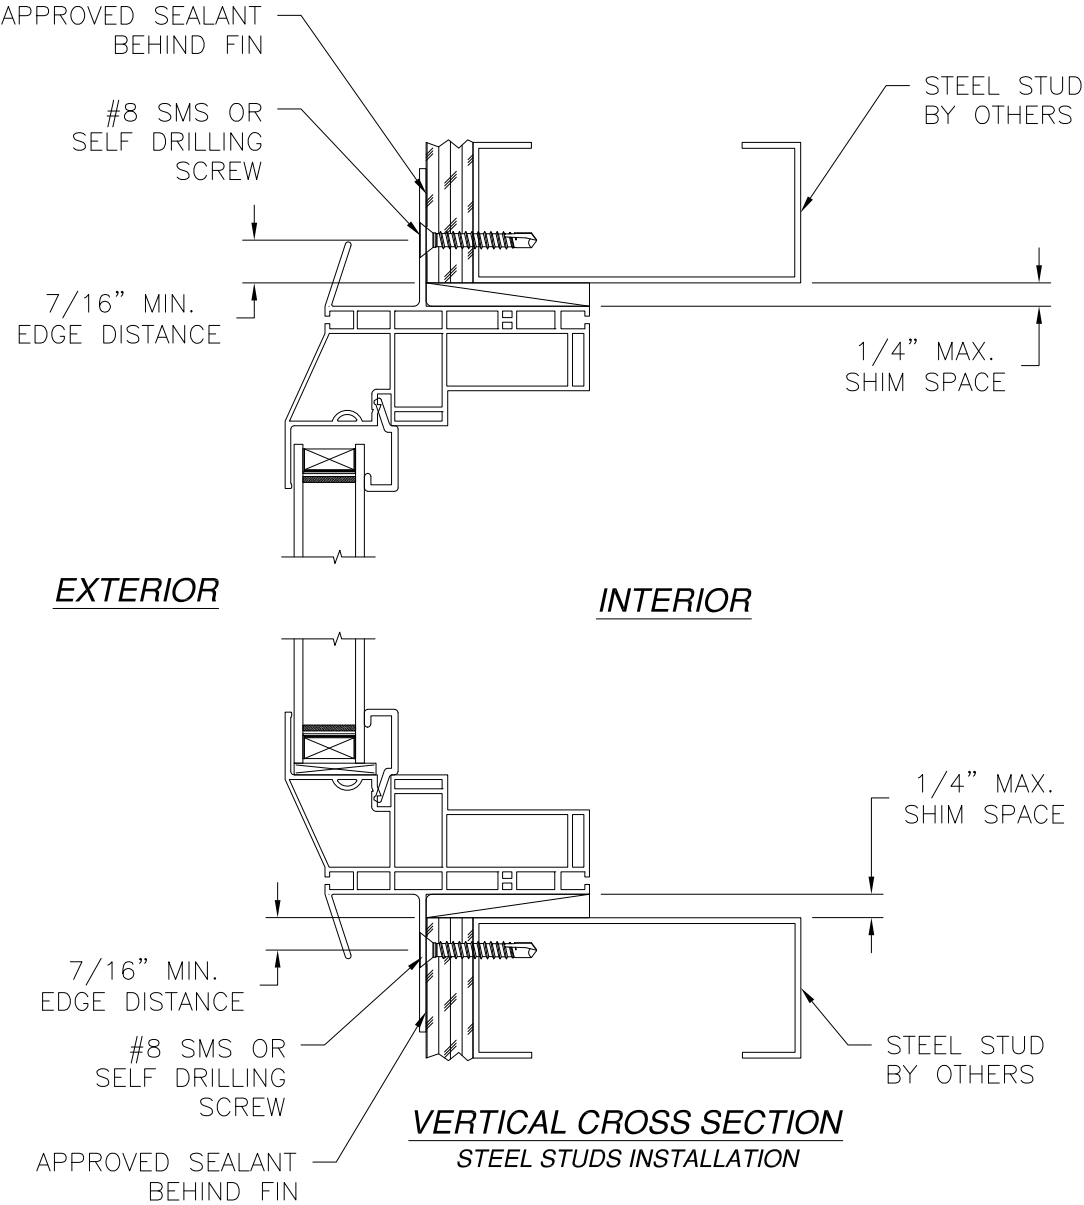

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112







MI WINDOWS & DOORS, LLC. 650 WEST MARKET STREET GRATZ, PA 17030-0370		
SERIES 3500 HP, HPPW, HPSDLITES, HPSP, HPT, 1255 HPPW PVC FIXED WINDOW NON-IMPACT FIN INSTALLATION DETAILS W/J-CHANNEL		
DRAWN: V.L.	DWG NO. 08-01772	REV C
SCALE NTS	DATE 09/12/12	SHEET 9 OF 10
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 10/31/2023



Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	REVISED PER NEW CODE	10/31/2023	R.L.

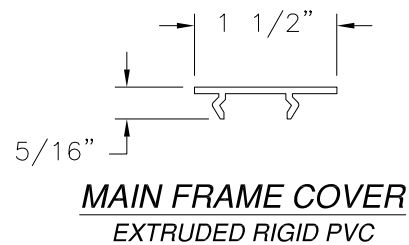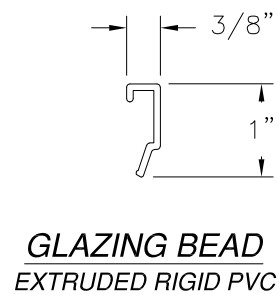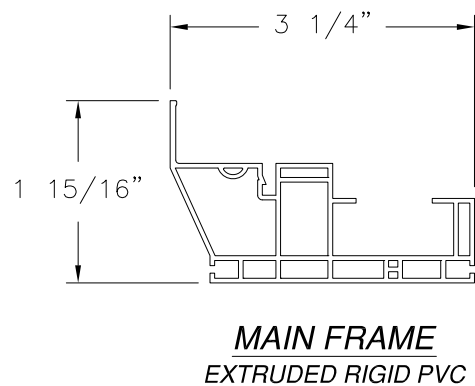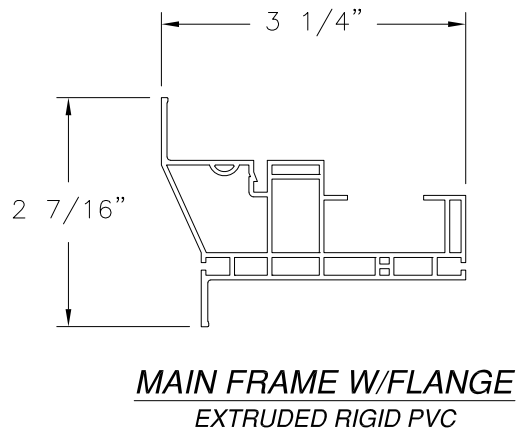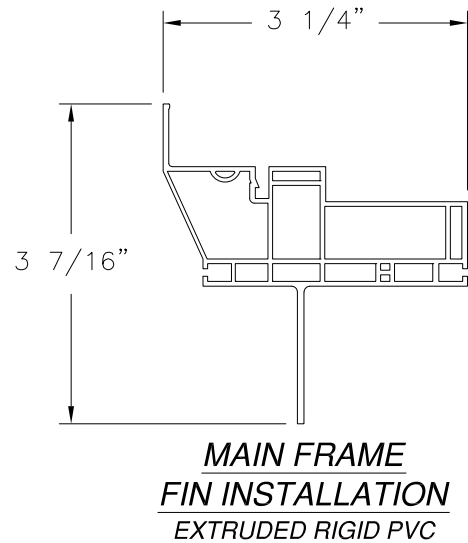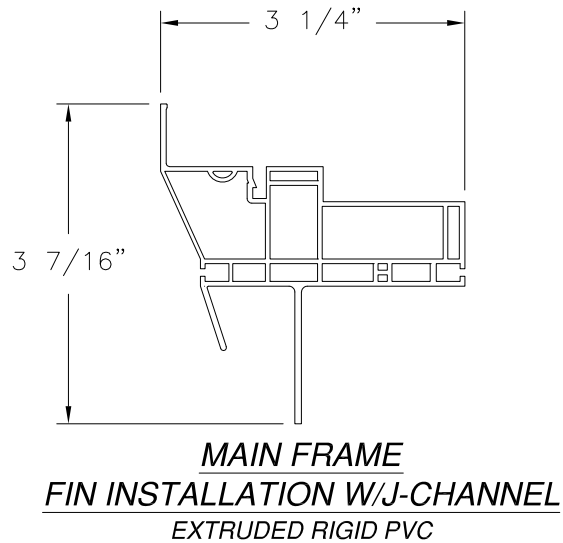

SIGNED: 10/31/2023

MI WINDOWS & DOORS, LLC.
650 WEST MARKET STREET
GRATZ, PA 17030-0370

SERIES 3500 HP, HPPW, HPSDLITES, HPSP, HPT,
1255 HPPW PVC FIXED WINDOW NON-IMPACT
COMPONENTS

DRAWN:
V.L.

DWG NO.
08-01772


REV
C

SCALE NTS

DATE 09/12/12

SHEET 10 OF 10

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

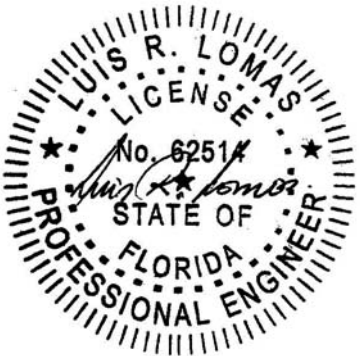

Luis R. Lomas P.E.
FL No.: 62514