



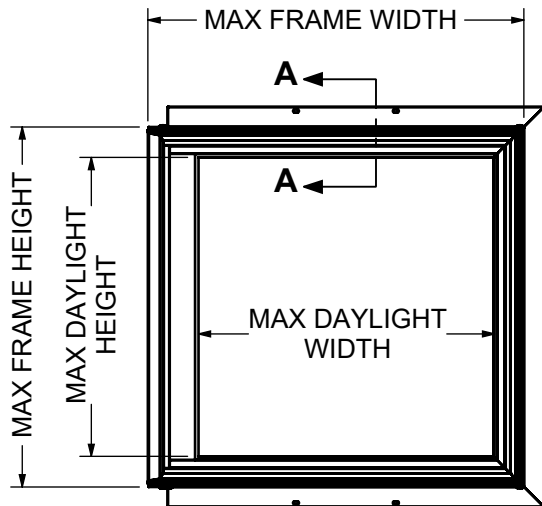

SECURED TO BUCK WITH #6 X 1-5/8" NON-CORROSIVE SCREWS PLACED 2-4" FROM EACH CORNER AND 8-10" ON CENTER THROUGH THE NAILING FIN AT HEAD AND SIDES TYP.

HEAD/SIDE/SILL ANCHORAGE

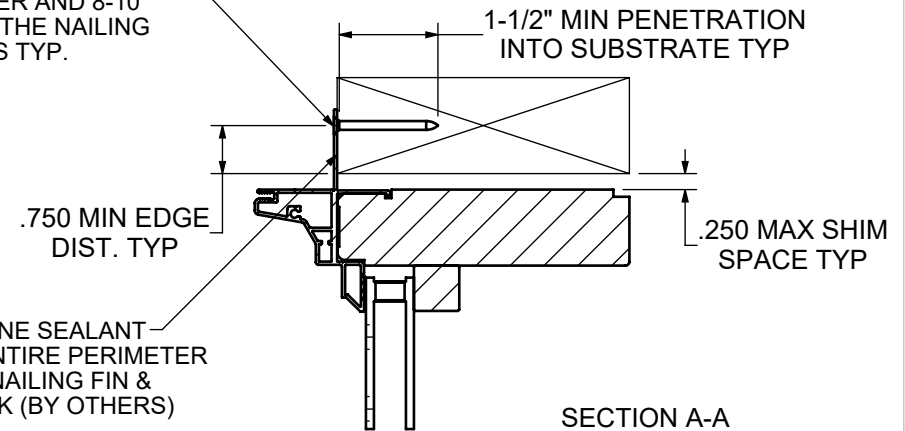

SECTION A-A
SCALE 1 : 3

DESCRIPTION	MAX FRAME SIZE		MAX DAYLIGHT OPENING		DESIGN PRESSURE (DPI)	FRAME MATERIAL	INSTALLATION METHOD
	WIDTH (IN)	HEIGHT (IN)	WIDTH (IN)	HEIGHT (IN)			
8306 DS CORNER	49	119.5	44.938	116.188	+40/-40	ALUMINUM	NAIL FIN INSTALLATION
	61	96	56.938	92.188	+50/-50	/WOOD	

NOTE(S):

- THESE UNITS HAVE BEEN TESTED, ANALYZED, HALMARK CERTIFIED AND FBC APPROVED.
- THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY THE CURRENT EDITION FLORIDA BUILDING CODE (FBC) EXCLUDING HVHZ. THE PRODUCT HAS BEEN EVALUATED TO THE FOLLOWING:
 - AAMA/WDMA/CSA 101/I.S.2/A440-17
 - AAMA/WDMA/CSA 101/I.S.2/A440-22
- THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE DOOR(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.
- FASTENERS, ANCHORS, AND CONNECTORS SHALL COMPLY WITH THE CORROSION RESISTANCE REQUIREMENTS OF THE 2026 FLORIDA BUILDING CODE, SECTION 1711, BASED ON EXPOSURE CONDITIONS AND PROXIMITY TO A SALTWATER SHORELINE AND NOT ALL THE ONES SHOWN HERE NECESSARILY APPLY.

WEATHER SHIELD

WINDOW & DOORS

8306

NAILING FIN INSTALLATION

TOLERANCES UNLESS SPECIFIED:	
INCHES	ANGLE
.X ± .1"	XX ± 1°
.XX ± .03"	XX.X ± .5° (1/2°)
.XXX ± .015"	XX.XX ± .25° (1/4°)

WEATHER SHIELD®
WINDOWS & DOORS

TYP. WALL THICKNESS:

PRODUCTS:
8306

DRAWN BY:
BKL

DATE:
4/22/2026

TITLE:
INSTALLATION INSTRUCTIONS

DWG NO.:
45-45595

REV
A

SCALE: 1:1 SHEET NAME: Sheet1 SHEET 1 OF 1

DO NOT SCALE DRAWING

REV	DATE	DESCRIPTION	PCR NO.	ENG

WT/FT:	AREA:
MAT:	FINISH:
DIE TOOL:	CUT STOCK:
PROFILE #:	