

4680 Vinita Court Chino, CA 91710

## "F1 SERIES" INTERCONNECTED LOCKSET in a STEEL DOOR


## INSWING / OUTSWING "IMPACT"

## **GENERAL NOTES**


- This product has been evaluated and is in compliance with the 6th Edition (2017) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
- 2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco. Anchors shown are for the door components only. Refer to the current Florida Statewide product approval for the anchoring of the door system to the substrate.
- 3. When used in areas requiring wind borne debris protection this product complies with Section 1609.1.2 of the FBC and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
- 4. This product has been tested in the door panels as specified in this approval.

  Substitution into a similar product may be approved for use by the local Authority Having Jurisdiction. In all cases, the steel door used must possess a comparable current Florida Statewide product approval w/ installation instructions. The door panel size and design pressure (DP) rating shall not exceed the sizes and DP ratings shown in this approval or the steel side hinged swing door approval being used.
- 5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS				
SHEET#	DESCRIPTION			
1	Typical elevation, design pressures & general notes			
2	"F1 Series" interconnected lockset details			
3	Steel door panel details			

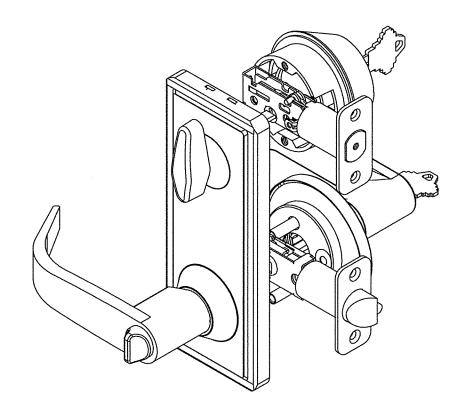

"F1 Series" Interconnected Lockset

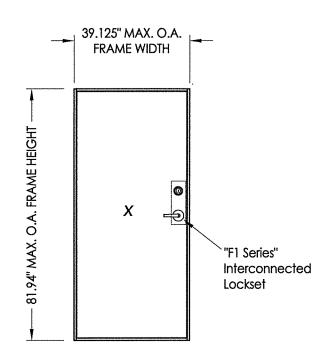

SINGLE	39.125" x 81.94"	"F1 Series" Interconnected Lockset	+60.0	-65.0
	DIMENSION		POSITIVE	NEGATIVE
CONFIGURATION	MAX FRAME	LOCK TYPE	DESIGN PRESSURE (PSF) INSWING / OUTSWING	

