


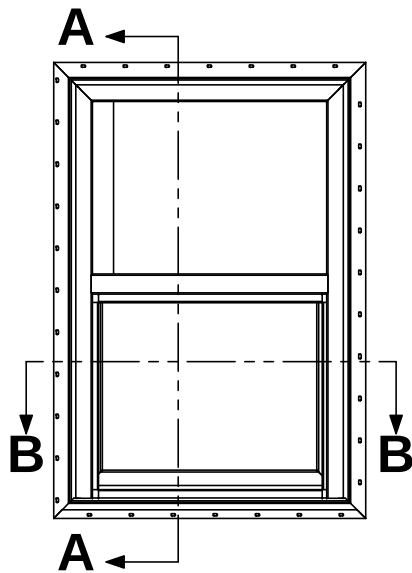

Weather Shield *Windows & Doors*

**9103 Single Hung
"NON-IMPACT"
NAILING FIN INSTALLATION**

1-1/2" MINIMUM PENETRATION
INTO SUBSTRATE TYP


SECURE TO BUCK WITH
#6 X 1-5/8" NON-CORROSIVE SCREW
8-10" ON CENTER THROUGH NAILING
FIN AROUND THE UNITS ENTIRE
PERIMETER TYP

PERIMETER SEALANT
BY OTHERS TYP

SECTION A-A
EXTERIOR
SIDE VIEW


WOOD BUCK BY
OTHERS TYP

1/4"
[6mm] MAX
SHIM TYP

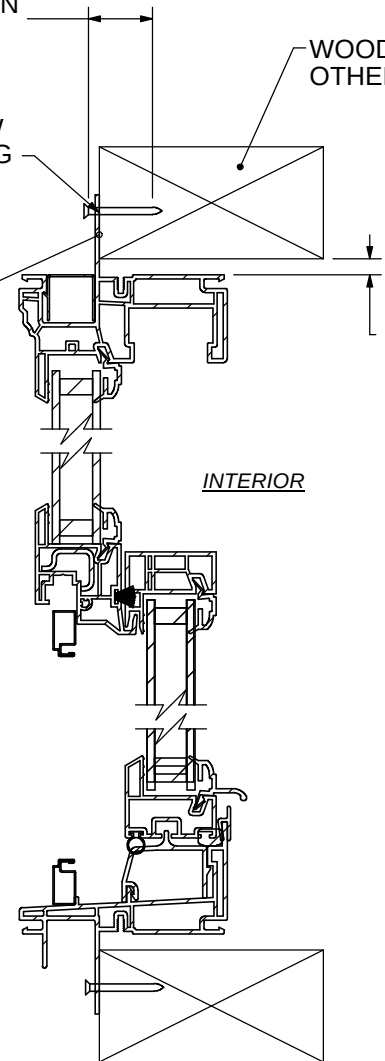

TOP VIEW
SECTION B-B
INTERIOR

EXTERIOR

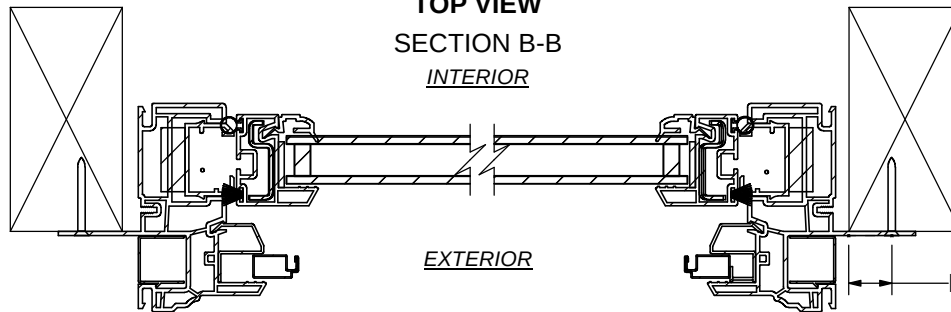

.625" MINIMUM
EDGE DISTANCE
TYP.

THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

PROPERTY OF WEATHER SHIELD MFG., INC. DRAWING IS NOT TO BE REPRINTED OR SUBMITTED FOR USE OUTSIDE OF WEATHER SHIELD MFG., INC. ALL RIGHTS RESERVED.

MATERIAL:
DIV./ORDER #:
DATE ORDERED:
Q.C. COMPARATOR CHECK: ☐

Weather Shield
Windows & Doors

TYP. WALL THICKNESS:
AREA:
WT./FT.:
FILE PATH:

FINISH:
CUT STOCK SIZE:
ECO OR W.S. #:
DRAWN BY:
DATE:

PRODUCTS:
9103 SINGLE HUNG
TITLE:

DWG. NO.
70-1482-17

REV.
.1

SCALE: 1/24 SHEET NAME: Sheet1 SHEET 1 OF 1

REVISION	DATE	DESCRIPTION	WHITE SLIP NUMBER	ENG.

DO NOT SCALE DRAWING

JGB

7/23/12