




Fiber-Classic® & Smooth-Star®

COMPOSITE EDGE
OPAQUE FIBERGLASS SINGLE DOOR
w/ SIDELITE(S)
INSWING/OUTSWING
"NON-IMPACT"

GENERAL NOTES

- 1. This product has been evaluated and is in compliance with the 9th Edition (2026) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
- 2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
- 3. When used in areas requiring wind borne debris protection, this product is required to be protected with an impact resistant covering that complies with FBC Sections 1609.1.2 & R301.2.1.2.
- 4. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
- 5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
- 6. Fiber-Classic & Smooth-Star Door and Sidelite panels require the use of "J" part numbers and must be stained or painted within six months of installation.


TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical Elevations, Design Pressures & General Notes
2	Door Panel Details
3	Sidelite Panel Details
4	Elevations
5	Horizontal & Vertical Cross Sections (2X Buck)
6	Horizontal & Vertical Cross Sections (1X Buck)
7	Horizontal & Vertical Cross Sections (Direct to Masonry)
8	Vertical Cross Sections (Thresholds)
9	Buck Anchoring
10	Frame Anchoring
11	Hardware Details
12	Glazing Details
13	Components
14	Bill of Materials

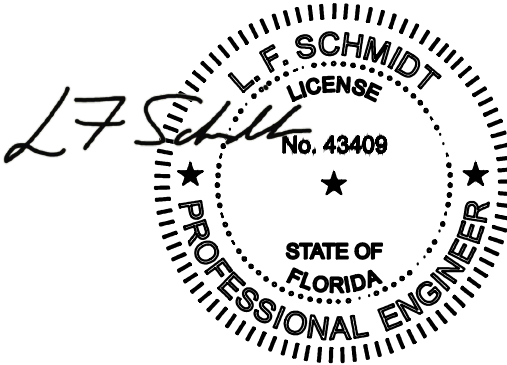

Digitally signed by Lyndon F Schmidt
Date: 2026.08.05 12:30:30 -04'00'

This item has been digitally signed and sealed by L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

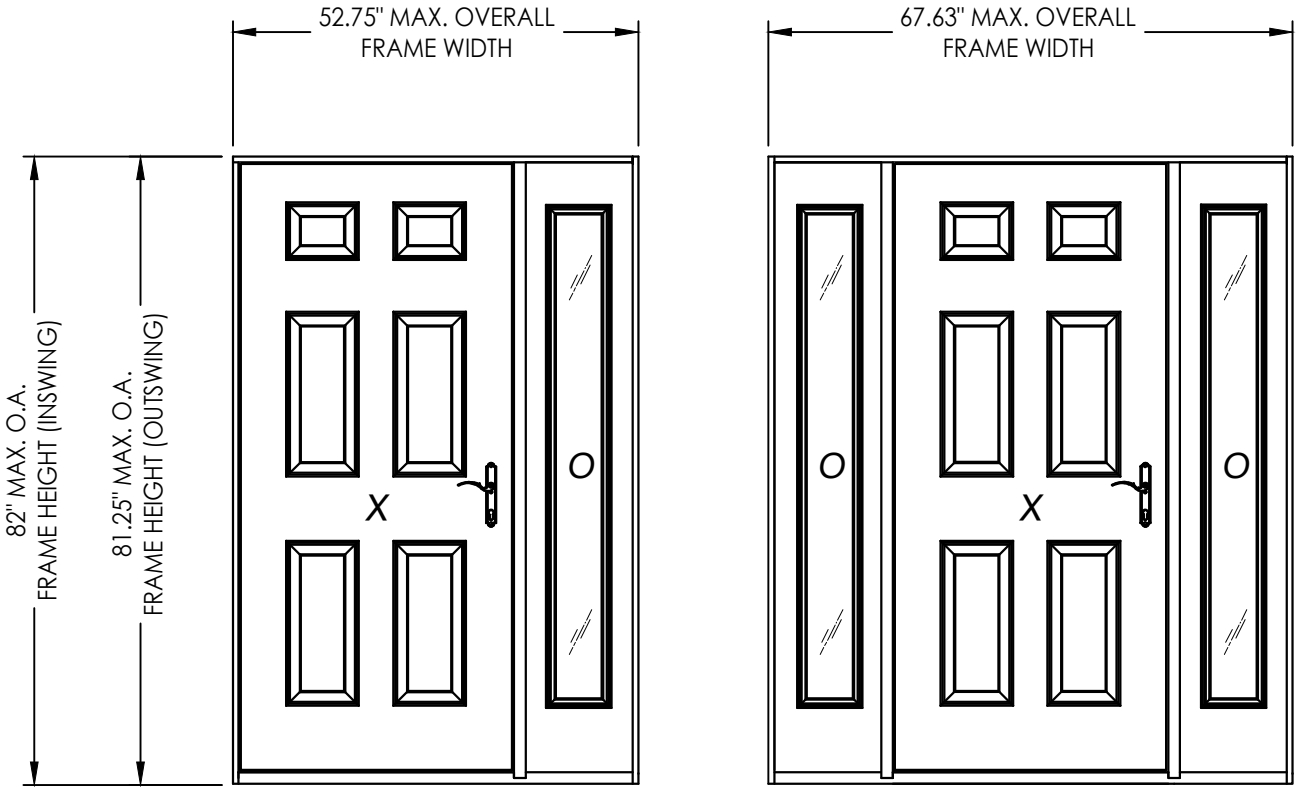

CONTINUOUS HEAD & SILL

CONFIGURATION	DESIGN PRESSURE (PSF) INSWING		DESIGN PRESSURE (PSF) OUTSWING	
	POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
XO, OX, OXO	+70.0	-70.0	+70.0	-70.0

See Sheet 4 for Hardware Specifications

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

6	7/03/26	UPDATE TO 9TH ED. (2026)	FBC	LFS
5	7/19/23	UPDATE TO 8TH ED. (2023)	FBC	LFS
4	7/21/20	UPDATE TO 7th ED (2020)	FBC	BY
NO.		DATE	REVISIONS	

DATE: 8/10/16

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS


DRAWING NO.: FL-20461.19

SHEET 1 OF 14


© 2016 R.W. BUILDING CONSULTANTS INC.

RWBUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\Therma-Tru\FL-20461 R10\FL-20461.19-20.dwg

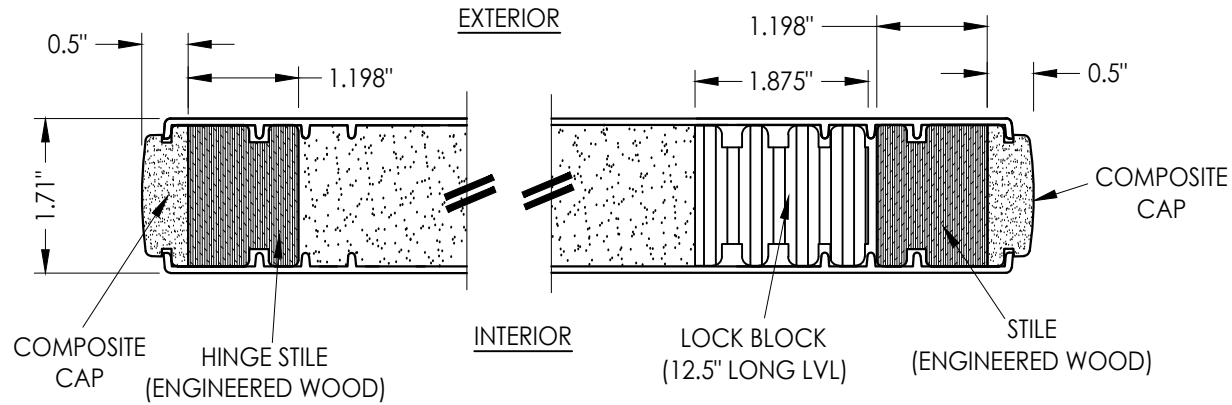


1
2 HORIZONTAL CROSS SECTION

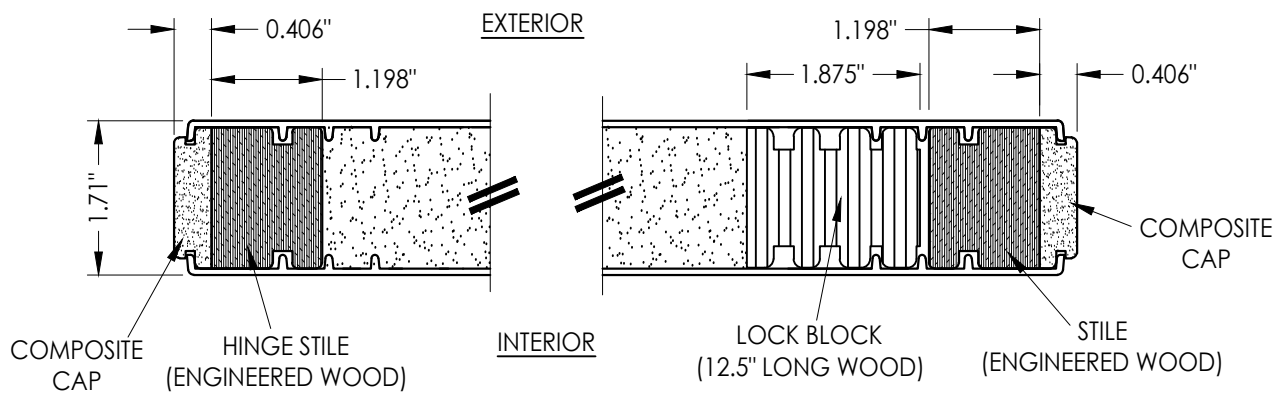


2
2 HORIZONTAL CROSS SECTION

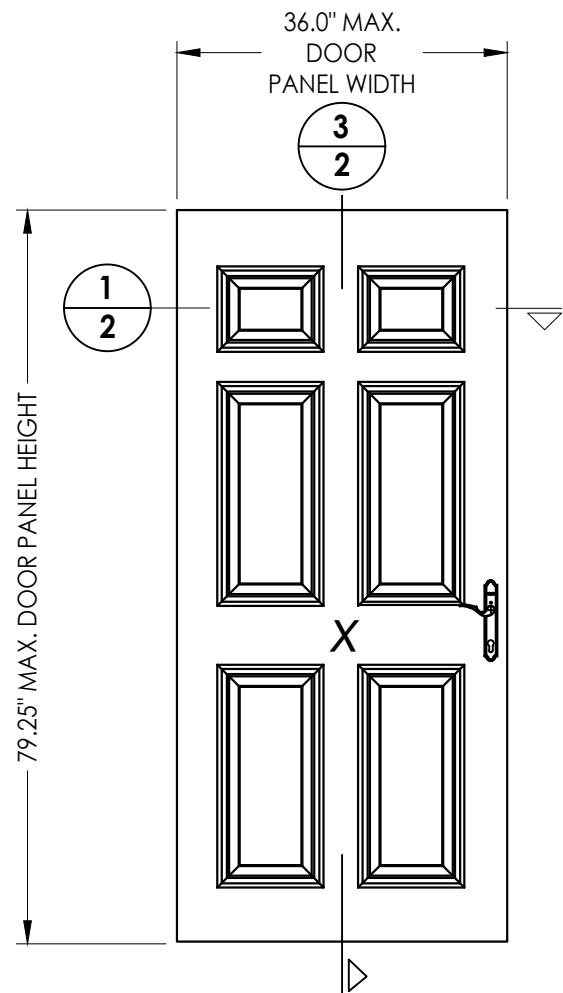


40 DOOR PANEL BOOK

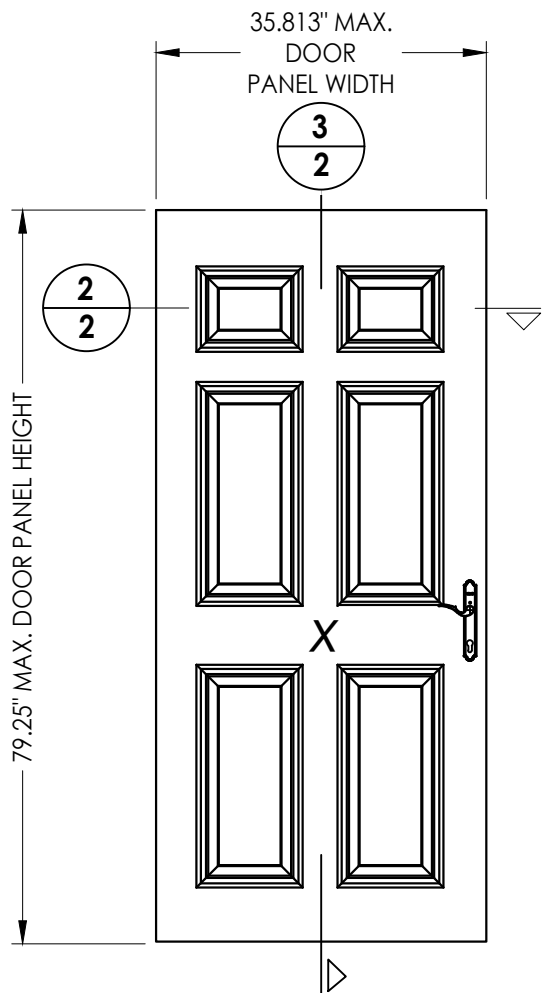

41 DOOR PANEL Hybrid Door

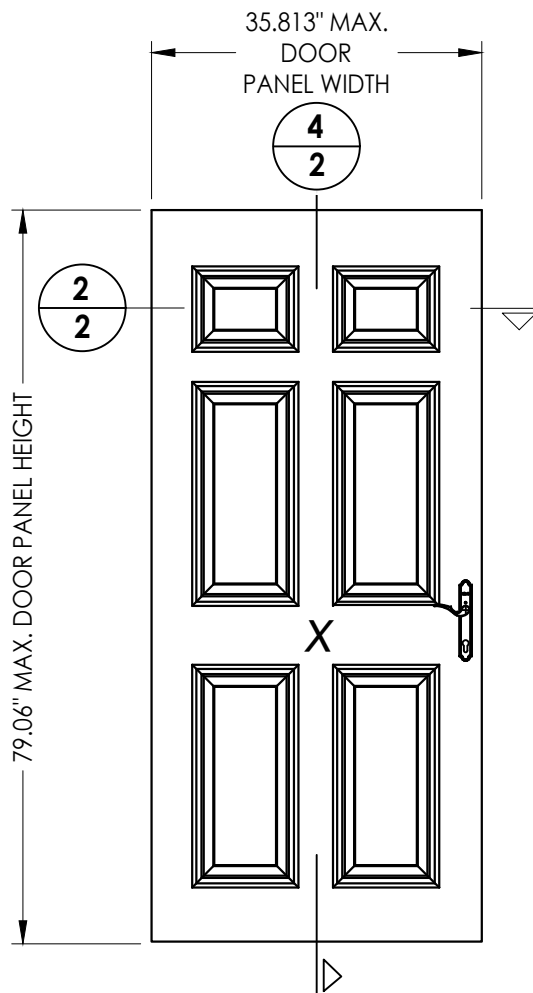

42 DOOR PANEL U1 Door

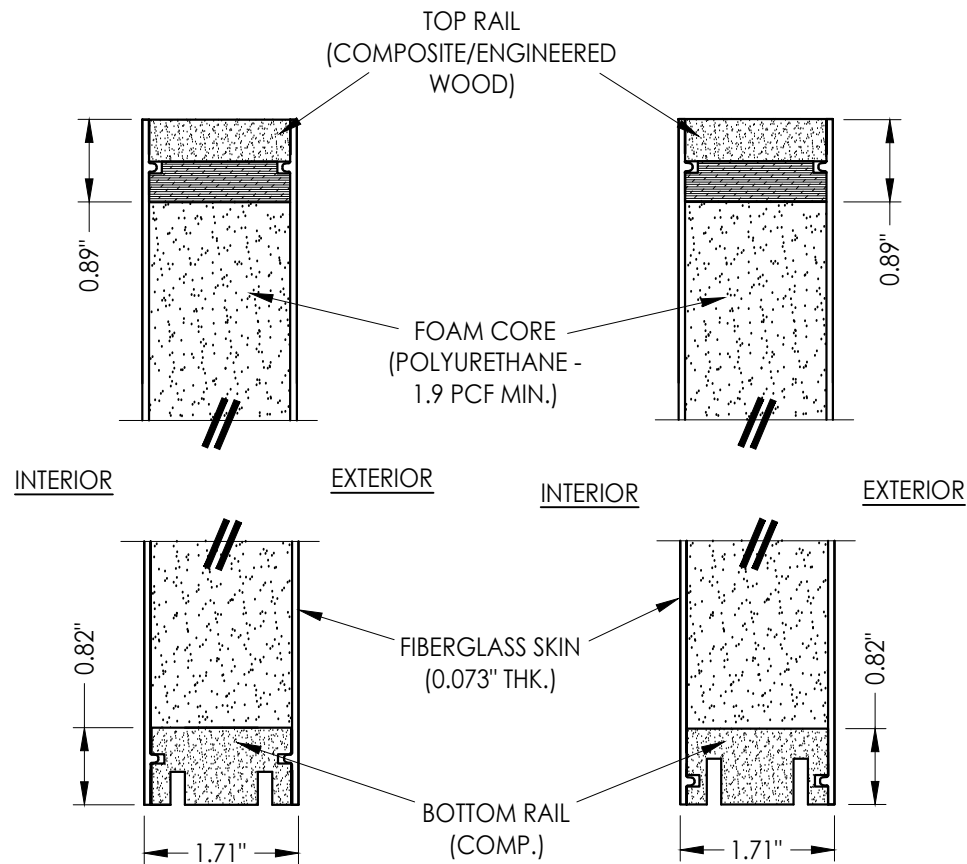

3
2 VERTICAL CROSS SECTION

4
2 VERTICAL CROSS SECTION

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
DOOR PANEL DETAILS


NO.	DATE	REVISIONS
6	7/03/26	UPDATE TO 9TH ED. (2026) FBC
5	7/19/23	UPDATE TO 8TH ED. (2023) FBC
4	7/21/20	UPDATE TO 7th ED (2020) FBC

DATE: 8/10/16
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-20461.19
SHEET 2 OF 14



Z:\2023 FBC Drawings\Therma-Tru\FL-20461 R10\FL-20461.19-20.dwg

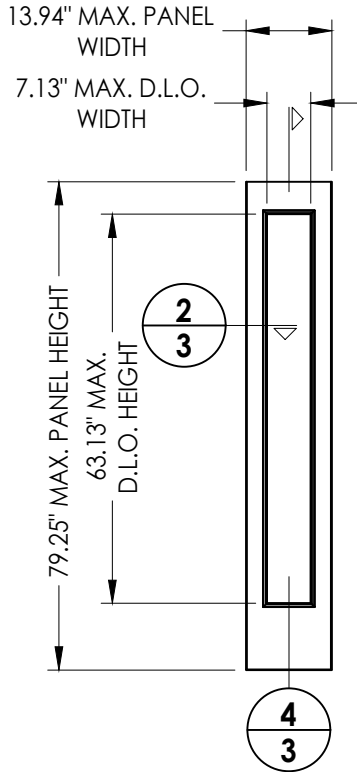


60 SIDELITE PANEL
Full Lite
Flush Glazed

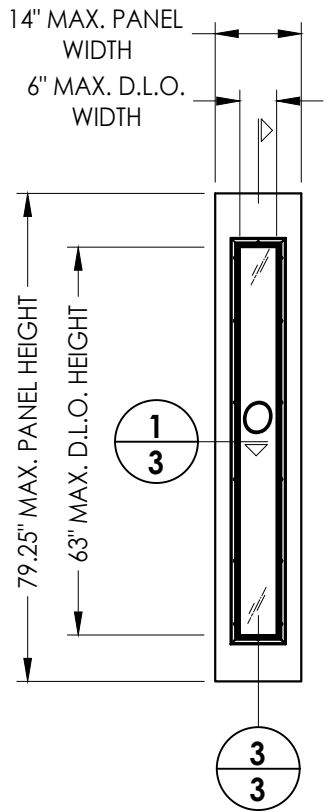


50 SIDELITE PANEL
Full Lite
Lip Lite

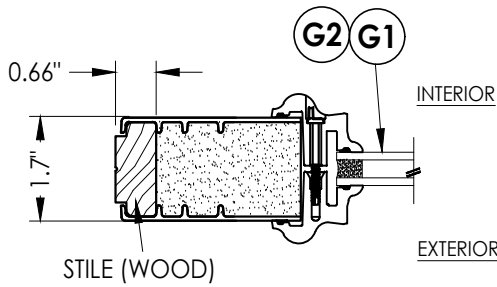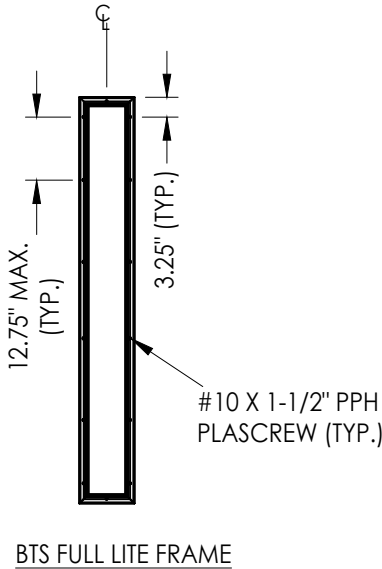


1 HORIZONTAL CROSS SECTION
Lip Lite Glazing

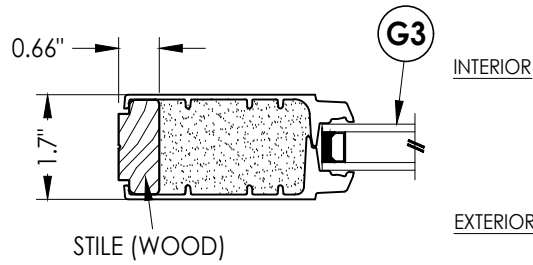

2 HORIZONTAL CROSS SECTION
Flush Glazing

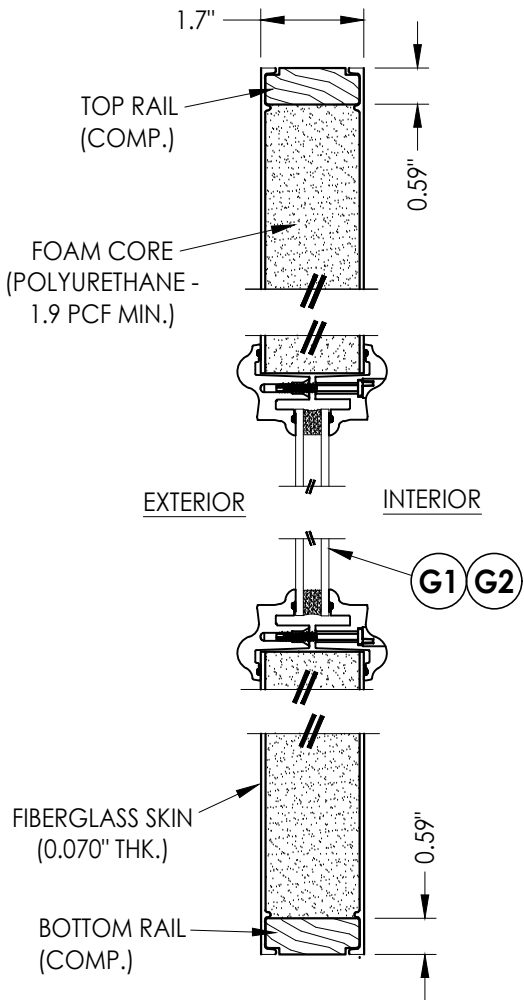

3 VERTICAL CROSS SECTION
Lip Lite Glazing Shown

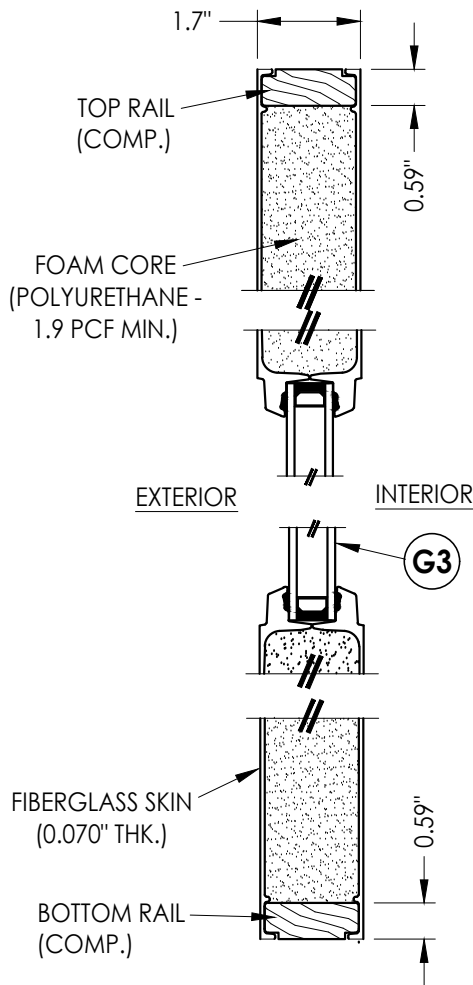

4 VERTICAL CROSS SECTION
Flush Glazing Shown

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: **THERMA-TRU
FIBERGLASS DOOR**

PART OR ASSEMBLY:
SIDELITE PANEL DETAILS

NO.	DATE	REVISIONS
6	7/03/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	7/19/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	7/21/20	UPDATE TO 7th ED (2020) FBC LFS

DATE: 8/10/16


SCALE: N.T.S.

DWG. BY: JK


CHK. BY: LFS

DRAWING NO.: FL-20461.19

SHEET 3 OF 14

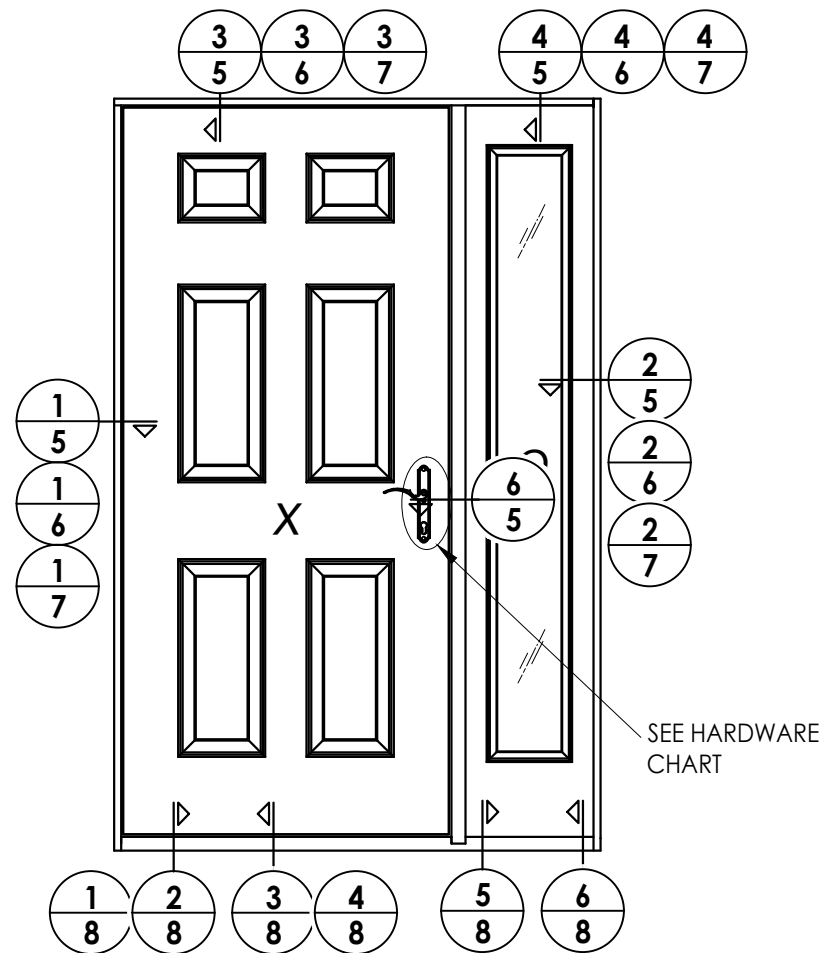

ELEVATION
XO

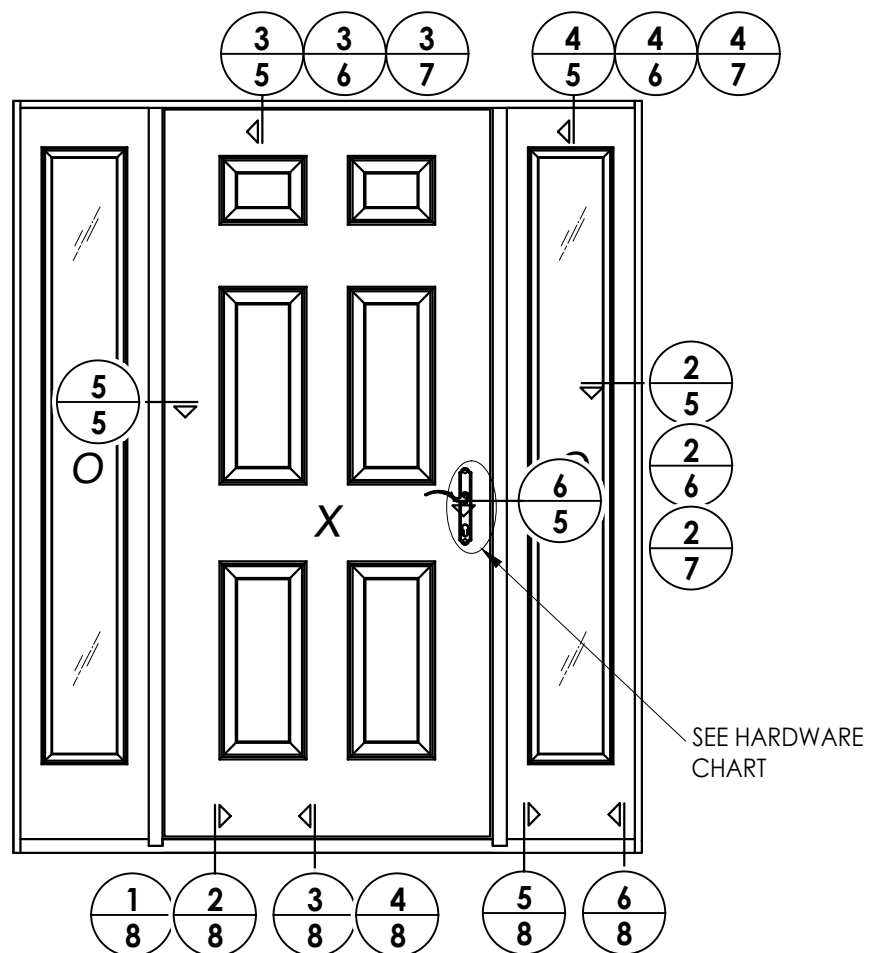

ELEVATION
OXO

HARDWARE TABLE	
MANUFACTURER	MODEL
HOPPE (THERMA-TRU)	MULTIPOINT : MPDGART (3 pt. Manual Tongue)



Fiber-Classic/Smooth-Star Door Panel Options

Products approved include all embossed and recessed panel doors.
Similar opaque panel configurations are allowed.
Panels shown are for illustration and are representative only.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


R^W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: THERMA-TRU
FIBERGLASS DOOR


PART OR ASSEMBLY:
ELEVATIONS

DATE:		8/10/16	
SCALE:		N.T.S.	
DWG. BY:		JK	
CHK. BY:		LFS	
DRAWING NO.:			
FL-20461.19			
SHEET		4 OF 14	


Z:\2023 FBC Drawings\Therma-Tru\FL-20461 R10\FL-20461.19-20.dwg

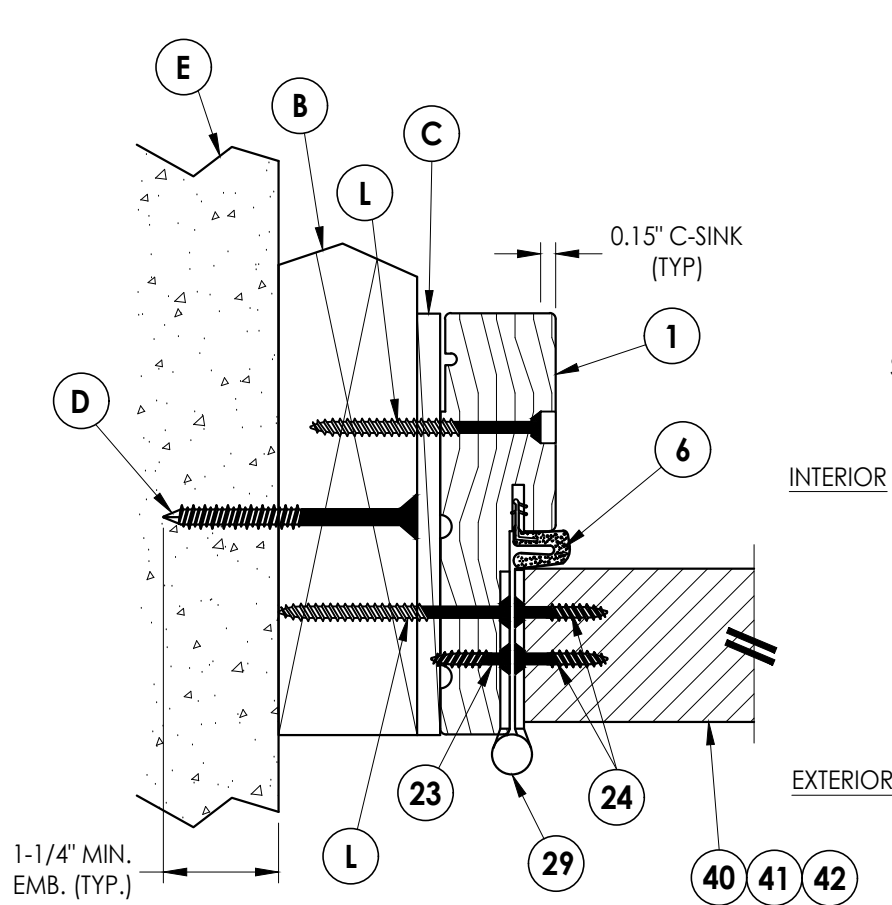


1
5 **HORIZONTAL CROSS SECTION**
Shown w/ 2X Buck
Outswing shown (Inswing similar)

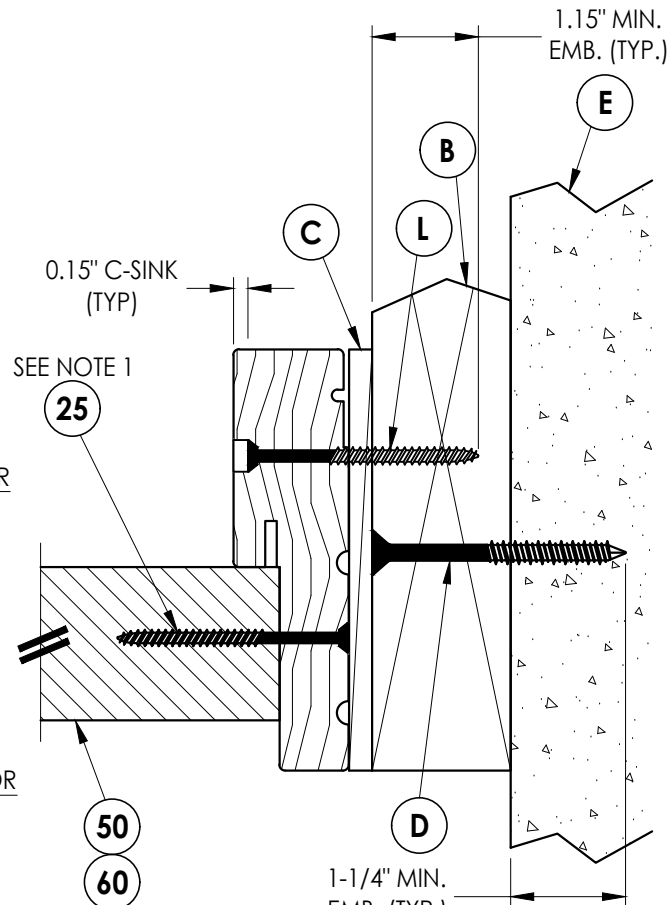

2
5 **HORIZONTAL CROSS SECTION**
Shown w/ 2X Buck
Outswing shown (Inswing similar)

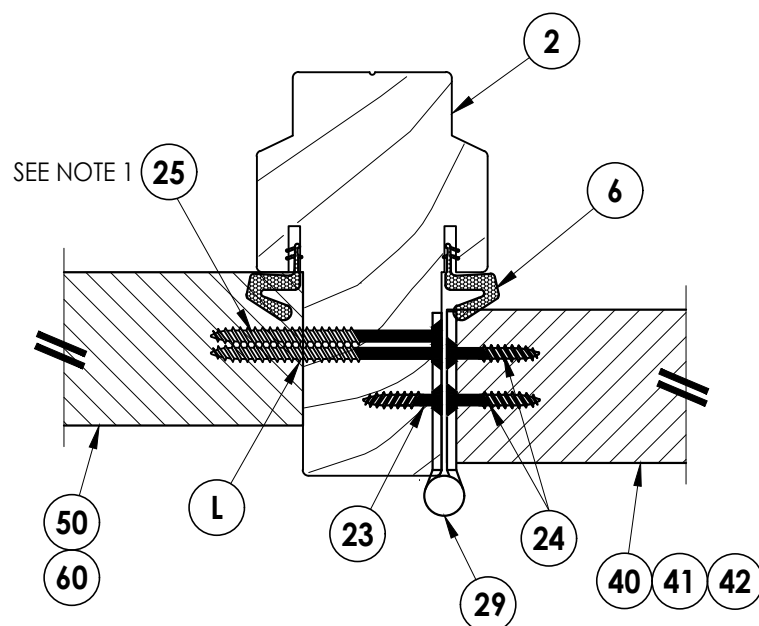


5
5 **HORIZONTAL CROSS SECTION**
Outswing shown (Inswing similar)

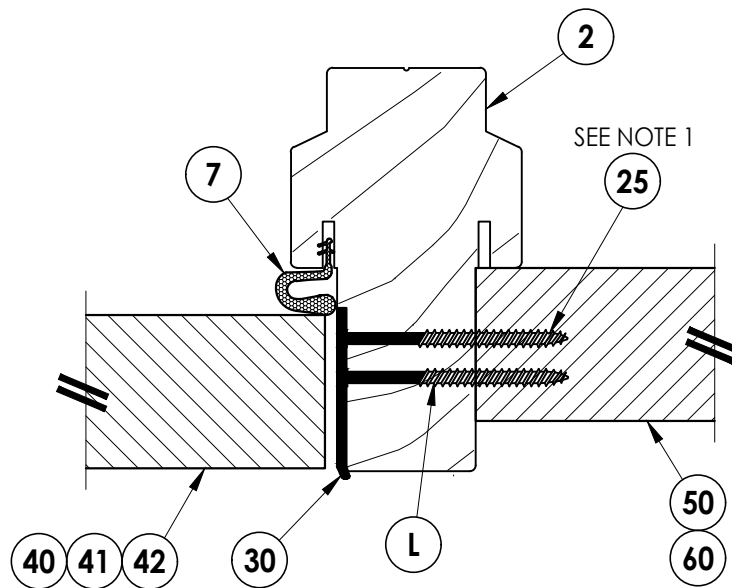


6
5 **HORIZONTAL CROSS SECTION**
Outswing shown (Inswing similar)

- Notes:
1. Sidelite assembly screws located 6" from each end and then 5 more equally spaced (7 total along jamb/mullion).
 2. Sidelite assembly screws located 4" from each end (2 total along head/sill).

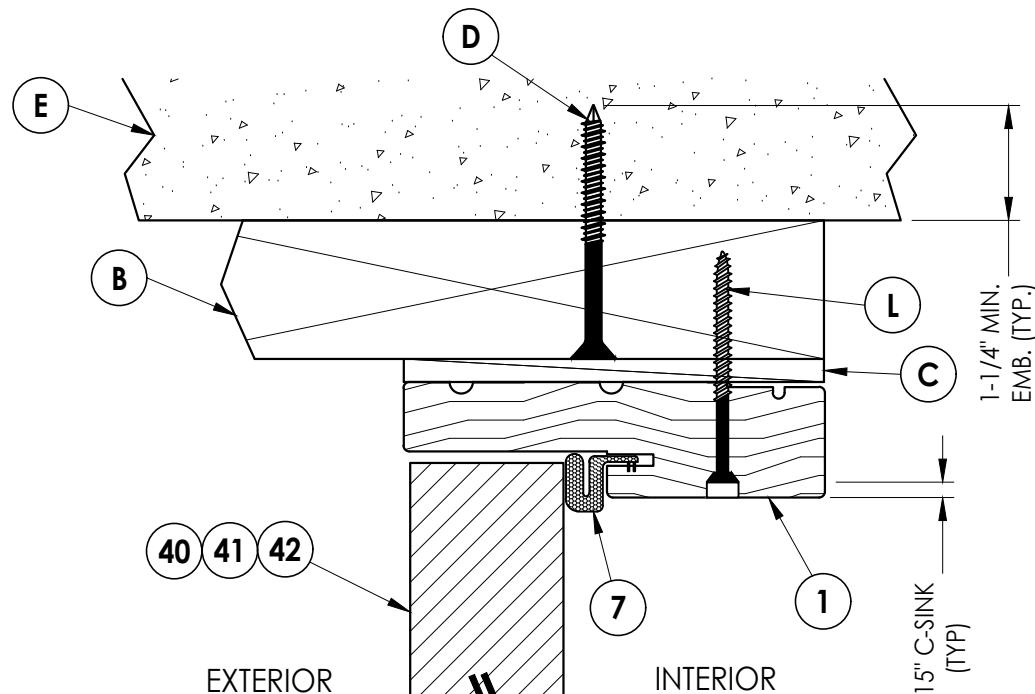

3
5 **VERTICAL CROSS SECTION**
Shown w/ 2X Buck
Outswing shown (Inswing similar)

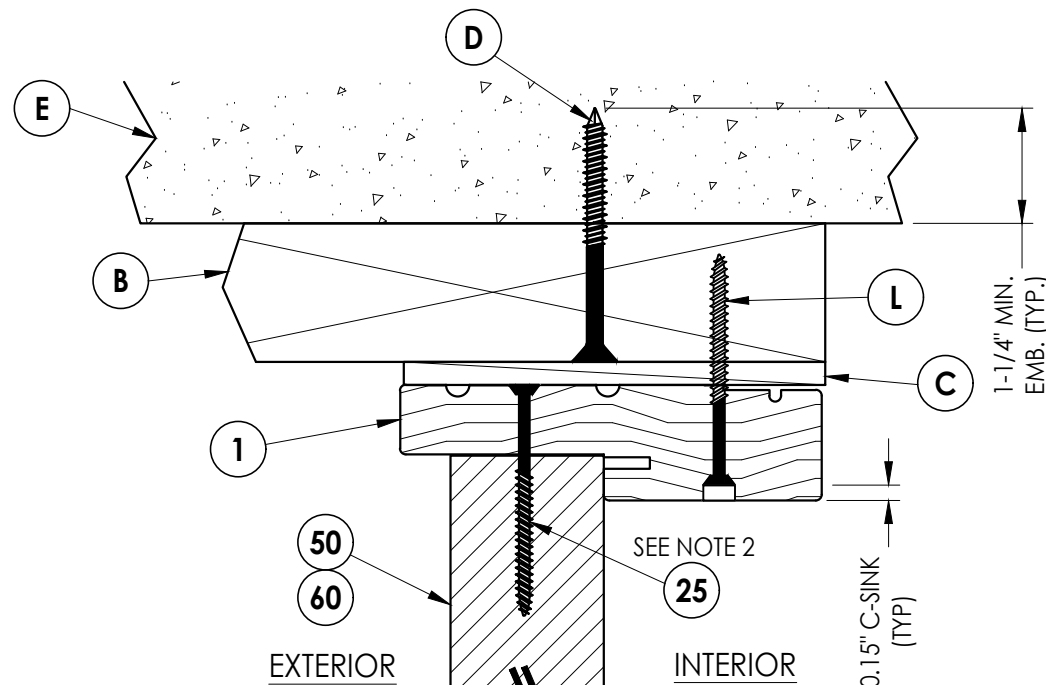

4
5 **VERTICAL CROSS SECTION**
Shown w/ 2X Buck
Outswing shown (Inswing similar)

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (2X BUCK)

NO.	DATE	REVISIONS
6	7/03/26	UPDATE TO 9TH ED. (2026) FBC
5	7/19/23	UPDATE TO 8TH ED. (2023) FBC
4	7/21/20	UPDATE TO 7th ED (2020) FBC
3		
2		
1		

DATE: 8/10/16

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS


DRAWING NO.:

FL-20461.19


SHEET 5 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-20461 R10\FL-20461.19-20.dwg


- Notes:
1. Sidelite assembly screws located 6" from each end and then 5 more equally spaced (7 total along jamb/mullion).
 2. Sidelite assembly screws located 4" from each end (2 total along head/sill).

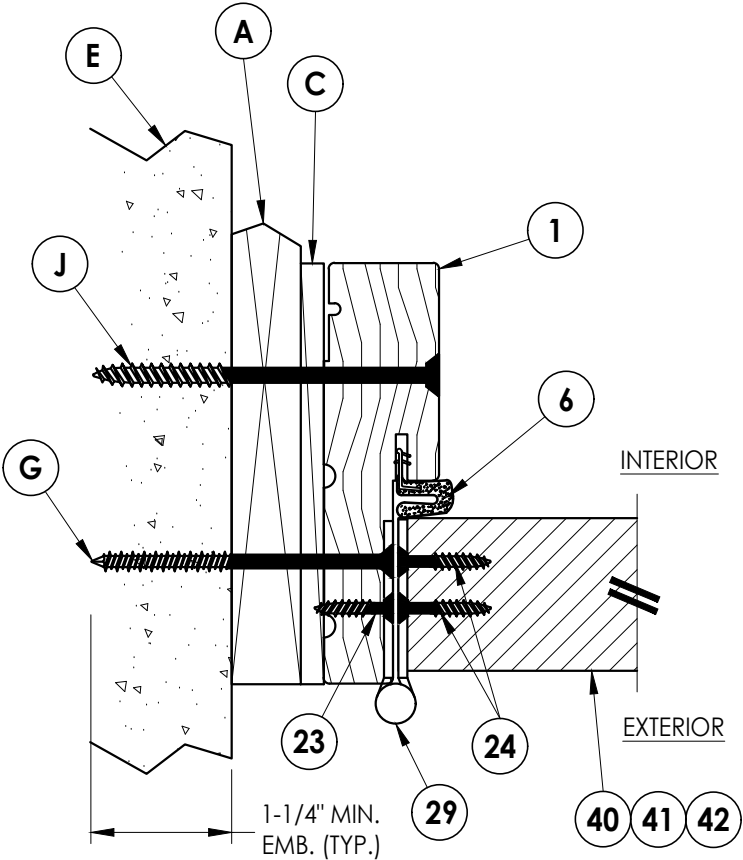


1
6 **HORIZONTAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

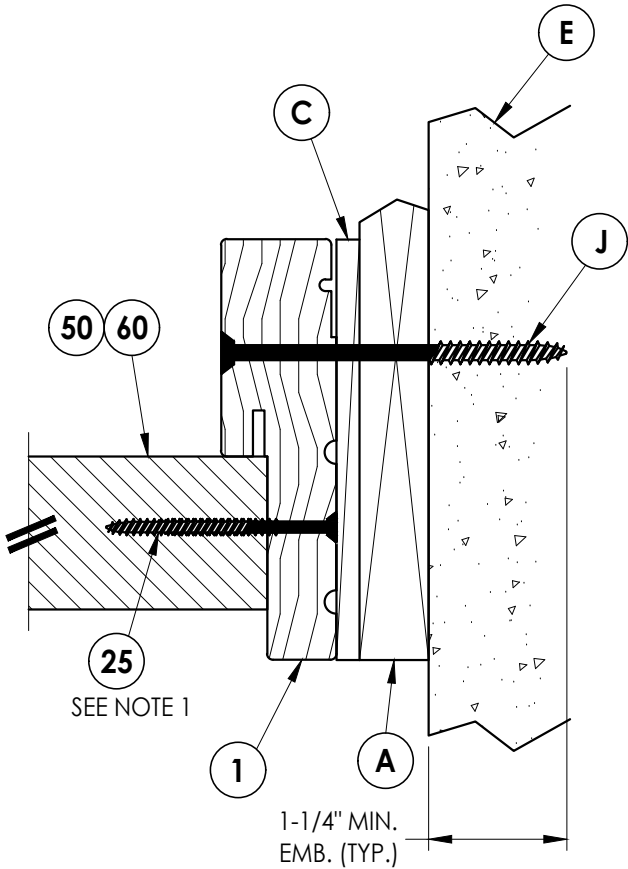

2
6 **HORIZONTAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

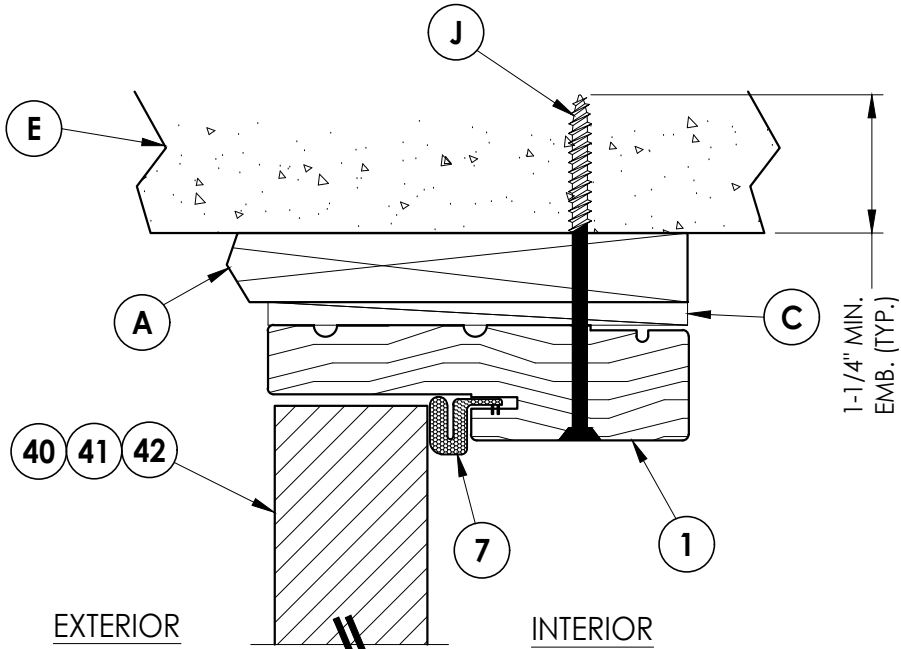

3
6 **VERTICAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

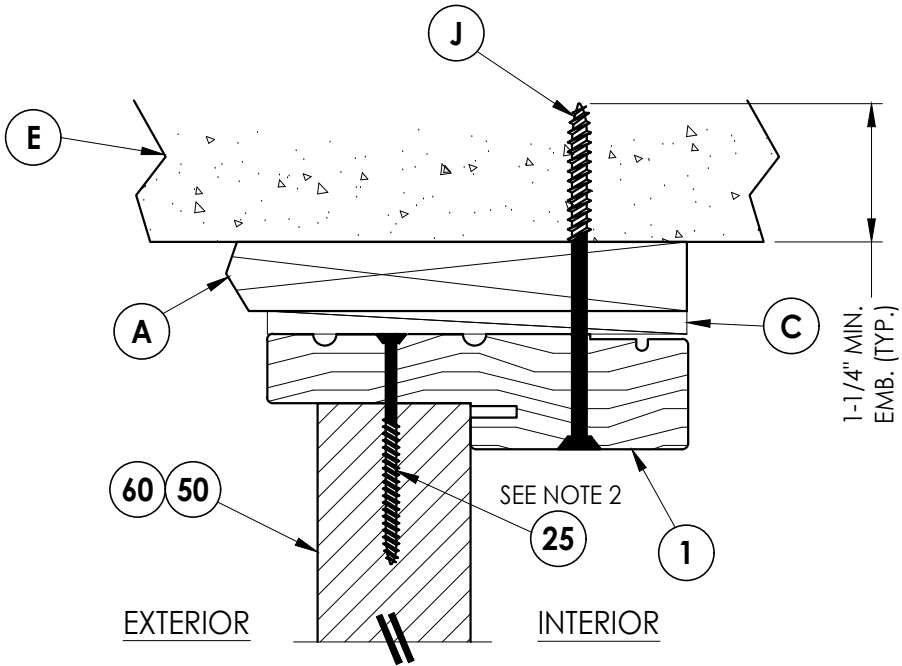

4
6 **VERTICAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: THERMA-TRU
FIBERGLASS DOOR
PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (1X BUCK)


REVISIONS		NO.	DATE	BY
6	7/03/26	UPDATE TO 9TH ED. (2026)	FBC	LFS
5	7/19/23	UPDATE TO 8TH ED. (2023)	FBC	LFS
4	7/21/20	UPDATE TO 7th ED (2020)	FBC	LFS

DATE: 8/10/16
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.:
FL-20461.19
SHEET 6 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-20461 R10\FL-20461.19-20.dwg

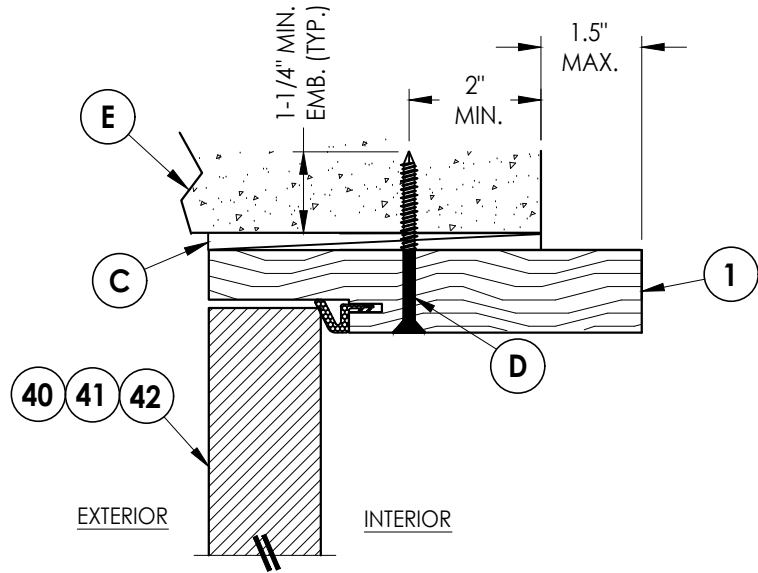


3
7 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

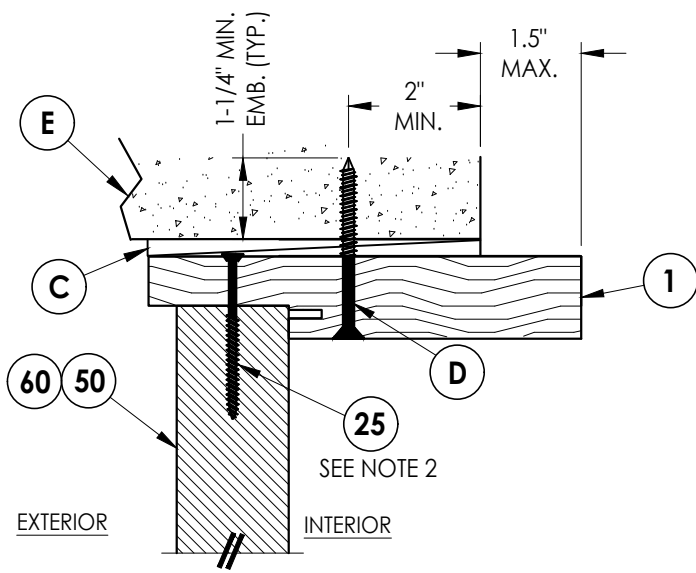


4
7 **VERTICAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

- Notes:
1. Sidelite assembly screws located 6" from each end and then 5 more equally spaced (7 total along jamb/mullion).
 2. Sidelite assembly screws located 4" from each end (2 total along head/sill).

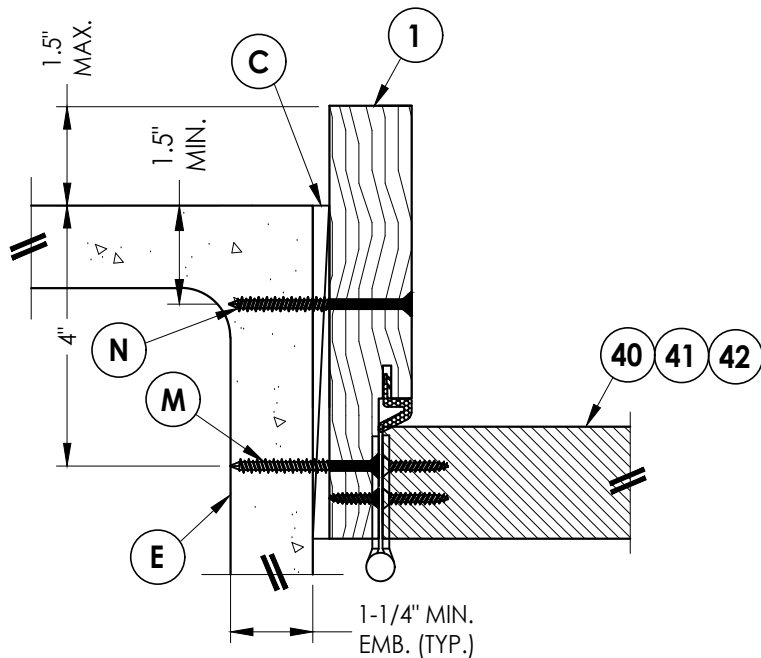

1
7 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

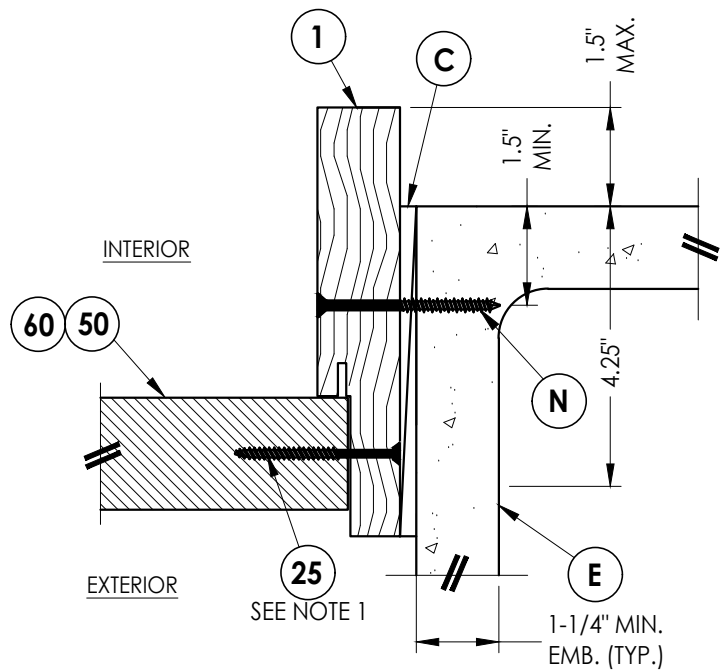

2
7 **VERTICAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
SECTIONS (DIRECT TO MASONRY)

REVISIONS			
NO.	DATE	BY	
6	7/03/26	UPDATE TO 9TH ED. (2026)	FBC LFS
5	7/19/23	UPDATE TO 8TH ED. (2023)	FBC LFS
4	7/21/20	UPDATE TO 7th ED (2020)	FBC LFS

DATE: 8/10/16

SCALE: N.T.S.

DWG. BY: JK







CHK. BY: LFS

DRAWING NO.:
FL-20461.19

SHEET 7 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-20461 R10\FL-20461.19-20.dwg

- Notes:
1. Sill Item #'s 17, 18, 32, 34, 35, 36, 37, 38 & 39 are attached to jambs w/ (3) #8 X 2-1/2" pph screws at each end.
Sill Item #'s 16 & 33 are attached to jambs w/ (2) #8 X 2-1/2" pph screws at each end.
Sill Item #15 is attached to jambs utilizing (2) #10 X 2" pph SMS at each end.
2. Sidelite assembly screws located 4" from each end (2 total along head/sill).

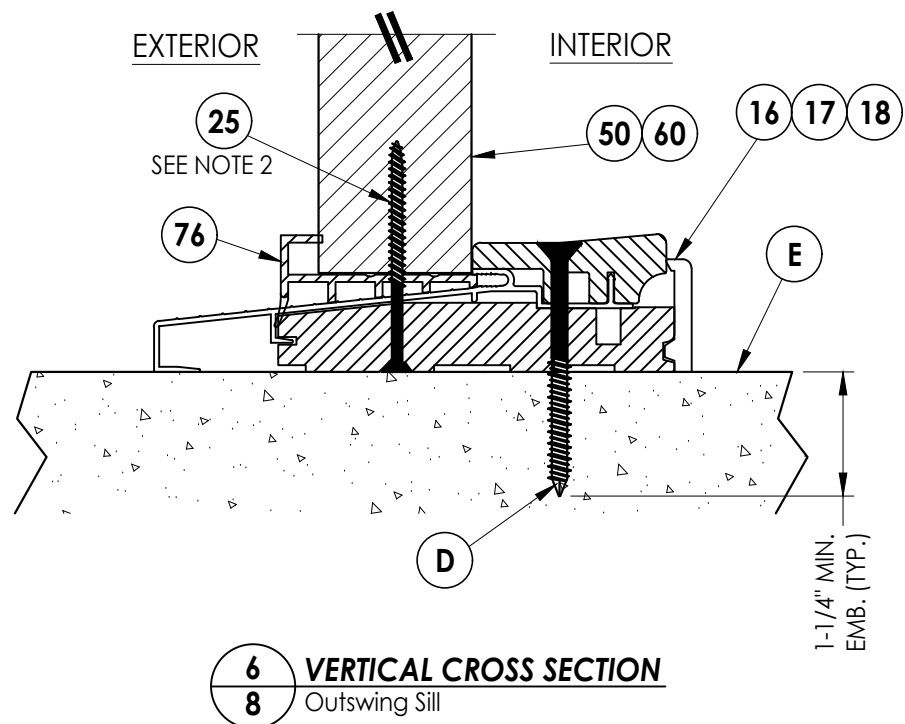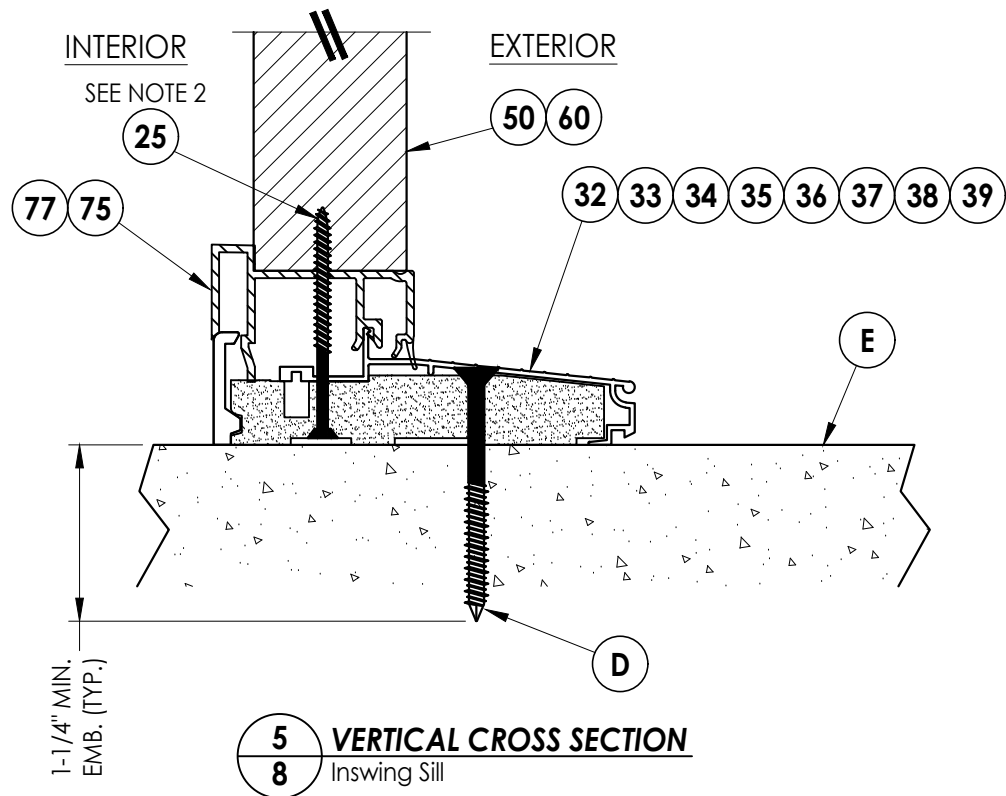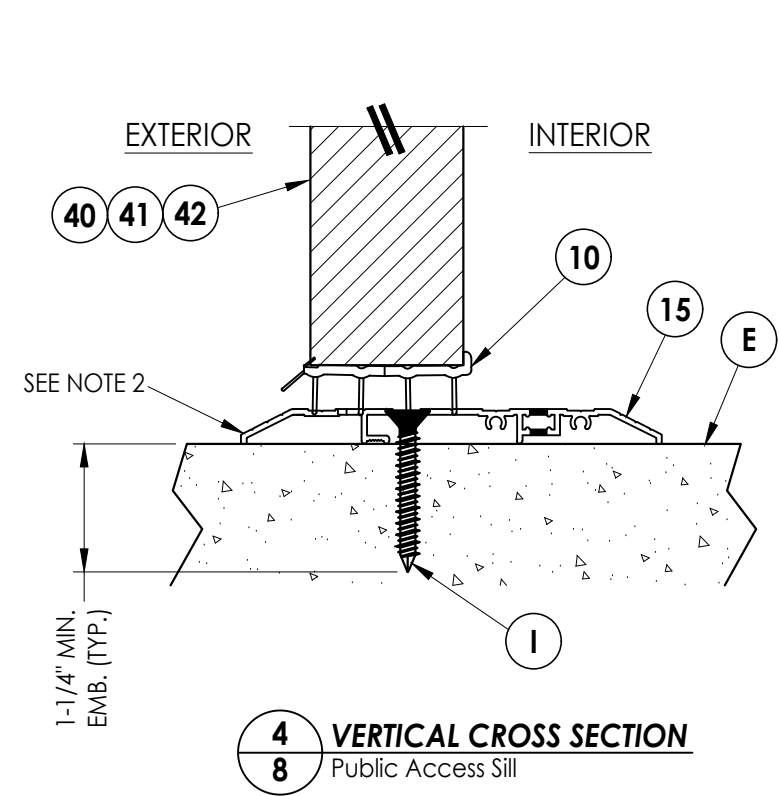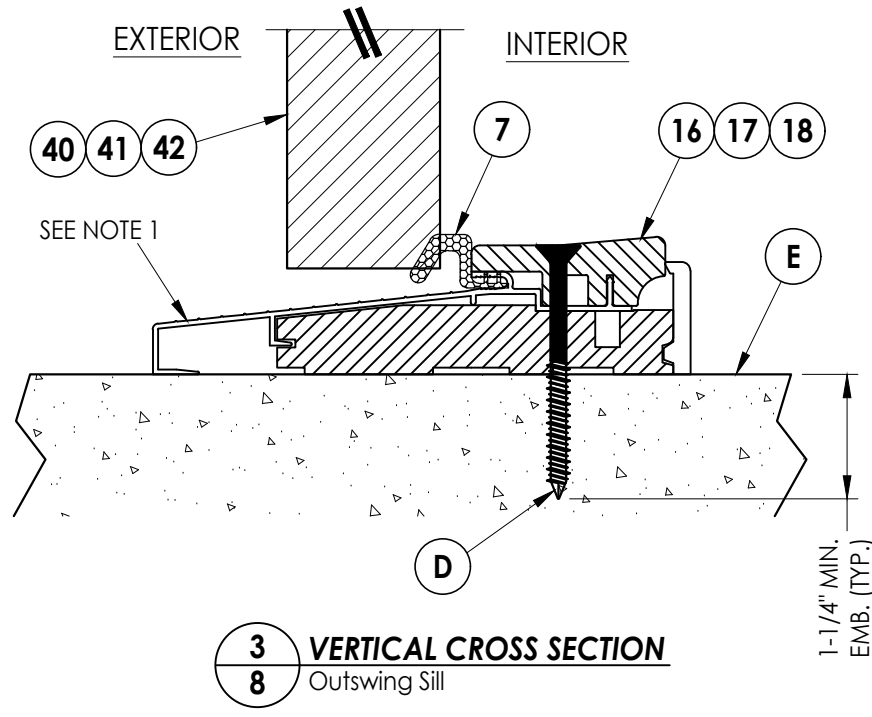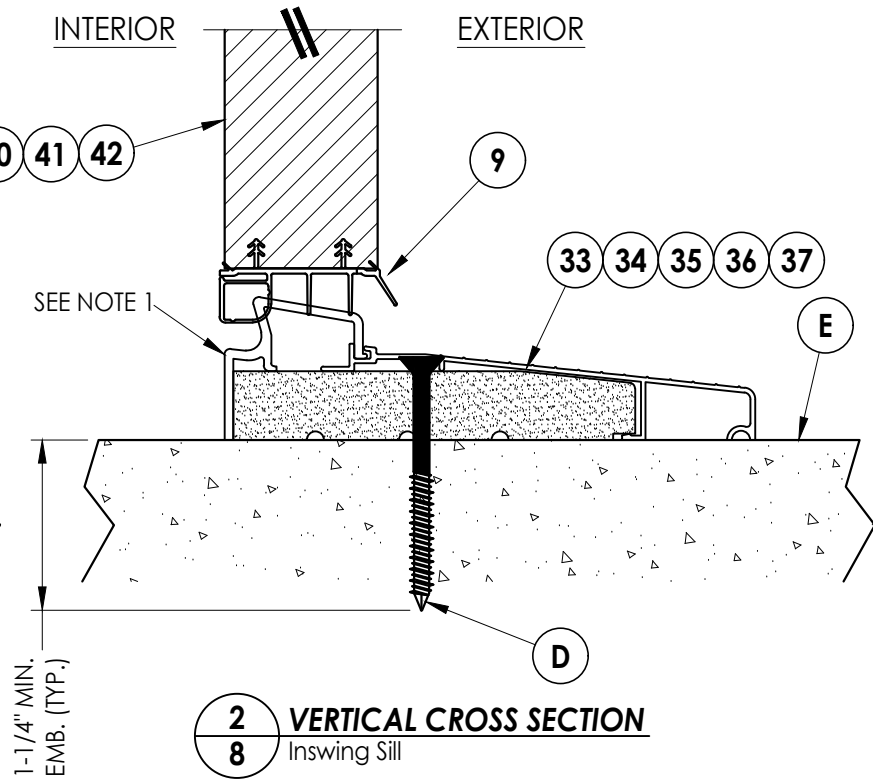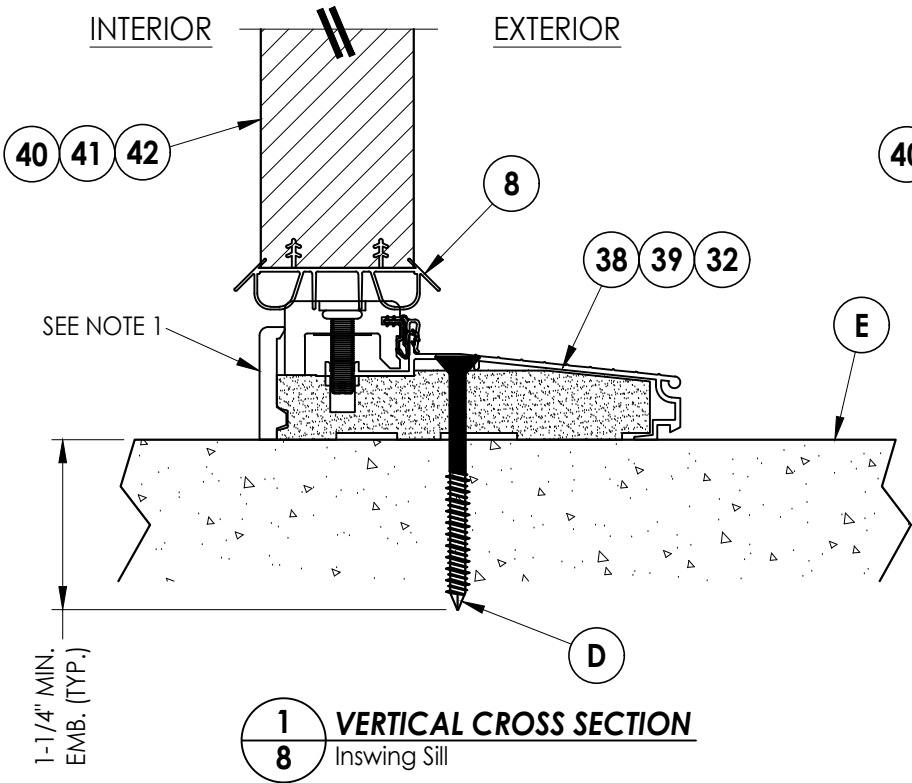

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.


P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: THERMA-TRU
FIBERGLASS DOOR


PART OR ASSEMBLY:
VERTICAL CROSS
SECTIONS (THRESHOLDS)

NO.	DATE	REVISIONS
6	7/03/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	7/19/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	7/21/20	UPDATE TO 7th ED (2020) FBC LFS
		BY

DATE: 8/10/16
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-20461.19
SHEET 8 OF 14

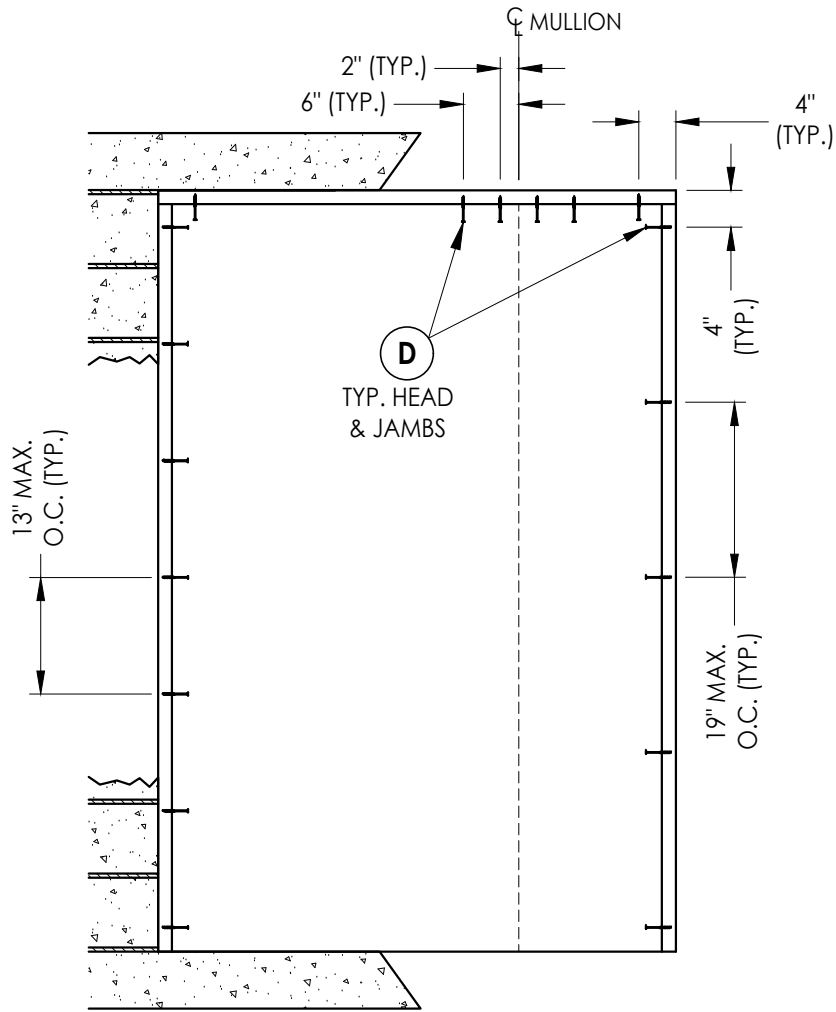

XO/OX

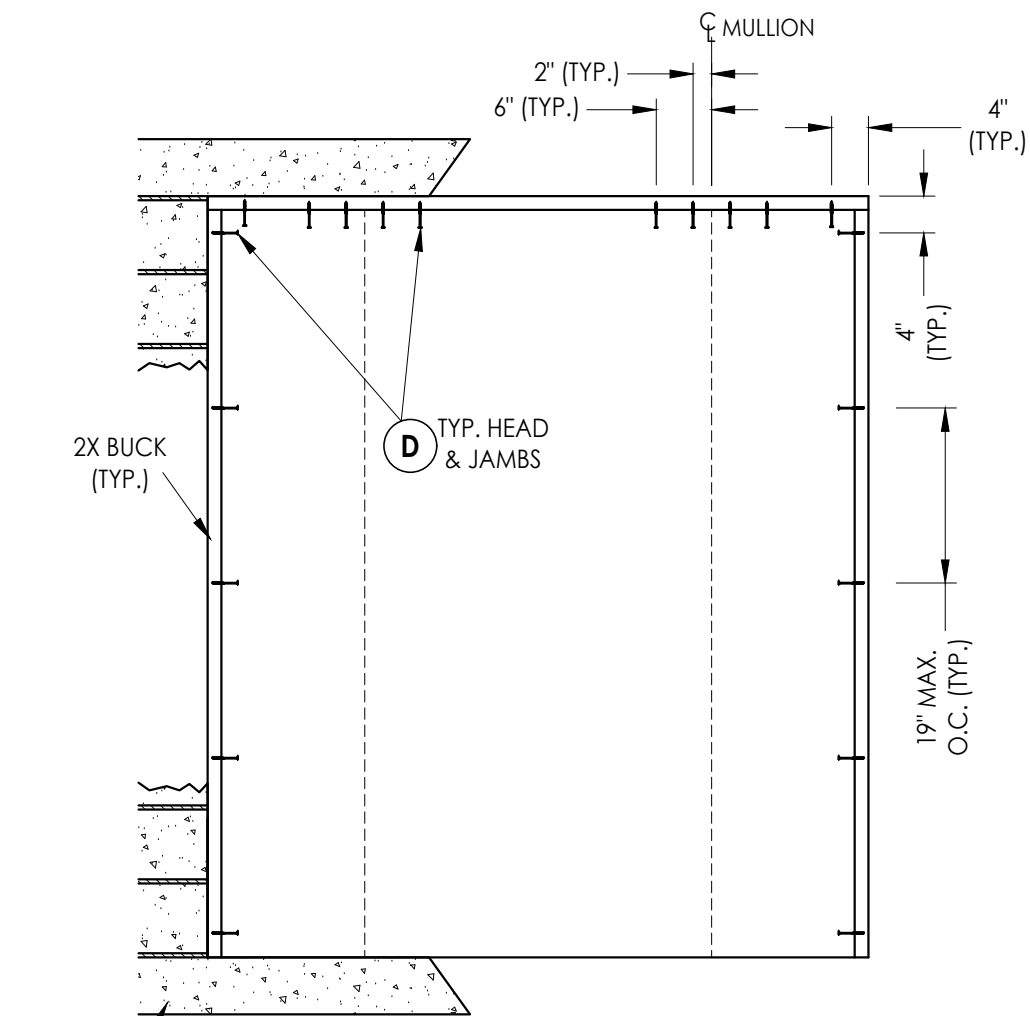

OXO

MASONRY
(TYP.)

2X BUCK ANCHORING

NO.	DATE	REVISIONS
6	7/03/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	7/19/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	7/21/20	UPDATE TO 7th ED (2020) FBC LFS
		BY

DATE: 8/10/16

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:

FL-20461.19

SHEET 9 OF 14




Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
BUCK ANCHORING

Z:\2023 FBC Drawings\Therma-Tru\FL-20461 R10\FL-20461.19-20.dwg

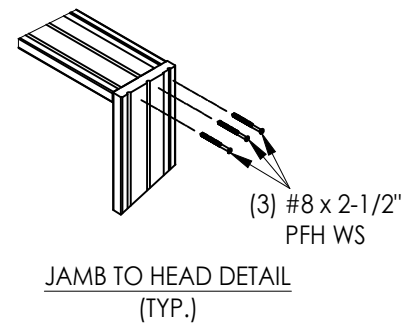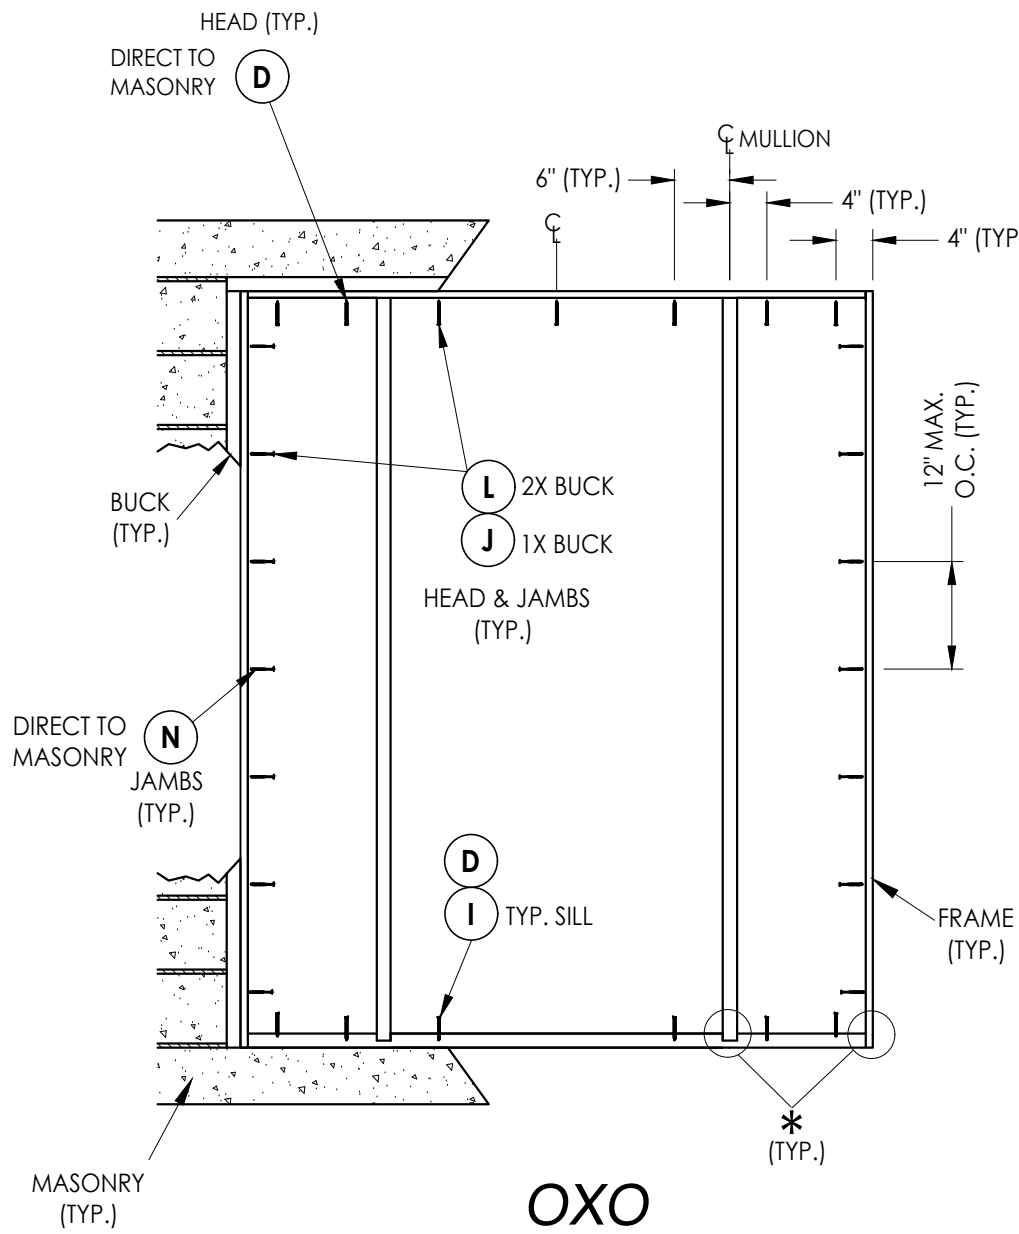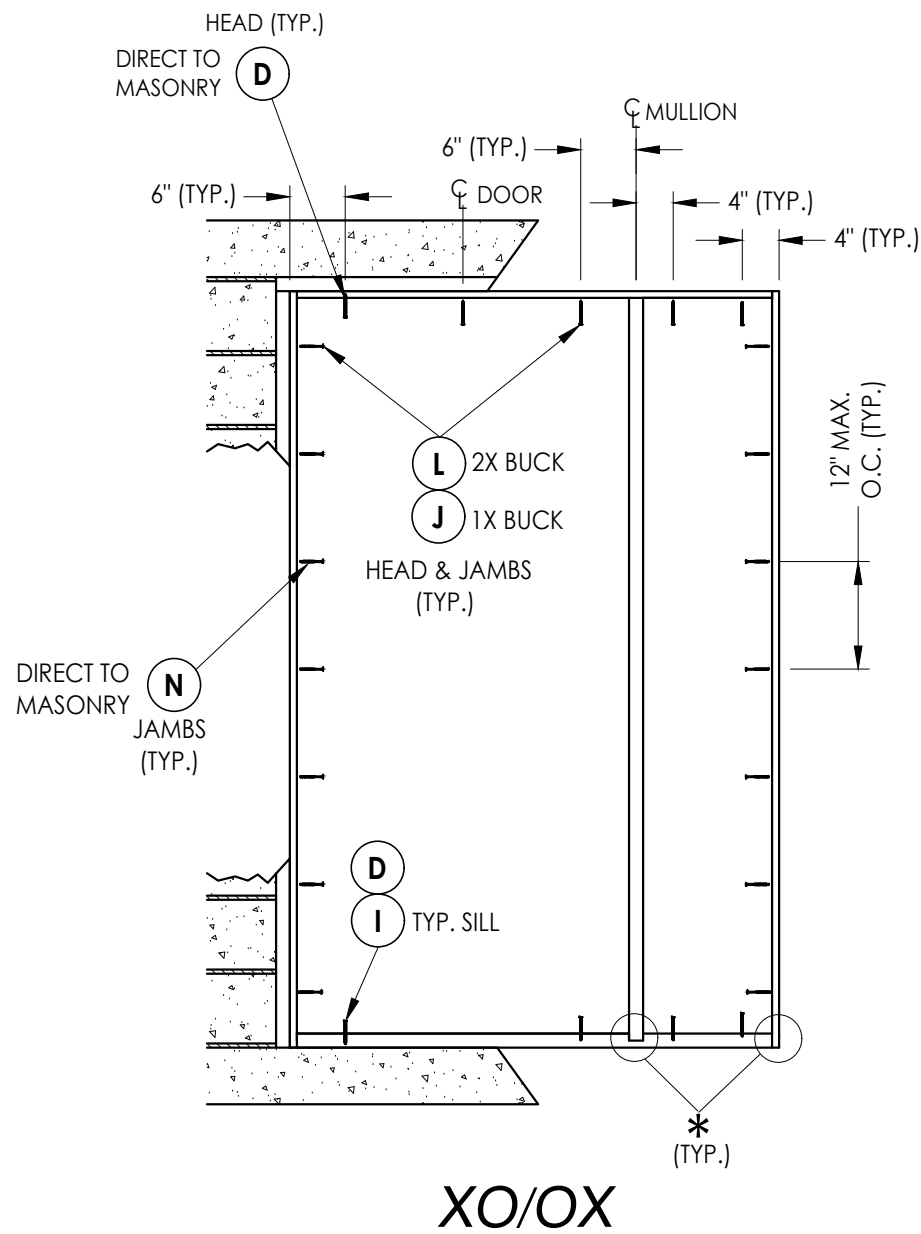

FRAME ANCHORING

* The frame jambs and vertical mullions are secured to the head and sill with (3) #8 x 2-1/2" wood screws each.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

R.W. BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
BUCK ANCHORING

NO.	DATE	REVISIONS
6	7/03/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	7/19/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	7/21/20	UPDATE TO 7th ED (2020) FBC LFS
		BY

DATE: 8/10/16

SCALE: N.T.S.

DWG. BY: JK




CHK. BY: LFS

DRAWING NO.:



FL-20461.19

SHEET 10 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-20461 R10\FL-20461.19-20.dwg

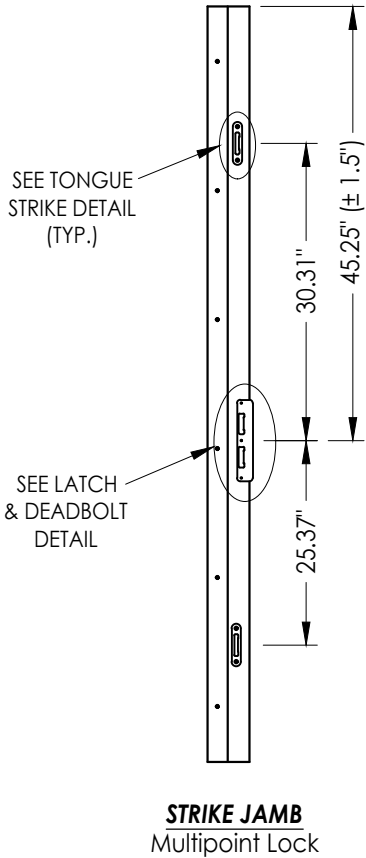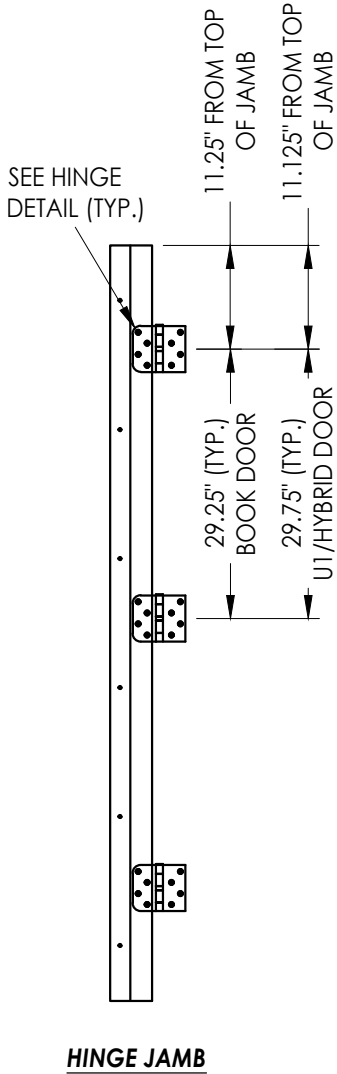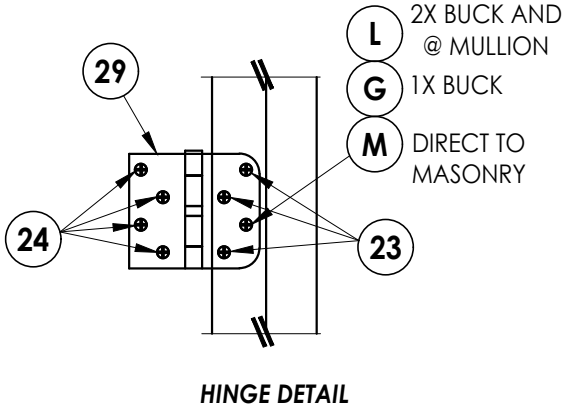


MULTIPOINT LOCK STRIKE DETAILS

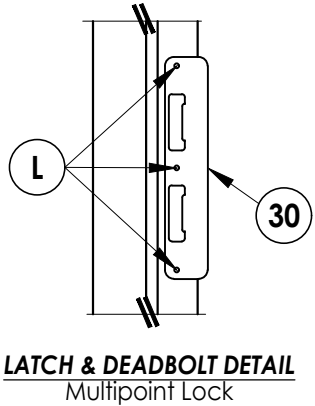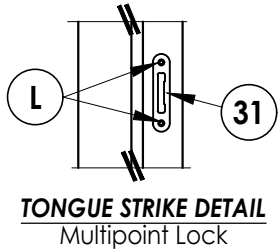


DATE: 8/10/16		PRODUCT:		Documents Prepared By:	
SCALE: N.T.S.		THERMA-TRU		Lyndon F. Schmidt	
DWG. BY: JK		FIBERGLASS DOOR		P.E. No. 43409	
CHK. BY: LFS		PART OR ASSEMBLY:		RW BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
DRAWING NO.: FL-20461.19		HARDWARE DETAILS			
SHEET 11 OF 14					
6	7/03/26	UPDATE TO 9TH ED. (2026)	FBC	LFS	
5	7/19/23	UPDATE TO 8TH ED. (2023)	FBC	LFS	
4	7/21/20	UPDATE TO 7th ED (2020)	FBC	LFS	
NO.	DATE			BY	
					REVISIONS


Z:\2023 FBC Drawings\Therma-Tru\FL-20461 R10\FL-20461.19-20.dwg

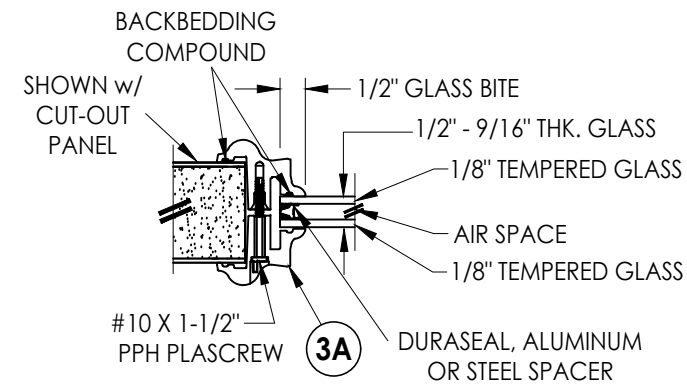


G1 GLAZING DETAIL
BTS Lite Frame
Sidelites

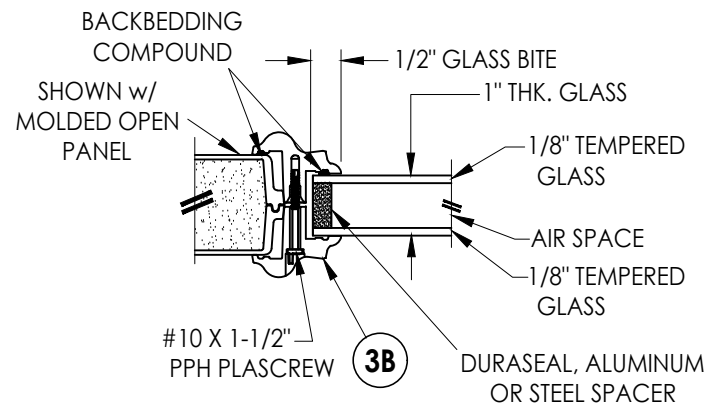


G2 GLAZING DETAIL
BTS Lite Frame
Sidelites

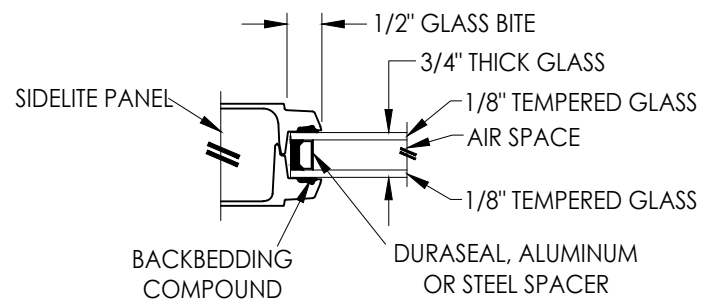

G3 GLAZING DETAIL
Flush Glazing
Sidelites

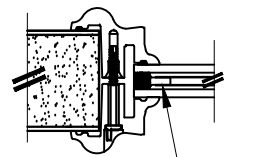


INTERNAL GRID (GBG)




INTERNAL GRID (GBG)
(Optional Aluminum Spacer)


9/16" INSULATED GLASS INSERT OPTIONS

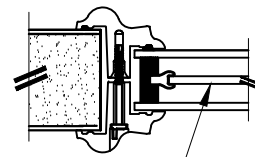


DECORATIVE INSERT

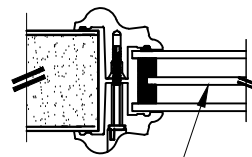


PRIVACY INSERT

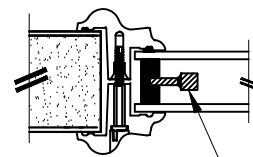


WROUGHT IRON INSERT

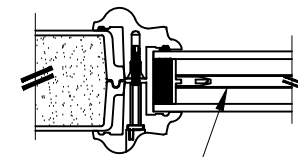

INTERNAL GRID (GBG)

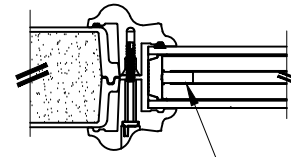


INTERNAL GRID (GBG)
(Optional Aluminum Spacer)

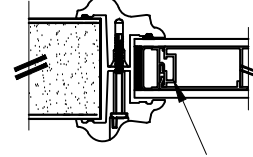


MINI BLIND
(Aluminum Spacer)


1" INSULATED GLASS INSERT OPTIONS




INTERNAL GRID (GBG)



INTERNAL GRID (GBG)




DECORATIVE INSERT




PRIVACY INSERT

3/4" INSULATED GLASS INSERT OPTIONS



3A BTS LITE FRAME
1/2" & 9/16" Glazing



3B BTS LITE FRAME
1" Glazing

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


R.W. BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:	THERMA-TRU FIBERGLASS DOOR	
	PART OR ASSEMBLY:	GLAZING DETAILS


NO.	DATE	REVISIONS			
		BY	DATE	DESCRIPTION	DATE
6	7/03/26	UPDATE TO 9TH ED.	(2026)	FBC	LFS
5	7/19/23	UPDATE TO 8TH ED.	(2023)	FBC	LFS
4	7/21/20	UPDATE TO 7TH ED.	(2020)	FBC	LFS

DATE:	8/10/16
SCALE:	N.T.S.
DWG. BY:	JK
CHK. BY:	LFS
DRAWING NO.:	FL-20461.19
SHEET	12 OF 14


Z:\2023 FBC Drawings\Therma-Tru\FL-20461 R10\FL-20461.19-20.dwg

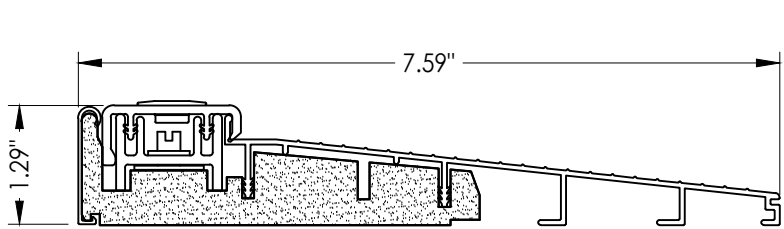


32 INSWING THRESHOLD
Inswing Basic Composite Adjustable Sill 7-1/2"

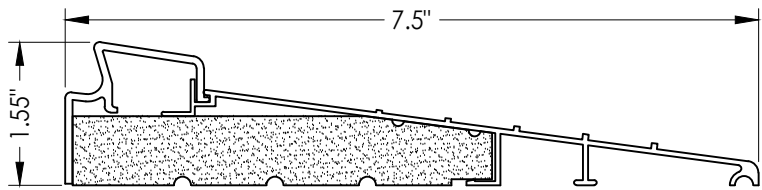


37 INSWING THRESHOLD
Inswing Basic Fixed 7-1/2" Sill

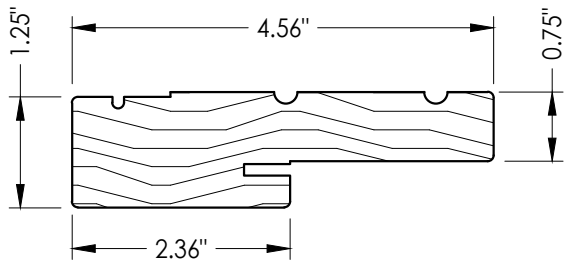


1 WOOD JAMB

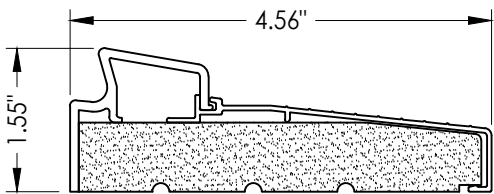


33 INSWING THRESHOLD
Inswing Basic Fixed Sill

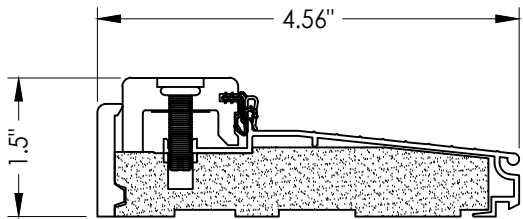


38 INSWING THRESHOLD
Inswing Composite Adjustable Sill

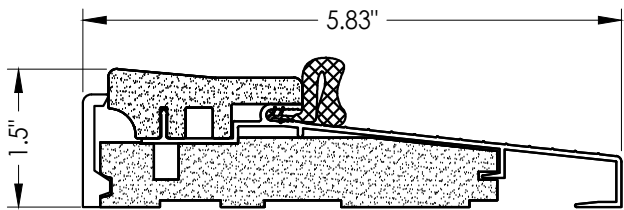


16 OUTSWING THRESHOLD
Composite Sill

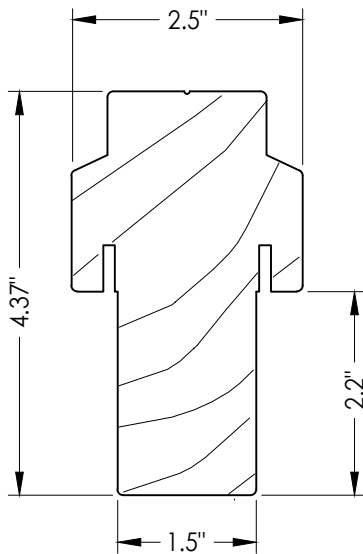


2 INTEGRAL MULLION

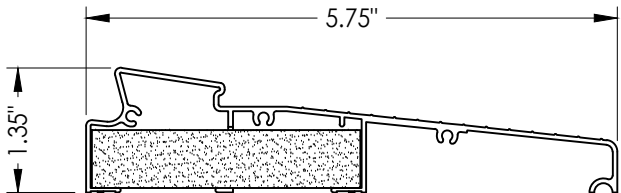


34 INSWING THRESHOLD
Inswing Moderate Climate Sill 1-3/8"

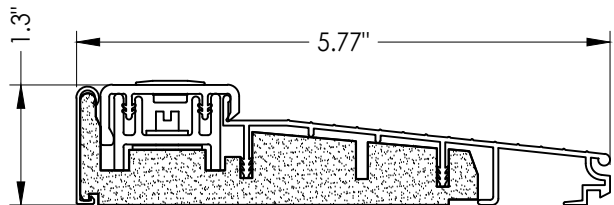


39 INSWING THRESHOLD
Inswing Basic Composite Adjustable Sill

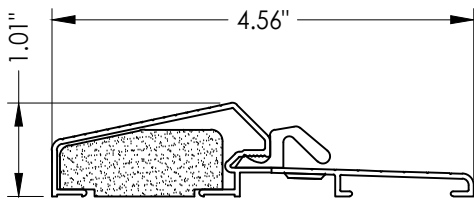


17 OUTSWING THRESHOLD
Composite / Aluminum Sill

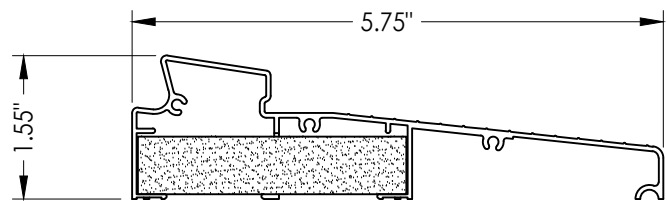


35 INSWING THRESHOLD
Inswing Moderate Climate Sill

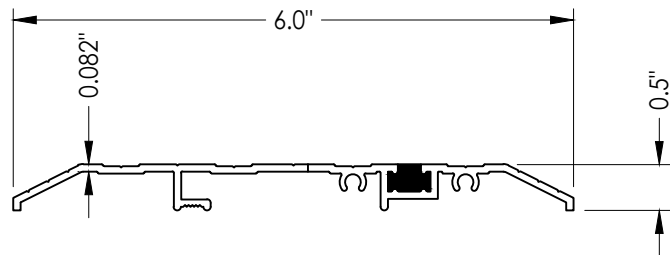


15 PUBLIC ACCESS THRESHOLD

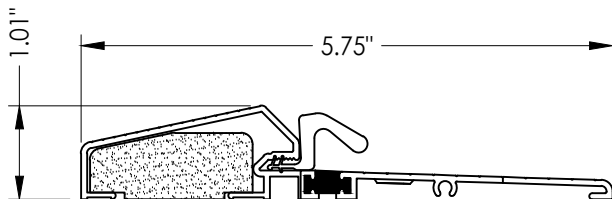


18 OUTSWING THRESHOLD
Composite / Aluminum Sill
(Thermal Break)

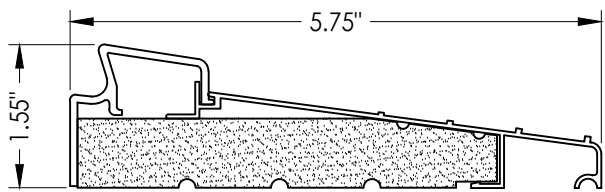


36 INSWING THRESHOLD
Inswing Basic Fixed 5-3/4" Sill

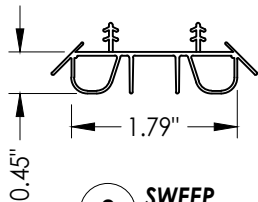


8 SWEEP




9 SWEEP




10 SWEEP

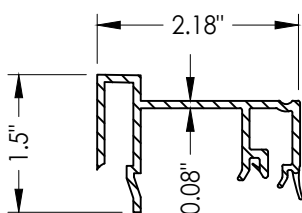

75 SIDELITE SPACER
Inswing

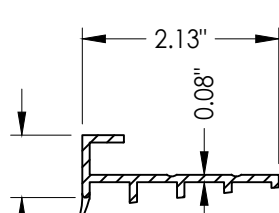

76 SIDELITE SPACER
Outswing

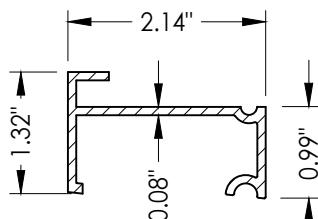

77 SIDELITE SPACER
Inswing
Moderate Climate Threshold

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:

COMPONENTS

NO.	DATE	REVISIONS
6	7/03/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	7/19/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	7/21/20	UPDATE TO 7th ED (2020) FBC LFS

DATE: 8/10/16

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.: FL-20461.19

SHEET 13 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-20461 R10\FL-20461.19-20.dwg

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (SG >= 0.42)	WOOD
B	2X BUCK (SG >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH ELCO OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
G	3/16" X 3-1/4" ITW CONCRETE SCREW	STEEL
I	1/4" X 1-3/4" PFH ELCO OR ITW CONCRETE SCREW	STEEL
J	1/4" X 3-3/4" PFH ELCO OR ITW CONCRETE SCREW	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL
M	3/16" X 2-1/4" ITW CONCRETE SCREW	STEEL
N	3/16" X 2-3/4" ITW CONCRETE SCREW	STEEL
1	JAMB (FINGER JOINT PINE)	WOOD
2	INTEGRAL MULLION (PINE, SG >=0.42)	WOOD
6	WEATHERSTRIP (MEDIUM REACH)	FOAM
7	WEATHERSTRIP (LONG REACH)	FOAM
8	SWEEP	VINYL
9	SWEEP (USE w/ MODERATE CLIMATE THRESHOLD)	VINYL
10	SWEEP (USE w/ PUBLIC ACCESS THRESHOLD)	VINYL
15	PUBLIC ACCESS THRESHOLD	ALUM
16	OUTSWING THRESHOLD	ALUM/COMP
17	OUTSWING THRESHOLD	ALUM/COMP
18	OUTSWING THRESHOLD	ALUM/COMP
23	#10 x 3/4" PFH WOOD SCREW	STEEL
24	#10 x 1" PFH WOOD SCREW	STEEL

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
25	#8 x 2-1/2" PFH WOOD SCREW	STEEL
29	4" X 4" HINGE	STEEL
30	LATCH & DEADBOLT STRIKE PLATE (TONGUE SYSTEM)	ALUM/COMP
31	MULTIPOINT STRIKE PLATE (TONGUE SYSTEM)	ALUM/COMP
32	INSWING THRESHOLD	ALUM/COMP
33	INSWING THRESHOLD	ALUM/COMP
34	INSWING THRESHOLD	ALUM/COMP
35	INSWING THRESHOLD	ALUM/COMP
36	INSWING THRESHOLD	ALUM/COMP
37	INSWING THRESHOLD	ALUM/COMP
38	INSWING THRESHOLD	ALUM/COMP
39	INSWING THRESHOLD	ALUM/COMP
40	DOOR PANEL (BOOK)	-
41	DOOR PANEL (HYBRID)	-
42	DOOR PANEL (U1)	-
50	SIDELITE (FULL LITE)	-
60	SIDELITE (FLUSH GLAZED)	-
75	SIDELITE SPACER (INSWING)	PVC
76	SIDELITE SPACER (OUTSWING)	PVC
77	SIDELITE SPACER (INSWING) - MODERATE CLIMATE SILL	PVC

CORROSION RESISTANCE - SALTWATER ENVIRONMENTS
Fasteners & connectors in areas within 3000 ft (914 m) of a saltwater coastline shall comply with FBC Sections 1711.1 or R332.1.

- CONCRETE ANCHOR NOTES:
- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
 - Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
 - Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
ELCO ULTRACON®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	AS SHOWN	1-1/2"

- WOOD SCREW INSTALLATION NOTES:
- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:

THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:

BILL OF MATERIALS

REVISIONS

NO.	DATE	BY
6	7/03/26	LFS
5	7/19/23	LFS
4	7/21/20	LFS

DATE: 8/10/16

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.: FL-20461.19

SHEET 14 OF 14

RW

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2016 R.W. BUILDING CONSULTANTS INC.