


GENERAL NOTES

7. This product evaluation drawing has been developed in compliance with the 8th Edition (2023) Florida Building Code (FBC) including the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in the "HVHZ" this product complies with Section 1626 of the FBC and does not require an impact resistant covering.
4. When used in areas outside of the "HVHZ" requiring wind borne debris protection, this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
5. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
6. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
7. This product meets the water infiltration requirements for the "HVHZ".
8. Outswing configurations using Coastal Sill (item #19) & Composite Sill (item #16) under active doors meet water infiltration requirements for "HVHZ". All other configurations do not meet the water infiltration requirements for the "HVHZ" and shall be installed only in non-habitable areas or at habitable locations protected by an overhang or canopy such that the angle between the edge of canopy or overhang to sill is less than 45 degrees.

TABLE OF CONTENTS			
SHEET#	DESCRIPTION	SHEET#	
1	Typical Elevations, Design Pressures & General Notes	7	Vertical Cross Sections (Thresholds)
2	Door Panel Details	8	Buck & Frame Anchoring
3	Elevations	9	Hardware Details
4	Horizontal & Vertical Cross Sections (2X Buck)	10	Components
5	Horizontal & Vertical Cross Sections (1X Buck)	11	Components & Bill of Materials
6	Horizontal & Vertical Cross Sections (Direct to Masonry)		

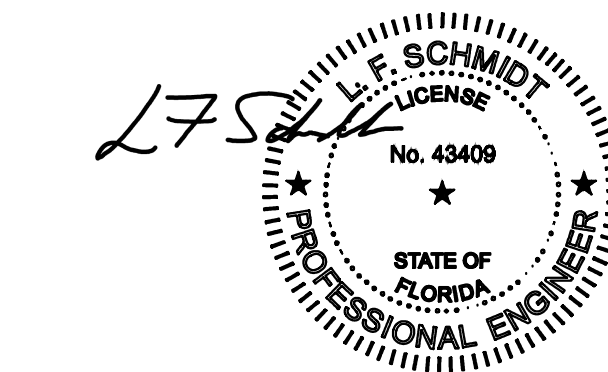


Digitally signed by
Lyndon F Schmidt
Date: 2023.07.25
09:52:33 -04'00'

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

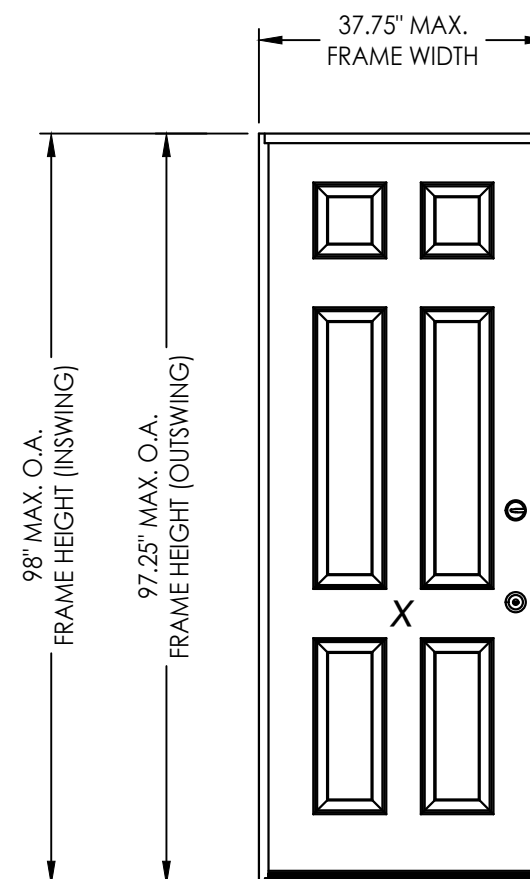

CONFIGURATION	LOCK HARDWARE	LOCK & DEADBOLT SPACING	DESIGN PRESSURE (PSF) INSWING		DESIGN PRESSURE (PSF) OUTSWING	
			POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
X	Latch & Deadbolt	5-1/2"	+65.0	-70.0	+65.0	-65.0
X	Latch & Deadbolt	12"	+80.0	-80.0	+80.0	-80.0
X	Multipoint	N/A	+75.0	-80.0	+80.0	-80.0

See Sheet 3 for Hardware Specifications

4	7/25/23	UPDATE TO 8TH ED. (2023)	FBC	LFS	
3	7/22/20	UPDATE TO 7th ED (2020)	FBC	LFS	
2	4/06/19	ADD 5-1/2" LATCH/DB SPACING.		LFS	
1	7/14/17	UPDATE TO 6TH ED. (2017)	FBC	JK	
NO.	DATE	REVISIONS			

DATE: 08/02/16

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:

FL-20470.4

SHEET 1 OF 11

[illegible]


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

R²W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33486
Phone No.: 813.659.9197
FBPE Registry No. 9813





ART OR ASSEMBLY:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

© 2016 R.W. BUILDING CONSULTANTS INC.

Z:\2023 FBC Drawings\Therma-Tru\FL-20470 R4\FL-20470.4-6.dwg

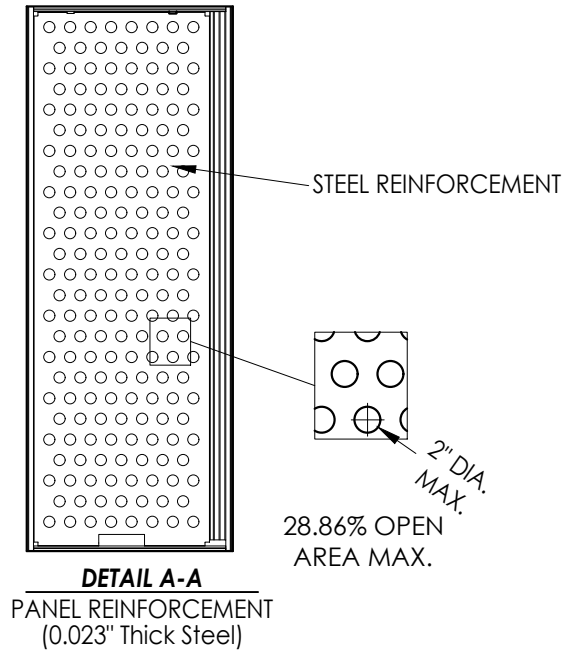

* #8 X 2.5\"/>

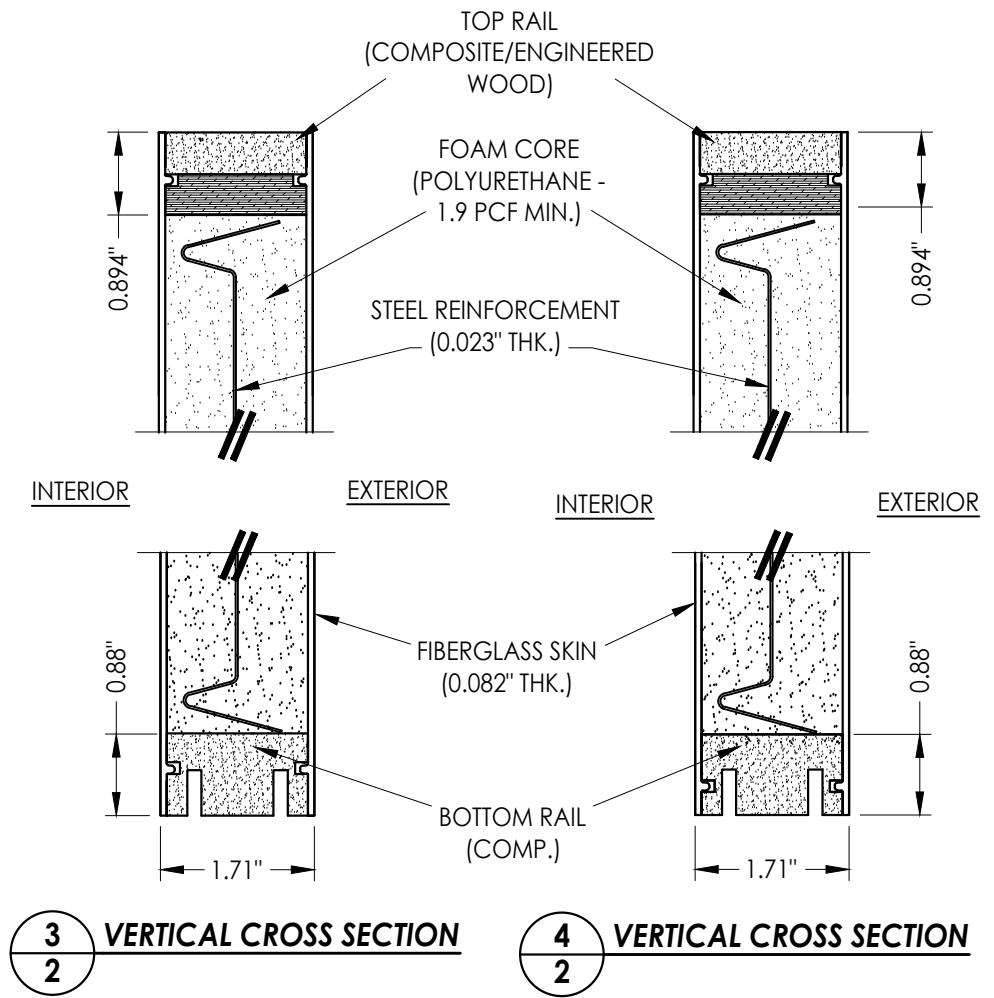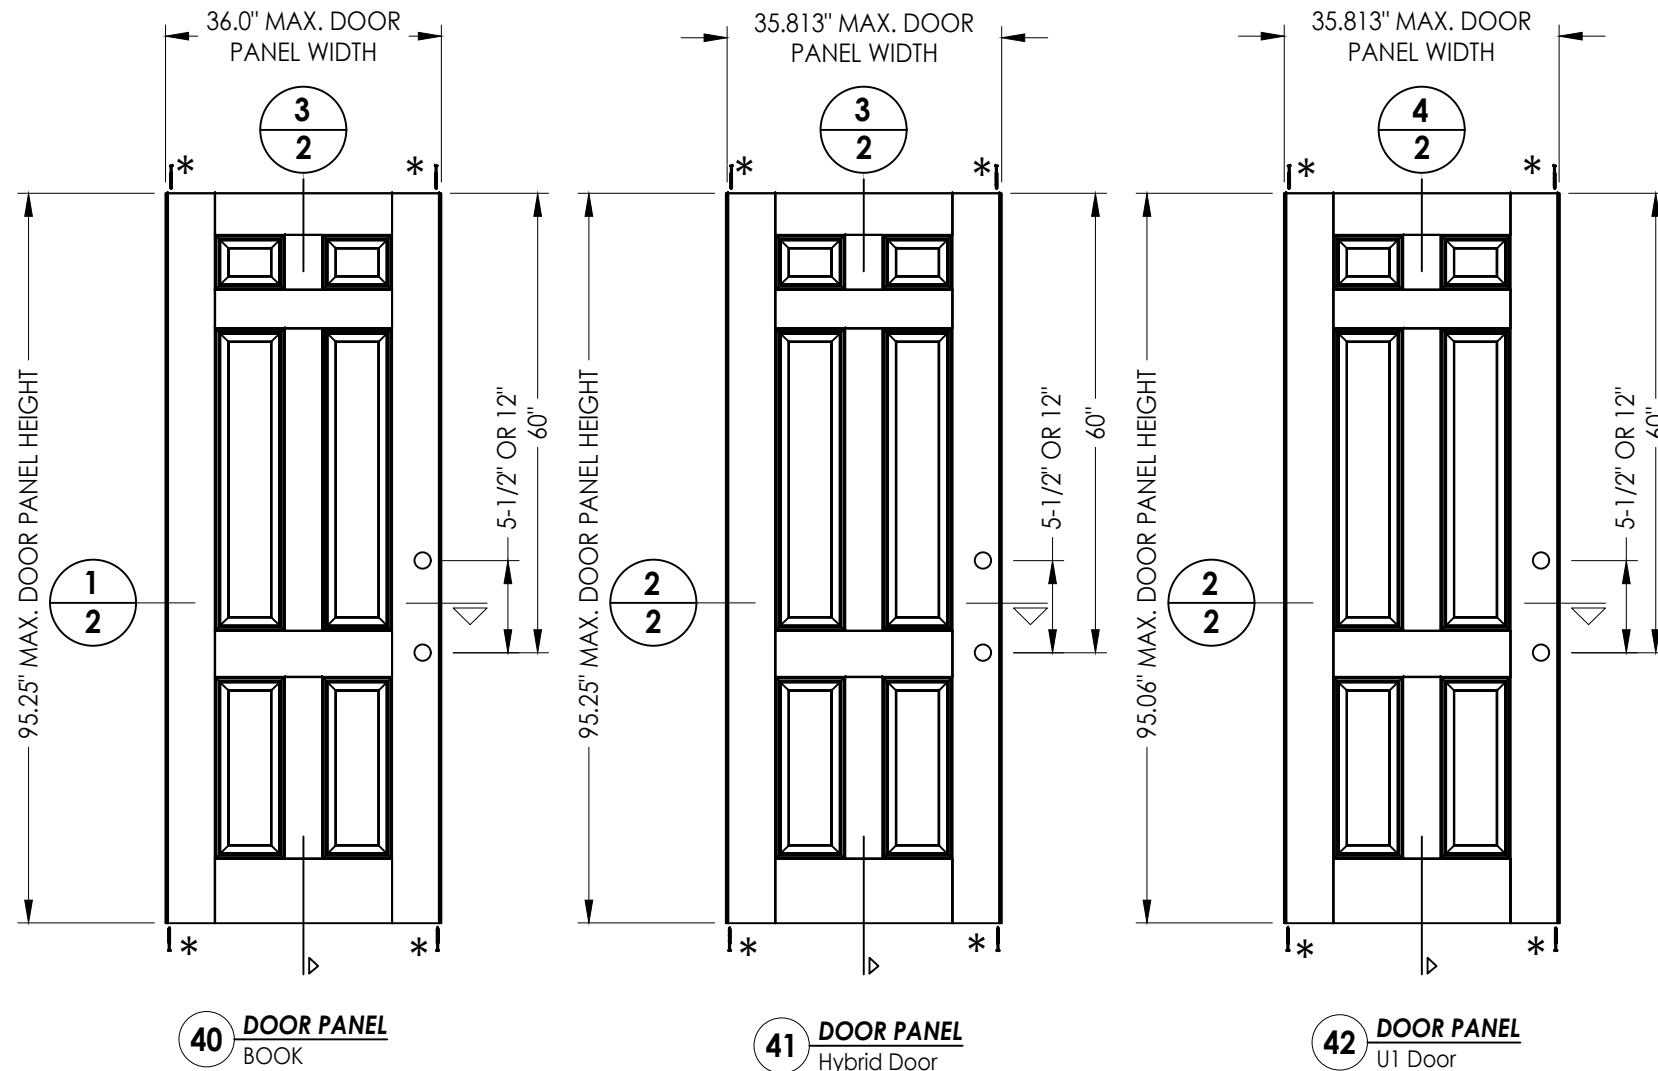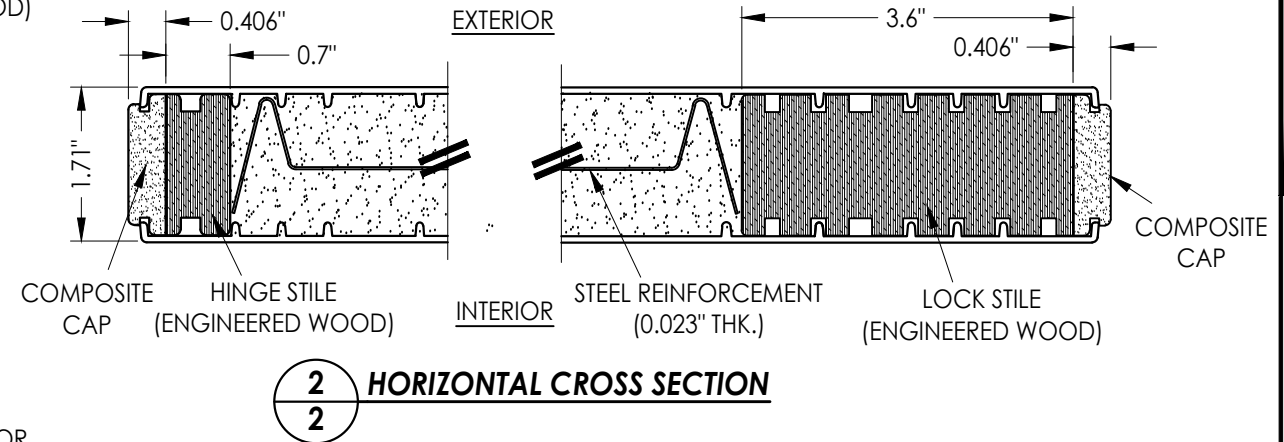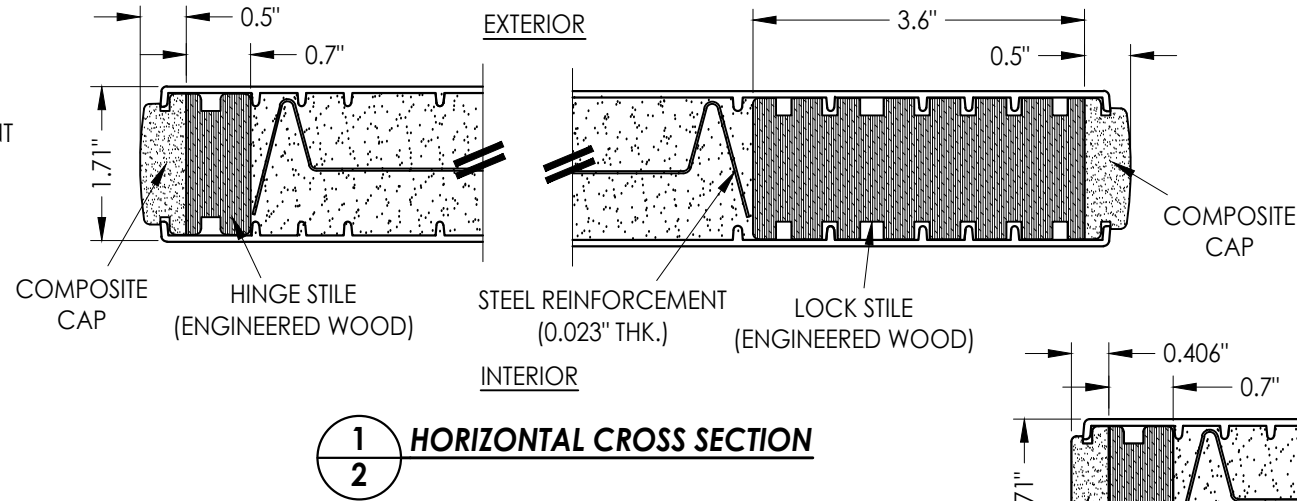


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
DOOR PANEL DETAILS

		REVISIONS			
		NO.	DATE	BY	
4	7/25/23	UPDATE TO 8TH ED. (2023)	FBC	LFS	
3	7/22/20	UPDATE TO 7th ED (2020)	FBC	LFS	
2	4/06/19	ADD 5-1/2\" LATCH/DB SPACING	LFS	JK	
1	7/14/17	UPDATE TO 6TH ED. (2017)	FBC	JK	
DATE: 08/02/16					
SCALE: N.T.S.					
DWG. BY: JK					
CHK. BY: LFS					
DRAWING NO.: FL-20470.4					
SHEET 2 OF 11					

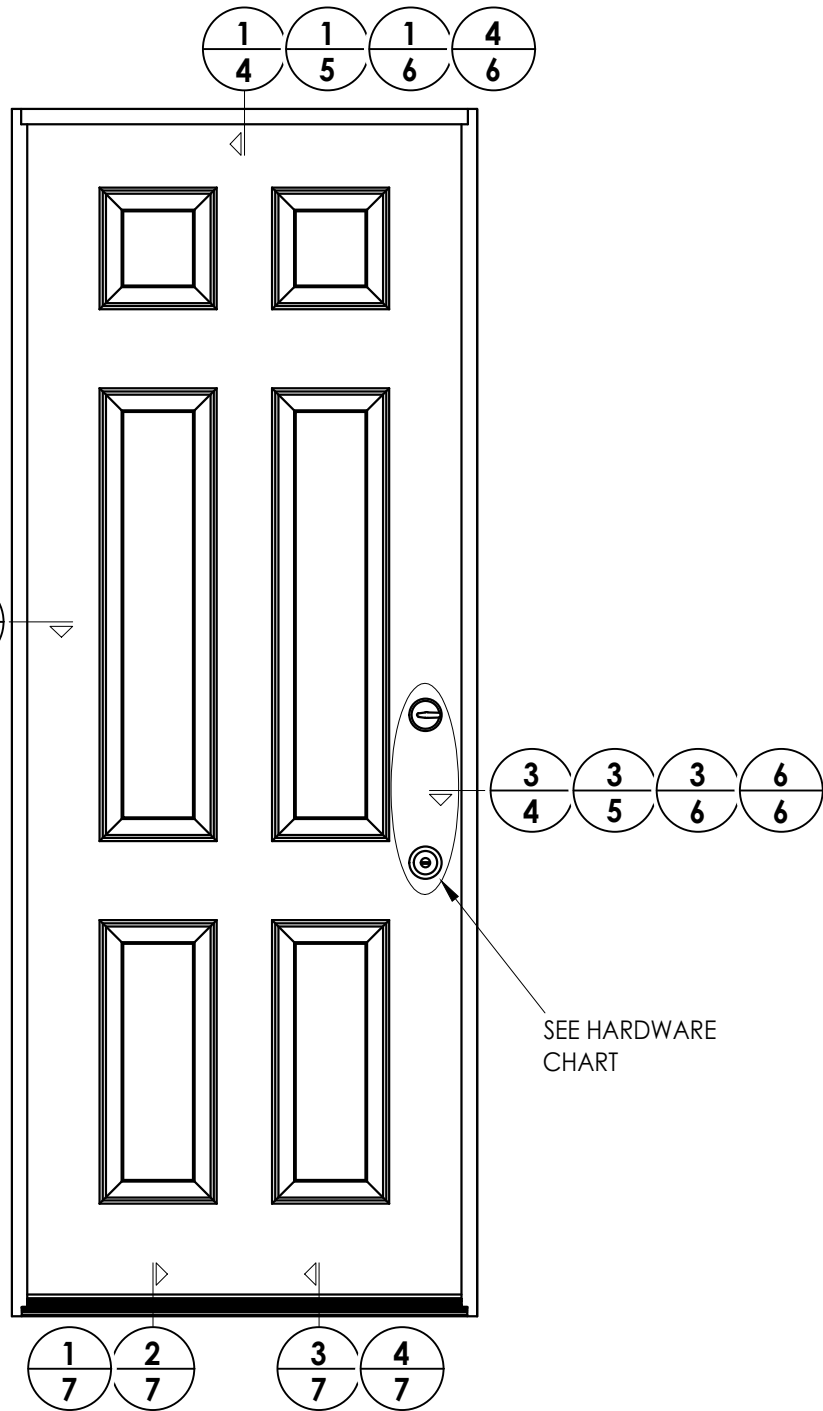

HARDWARE TABLE	
MANUFACTURER	MODEL
SCHLAGE	KNOB: F51 DEADBOLT: B60
KWIKSET	KNOB: SIGNATURE SERIES DEADBOLT: SIGNATURE SERIES (980)
HOPPE (THERMA-TRU)	MULTIPOINT : MPDGART (3 pt. Manual Tongue)

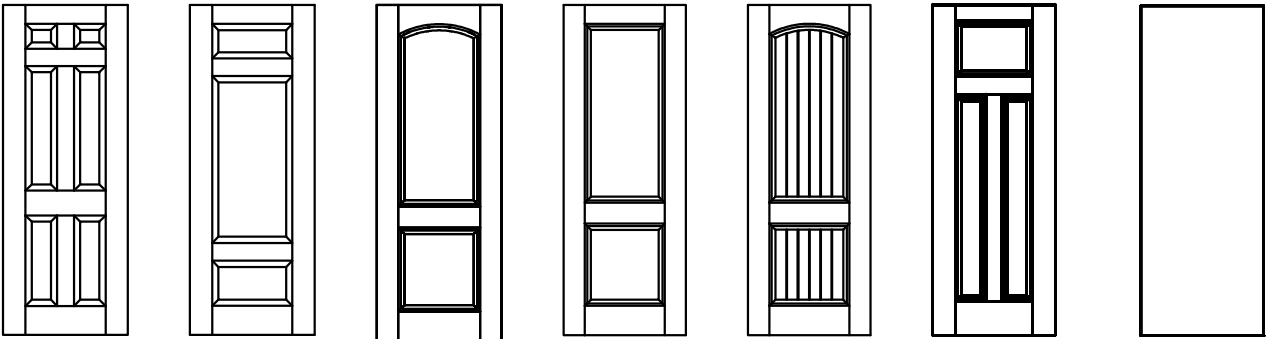

Panel options shown are for illustration and are representative only
(similar opaque panel configurations are allowed)


[illegible]

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


Rea BUILDING CONSULTANTS, INC.

P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\Therma-Tru\FL-20470 R4\FL-20470.4-6.dwg

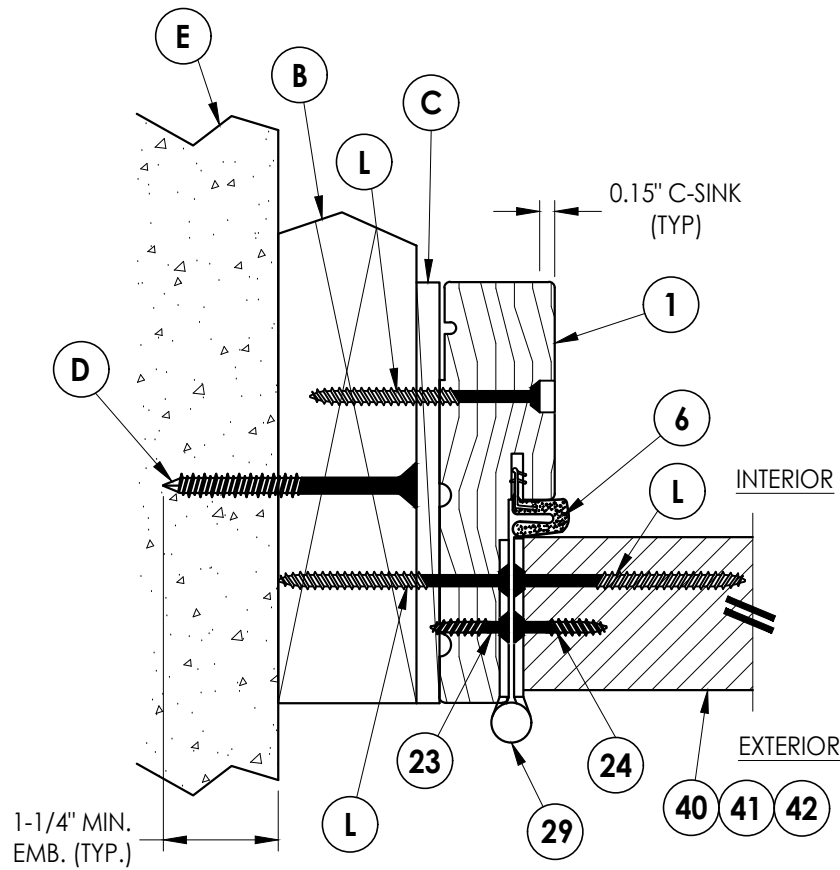

2 HORIZONTAL CROSS SECTION
4 Shown w/ 2X Buck
Outswing shown (Inswing similar)

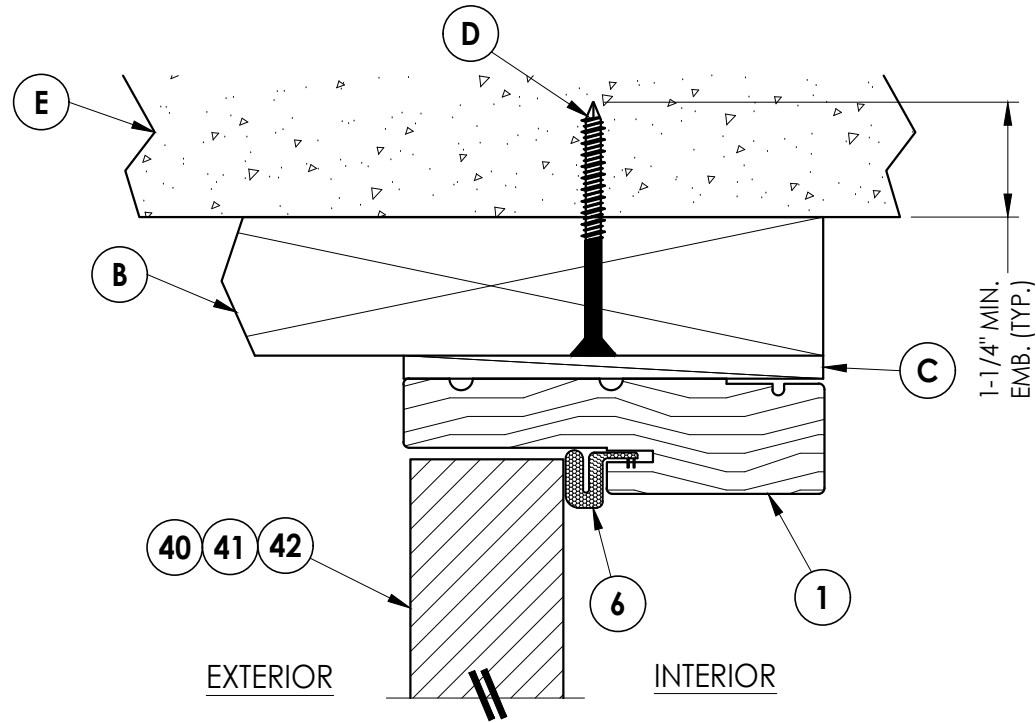

1 VERTICAL CROSS SECTION
4 Shown w/ 2X Buck
Outswing shown (Inswing similar)

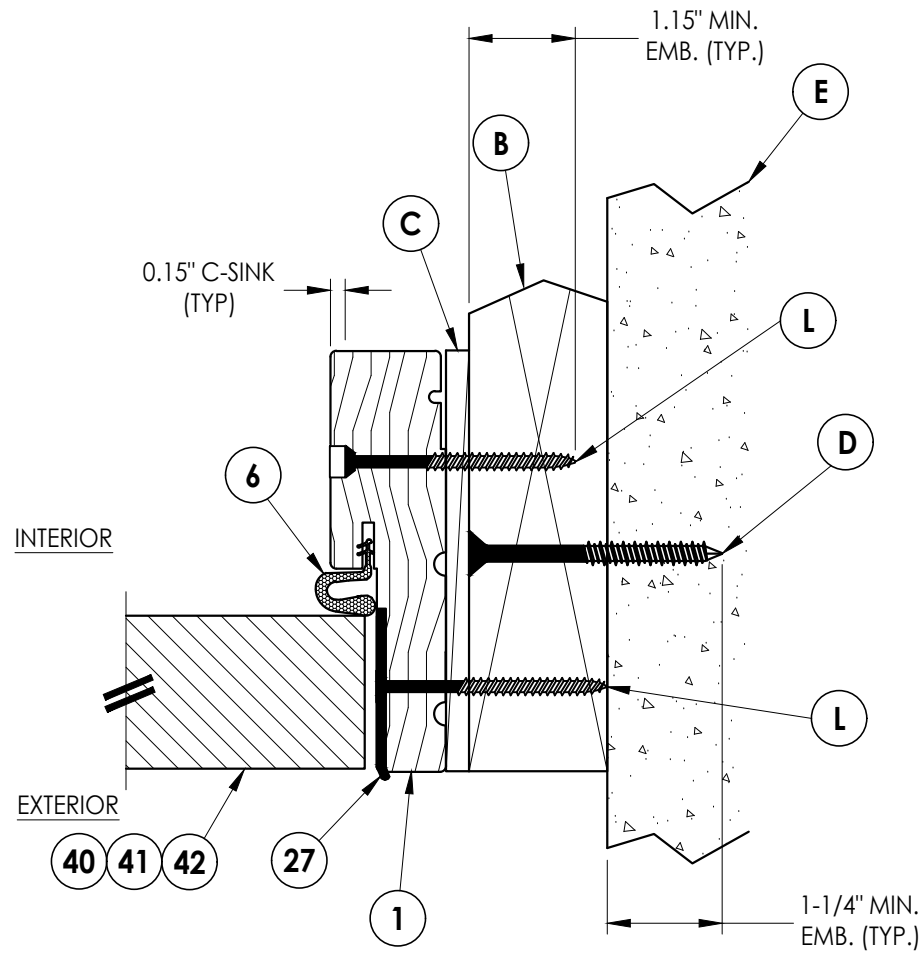


3 HORIZONTAL CROSS SECTION
4 Shown w/ 2X Buck
Outswing shown (Inswing similar)

PRODUCT:		THERMA-TRU FIBERGLASS DOOR		PART OR ASSEMBLY:		HORIZONTAL & VERTICAL CROSS SECTIONS (2X BUCK)	
NO.	DATE	REVISIONS	BY	DATE	BY	DATE	BY
4	7/25/23	UPDATE TO 8TH ED. (2023) FBC	LFS				
3	7/22/20	UPDATE TO 7th ED (2020) FBC	LFS				
2	4/06/19	ADD 5-1/2" LATCH/DB SPACING	LFS				
1	7/14/17	UPDATE TO 6TH ED. (2017) FBC	JK				
DATE: 08/02/16		SCALE: N.T.S.		DWG. BY: JK		CHK. BY: LFS	
DRAWING NO.: FL-20470.4		SHEET 4 OF 11					


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\Therma-Tru\FL-20470 R4\FL-20470.4-6.dwg

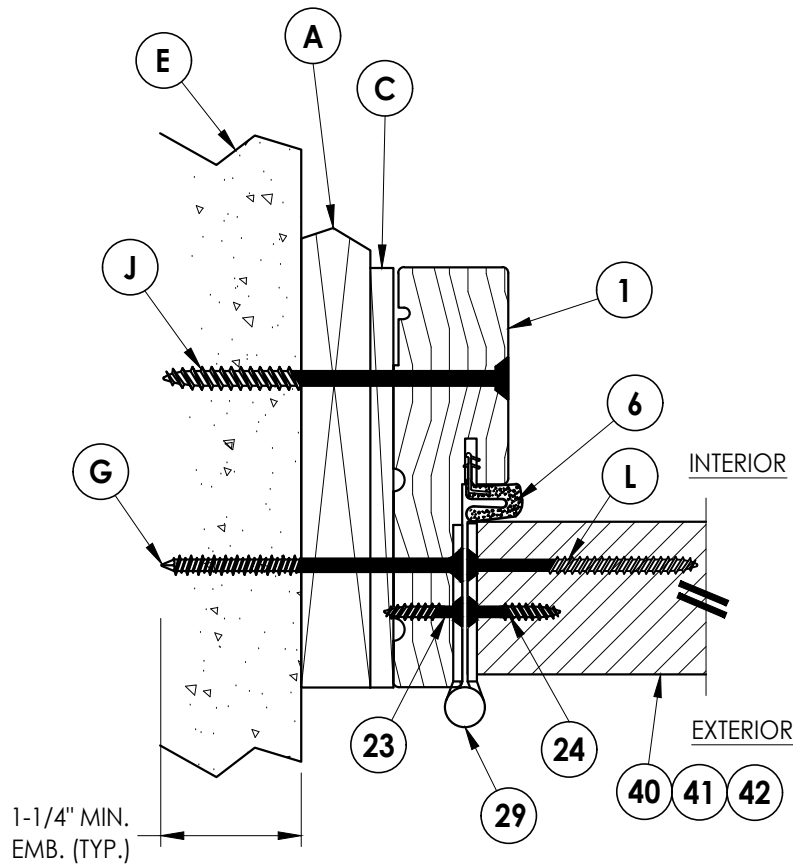

2
5 **HORIZONTAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

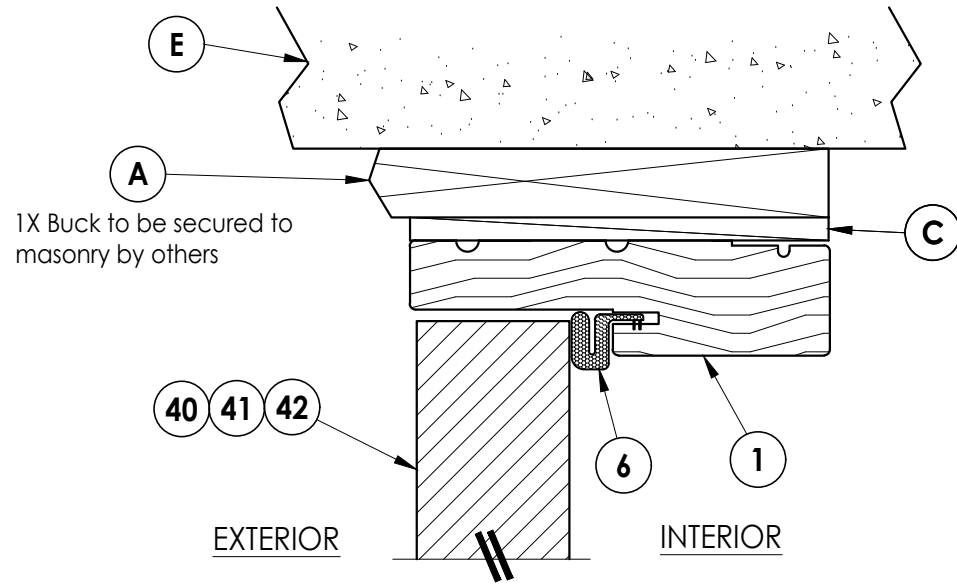

1
5 **VERTICAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

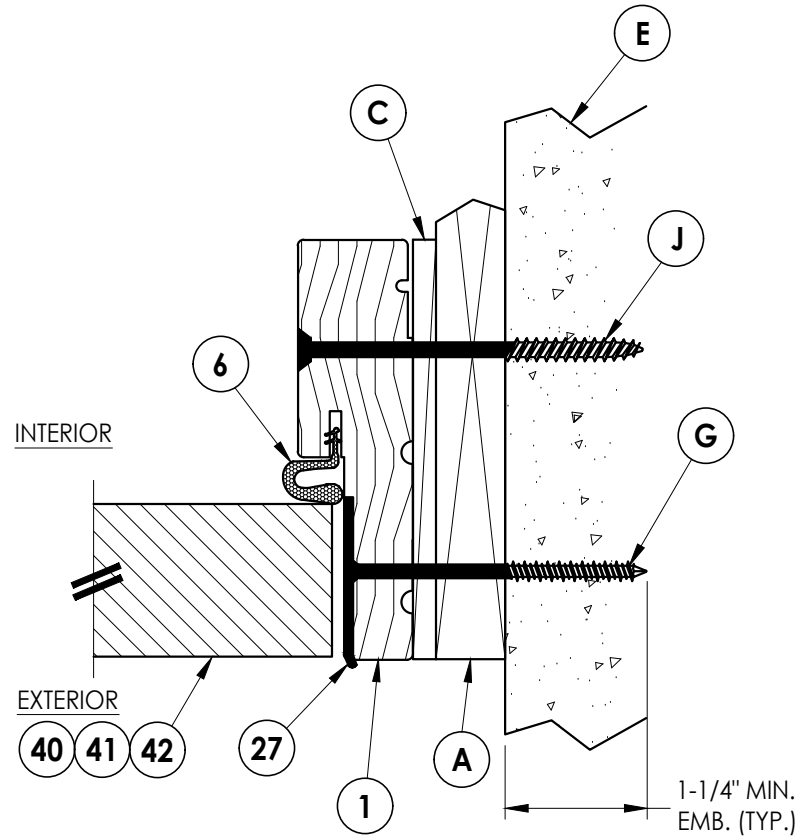

3
5 **HORIZONTAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (1X BUCK)

NO.	DATE	REVISIONS
4	7/25/23	UPDATE TO 8TH ED. (2023) FBC LFS
3	7/22/20	UPDATE TO 7th ED (2020) FBC LFS
2	4/06/19	ADD 5-1/2" LATCH/DB SPACING LFS
1	7/14/17	UPDATE TO 6TH ED. (2017) FBC JK

DATE: 08/02/16

SCALE: N.T.S.

DWG. BY: JK


CHK. BY: LFS

DRAWING NO.:


FL-20470.4

SHEET 5 OF 11

Z:\2023 FBC Drawings\Therma-Tru\FL-20470 R4\FL-20470.4-6.dwg

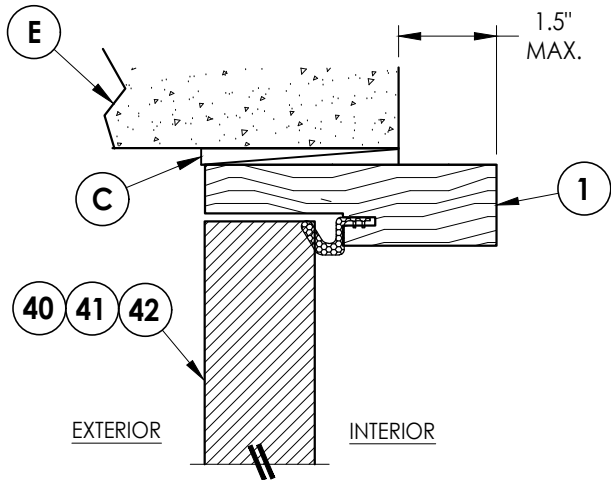


1
6 **VERTICAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 4-9/16" jamb

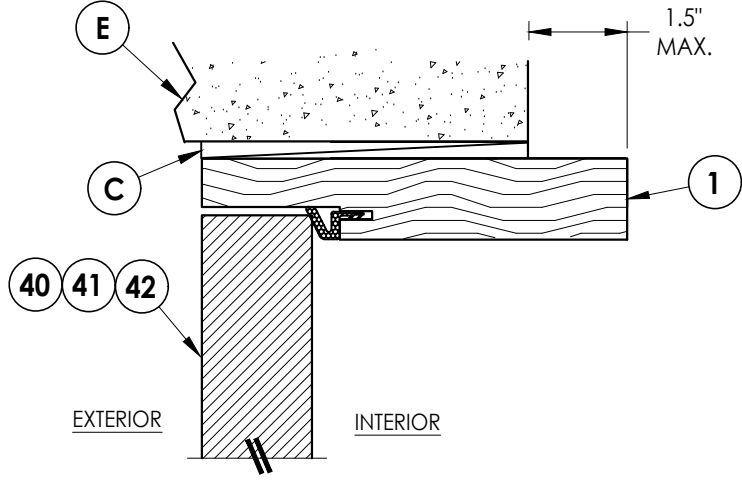


4
6 **VERTICAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb


DIRECT TO MASONRY MAX. DESIGN PRESSURE:
w/ STANDARD STRIKE = ± 47 PSF
w/ SECURITY STRIKE = ± 55 PSF

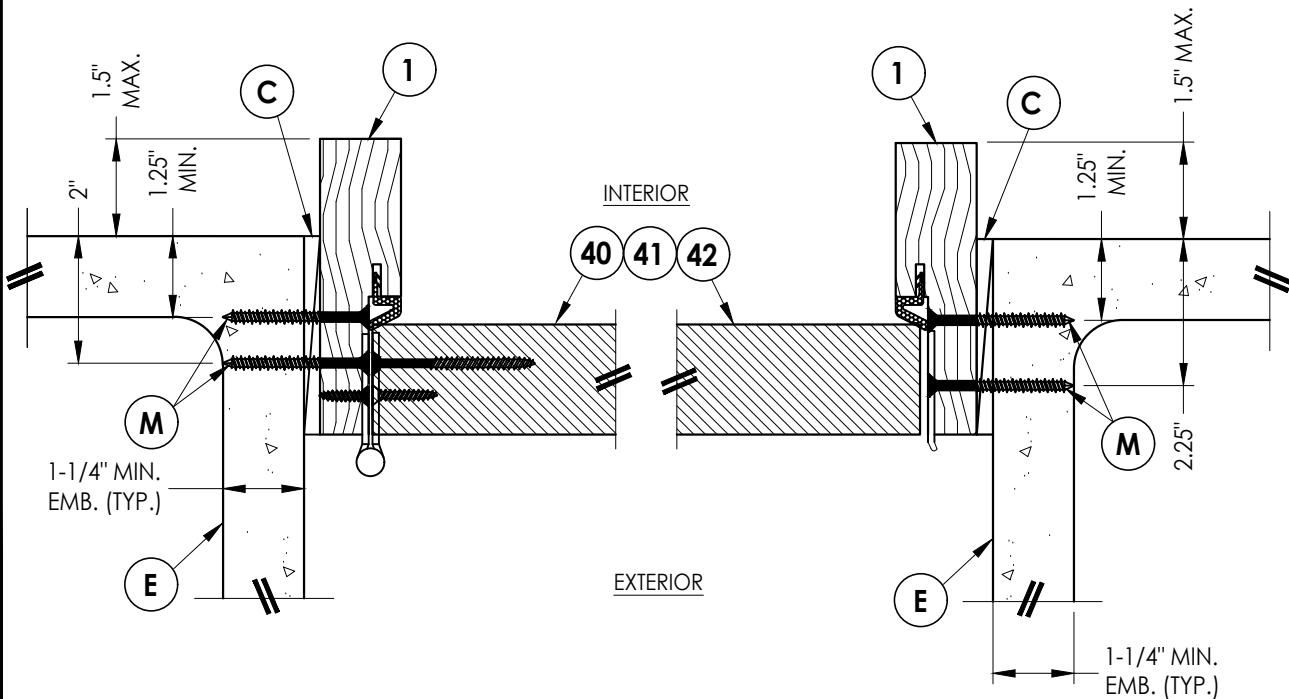


2
6 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 4-9/16" jamb

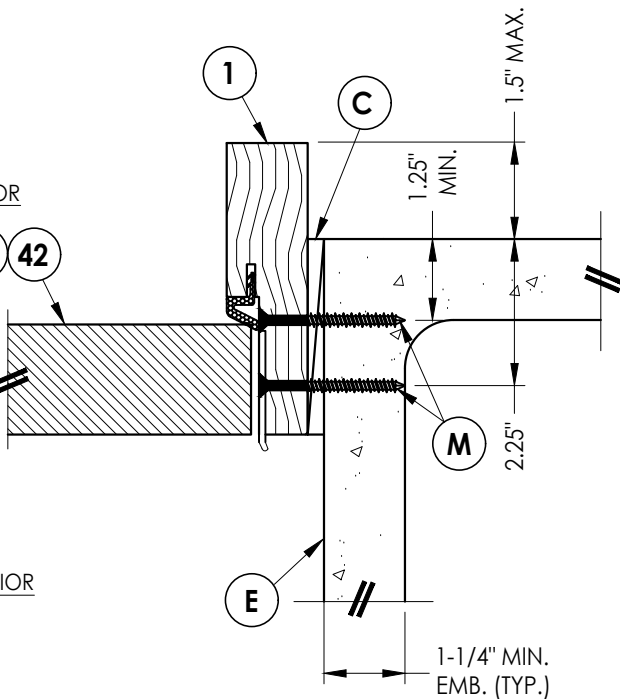

3
6 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 4-9/16" jamb

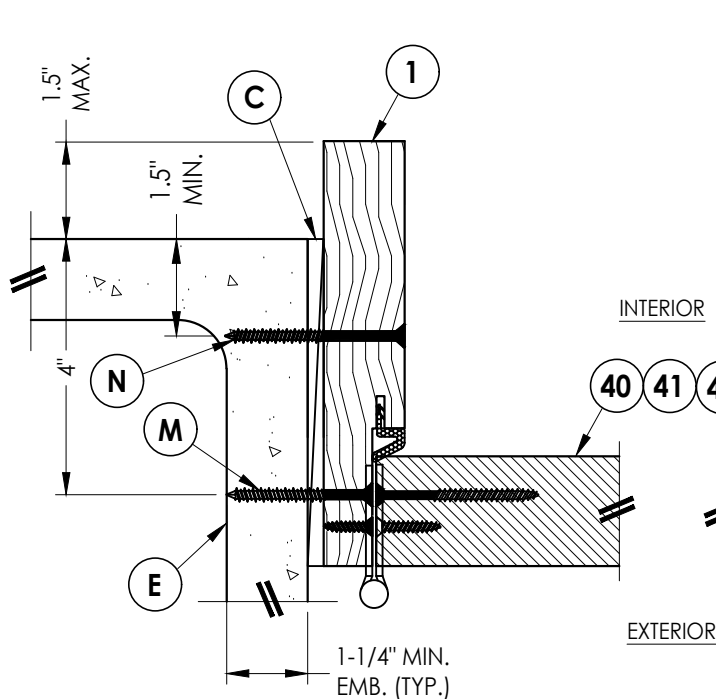

5
6 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

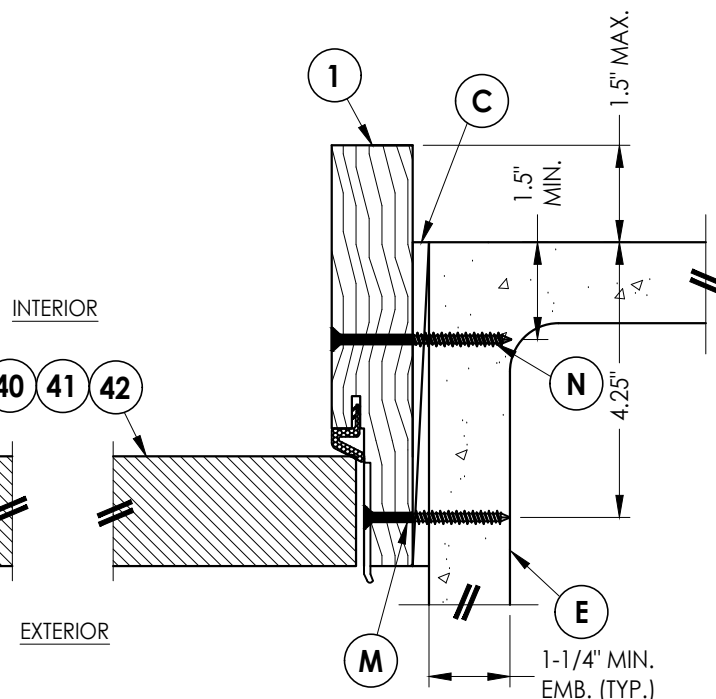

6
6 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
SECTIONS (DIRECT TO MASONRY)

NO.	DATE	REVISIONS
4	7/25/23	UPDATE TO 8TH ED. (2023) FBC
3	7/22/20	UPDATE TO 7TH ED (2020) FBC
2	4/06/19	ADD 5-1/2" LATCH/DB SPACING
1	7/14/17	UPDATE TO 6TH ED. (2017) FBC
NO.	DATE	BY

DATE: 08/02/16
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-20470.4
SHEET 6 OF 11

1. Sill Item #'s 16, 32, 33, 36, 37, 38, 39, 43, 44, 45, 46, 47 & 48 are attached to jambs w/ (3) #8 X 2-1/2" pfh screws at each end.
Sill Item #'s 17, 18 & 19 are attached to jambs w/ (2) #8 X 2-1/2" pfh screws at each end.
Sill Item #15 is attached to jambs utilizing (2) #10 X 2" pph SMS at each end.



4	7/25/23	UPDATE TO 8TH ED. (2023)	FBC	LFS		
3	7/22/20	UPDATE TO 7th ED (2020)	FBC	LFS		
2	4/06/19	ADD 5-1/2" LATCH/DB SPACING	FBC	LFS		
1	7/14/17	UPDATE TO 6TH ED. (2017)	FBC	JK		
NO.	DATE					
				REVISIONS		

DATE: 08/02/16

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS






DRAWING NO.: FL-20470.4

SHEET 7 OF 11

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

R^W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Therma-Tru\FL-20470 R4\FL-20470.4-6.dwg

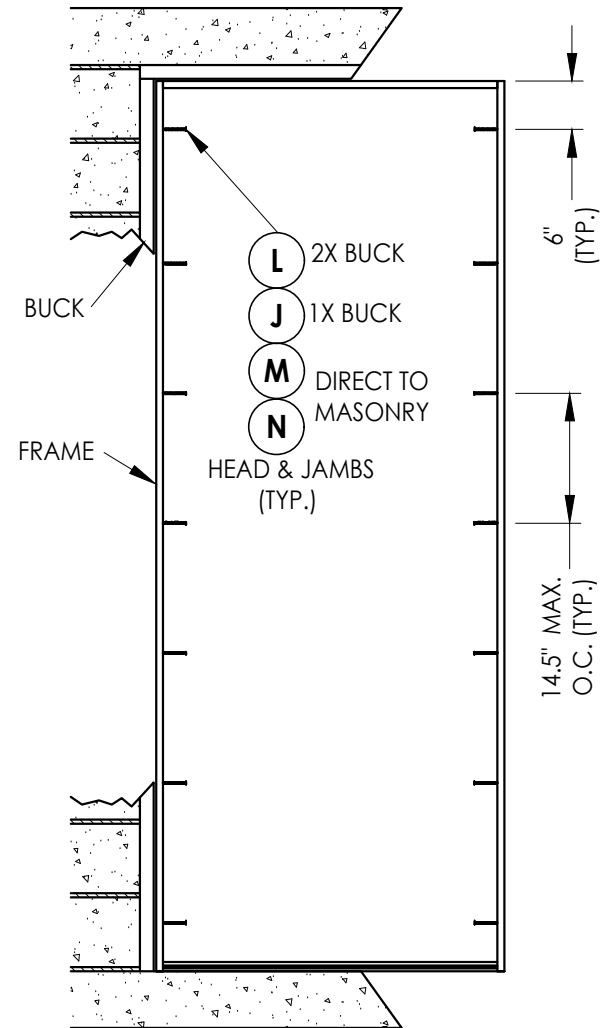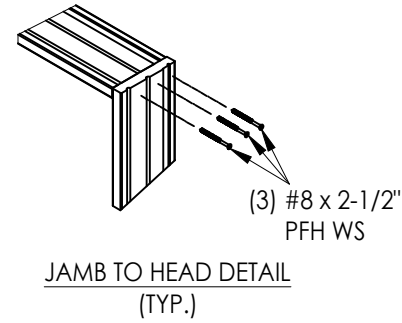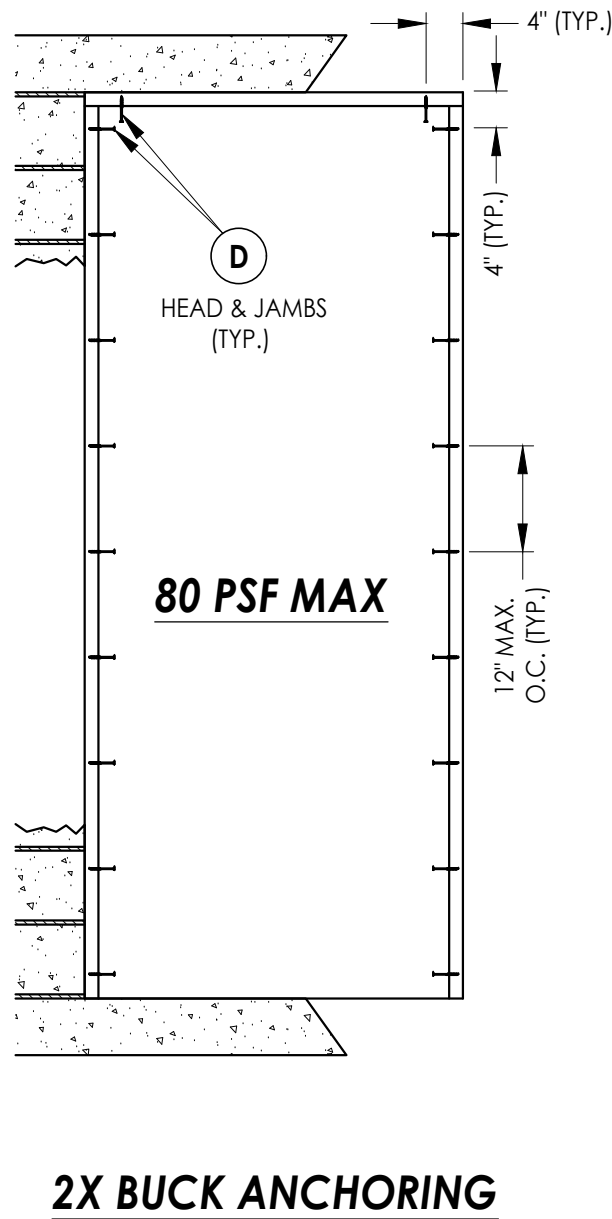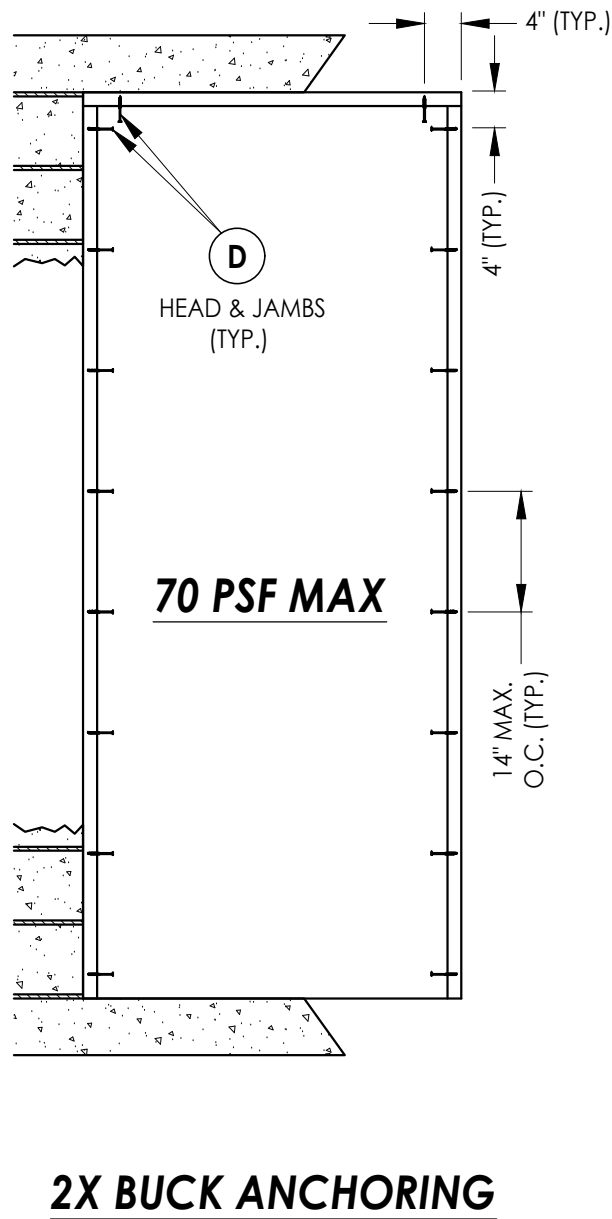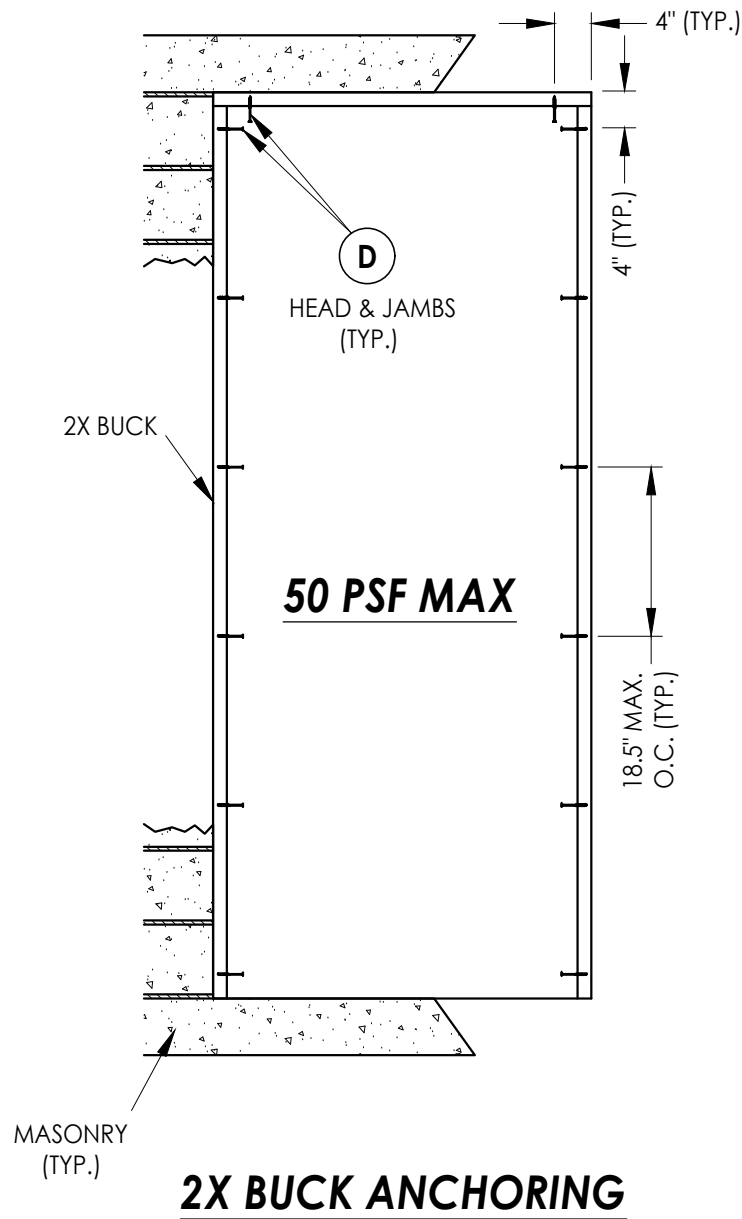


DATE:	08/02/16
SCALE:	N.T.S.
DWG. BY:	JK
CHK. BY:	LFS
DRAWING NO.:	FL-20470.4
SHEET	8 OF 11

NO.	DATE	REVISIONS
4	7/25/23	UPDATE TO 8TH ED. (2023) FBC LFS
3	7/22/20	UPDATE TO 7th ED (2020) FBC LFS
2	4/06/19	ADD 5-1/2" LATCH/DB SPACING LFS
1	7/14/17	UPDATE TO 6TH ED. (2017) FBC JK
		BY

PRODUCT:	Therma-Tru FIBERGLASS DOOR
PART OR ASSEMBLY:	BUCK AND FRAME ANCHORING


Documents Prepared By:	Lyndon F. Schmidt P.E. No. 43409
	R^W BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813

Z:\2023 FBC Drawings\Therma-Tru\FL-20470 R4\FL-20470.4-6.dwg

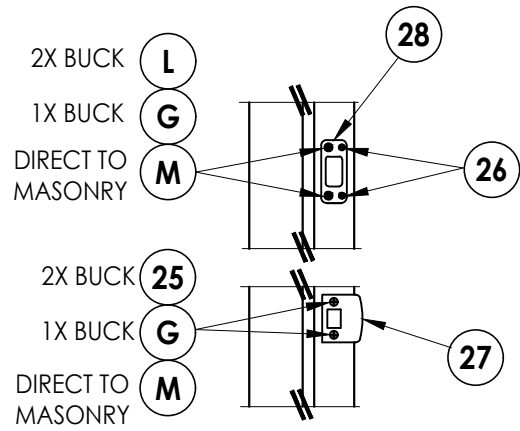

LATCH & DEADBOLT DETAIL


Kwikset

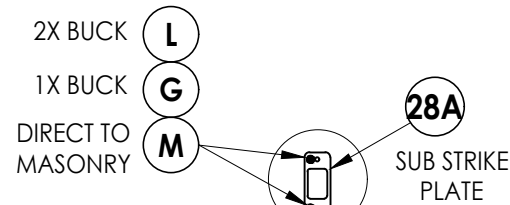

LATCH & DEADBOLT DETAIL

Schlage

LATCH & DEADBOLT STRIKE DETAILS

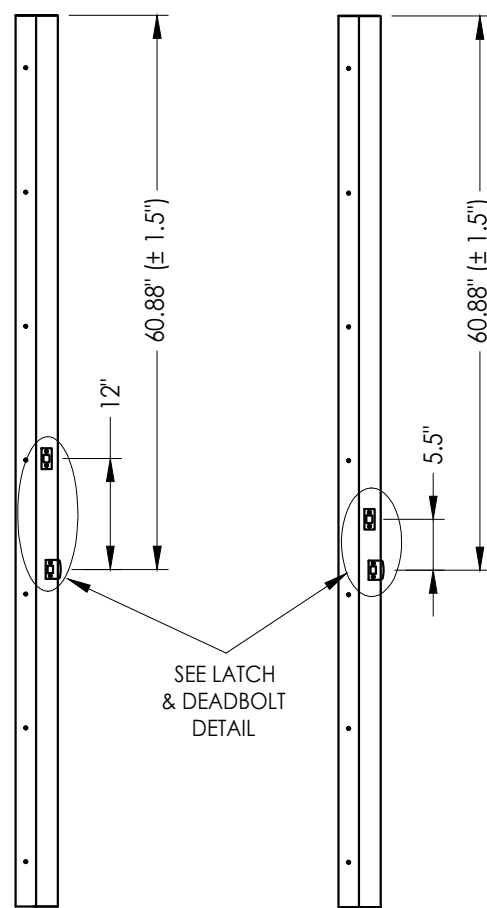


STRIKE JAMB

Latch & Deadbolt
(12" o.c. spacing)


STRIKE JAMB

Latch & Deadbolt
(5-1/2" o.c. spacing)

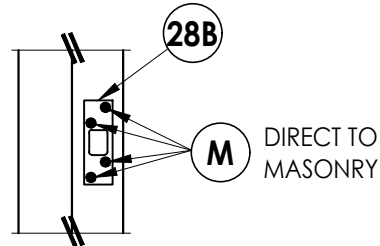


DEADBOLT STRIKE DETAILS


(Security Deadbolt Strike Plate)

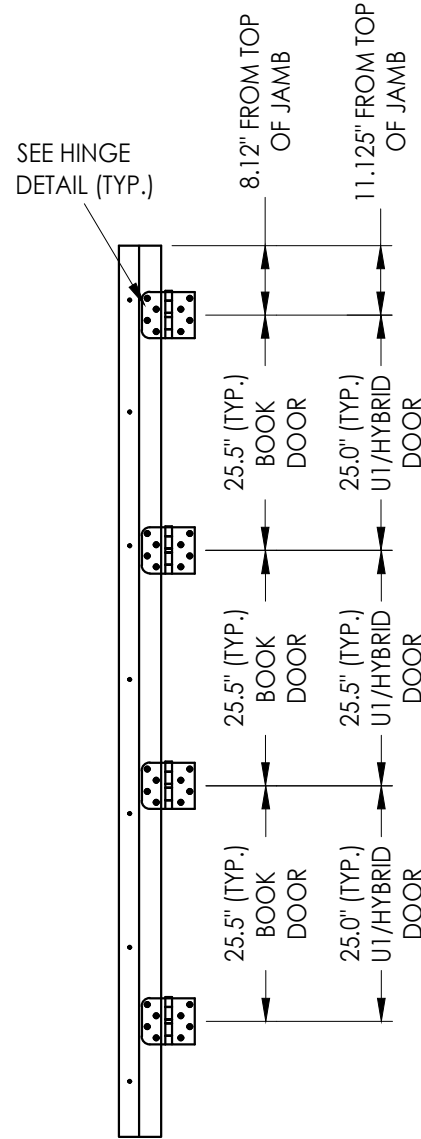

HINGE JAMB

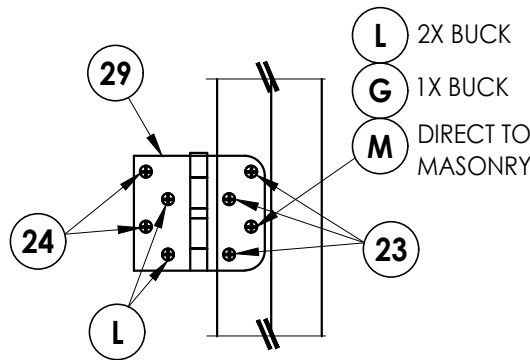


HINGE DETAIL

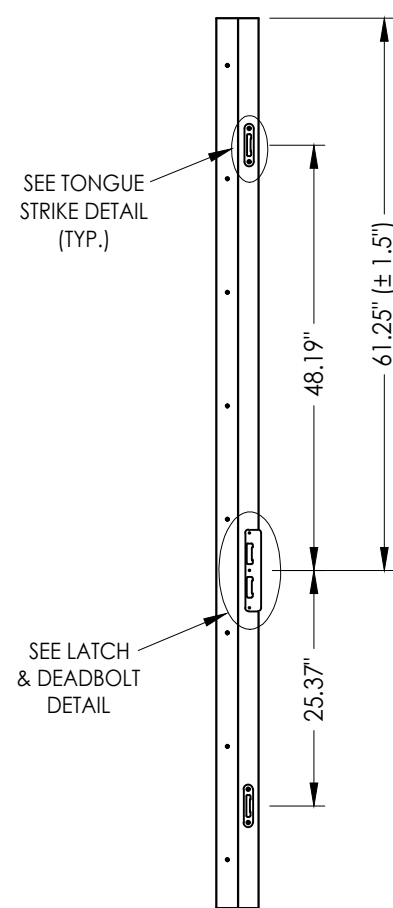


STRIKE JAMB

Multipoint Lock

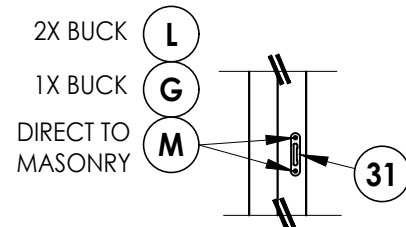

TONGUE STRIKE DETAIL

Multipoint Lock

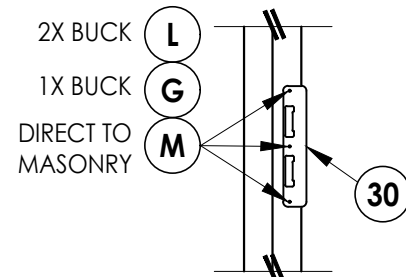

LATCH & DEADBOLT DETAIL

Multipoint Lock

MULTIPOINT LOCK STRIKE DETAILS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
HARDWARE DETAILS

NO.	DATE	REVISIONS			
		DATE	BY	CHK	LFS
4	7/25/23	UPDATE TO 8TH ED. (2023)	FBC	LFS	
3	7/22/20	UPDATE TO 7th ED (2020)	FBC	LFS	
2	4/06/19	ADD 5-1/2" LATCH/DB SPACING			
1	7/14/17	UPDATE TO 6TH ED. (2017)	FBC	JK	

DATE: 08/02/16

SCALE: N.T.S.

DWG. BY: JK


CHK. BY: LFS

DRAWING NO.:

FL-20470.4


SHEET 9 OF 11

Z:\2023 FBC Drawings\Therma-Tru\FL-20470 R4\FL-20470.4-6.dwg

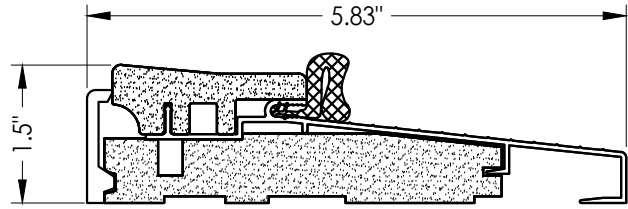


16 OUTSWING THRESHOLD
Composite Sill


MAX. +55 PSF
(where water infiltration is required)

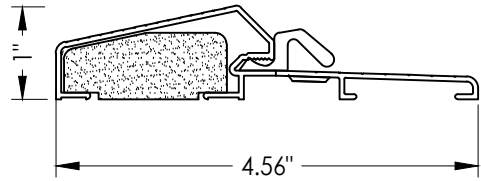


17 OUTSWING THRESHOLD
Composite / Aluminum Sill

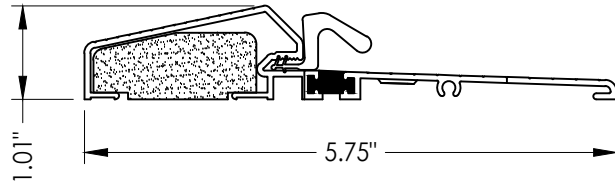


18 OUTSWING THRESHOLD
Composite / Aluminum Sill
(Thermal Break)

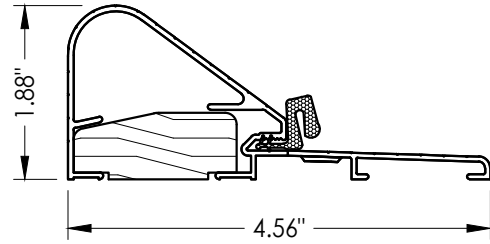


19 COASTAL OUTSWING THRESHOLD
Wood / Aluminum Sill

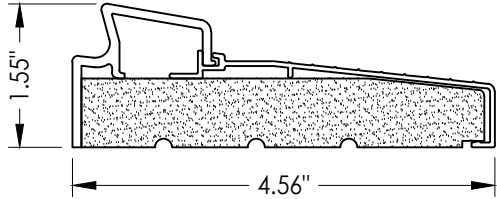


33 INSWING THRESHOLD
Inswing Basic Fixed Sill

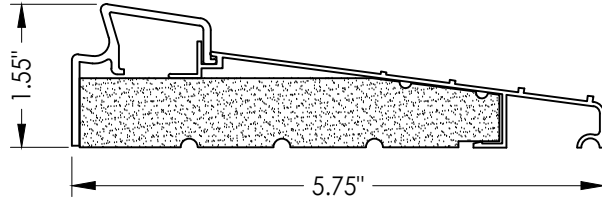


36 INSWING THRESHOLD
Inswing Basic Fixed 5-3/4" Sill

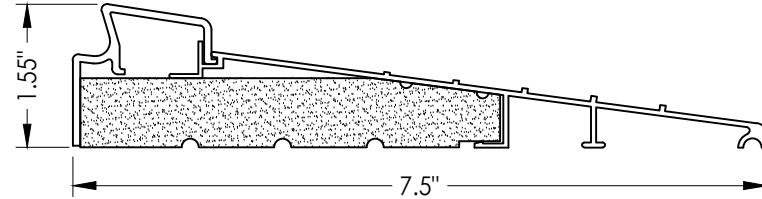


37 INSWING THRESHOLD
Inswing Basic Fixed 7-1/2" Sill

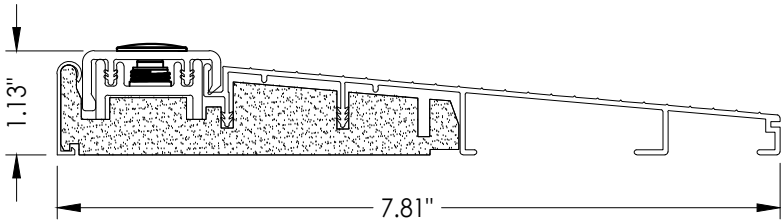


32 INSWING THRESHOLD
Inswing Composite Adjustable 7-3/4" Sill

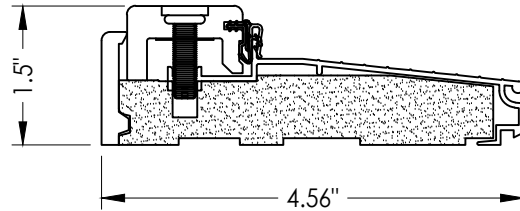


38 INSWING THRESHOLD
Inswing Composite Adjustable Sill

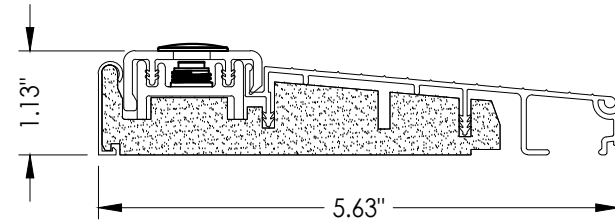


39 INSWING THRESHOLD
Inswing Composite Adjustable Sill

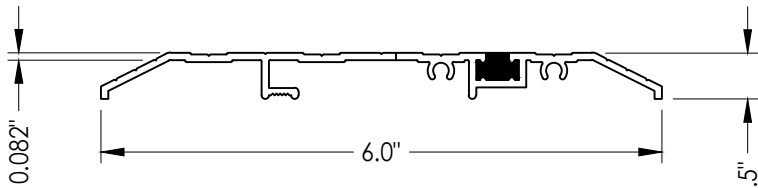


15 PUBLIC ACCESS THRESHOLD

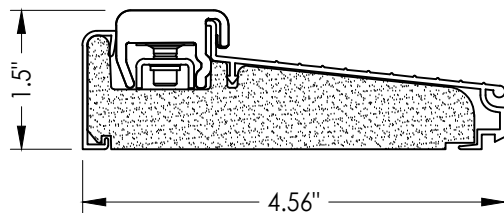


43 INSWING THRESHOLD
Inswing Composite Adjustable Sill
Book, Hybrid

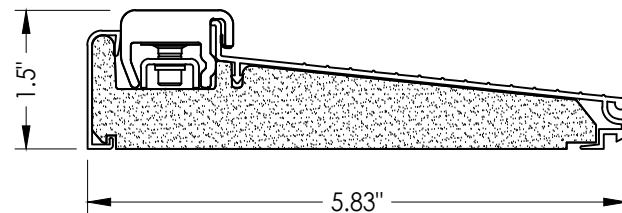


44 INSWING THRESHOLD
Inswing Composite Adjustable Sill
Book, Hybrid

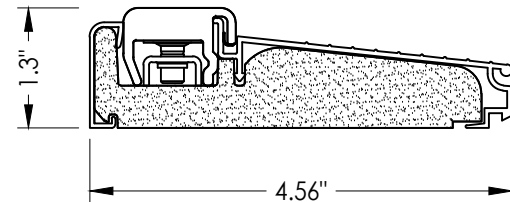


46 INSWING THRESHOLD
Inswing Composite Adjustable Sill
U1

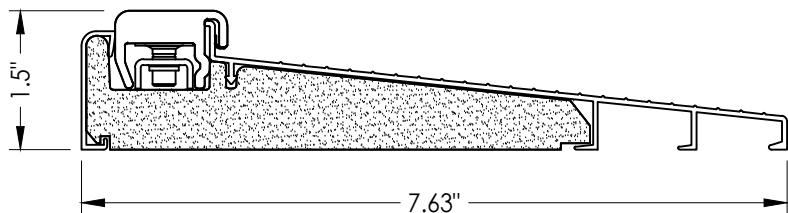

45 INSWING THRESHOLD
Inswing Composite Adjustable Sill
Book, Hybrid

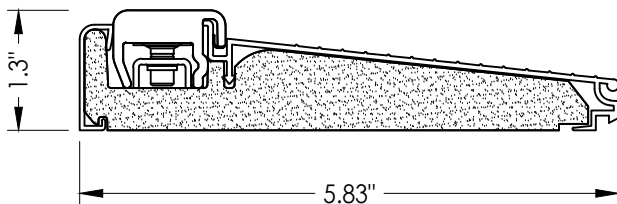

47 INSWING THRESHOLD
Inswing Composite Adjustable Sill
U1

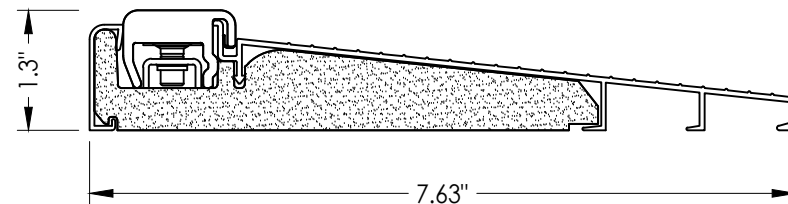

48 INSWING THRESHOLD
Inswing Composite Adjustable Sill
U1

Documents Prepared By:

RW BUILDING CONSULTANTS, INC.
P.O. Box 230 Valrico FL, 33595
Phone No.: 813.659.9197
Florida Board of Professional Engineers
Certificate Of Authorization No. 9813

PRODUCT: THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:

COMPONENTS

						REVISIONS	
						NO.	DATE
	4	7/25/23	UPDATE TO 8TH ED. (2023)	FBC	LFS		
	3	7/22/20	UPDATE TO 7th ED (2020)	FBC	LFS		
	2	4/06/19	ADD 5-1/2" LATCH/DB SPACING	FBC	LFS		
	1	7/14/17	UPDATE TO 6TH ED. (2017)	FBC	JK		

DATE: 08/02/16

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.: FL-20470.4

SHEET 10 OF 11

Z:\2023 FBC Drawings\Therma-Tru\FL-20470 R4\FL-20470.4-6.dwg

BILL OF MATERIALS			BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL	ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (SG >= 0.42)	WOOD	25	#8 x 2-1/2" PFH WOOD SCREW	STEEL
B	2X BUCK (SG >= 0.42)	WOOD	26	#8 x 5/8" PFH WOOD SCREW	STEEL
C	1/4" MAX. SHIM SPACE	-	27	LATCH STRIKE PLATE	STEEL
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL	28	DEADBOLT STRIKE PLATE (STANDARD)	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE	28A	DEADBOLT SUB STRIKE PLATE	STEEL
			28B	DEADBOLT STRIKE PLATE (SECURITY)	STEEL
G	3/16" X 3-1/4" ITW CONCRETE SCREW	STEEL	29	4" X 4" HINGE	STEEL
J	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL	30	LATCH & DEADBOLT STRIKE PLATE (TONGUE SYSTEM)	ALUM/COMP
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL	31	MULTIPOINT STRIKE PLATE (TONGUE SYSTEM)	ALUM/COMP
M	3/16" X 2-1/4" ITW CONCRETE SCREW	STEEL	32	INSWING THRESHOLD	ALUM/COMP
N	3/16" X 2-3/4" ITW CONCRETE SCREW	STEEL	33	INSWING THRESHOLD	ALUM/COMP
1	JAMB (FINGER JOINT PINE)	WOOD	36	INSWING THRESHOLD	ALUM/COMP
6	WEATHERSTRIP (MEDIUM REACH)	FOAM	37	INSWING THRESHOLD	ALUM/COMP
7	WEATHERSTRIP (LONG REACH)	FOAM	38	INSWING THRESHOLD	ALUM/COMP
8	SWEEP	VINYL	39	INSWING THRESHOLD	ALUM/COMP
9	SWEEP (USE w/ MODERATE CLIMATE THRESHOLD)	VINYL	40	DOOR PANEL (BOOK)	-
10	SWEEP (USE w/ PUBLIC ACCESS THRESHOLD)	VINYL	41	DOOR PANEL (HYBRID)	-
15	PUBLIC ACCESS THRESHOLD	ALUM	42	DOOR PANEL (U1)	-
16	OUTSWING THRESHOLD	ALUM/COMP	43	INSWING THRESHOLD	ALUM/COMP
17	OUTSWING THRESHOLD	ALUM/COMP	44	INSWING THRESHOLD	ALUM/COMP
18	OUTSWING THRESHOLD	ALUM/COMP	45	INSWING THRESHOLD	ALUM/COMP
19	COASTAL OUTSWING THRESHOLD	ALUM/WOOD	46	INSWING THRESHOLD	ALUM/COMP
22	#8 x 3/4" PFH WOOD SCREW	STEEL	47	INSWING THRESHOLD	ALUM/COMP
23	#10 x 3/4" PFH WOOD SCREW	STEEL	48	INSWING THRESHOLD	ALUM/COMP
24	#10 x 1" PFH WOOD SCREW	STEEL			


CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	AS SHOWN	1-1/2"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

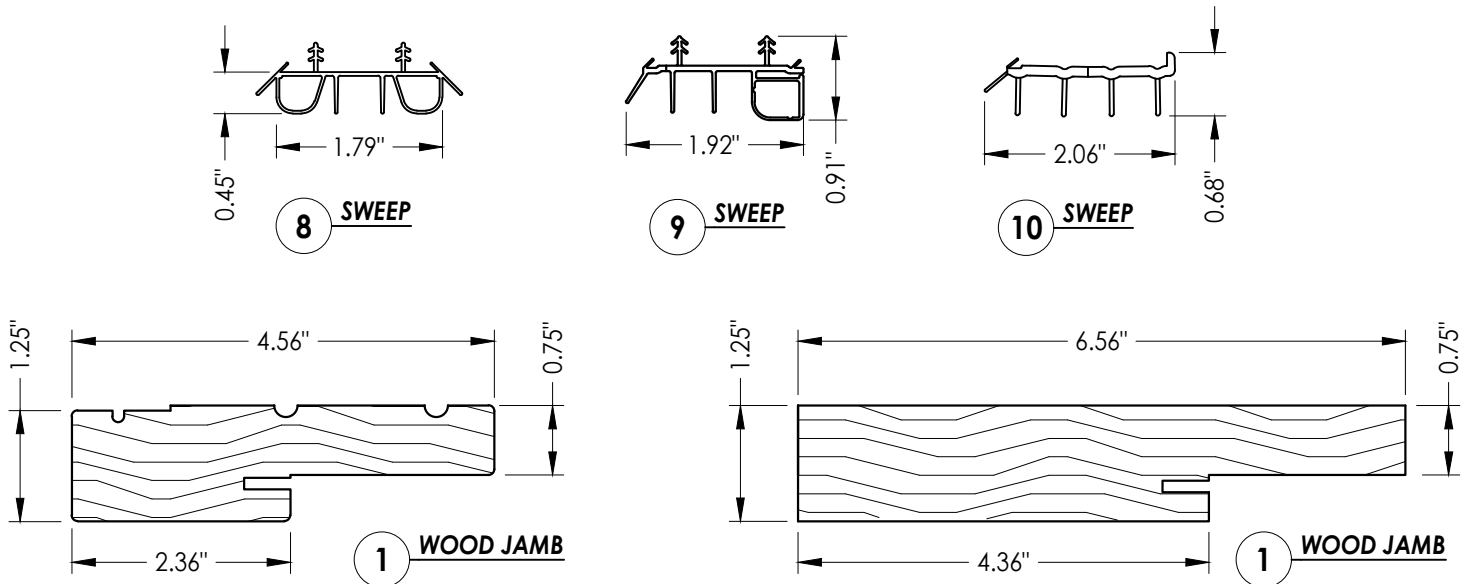

Documents Prepared By:

RW BUILDING CONSULTANTS, INC.
P.O. Box 230 Valrico FL, 33595
Phone No.: 813.659.9197
Florida Board of Professional Engineers
Certificate Of Authorization No. 9813

PRODUCT:

THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:

COMPONENTS
& BILL OF MATERIALS

DATE: 08/02/16

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.: FL-20470.4

SHEET 11 OF 11