

SERIES 82000 HORIZONTAL SLIDING WINDOW, NON-IMPACT


SHEET	DESCRIPTION
1.....	ELEVATION, GEN. NOTES
2.....	SECTION DETAILS
3.....	ANCHORAGE DETAILS, NOTES
4.....	B.O.M., JOINERY, PART DRAWINGS

TAFCO CORPORATION
1953 NORTH 17TH AVE.
MELROSE PARK, ILLINOIS 60160
PH: 847-678-8425


VINYL HORIZONTAL
SLIDING WINDOW
SERIES 82000

TABLE 1. DESIGN PRESSURE RATINGS

GLASS	DESIGN PRESSURE RATING	IMPACT RATING
1/8"-1/8" I.G. ANNEALED MINIMUM	+30/-30 PSF	NONE
5/32" ANNEALED MINIMUM	+20/-20 PSF	NONE

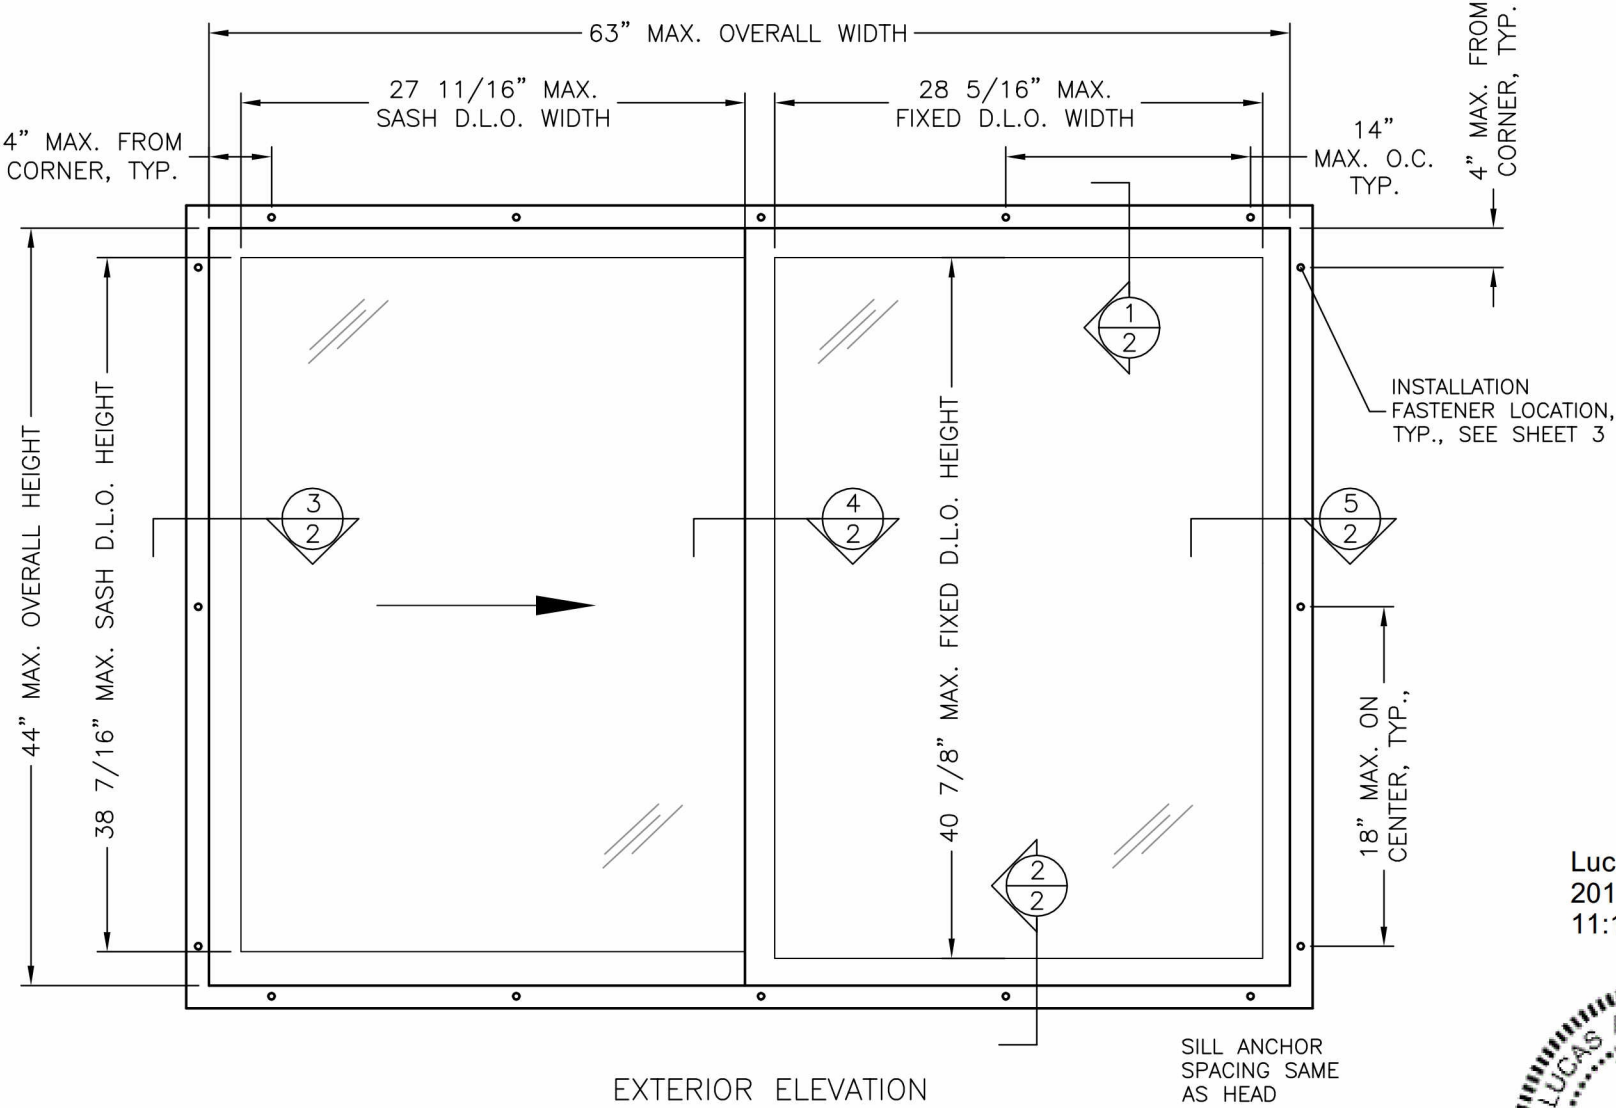

Lucas A. Turner
2016-06-17
11:18-04:00

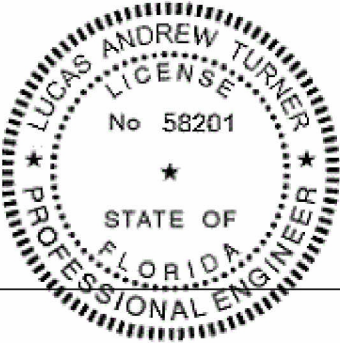

22

6/17/2016
LUCAS A. TURNER, P.E.
FL PE # 58201
TURNER ENGINEERING &
CONSULTING, INC.
(COA # 29779)
1239 JABARA AVE.
NORTH PORT, FL 34288
PH. 941-380-1574

GENERAL NOTES

1. THIS PRODUCT, FABRICATED AND ANCHORED AS DETAILED IN THIS DRAWING, IS NON-IMPACT RESISTANT AND REQUIRES THE USE OF IMPACT PROTECTIVE DEVICES (SHUTTERS) IN WINDBORNE DEBRIS REGIONS.
2. THIS PRODUCT HAS BEEN TESTED TO AAMA/WDMA/CSA 101/I.S.2/A440-08/11, AND MEETS THE REQUIREMENTS OF THE FLORIDA BUILDING CODE, 5TH EDITION (2014), NOT INCLUDING THE HIGH VELOCITY HURRICANE ZONE. PRODUCTS SHALL BE CONSTRUCTED AS INDICATED IN INTERTEK/ATI REPORTS F5086.01-109-44-R0 AND F9644.01-109-44-R0; FOR DETAILS NOT SHOWN IN THIS DRAWING SEE REPORTS.
3. ALLOWABLE CONFIGURATIONS: XO (OPERABLE/FIXED) OR OX (FIXED/OPERABLE)
4. THE DESIGN PRESSURE RATINGS AS SHOWN IN TABLE 1, THIS SHEET, ARE AS LIMITED BY ASTM E-1300 04 GLASS TABLES, AND TESTED WATER AND STRUCTURAL PRESSURES. OTHER GLASS, ANNEALED OR TEMPERED OF GREATER OR EQUAL THICKNESS TO THOSE NOTED IN TABLE 1, WHICH MEETS ASTM E 1300 REQUIREMENTS FOR EACH PROJECT, MAY BE USED.
5. THE 4/3 ALLOWABLE STRESS INCREASE FACTOR (SHORT-TERM INCREASE FACTOR) HAS NOT BEEN USED IN THE ANCHOR ANALYSIS FOR THIS SYSTEM. THE 1.6 Cd FACTOR WAS USED IN THE ANALYSIS OF ANCHORAGE INTO WOOD SUBSTRATE.
6. INSTALLATION OF WOOD BUCKS TO THE SUBSTRATE TO BE ENGINEERED BY OTHERS OR AS APPROVED BY THE AUTHORITY HAVING JURISDICTION (A.H.J.). BUCKING, OPENINGS, & BUCKING FASTENERS MUST BE PROPERLY DESIGNED & INSTALLED BY OTHERS IN ACCORDANCE WITH THE FBC TO TRANSFER SUPERIMPOSED LOADS TO THE STRUCTURE. ADEQUACY OF THE STRUCTURE TO RECEIVE THESE LOADS SHALL BE VERIFIED BY THE CONTRACTOR OR A.H.J.
7. DISSIMILAR MATERIALS THAT COME INTO CONTACT SHALL BE COATED OR OTHERWISE PROTECTED PER FBC CHAPTER 20 TO PREVENT GALVANIC REACTIONS. WOOD BUCKS, IF USED, SHALL BE PRESSURE TREATED, WITH EITHER A TREATMENT OR COATING COMPATIBLE WITH THIS PRODUCT. ALL ANCHORS USED SHALL BE OF A MATERIAL OR HAVE A COATING COMPATIBLE WITH THE PRESSURE TREATED WOOD BUCKS AND ALL OTHER WINDOW MATERIALS.
8. ALL HARDWARE & FASTENERS SHALL BE IN ACCORDANCE WITH THESE DRAWINGS, OR AS APPROVED, SIGNED, AND SEALED BY A FLORIDA-REGISTERED PROFESSIONAL ENGINEER ON A SITE-SPECIFIC BASIS.
9. SEALING AND FLASHING STRATEGIES FOR OVERALL WATER INFILTRATION RESISTANCE OF THE INSTALLED PRODUCT SHALL BE THE RESPONSIBILITY OF OTHERS AND IS NOT ADDRESSED BY THIS DOCUMENT.

DRAWN BY:

LAT

DATE:

6/15/16

SCALE:

NTS

REVISION:

REVISION:

DRAWING #


FPA-82000

SHEET DESCRIPTION

NOTES,
ELEVATION


SHEET
1 of 4

1
2

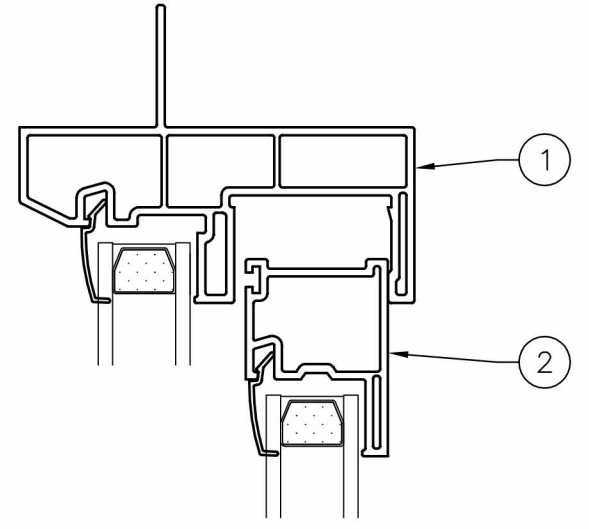


TYP. I.G.
GLAZING
DETAILK


2
2

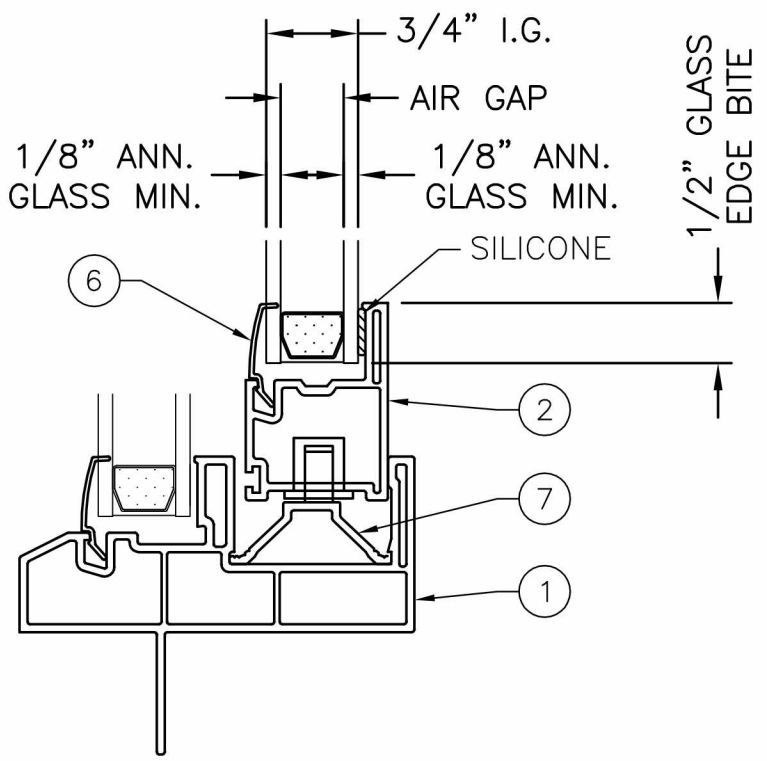


TYPICAL VERTICAL SECTION

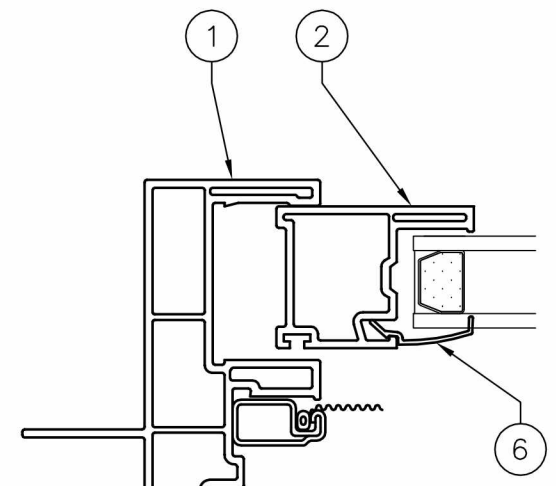

3
2

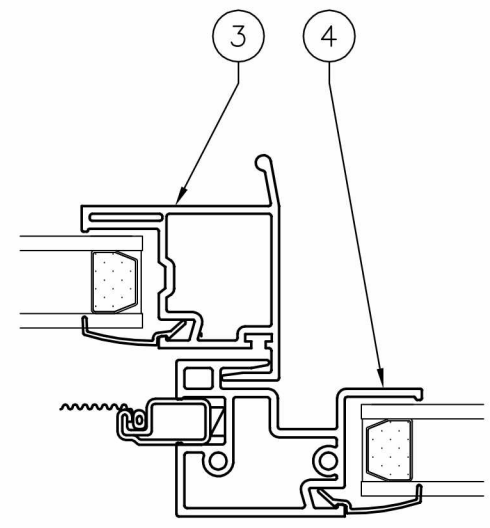


4
2

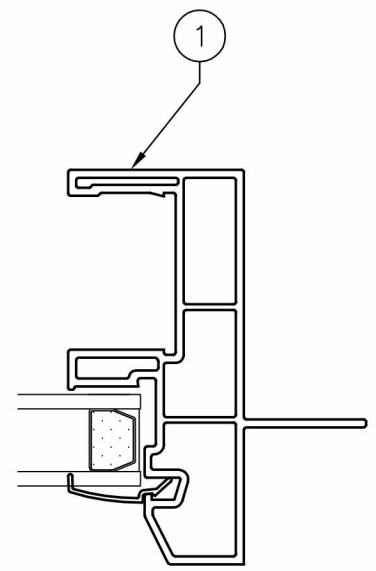


5
2

TYPICAL HORIZONTAL SECTION

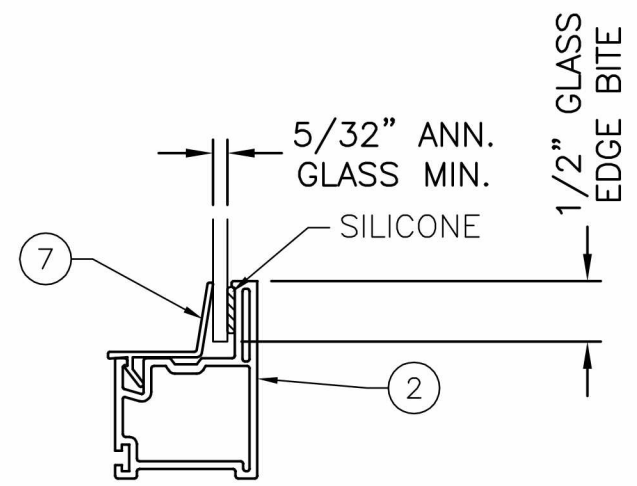

TYPICAL SINGLE GLAZING DETAIL

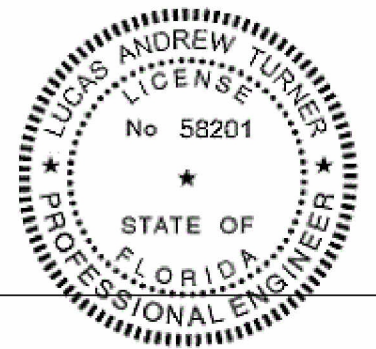


LT
6/17/2016
LUCAS A. TURNER, P.E.
FL PE # 58201
TURNER ENGINEERING &
CONSULTING, INC.
(COA # 29779)
1239 JABARA AVE.
NORTH PORT, FL 34288
PH. 941-380-1574

TAFCO CORPORATION
1953 NORTH 17TH AVE.
MELROSE PARK, ILLINOIS 60160
PH: 847-678-8425

VINYL HORIZONTAL
SLIDING WINDOW
SERIES 82000


DRAWN BY:	LAT
DATE:	6/15/16
SCALE:	NTS
REVISION:	
REVISION:	
DRAWING #	FPA-82000
SHEET DESCRIPTION	SECTION DETAILS
SHEET	2 of 4

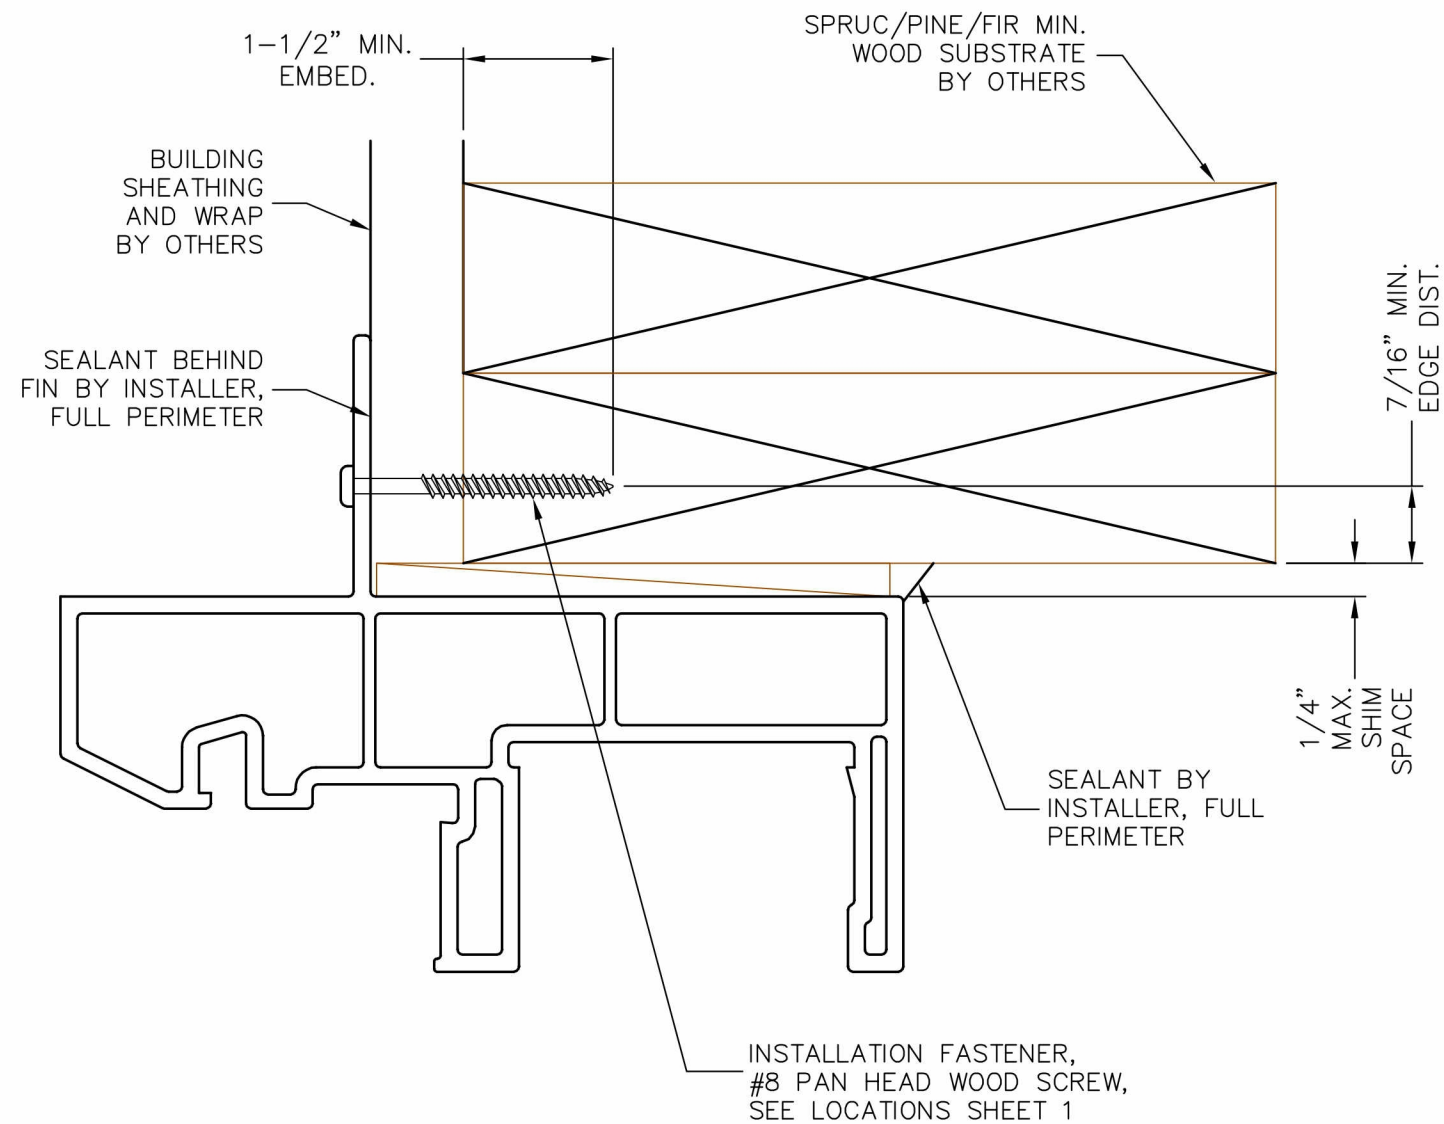

TYPICAL INSTALLATION HEAD, SILL, AND JAMB

GENERAL ANCHOR NOTES:

1. INSTALL ONE ANCHOR AS SHOWN ABOVE AT EACH LOCATION SHOWN IN THE ELEVATION ON SHEET 1 FOR PRODUCT PERIMETER.
2. INSTALL SHIMS AT EACH ANCHOR LOCATION WHERE A GAP OF 1/16" OR GREATER EXISTS BETWEEN PRODUCT FRAME AND SUBSTRATE.
3. SHIMS SHALL BE LOAD-BEARING (PLASTIC OR METALLIC) AND CAPABLE OF TRANSFERRING LOADS TO SUBSTRATE.
4. SPECIFIED ANCHOR EMBEDMENT TO WOOD SUBSTRATE SHALL BE BEYOND SHEATHING, WALL FINISH OR STUCCO.
5. THE INSTALLATION DETAIL SHOWN IS ALSO APPLICABLE FOR INSTALLATION TO WOOD BUCKS INSTALLED OVER CONCRETE/MASONRY, WITH ATTACHMENT OF 2X TO CONCRETE/MASONRY BY OTHERS.

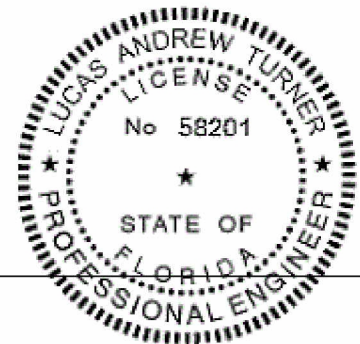

6/17/2016
 LUCAS A. TURNER, P.E.
 FL PE # 58201
 TURNER ENGINEERING &
 CONSULTING, INC.
 (COA # 29779)
 1239 JABARA AVE.
 NORTH PORT, FL 34288
 PH. 941-380-1574

TAFCO CORPORATION
 1953 NORTH 17TH AVE.
 MELROSE PARK, ILLINOIS 60160
 PH: 847-678-8425

VINYL HORIZONTAL
 SLIDING WINDOW
 SERIES 82000

DRAWN BY:

LAT

DATE:

6/15/16

SCALE:

NTS

REVISION:

REVISION:

DRAWING #

FPA-82000


SHEET DESCRIPTION

INSTALLATION
 DETAILS


SHEET
 3 of 4

82000 SERIES WINDOW BILL OF MATERIALS


ITEM NO.	DWG. NO.	NAME	MATERIAL	DESCRIP.
1	HMST82-01	MAIN FRAME	PVC	EXTRUSION
2	HMST82-03	SASH	PVC	EXTRUSION
3	HMST82-05	LOCKED SASH	PVC	EXTRUSION
4	HMST82-06	INTERLOCK	PVC	EXTRUSION
5	HMST82-07	TRACK	PVC	EXTRUSION
6	HMST130-10B	IG GLASS BEAD	PVC	EXTRUSION
7	HMST130-10A	SINGLE GLASS BEAD	PVC	EXTRUSION

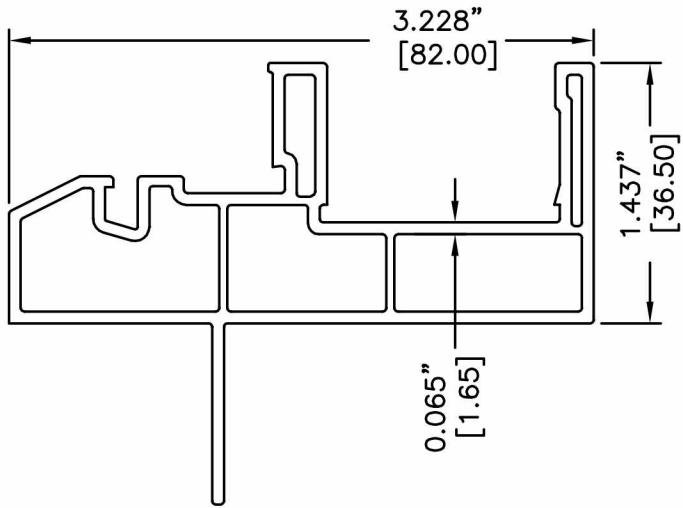


1 MAIN FRAME
HMST82-01

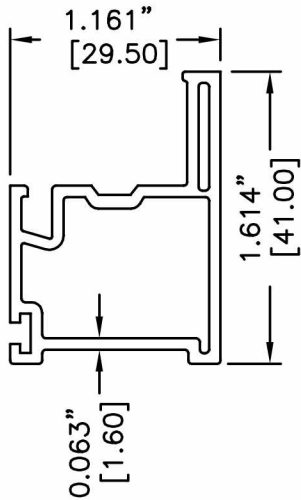


2 SASH
HMST82-03

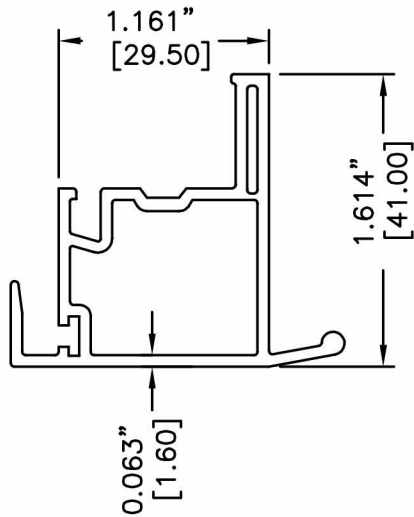


3 LOCKED SASH
HMST82-05

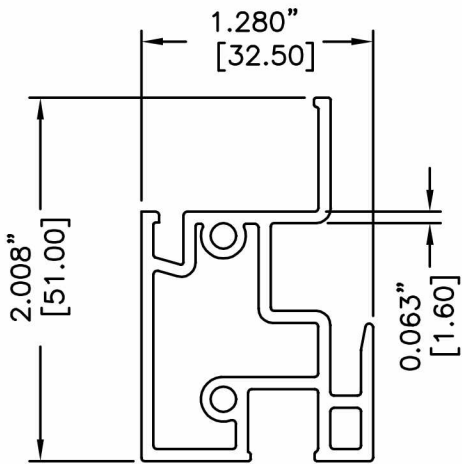


4 INTERLOCK
HMST82-06

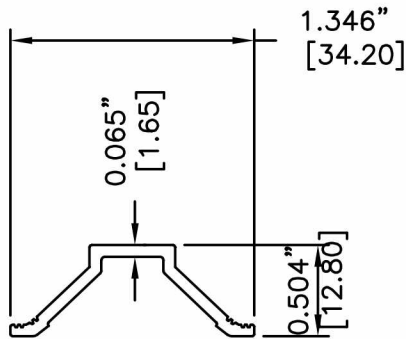


5 TRACK
HMST82-07

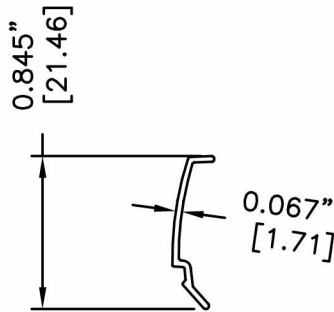

6 IG GLASS BEAD
HMST130-10B

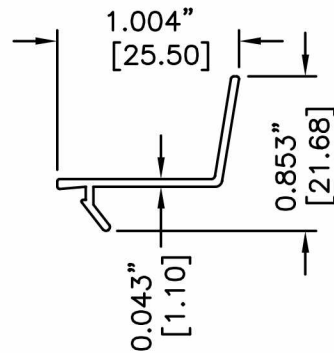

7 SINGLE GLASS BEAD
HMST130-10A

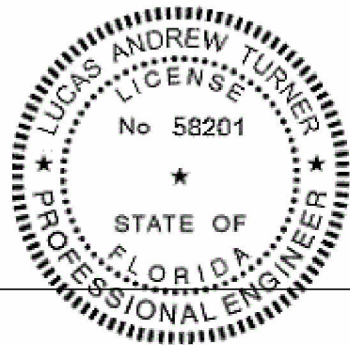

6/17/2016
LUCAS A. TURNER, P.E.
FL PE # 58201
TURNER ENGINEERING &
CONSULTING, INC.
(COA # 29779)
1239 JABARA AVE.
NORTH PORT, FL 34288
PH. 941-380-1574

DRAWN BY:	LAT
DATE:	6/15/16
SCALE:	NTS
REVISION:	
REVISION:	
DRAWING #	FPA-82000
SHEET DESCRIPTION	BOM, PART DWGS, CORNER
SHEET	4 of 4

TAFCO CORPORATION
1953 NORTH 17TH AVE.
MELROSE PARK, ILLINOIS 60160
PH: 847-678-8425

VINYL HORIZONTAL
SLIDING WINDOW
SERIES 82000