
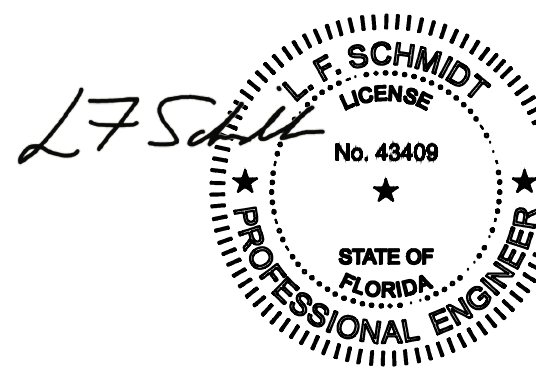


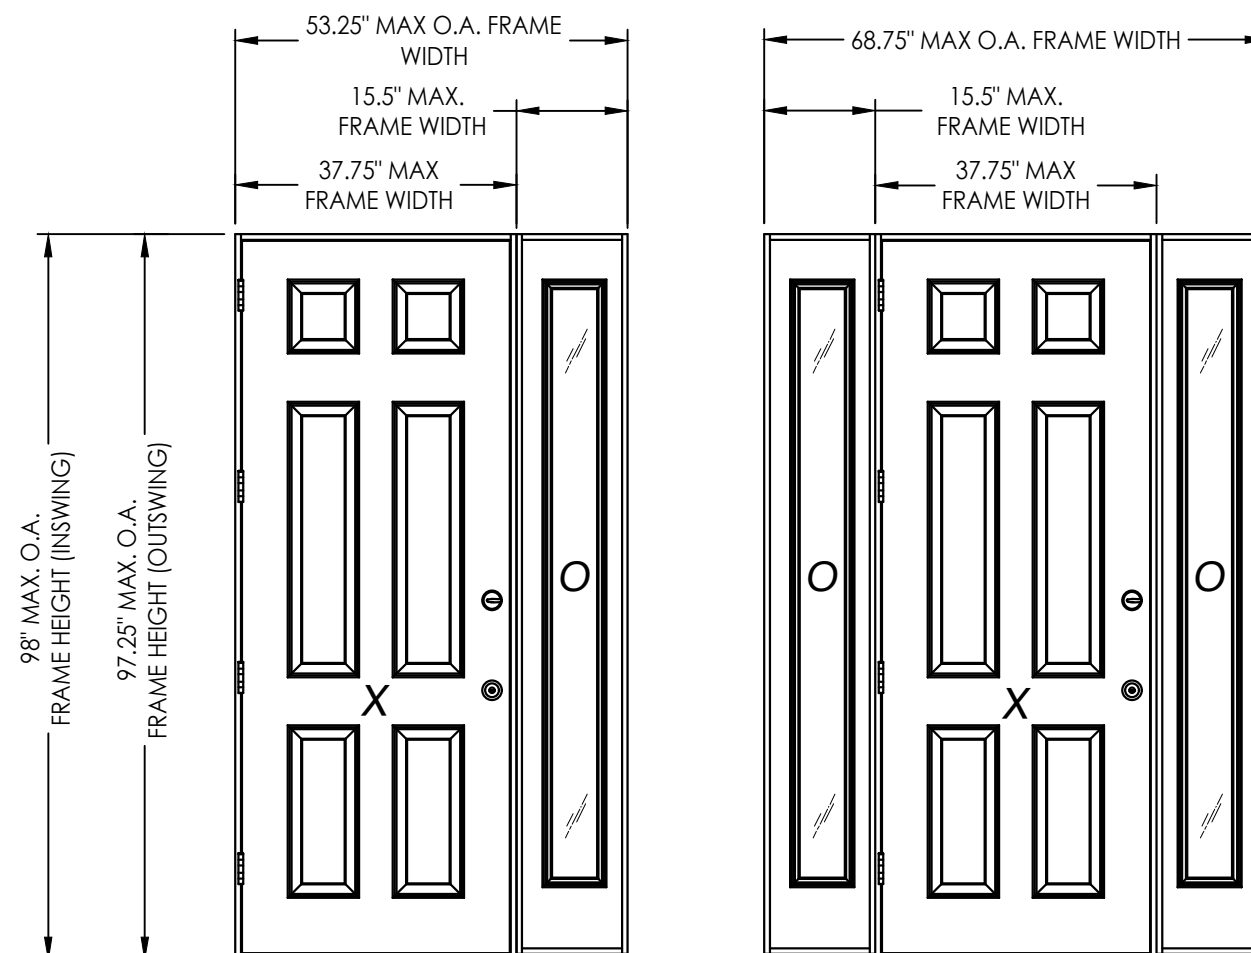


This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.

Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.


THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

[illegible]





Z:\2023 FBC Drawings\Therma-Tru\FL-21135 R7\FL-21135.10-13.dwg

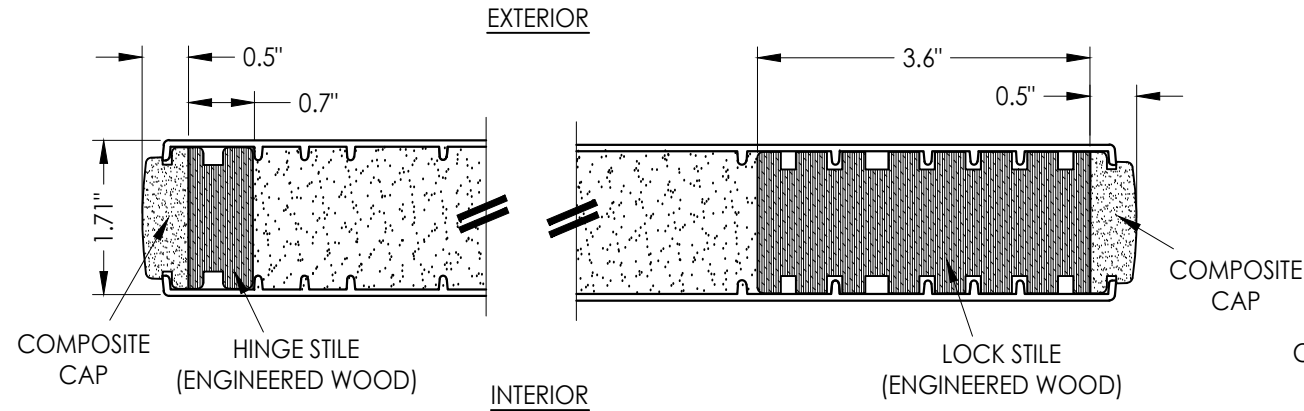

1
2 HORIZONTAL CROSS SECTION

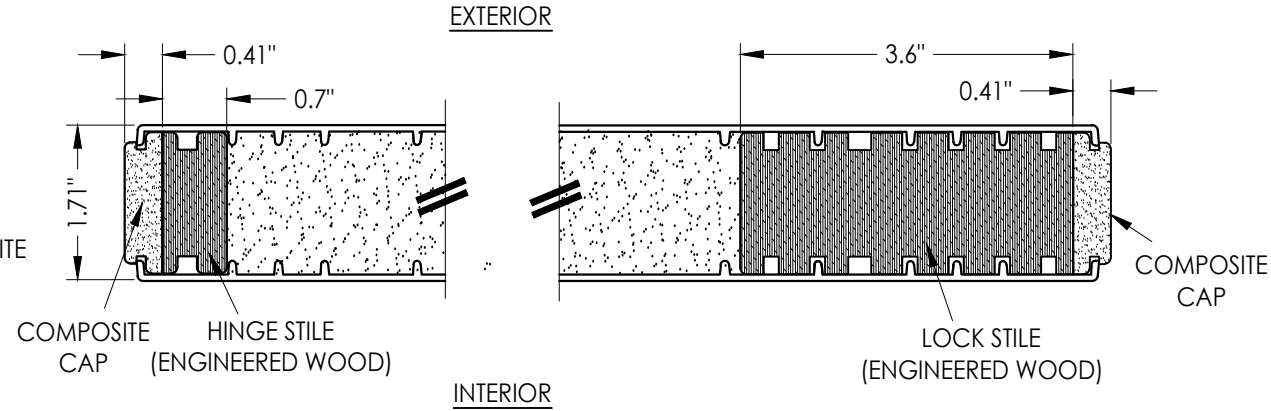

2
2 HORIZONTAL CROSS SECTION

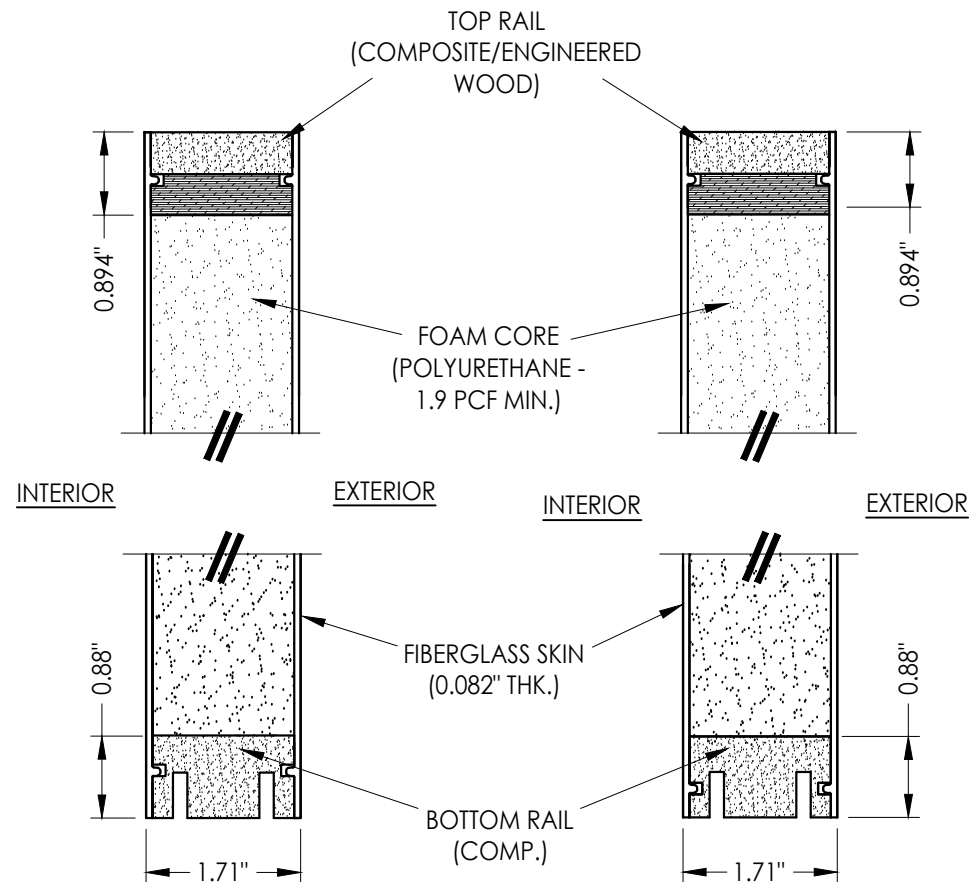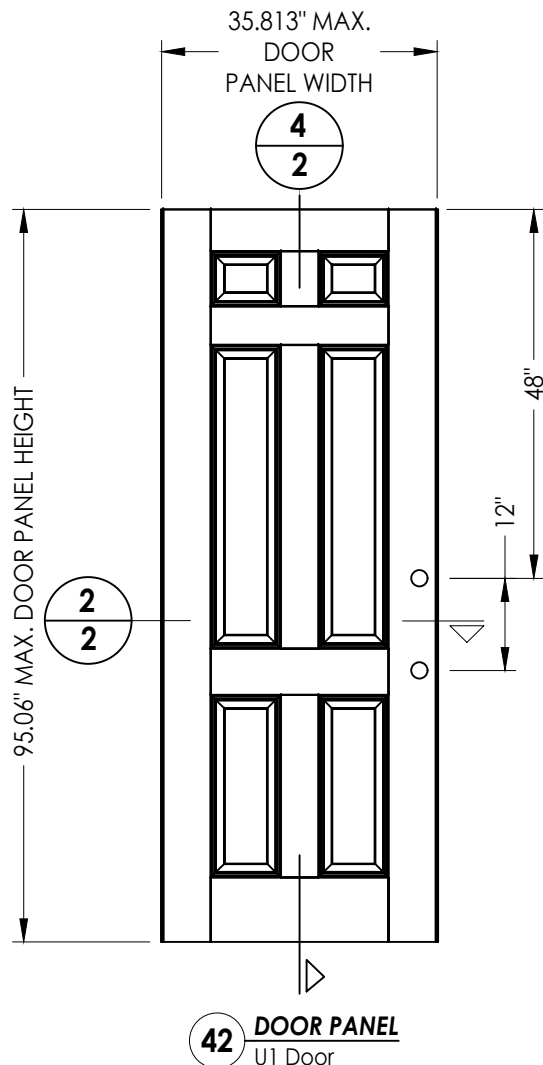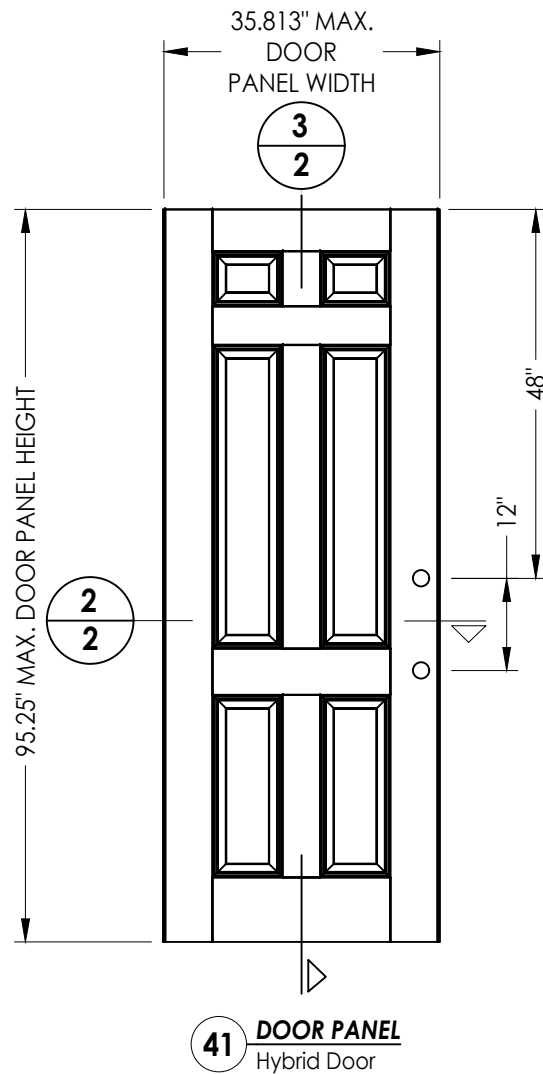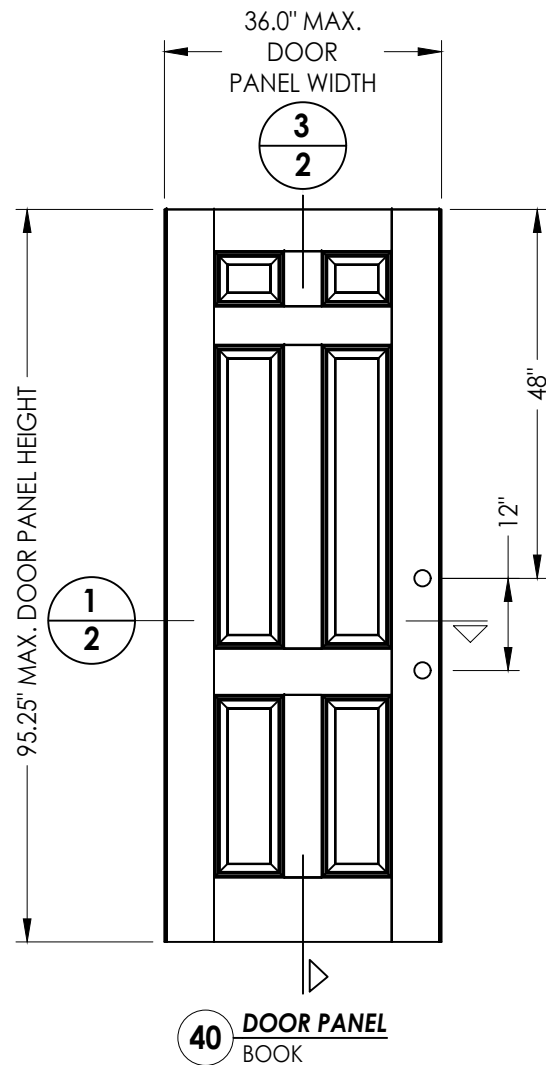

3
2 VERTICAL CROSS SECTION

4
2 VERTICAL CROSS SECTION

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
DOOR PANEL DETAILS


NO.	DATE	REVISIONS
3	7/2/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	8/21/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	7/16/20	UPDATE TO 7th ED (2020) FBC PO

DATE: 03/07/20
SCALE: N.T.S.
DWG. BY: TJ
CHK. BY: LFS
DRAWING NO.: FL-21135.13
SHEET 2 OF 14


Z:\2023 FBC Drawings\Therma-Tru\FL-21135 R7\FL-21135.10-13.dwg

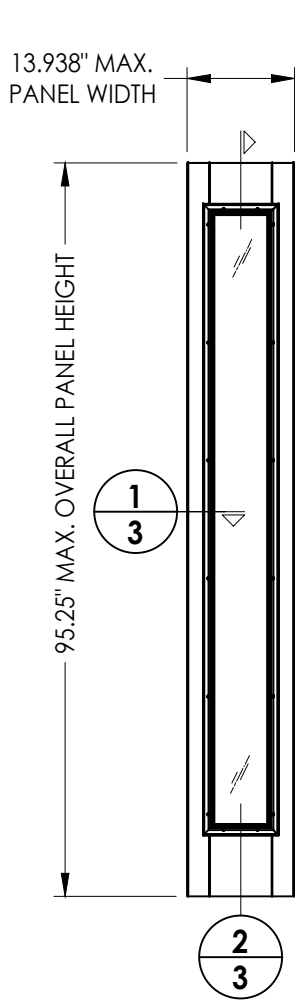


50 **SIDELITE PANEL**
FULL LITE
LIP LITE

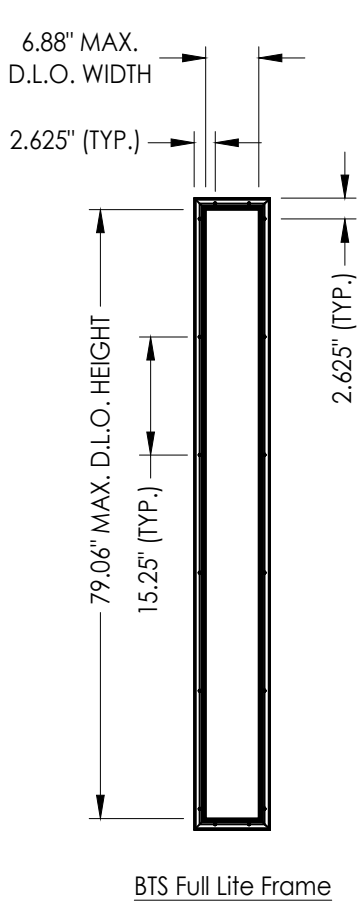


60 **SIDELITE PANEL**
FULL LITE
FLUSH GLAZED

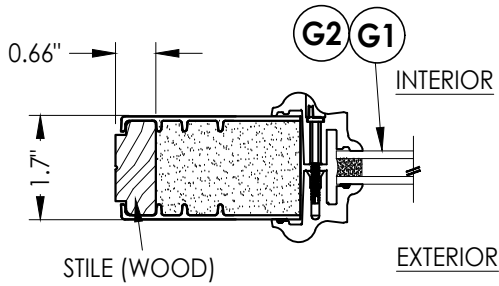


1 **HORIZONTAL CROSS SECTION**
3 Lip Lite Glazing

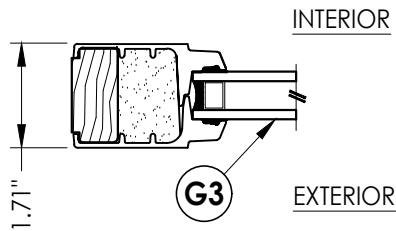

3 **HORIZONTAL CROSS SECTION**
3 Flush Glazed

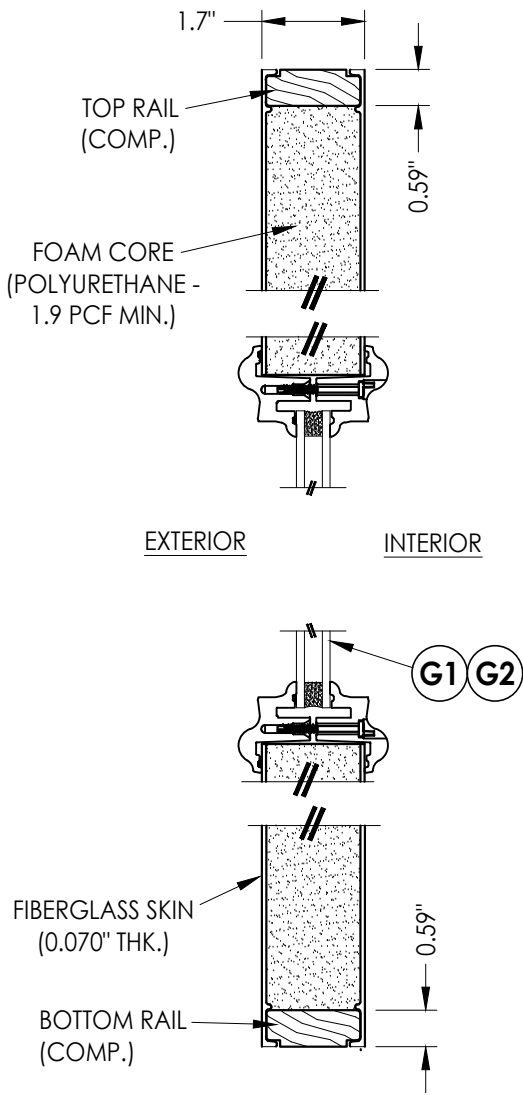

2 **VERTICAL CROSS SECTION**
3 Lip Lite Glazing

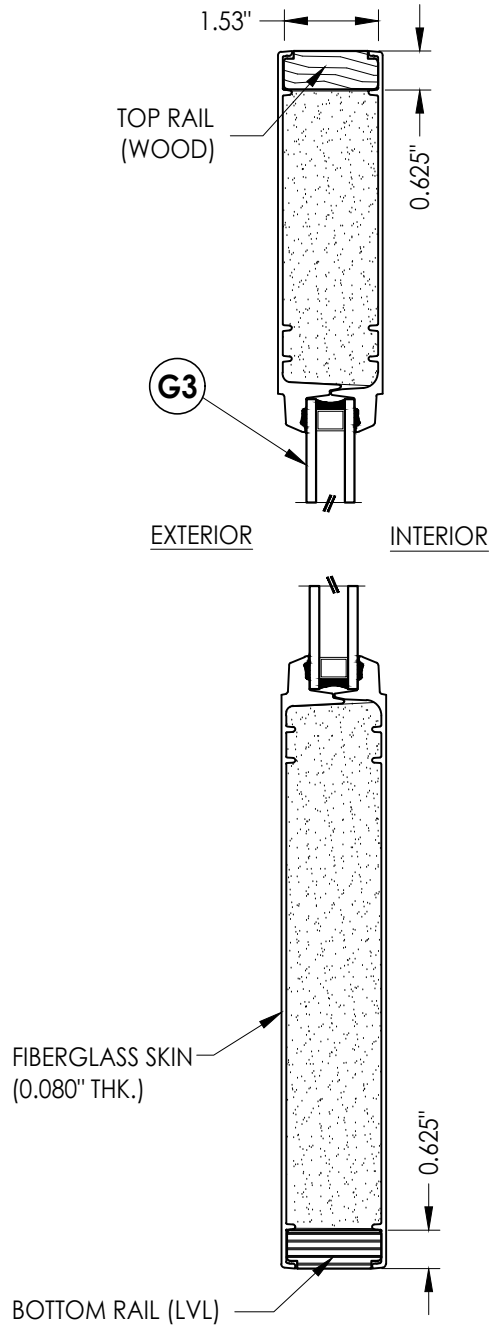

4 **VERTICAL CROSS SECTION**
3 Flush Glazed

REVISIONS			
NO.	DATE	BY	PO
3	7/2/26	UPDATE TO 9TH ED. (2026)	FBC
2	8/21/23	UPDATE TO 8TH ED. (2023)	FBC
1	7/16/20	UPDATE TO 7th ED (2020)	FBC

DATE: 03/07/20

SCALE: N.T.S.

DWG. BY: TJ

CHK. BY: LFS

DRAWING NO.:

FL-21135.13


SHEET 3 OF 14

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR


PART OR ASSEMBLY:
SIDELITE PANEL DETAILS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

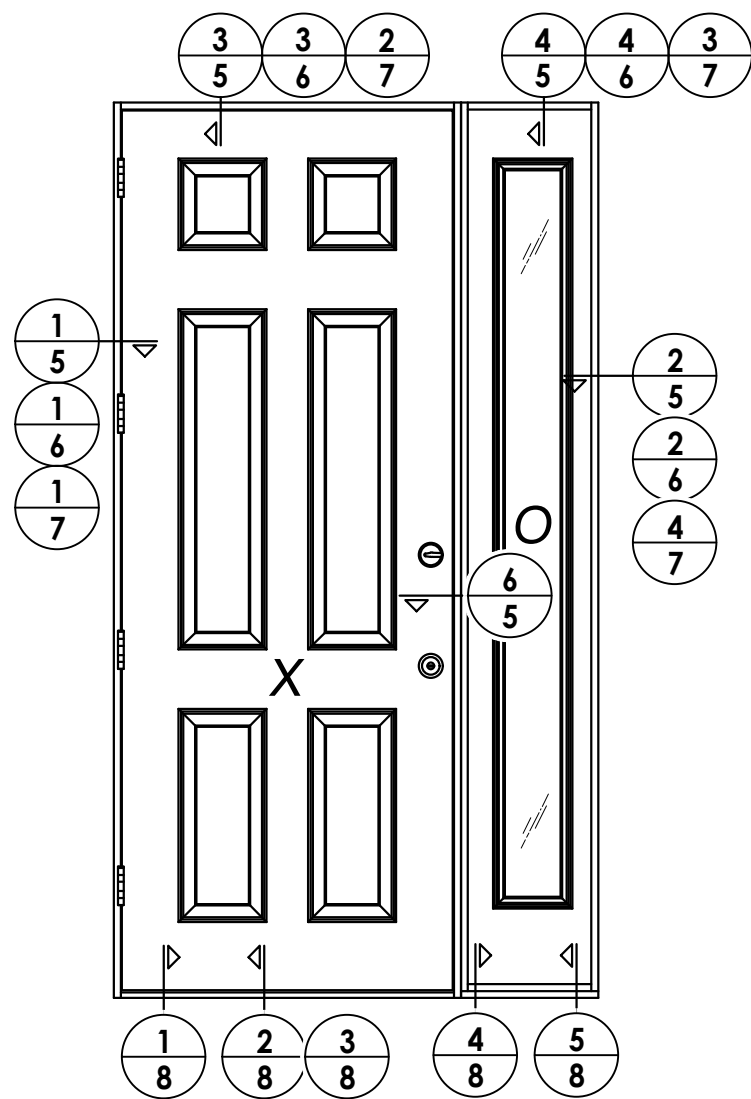

ELEVATION
XO

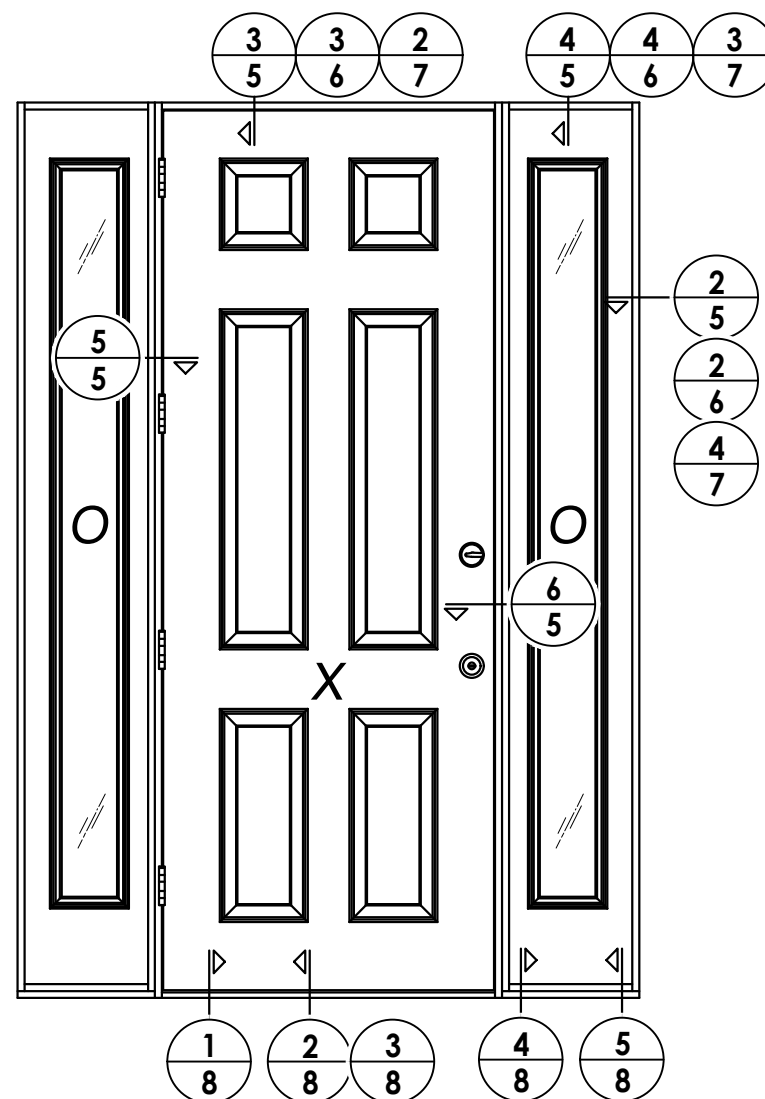

ELEVATION
OXO

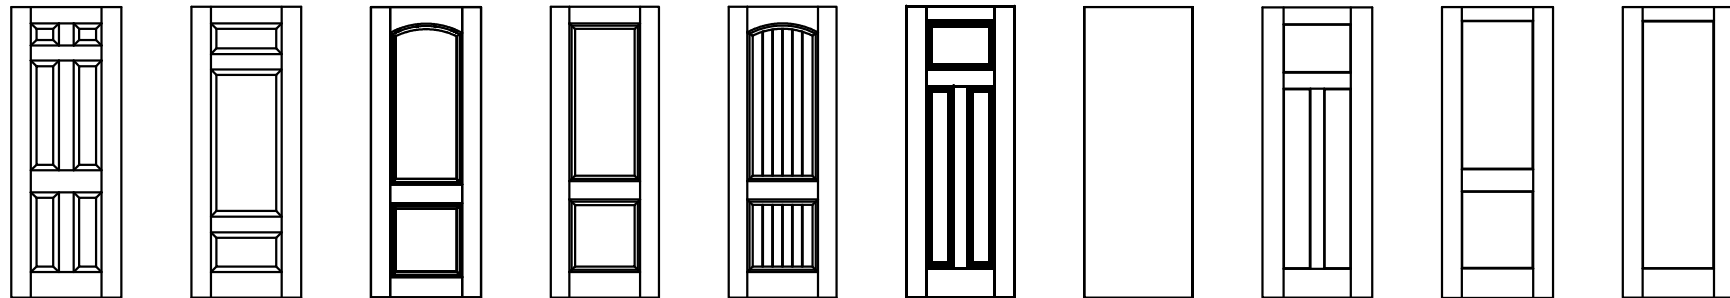

Benchmark Door Panel Options

Products approved include all embossed and recessed panel doors.
Similar opaque panel configurations are allowed.
Panels shown are for illustration and are representative only.

HARDWARE TABLE		
MANUFACTURER	MODEL	
SCHLAGE	KNOB: F51 DEADBOLT: B60	
KWIKSET	KNOB: SIGNATURE SERIES DEADBOLT: SIGNATURE SERIES (980)	

[illegible]


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

THERMA-TRU
FIBERGLASS DOOR


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2020 R.W. BUILDING CONSULTANTS INC.


Z:\2023 FBC Drawings\Therma-Tru\FL-21135 R7\FL-21135.10-13.dwg

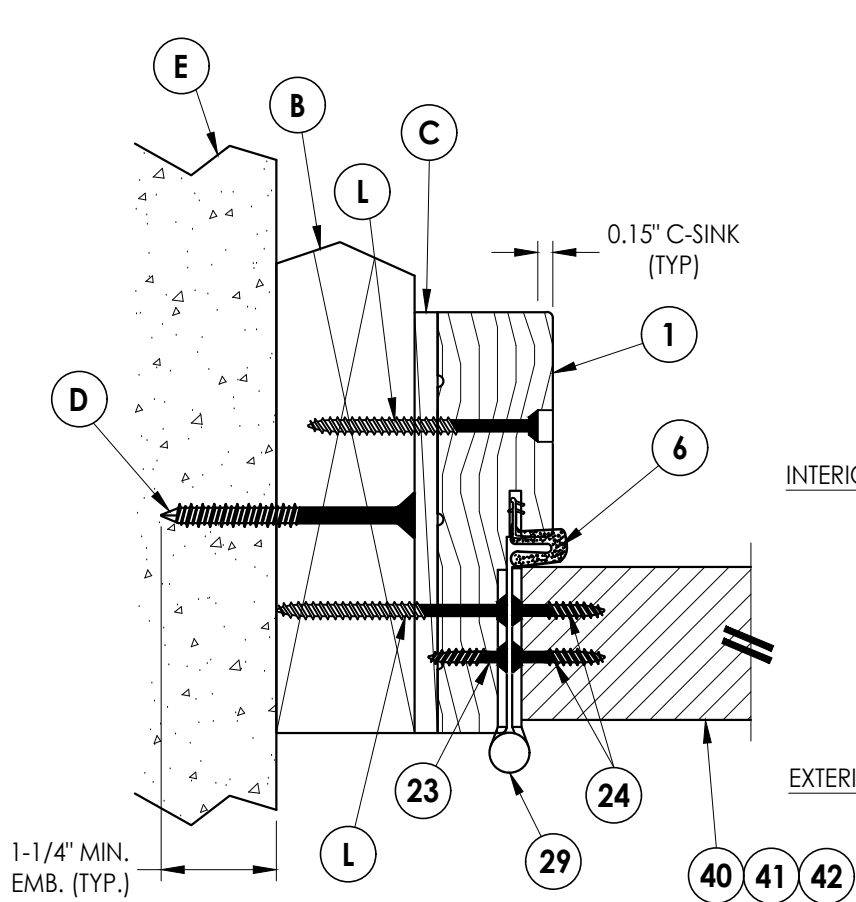


1 HORIZONTAL CROSS SECTION
5 Shown w/ 2X Buck
Outswing shown (Inswing similar)

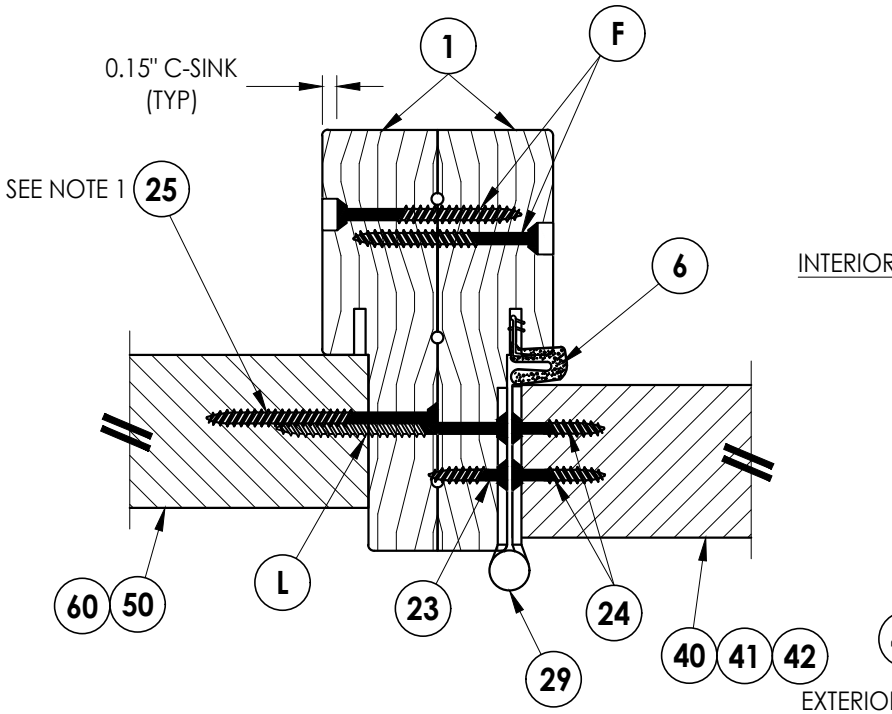


5 HORIZONTAL CROSS SECTION
5 Outswing shown (Inswing similar)

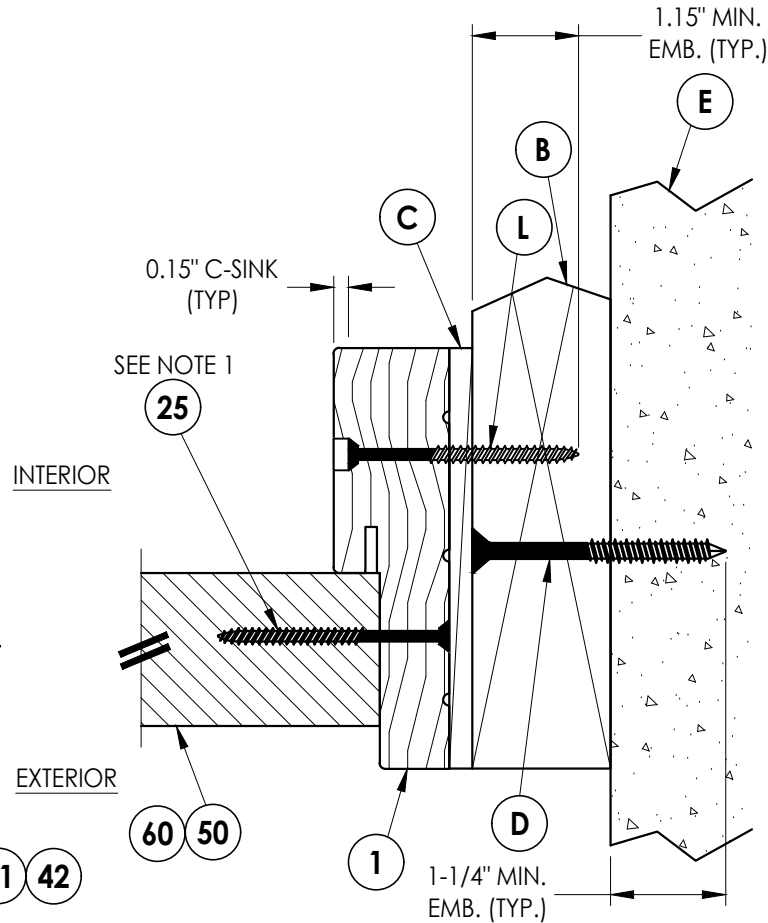


2 HORIZONTAL CROSS SECTION
5 Shown w/ 2X Buck
Outswing shown (Inswing similar)

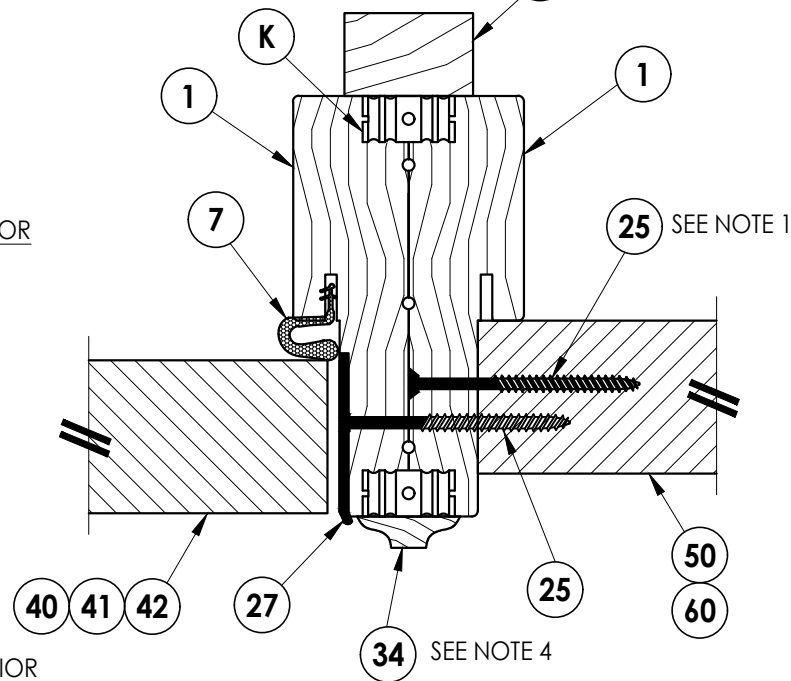

6 HORIZONTAL CROSS SECTION
5 Outswing shown (Inswing similar)
Shown with Optional Corrugated Fasteners

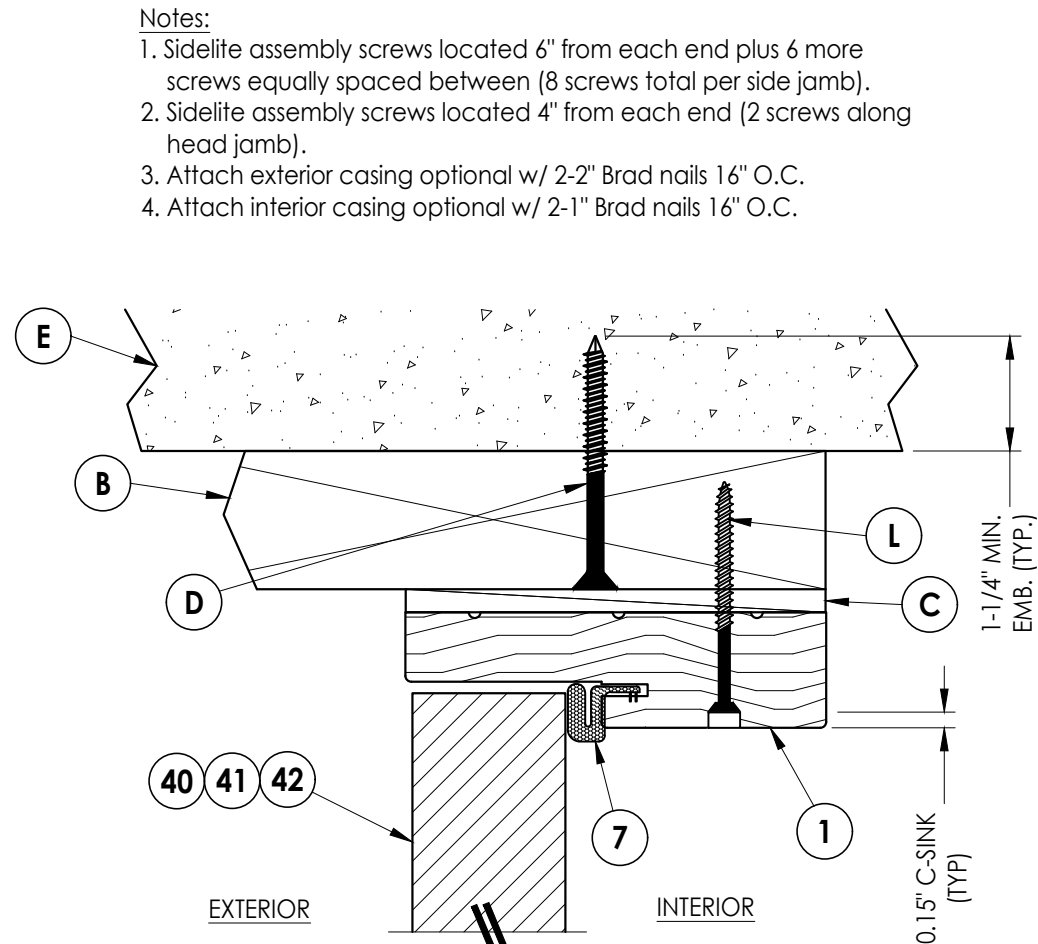

3 VERTICAL CROSS SECTION
5 Shown w/ 2X Buck
Outswing shown (Inswing similar)

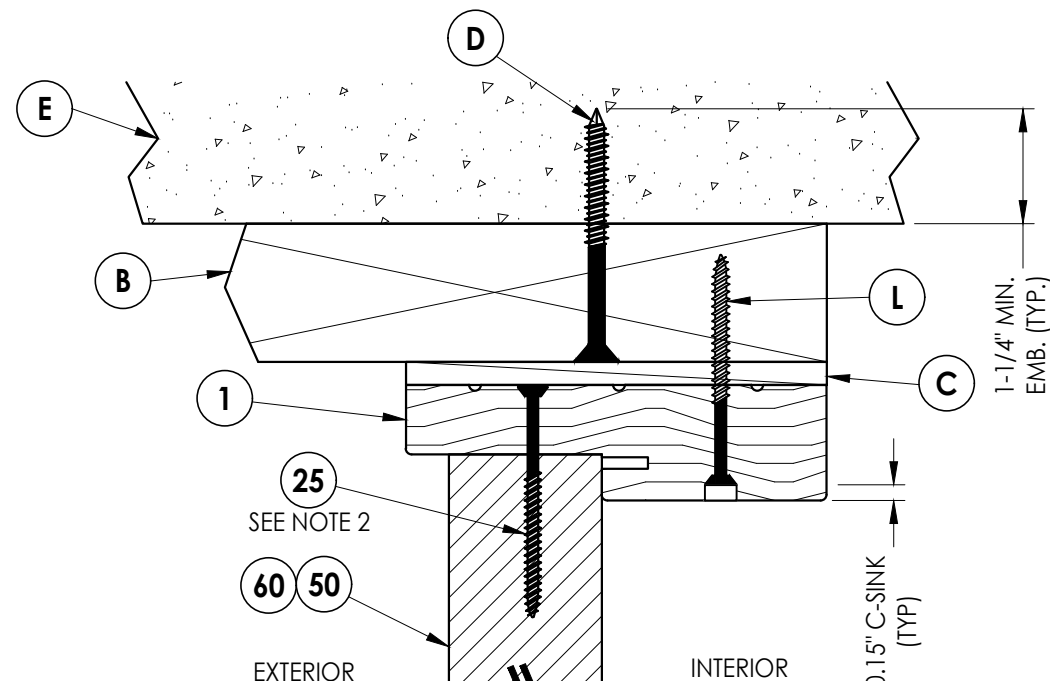

4 VERTICAL CROSS SECTION
5 Shown w/ 2X Buck
Outswing shown (Inswing similar)

- Notes:
1. Sidelite assembly screws located 6" from each end plus 6 more screws equally spaced between (8 screws total per side jamb).
 2. Sidelite assembly screws located 4" from each end (2 screws along head jamb).
 3. Attach exterior casing optional w/ 2-2" Brad nails 16" O.C.
 4. Attach interior casing optional w/ 2-1" Brad nails 16" O.C.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (2X BUCK)

NO.	DATE	REVISIONS
3	7/2/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	8/21/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	7/16/20	UPDATE TO 7th ED (2020) FBC PO

DATE: 03/07/20

SCALE: N.T.S.

DWG. BY: TJ


CHK. BY: LFS

DRAWING NO.: FL-21135.13


SHEET 5 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-21135 R7\FL-21135.10-13.dwg


- Notes:
1. Sidelite assembly screws located 6" from each end plus 6 more screws equally spaced between (8 screws total per side jamb).
 2. Sidelite assembly screws located 4" from each end (2 screws along head jamb).

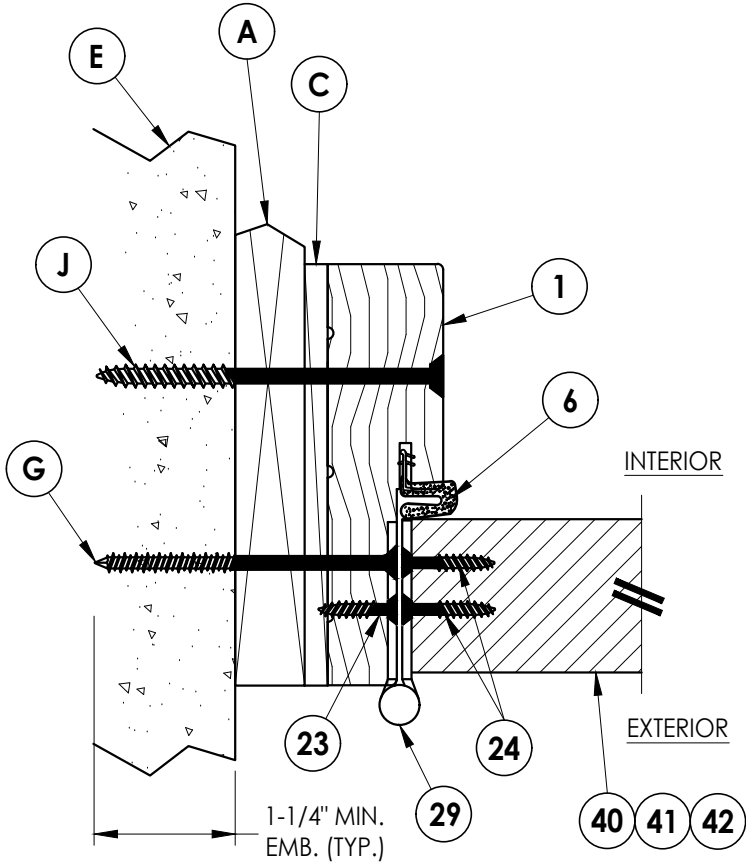


1
6 **HORIZONTAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

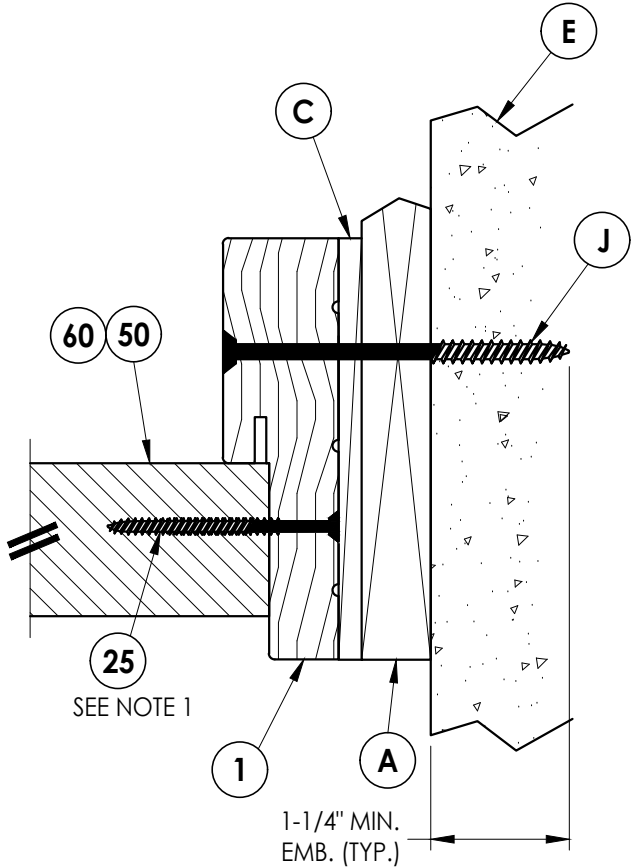

2
6 **HORIZONTAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

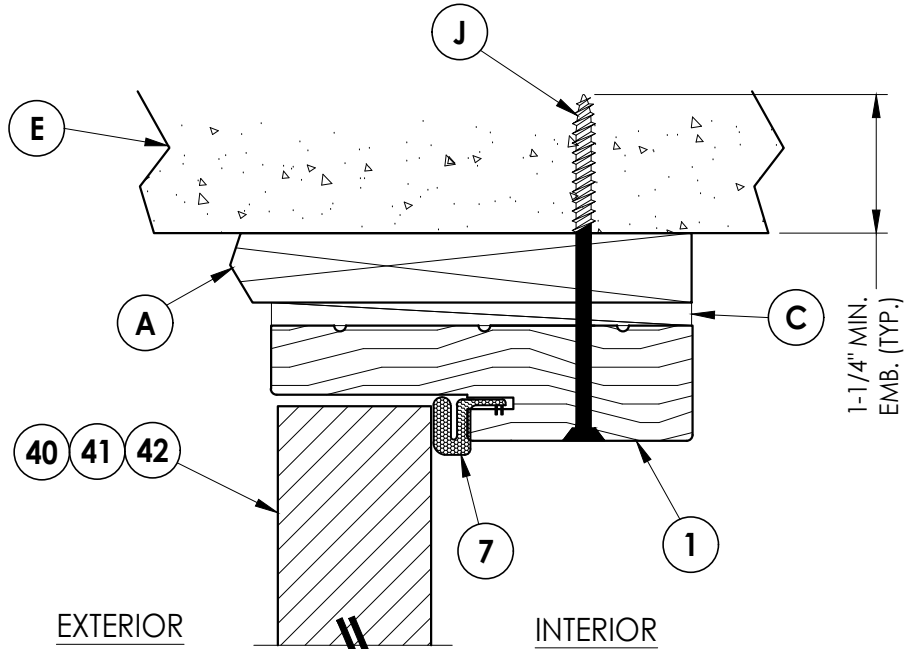

3
6 **VERTICAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

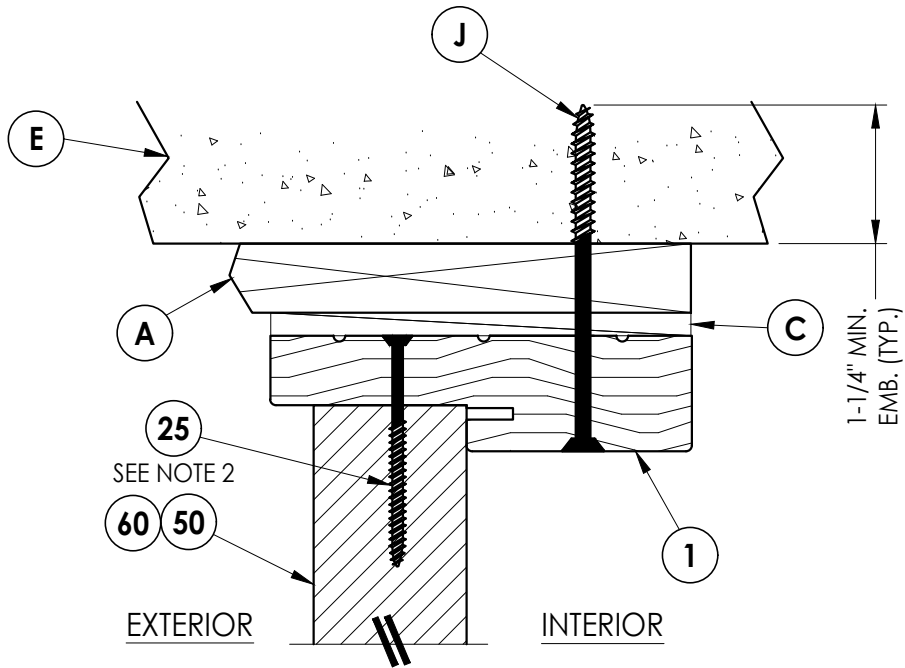

4
6 **VERTICAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (1X BUCK)

NO.	DATE	REVISIONS
3	7/2/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	8/21/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	7/16/20	UPDATE TO 7th ED (2020) FBC PO
		BY

DATE: 03/07/20

SCALE: N.T.S.

DWG. BY: TJ


CHK. BY: LFS

DRAWING NO.:

FL-21135.13

SHEET 6 OF 14


Z:\2023 FBC Drawings\Therma-Tru\FL-21135 R7\FL-21135.10-13.dwg

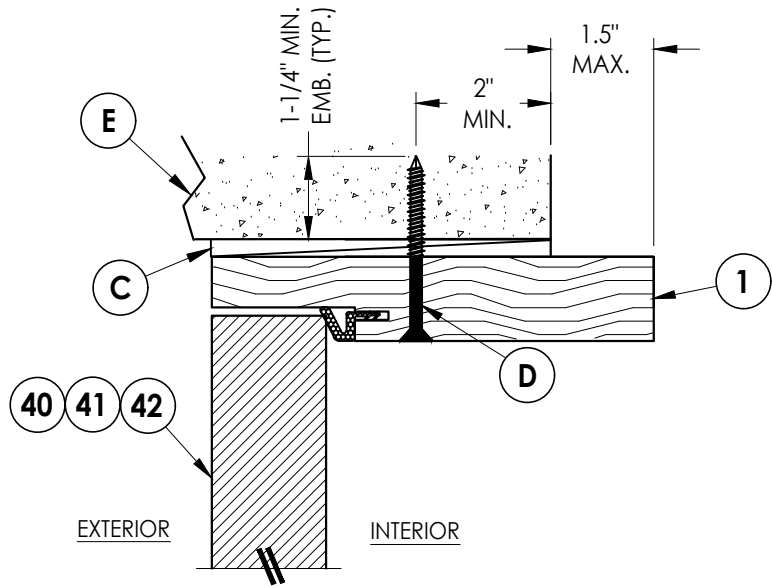


2
7 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

Notes:


1. Sidelite assembly screws located 6" from each end plus 6 more screws equally spaced between (8 screws total per side jamb).
2. Sidelite assembly screws located 4" from each end (2 screws along head jamb).

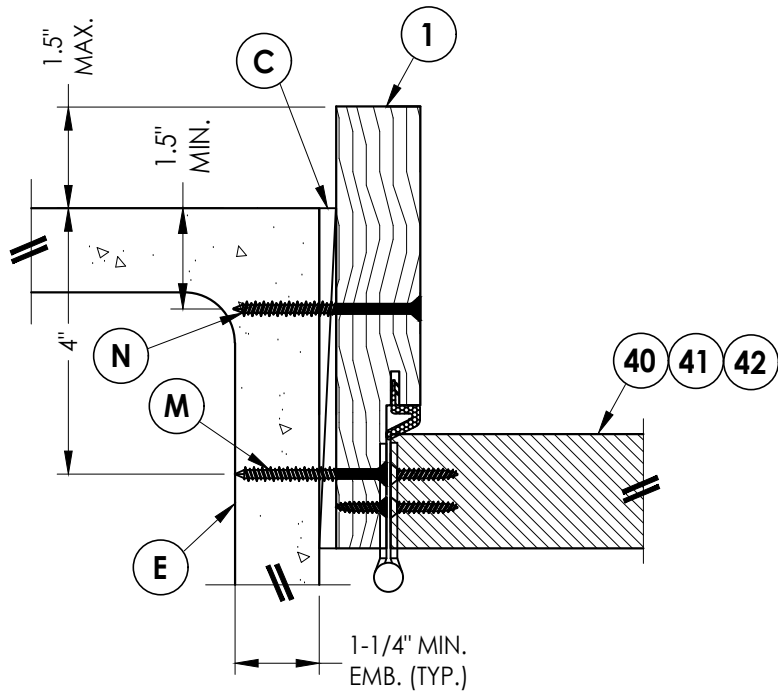

1
7 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

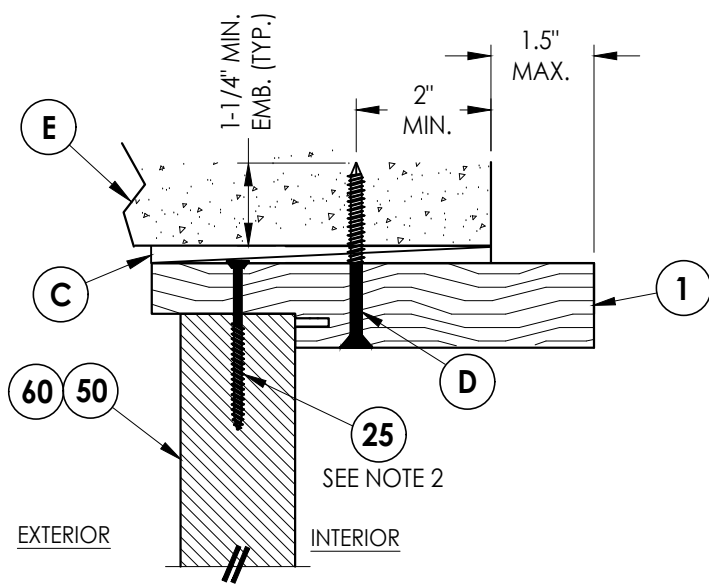

3
7 **VERTICAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

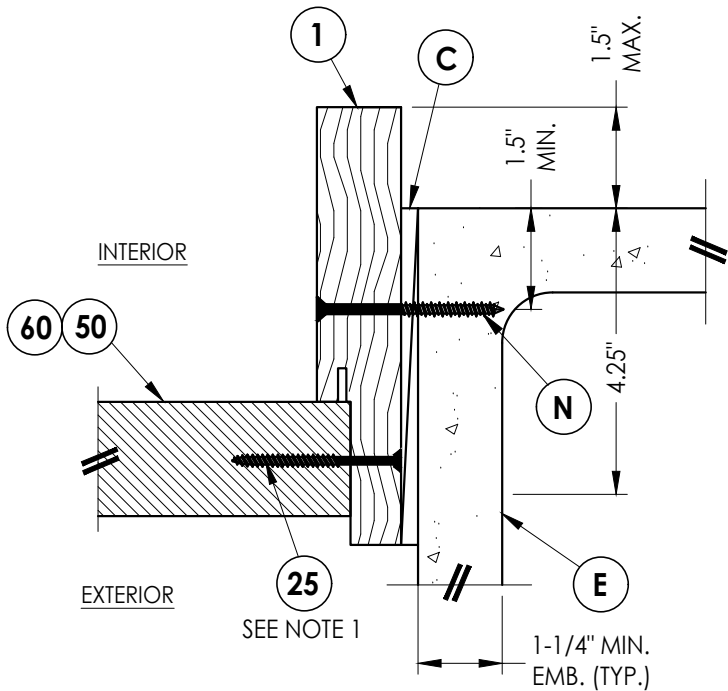

4
7 **VERTICAL CROSS SECTION**
Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
SECTIONS (DIRECT TO MASONRY)

NO.	DATE	REVISIONS
3	7/2/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	8/21/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	7/16/20	UPDATE TO 7th ED (2020) FBC PO

DATE: 03/07/20

SCALE: N.T.S.

DWG. BY: TJ

CHK. BY: LFS






DRAWING NO.:

FL-21135.13

SHEET 7 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-21135 R7\FL-21135.10-13.dwg

- Notes:
- Sill Item #'s 32, 38 & 39 are attached to jambs w/ (3) #8 X 2-1/2" pfh screws or (3) 2.5" staples at each end.
 - Sill Item #'s 16, 17, 18 & 19 are attached to jambs w/ (2) #8 X 2-1/2" pfh screws at each end.
 - Sill Item #15 is attached to jambs utilizing (2) #10 X 2" pph SMS at each end.

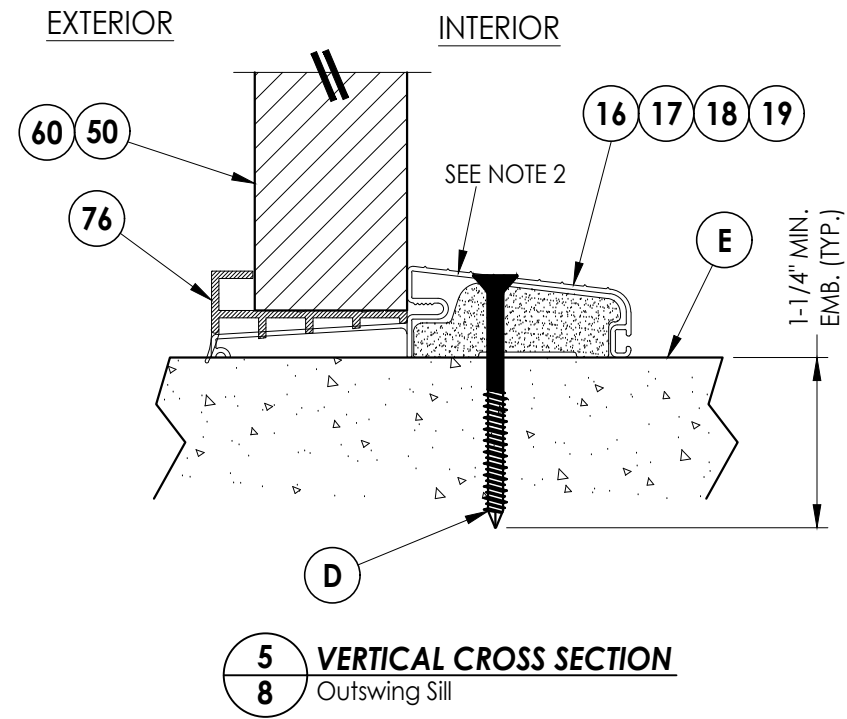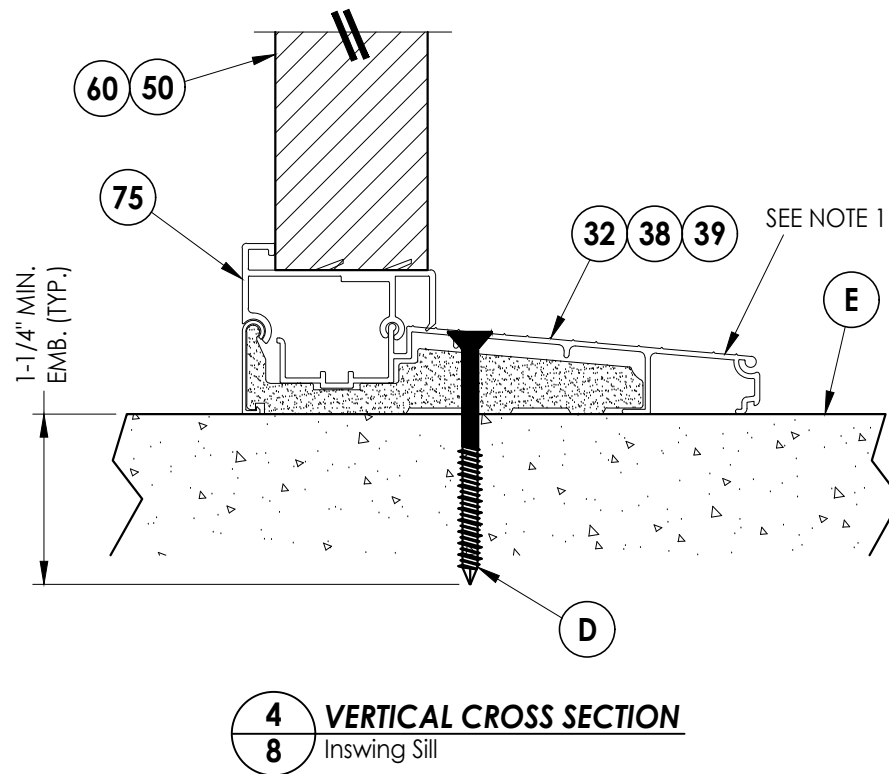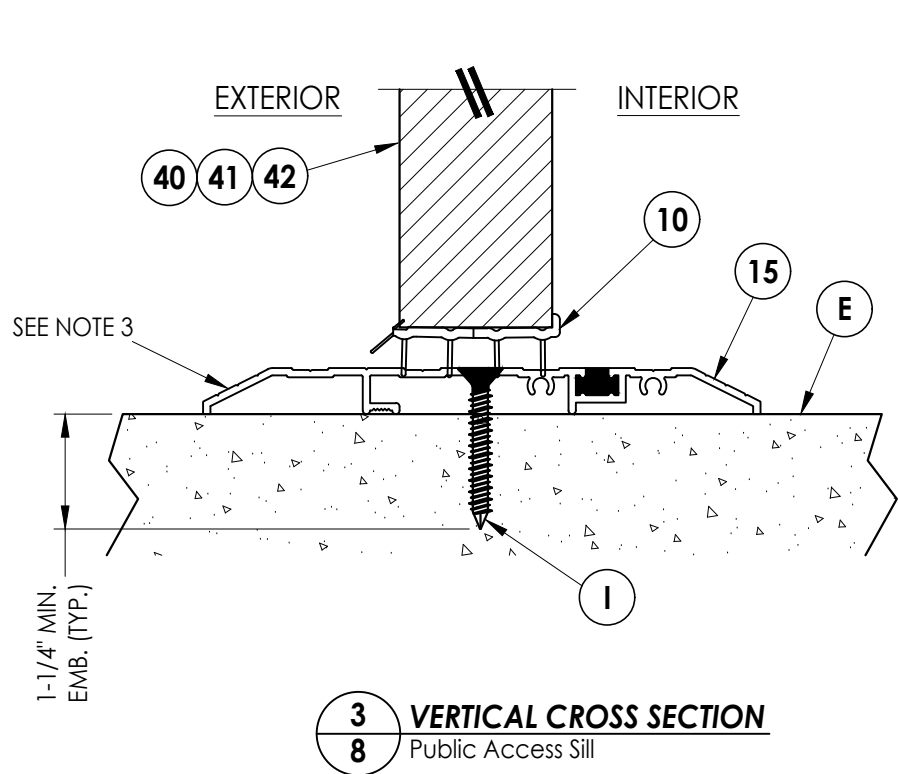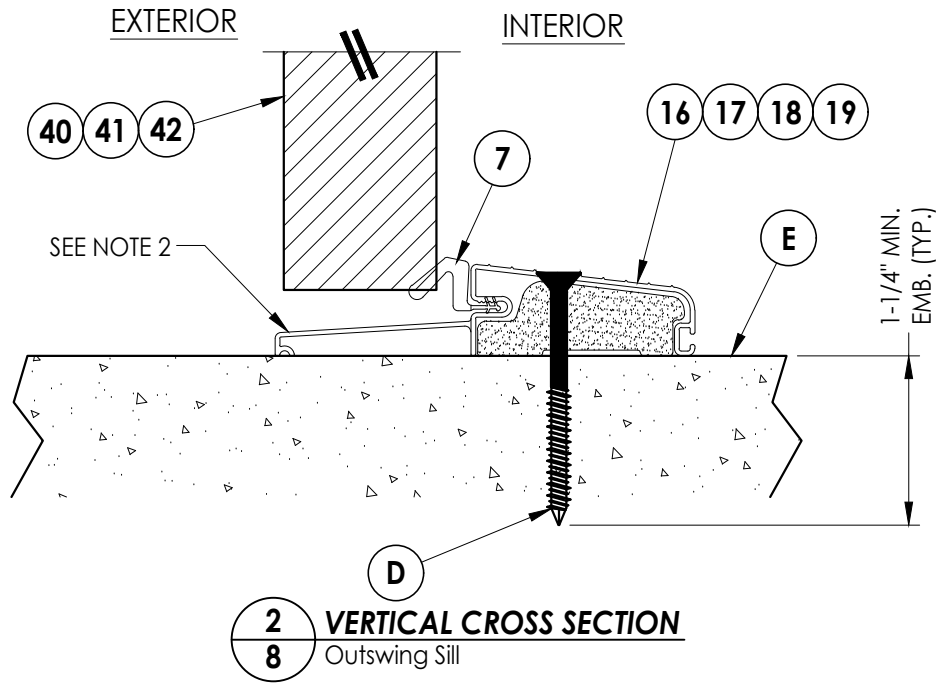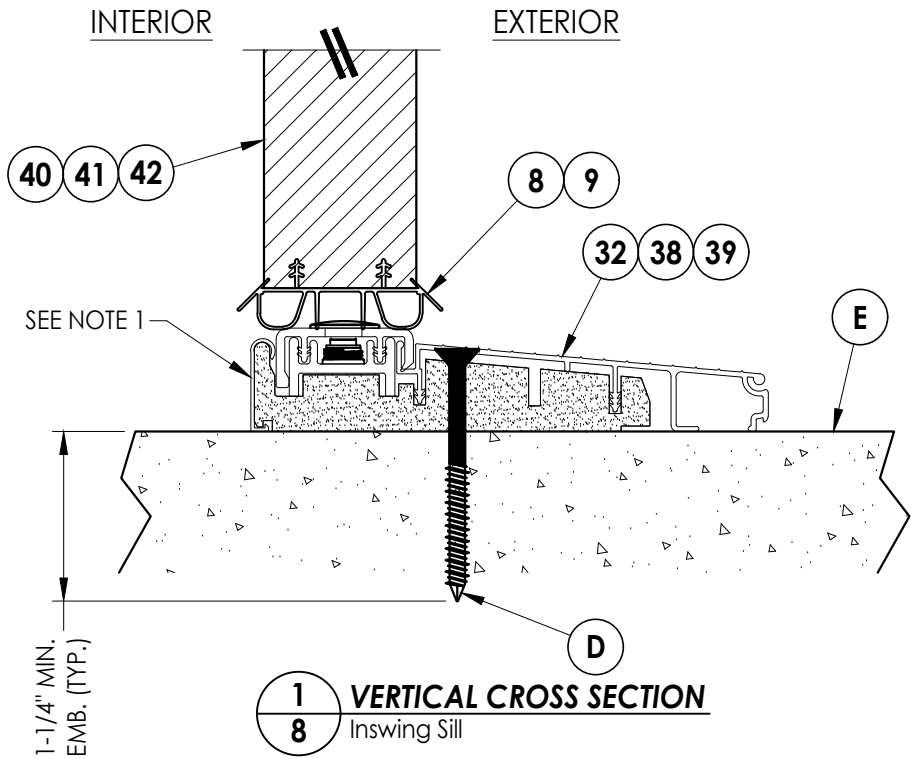

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
VERTICAL CROSS
SECTIONS (THRESHOLDS)

NO.	DATE	REVISIONS
3	7/2/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	8/21/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	7/16/20	UPDATE TO 7th ED (2020) FBC PO

DATE: 03/07/20

SCALE: N.T.S.

DWG. BY: TJ



CHK. BY: LFS

DRAWING NO.:

FL-21135.13

SHEET 8 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-21135 R7\FL-21135.10-13.dwg

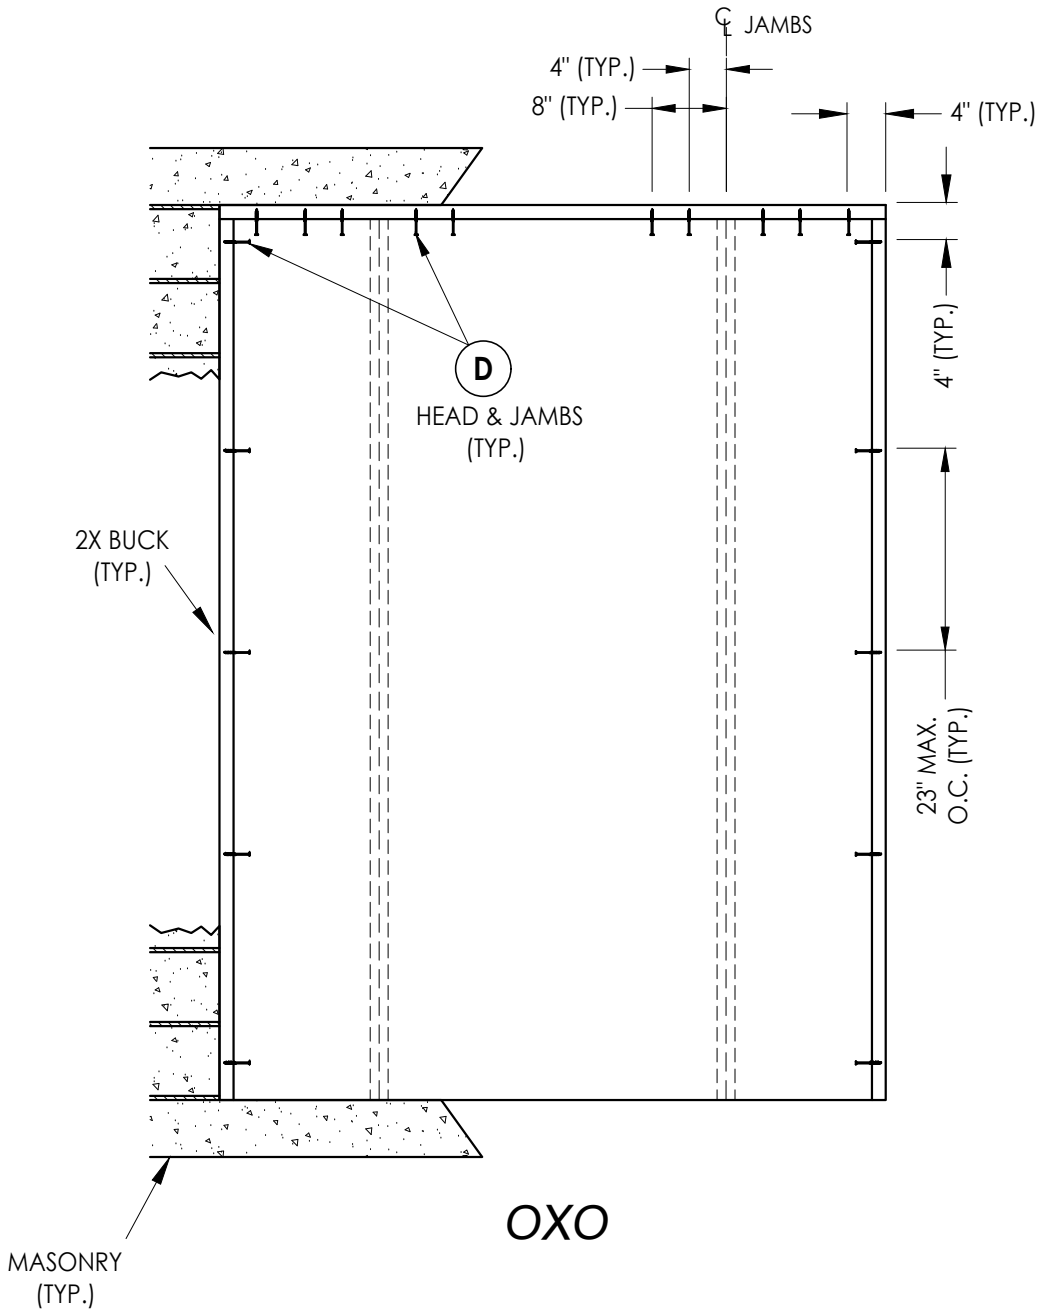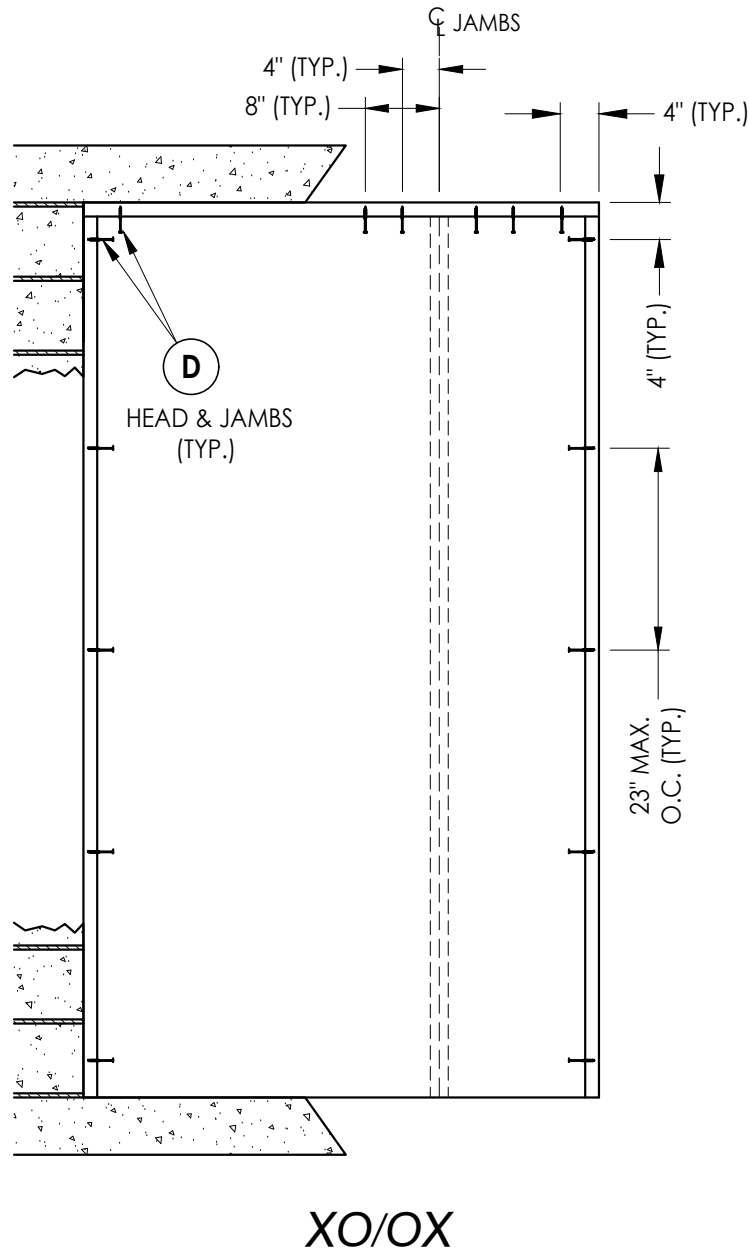

2X BUCK ANCHORING

REVISIONS	
NO.	DATE
3	7/2/26
2	8/21/23
1	7/16/20


DATE:	03/07/20
SCALE:	N.T.S.
DWG. BY:	TJ
CHK. BY:	LFS
DRAWING NO.:	FL-21135.13
SHEET	9 OF 14

PRODUCT:	THERMA-TRU FIBERGLASS DOOR
	PART OR ASSEMBLY: BUCK ANCHORING

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409



BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Therma-Tru\FL-21135 R7\FL-21135.10-13.dwg

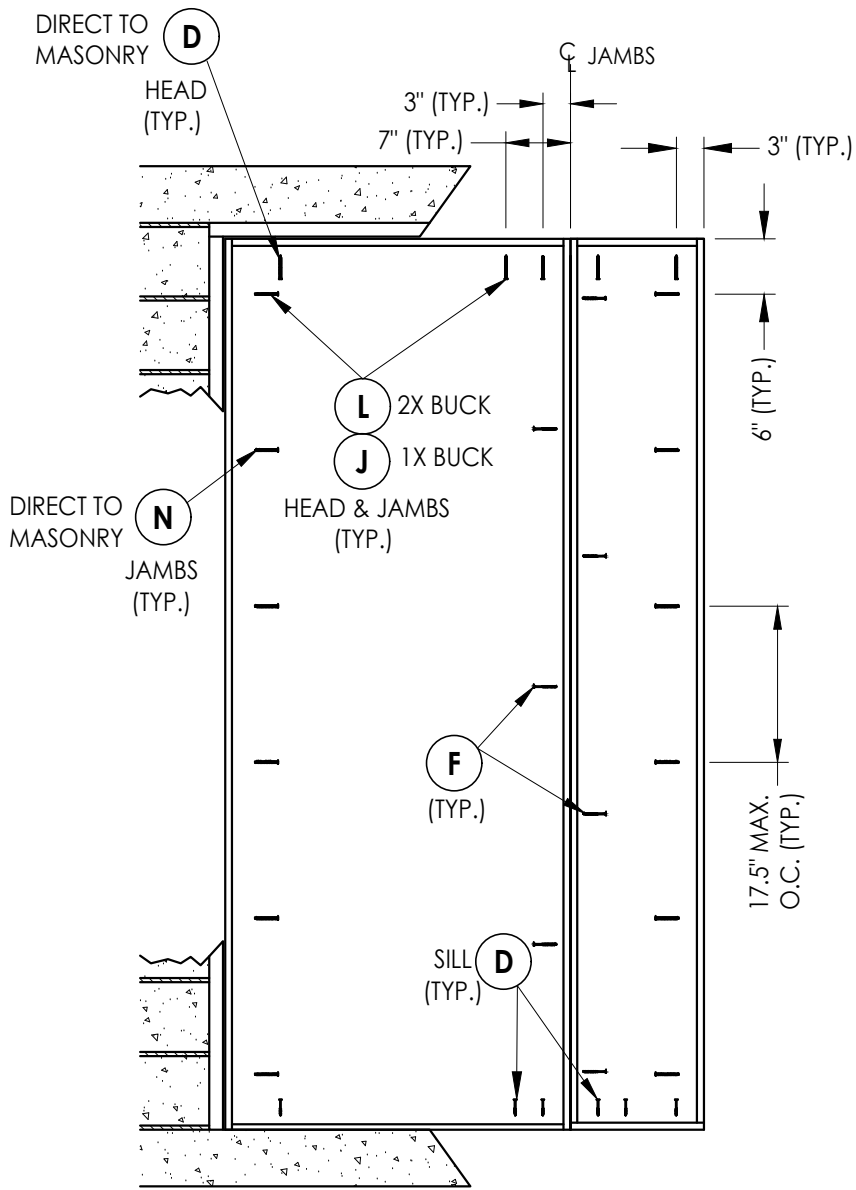


FRAME ANCHORING

FRAME ANCHORING

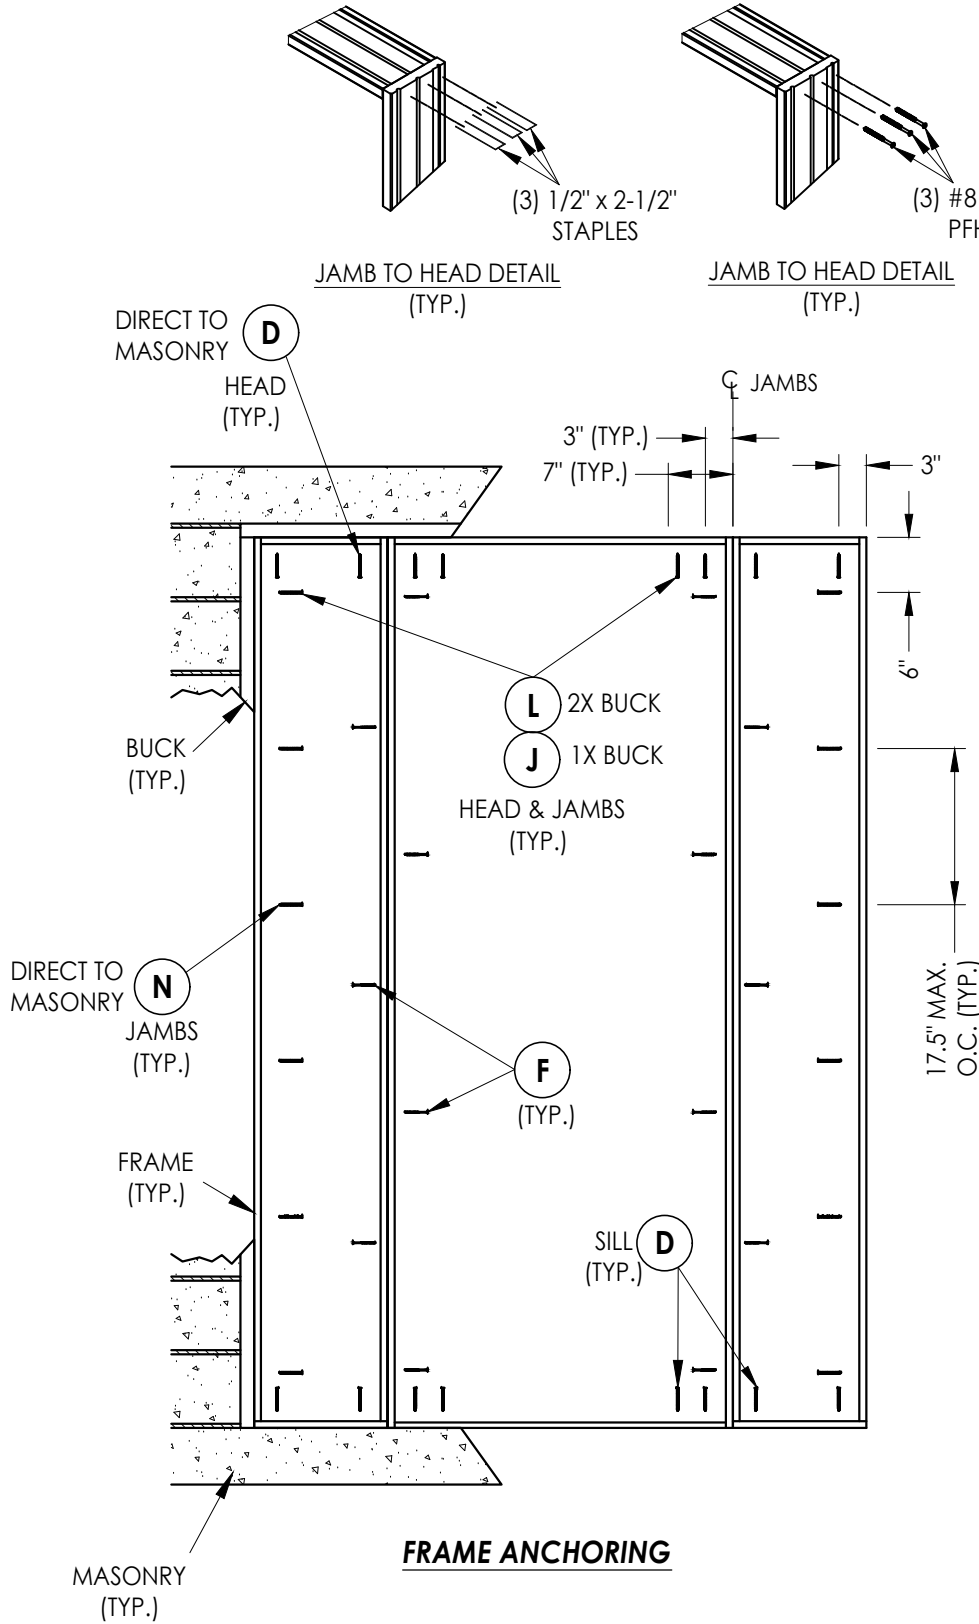

FRAME ANCHORING

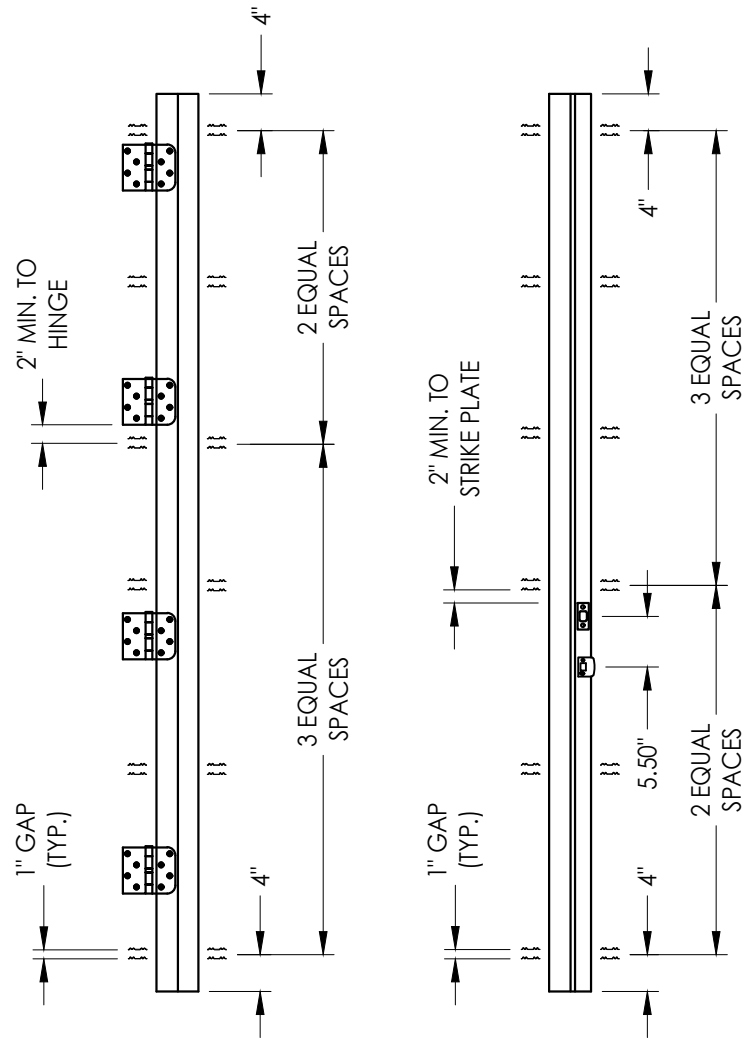

HINGE JAMB

STRIKE JAMB

CORRUGATED FASTENER LOCATIONS

NO.	DATE	REVISIONS			
		BY	PO	FBC	LFS
3	7/2/26	UPDATE TO 9TH ED. (2026)	FBC	LFS	
2	8/21/23	UPDATE TO 8TH ED. (2023)	FBC	LFS	
1	7/16/20	UPDATE TO 7th ED (2020)	FBC	PO	

DATE: 03/07/20

SCALE: N.T.S.

DWG. BY: TJ

CHK. BY: LFS

DRAWING NO.:



FL-21135.13

SHEET 10 OF 14




Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Therma-Tru\FL-21135 R7\FL-21135.10-13.dwg

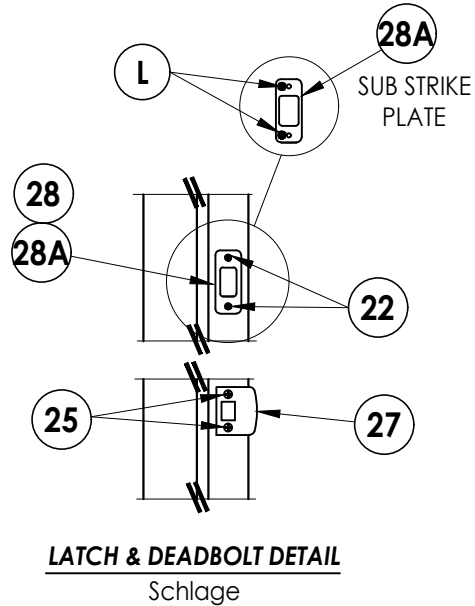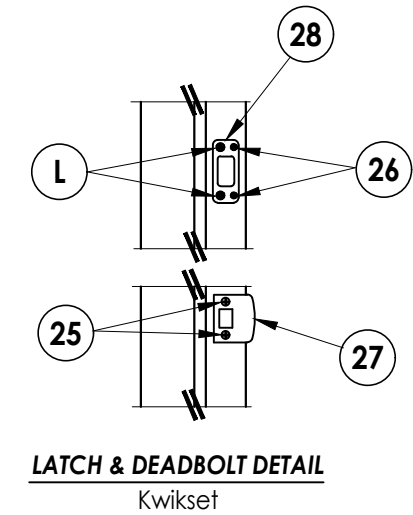

LATCH & DEADBOLT STRIKE DETAILS

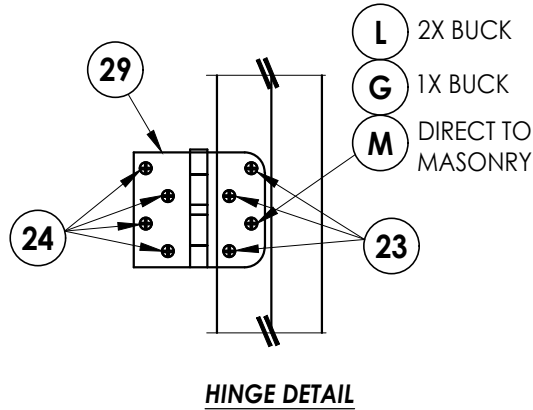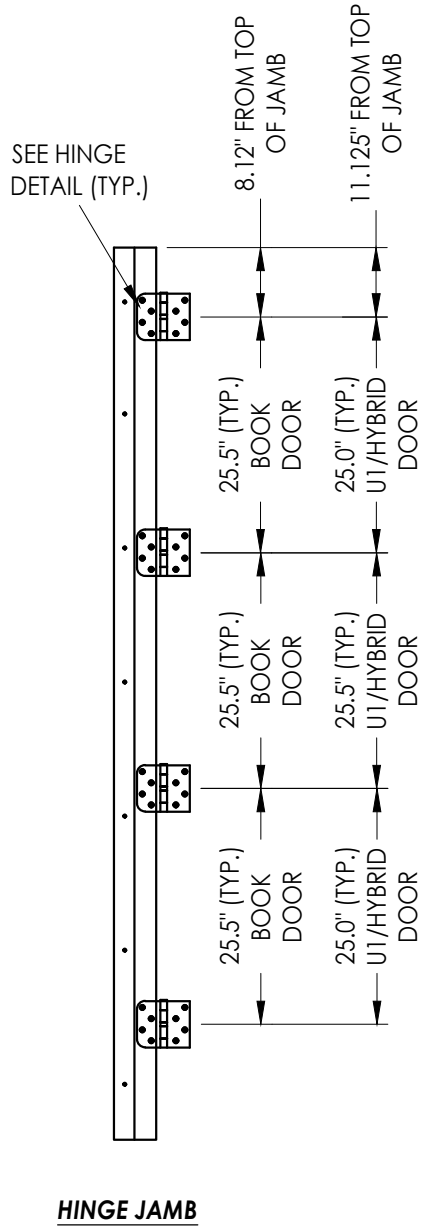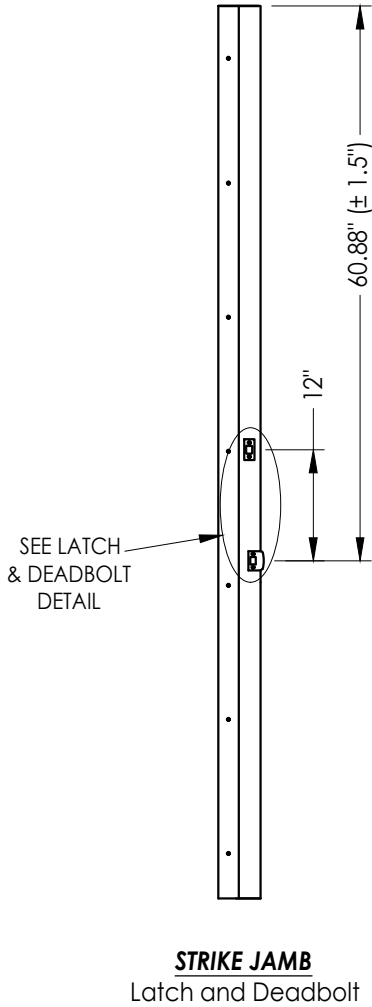


DATE		NO.		DATE	
03/07/20		1		7/16/20	
SCALE: N.T.S.		2		8/21/23	
DWG. BY: TJ		3		7/2/26	
CHK. BY: LFS					
DRAWING NO.: FL-21135.13					
SHEET 11 OF 14					

PRODUCT:		PART OR ASSEMBLY:	
THERMA-TRU FIBERGLASS DOOR		HARDWARE DETAILS	


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\Therma-Tru\FL-21135 R7\FL-21135.10-13.dwg

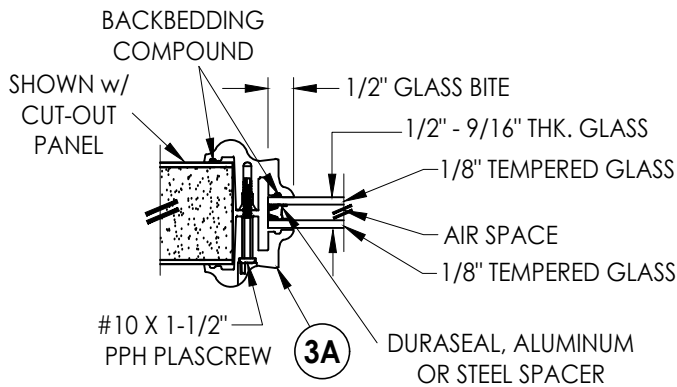


G1 GLAZING DETAIL
BTS Lite Frame
Sidelites

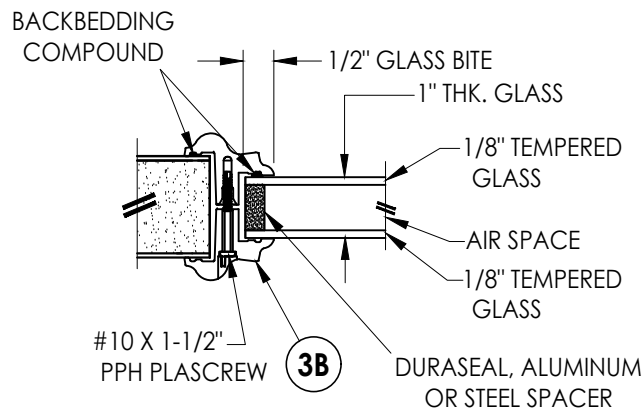


G2 GLAZING DETAIL
BTS Lite Frame
Sidelites

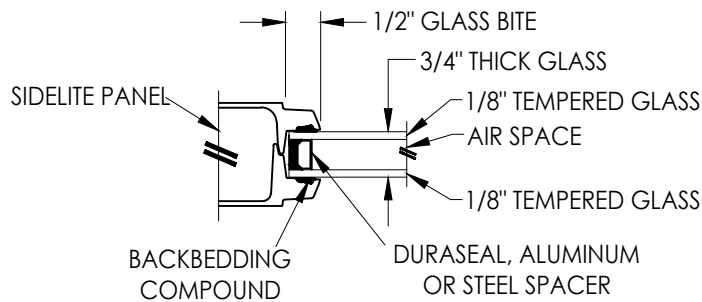

G3 GLAZING DETAIL
Flush Glazing
Sidelites

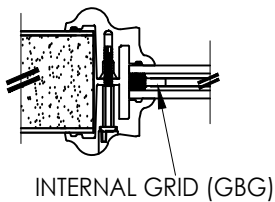


INTERNAL GRID (GBG)




INTERNAL GRID (GBG)
(Optional Aluminum Spacer)


9/16" INSULATED GLASS INSERT OPTIONS

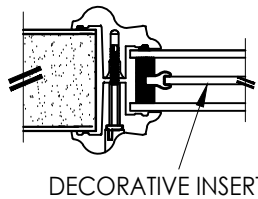


DECORATIVE INSERT

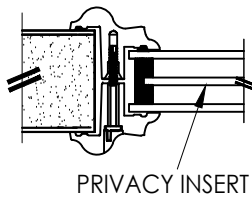


PRIVACY INSERT

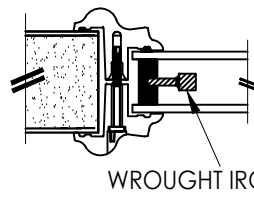


WROUGHT IRON INSERT

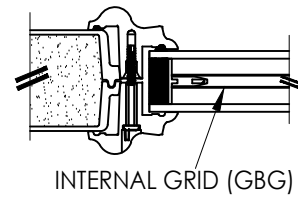

INTERNAL GRID (GBG)

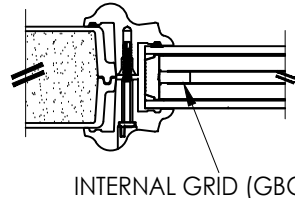


INTERNAL GRID (GBG)
(Optional Aluminum Spacer)

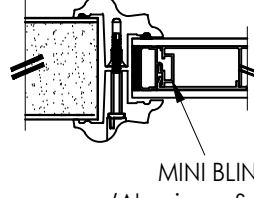


MINI BLIND
(Aluminum Spacer)


1" INSULATED GLASS INSERT OPTIONS




INTERNAL GRID (GBG)



INTERNAL GRID (GBG)




DECORATIVE INSERT




PRIVACY INSERT

3/4" INSULATED GLASS INSERT OPTIONS



3A BTS LITE FRAME
1/2" & 9/16" Glazing



3B BTS LITE FRAME
1" Glazing

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
GLAZING DETAILS

NO.	DATE	REVISIONS
3	7/2/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	8/21/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	7/16/20	UPDATE TO 7th ED (2020) FBC PO

DATE: 03/07/20


SCALE: N.T.S.

DWG. BY: TJ


CHK. BY: LFS

DRAWING NO.:
FL-21135.13


SHEET 12 OF 14

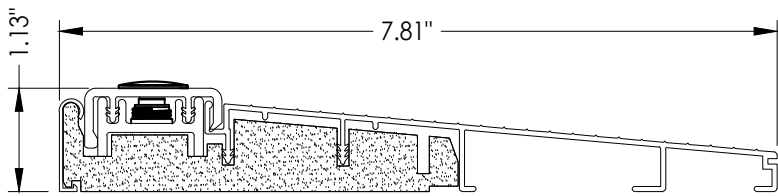


32 INSWING THRESHOLD
Inswing Composite Adjustable 7-3/4" Sill

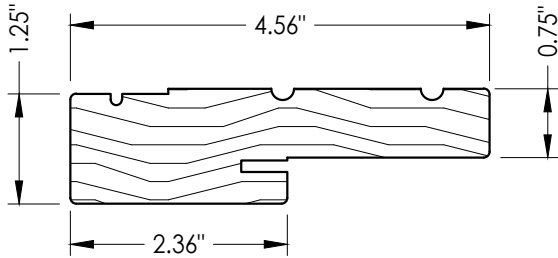


1 WOOD JAMB

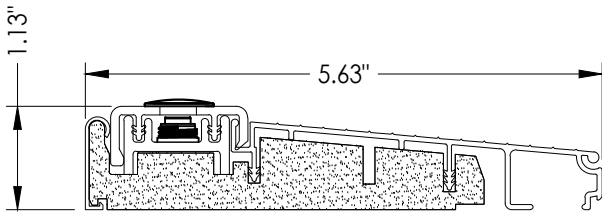


39 INSWING THRESHOLD
Inswing Composite Adjustable Sill

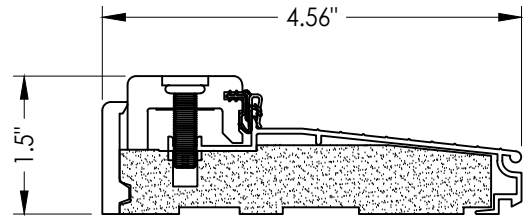


38 INSWING THRESHOLD
Inswing Composite Adjustable Sill

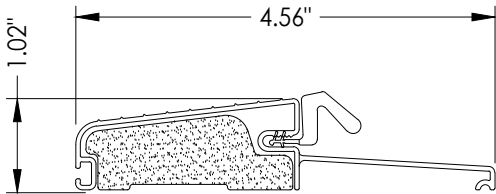


16 OUTSWING THRESHOLD
Composite Sill

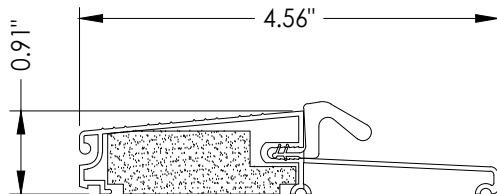


19 OUTSWING THRESHOLD
Composite Sill

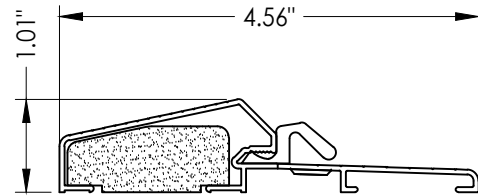


17 OUTSWING THRESHOLD
Composite / Aluminum Sill

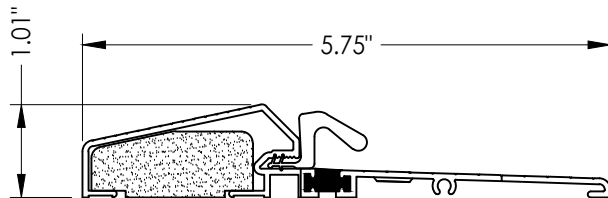


18 OUTSWING THRESHOLD
Composite / Aluminum Sill
(Thermal Break)

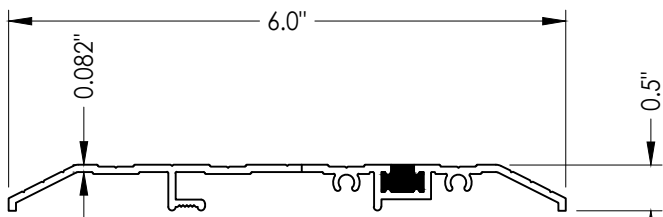


15 PUBLIC ACCESS THRESHOLD

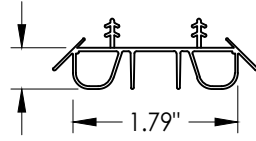


8 SWEEP




9 SWEEP

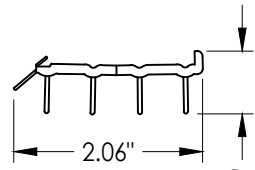

10 SWEEP

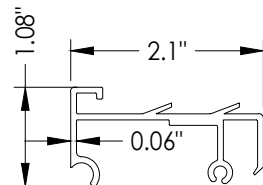

75 SIDELITE SPACER

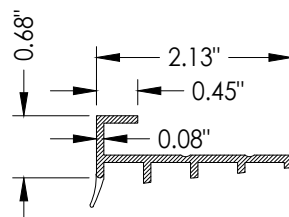

76 SIDELITE SPACER

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:

COMPONENTS

NO.	DATE	REVISIONS			
		BY	PO	LFS	FBC
3	7/2/26	UPDATE TO 9TH ED.	(2026)	FBC	LFS
2	8/21/23	UPDATE TO 8TH ED.	(2023)	FBC	LFS
1	7/16/20	UPDATE TO 7th ED	(2020)	FBC	PO

DATE: 03/07/20

SCALE: N.T.S.

DWG. BY: TJ

CHK. BY: LFS

DRAWING NO.:

FL-21135.13

SHEET 13 OF 14

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (SG >= 0.42)	WOOD
B	2X BUCK (SG >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	#10 X 2" PFH WOOD SCREW	STEEL
G	3/16" X 3-1/4" ITW CONCRETE SCREW	STEEL
I	1/4" X 1-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
J	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
K	1/2" X 1" X 25 GA. CORRUGATED FASTENER	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL
M	3/16" X 2-1/4" ITW CONCRETE SCREW	STEEL
N	3/16" X 2-3/4" ITW CONCRETE SCREW	STEEL
1	JAMB (FINGER JOINT PINE)	WOOD
6	WEATHERSTRIP (MEDIUM REACH)	FOAM
7	WEATHERSTRIP (LONG REACH)	FOAM
8	SWEEP	VINYL
9	SWEEP (USE w/ MODERATE CLIMATE THRESHOLD)	VINYL
10	SWEEP (USE w/ PUBLIC ACCESS THRESHOLD)	VINYL
15	PUBLIC ACCESS THRESHOLD	ALUM
16	OUTSWING THRESHOLD	ALUM/COMP
17	OUTSWING THRESHOLD	ALUM/COMP
18	OUTSWING THRESHOLD	ALUM/COMP
19	OUTSWING THRESHOLD	ALUM/COMP
22	#8 x 3/4" PFH WOOD SCREW	STEEL
23	#10 x 3/4" PFH WOOD SCREW	STEEL
24	#10 x 1" PFH WOOD SCREW	STEEL

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
25	#8 x 2-1/2" PFH WOOD SCREW	STEEL
26	#8 x 5/8" PFH WOOD SCREW	STEEL
27	LATCH STRIKE PLATE	STEEL
28	DEADBOLT STRIKE PLATE	STEEL
28A	DEADBOLT SUB STRIKE PLATE	STEEL
29	4" X 4" HINGE	STEEL
32	INSWING THRESHOLD	ALUM/COMP
34	INTERIOR MULL CASING	WOOD
35	EXTERIOR MULL CASING	WOOD
38	INSWING THRESHOLD	ALUM/COMP
39	INSWING THRESHOLD	ALUM/COMP
40	DOOR PANEL (BOOK)	-
41	DOOR PANEL (HYBRID)	-
42	DOOR PANEL (U1)	-
50	SIDELITE (FULL LITE)	-
60	SIDELITE (FLUSH GLAZED)	-
75	SIDELITE SPACER (INSWING)	PVC
76	SIDELITE SPACER (OUTSWING)	PVC

CORROSION RESISTANCE - SALTWATER ENVIRONMENTS
Fasteners & connectors in areas within 3000 ft (914 m) of a saltwater coastline shall comply with FBC Sections 1711.1 or R332.1.


CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON+	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	AS SHOWN	1-1/2"

WOOD SCREW INSTALLATION NOTES:

1. Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

DATE: 03/07/20		REVISIONS	
SCALE: N.T.S.			
DWG. BY: TJ			
CHK. BY: LFS			
DRAWING NO.: FL-21135.13			
SHEET 14 OF 14			
NO.	DATE		
3	7/2/26	UPDATE TO 9TH ED. (2026)	FBC LFS
2	8/21/23	UPDATE TO 8TH ED. (2023)	FBC LFS
1	7/16/20	UPDATE TO 7th ED (2020)	FBC PO
			BY
PART OR ASSEMBLY:		BILL OF MATERIALS	
PRODUCT:		THERMA-TRU FIBERGLASS DOOR	
Documents Prepared By:		Lyndon F. Schmidt P.E. No. 43409	
		 BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	