



8000 Designers' Vinyl Series Operating Single Hung 3-Wide Window
with 3-Wide Fixed Stacked, 3 Wide / 2-High Configuration
36x72-3W with 36x24-3W Stacked, 1/2" Horizontal and Vertical Mulls
Nail Fin Installation / Non-Impact

CCL Listing #448-H-002.12

ELEMENT TEST REPORT NUMBER: ESP016904P-1565 REV. B

8000 Designers' Vinyl Series Operating 3-Wide w/ Fixed 3-Wide Stack
1/2" Horizontal / Vertical Mulls. Nail Fin Installation / WDMA Instructions / Non-Impact


SHEET: 1 OF 3

DRAWN BY: B.K.

TEST REPORT SUMMARY:

- SINGLE UNIT, MAXIMUM FRAME SIZE:
OPERATING 35 1/2" (902mm) x 71 1/2" (1816mm)
FIXED 35 1/2" (902mm) x 23 1/2" (597mm)
- 3-WIDE UNIT, MAXIMUM FRAME SIZE:
OPERATING 107 1/2" (2731mm) x 71 1/2" (1816mm)
FIXED 107 1/2" (2731mm) x 23 1/2" (597mm)
- OVERALL DESIGN PRESSURE: ± 45.11 psf
- STRUCTURAL TEST PRESSURE: ± 67.67 psf
- RATING: LC-PG35

7. PRE-DRILL. **CAUTION:** DO NOT OVER FASTEN. SEAL PRE-DRILLED FRAME ANCHOR SCREW HOLES WITH SILICONE. NEXT, INSTALL (2) #8 X 2" PPH SCREWS THRU THE FRAME AT THE HEAD AND SILL, 4" & 8" ON CENTER, EACH SIDE OF THE CENTER OF THE VERTICAL UNIT. SEAL OVER SCREW HEAD. INSTALL CAP OVER HOLE.. 1-1/8" MINIMUM EMBEDMENT, 3/8" MINIMUM EDGE DISTANCE

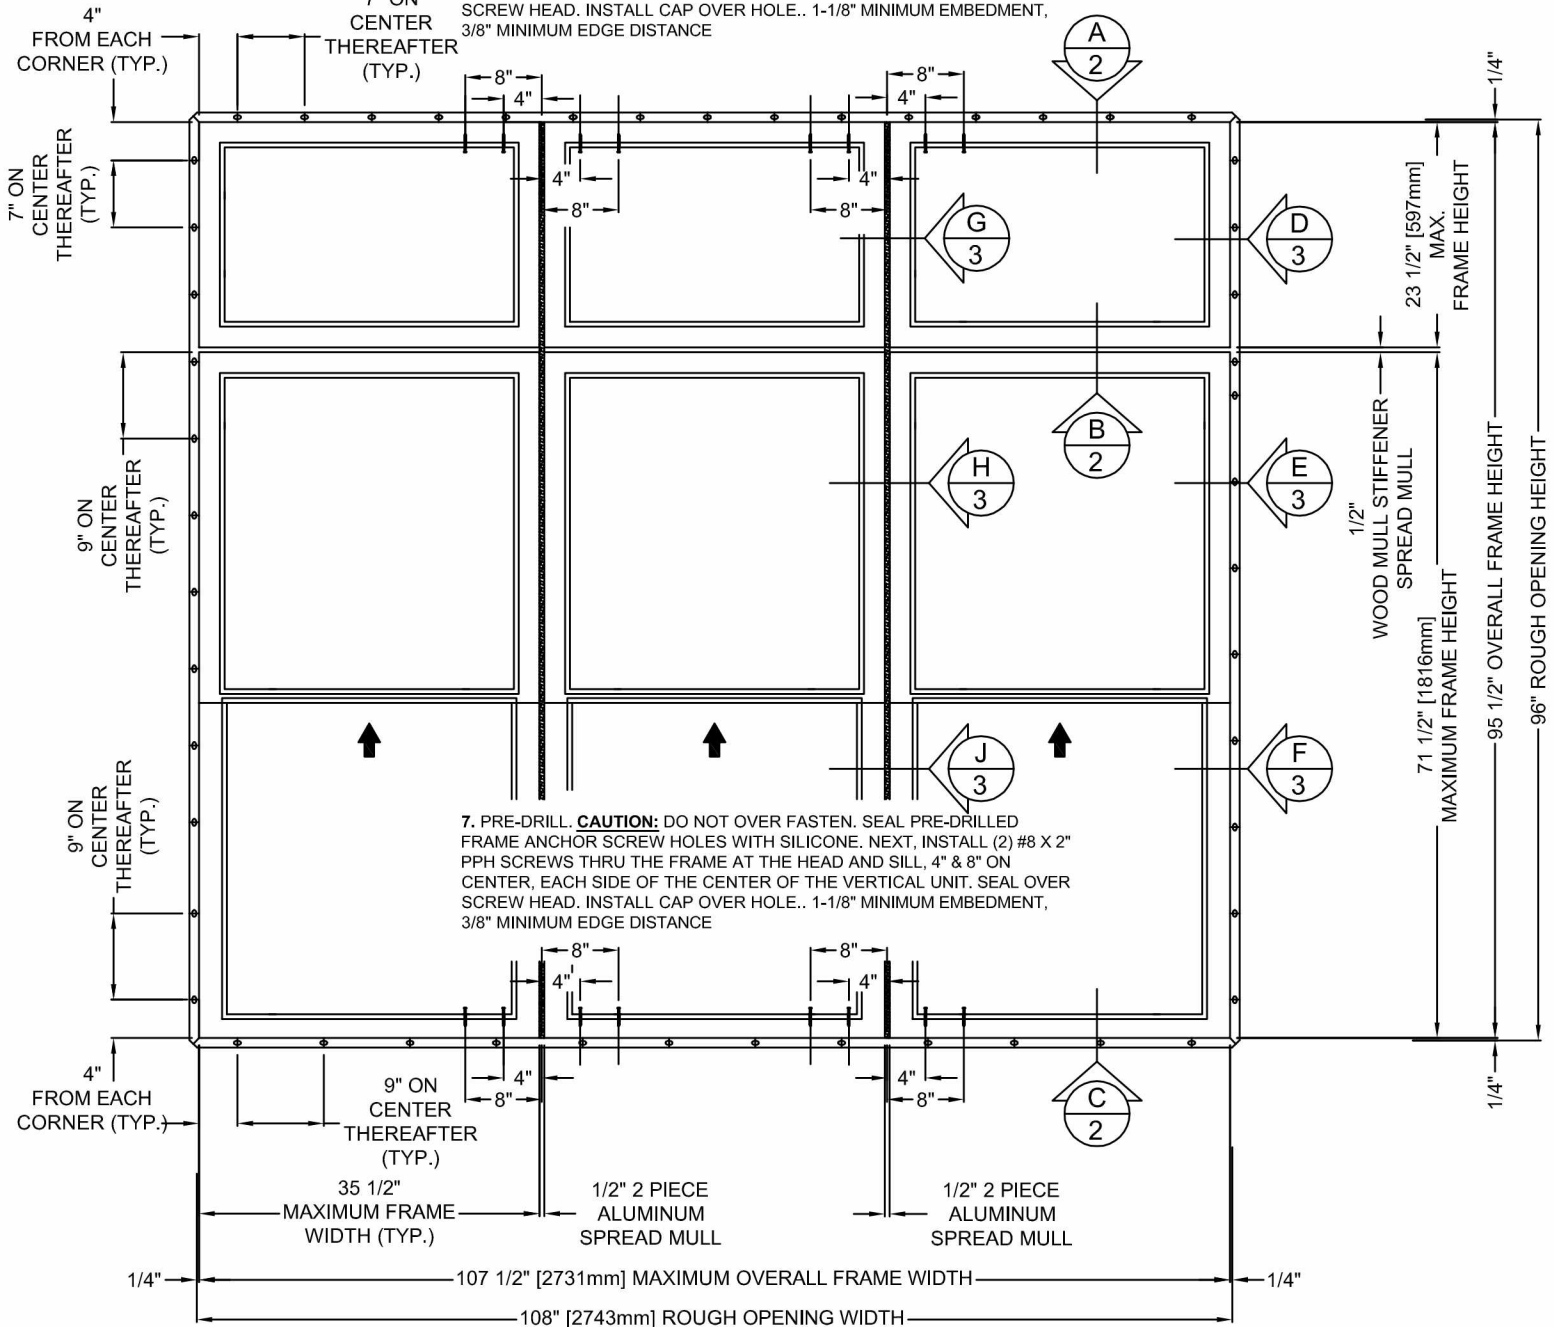



8000 Designers' Vinyl Series Operating Single Hung
3-Wide Window with 3-Wide Fixed Stacked
36x72-3W with 36x24-3W Callout
1/2" Horizontal and Vertical Mulls
Nail Fin Installation / Non-Impact

CCL Listing #448-H-002.12

ELEMENT TEST REPORT NUMBER: ESP016904P-1565 REV. B

8000 Designers' Vinyl Series Operating 3-Wide w/ Fixed 3-Wide Stack
1/2" Horizontal / Vertical Mulls

Nail Fin Installation / WDMA Instructions / Non-Impact

SHEET: 2 OF 3

DRAWN BY: B.K.

TEST REPORT SUMMARY:


- SINGLE UNIT, MAXIMUM BASIC UNIT FRAME SIZE:
OPERATING 35 1/2" (902mm) x 71 1/2" (1816mm)
FIXED 35 1/2" (902mm) x 23 1/2" (597mm)
- 3-WIDE UNIT, MAXIMUM BASIC UNIT FRAME SIZE:
OPERATING 107 1/2" (2731mm) x 71 1/2" (1816mm)
FIXED 107 1/2" (2731mm) x 23 1/2" (597mm)
- OVERALL DESIGN PRESSURE: **±45.11 psf**
- STRUCTURAL TEST PRESSURE: **±67.67 psf**
- RATING: **LC-PG35**

INSTALLATION NOTES:

1. USE 2" x _ WOOD BUCK
2. PLACE WOOD SHIMS EVERY 6-10"
3. 1/4" MAXIMUM SHIM SPACE AT HEAD, SILL AND EACH JAMB
4. APPLY A CONTINUOUS BEAD OF SEALANT BETWEEN THE NAIL FIN AND THE BUCK AT THE HEAD, SILL AND SIDE JAMBS TO SECURE NAILING FLANGE TO FRAMING MATERIAL
5. **OPERATING UNITS:** INSTALL #8 X 1-1/4" PPH GALVANIZED SCREWS SPACED MAXIMUM 4" FROM EACH CORNER AND MAXIMUM 9" ON CENTER THEREAFTER, THROUGH THE INTEGRAL NAIL FIN INTO THE FRAMING MATERIAL, AT SILL AND SIDE JAMBS
 - SILICONE SEAL OVER SCREW HEADS**FIXED UNITS:** INSTALL #8 X 1-1/4" PPH GALVANIZED SCREWS SPACED MAXIMUM 4" FROM EACH CORNER AND MAXIMUM 7" ON CENTER THEREAFTER, THROUGH THE INTEGRAL NAIL FIN INTO THE FRAMING MATERIAL, AT HEAD AND SIDE JAMBS, 3/8" MINIMUM EDGE DISTANCE.
 - SILICONE SEAL OVER SCREW HEADS
6. PRE-DRILL. SEAL PRE-DRILLED FRAME ANCHOR SCREW HOLES WITH SILICONE. **CAUTION:** DO NOT OVER FASTEN. INSTALL (2) #8 X 2" PPH SCREWS THRU THE FRAME, AT THE HEAD AND SILL, AND THRU THE FRAMING MATERIAL, 4" & 8" ON CENTER, EACH SIDE OF THE CENTER OF THE VERTICAL UNIT
 - SEAL OVER SCREW HEAD.
 - INSTALL CAP OVER HOLE
 - SILICONE SEAL OVER CAP
7. 1-1/8" MINIMUM FASTENER EMBEDMENT INTO FRAMING MATERIAL
8. MAXIMUM 3-WIDE, 2-HIGH FRAME WINDOW SIZE: **107 1/2" (2731mm) x 95 1/2" (2426mm)**

GENERAL INSTALLATION NOTES:

- Check rough opening for proper size, plumb, level and square.
- Make all necessary adjustments to ensure rough opening is plumb, level & square.
- Sill must be flat, level and capable of supporting the weight of the unit.
- Opening must allow a maximum of 1/4" shim space at head, sill and jambs.
- Wood buck, framing, fasteners, sealant and all wall system materials are provided by others

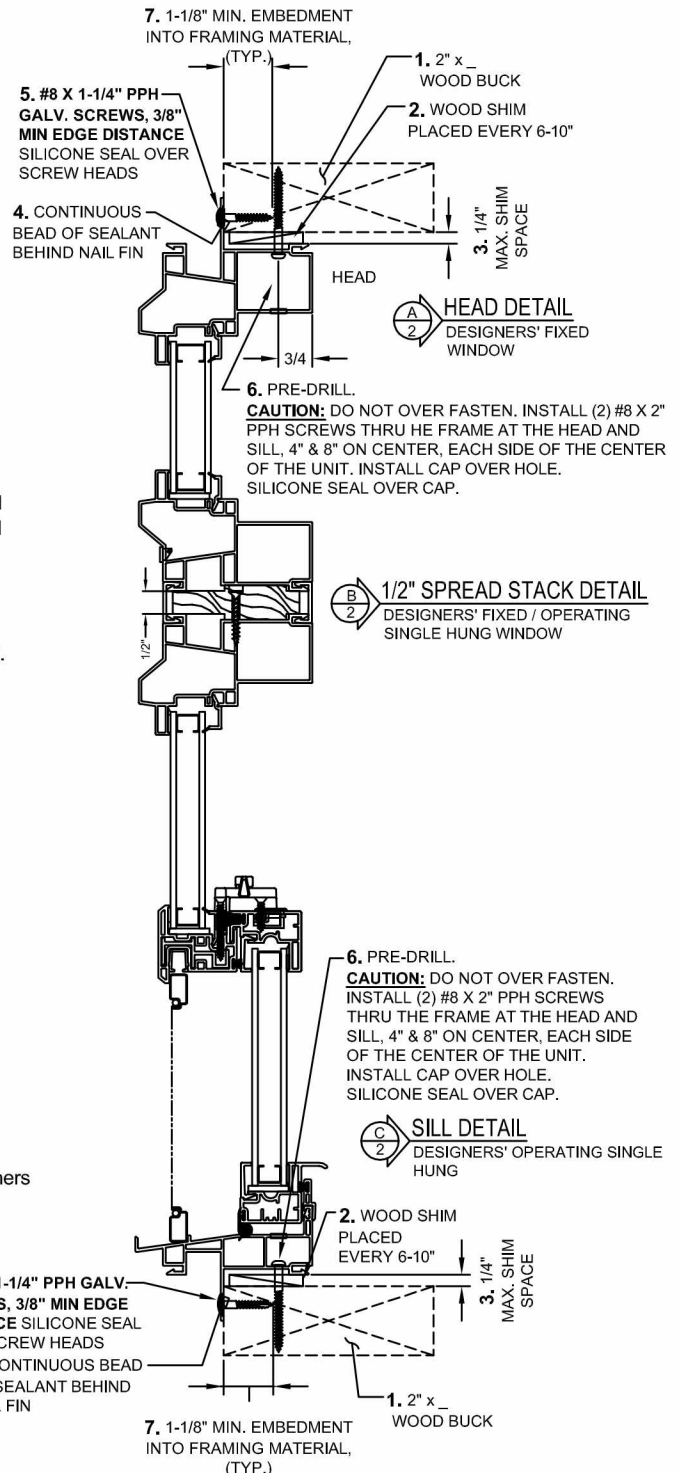

Installation requirements may vary in particular locations and in other types of construction. Proper installation is essential, and Sierra Pacific Windows, recommends consultation with an AAMA Certified Installer, or other qualified, registered building professional before installation of any Sierra Pacific product. Proper installation of Sierra Pacific products is the responsibility of the installer. Sierra Pacific is not responsible for proper installation. Sierra Pacific is not responsible for the design of, conditions in, or performance of building construction beyond the perimeters of the Sierra Pacific units. Sierra Pacific is not responsible for proper integration of the Sierra Pacific units with the weather-repellent systems of the building.



8000 Designers' Vinyl Series Operating Single Hung
3-Wide Window with 3-Wide Fixed Stacked
36x72-3W with 36x24-3W Callout
1/2" Horizontal and Vertical Mulls
Nail Fin Installation / Non-Impact

CCL Listing #448-H-002.12

ELEMENT TEST REPORT NUMBER: ESP016904P-1565 REV. B

8000 Designers' Vinyl Series Operating 3-Wide w/ Fixed 3-Wide Stack
1/2" Horizontal / Vertical Mulls

Nail Fin Installation / WDMA Instructions / Non-Impact

SHEET: 3 OF 3

DRAWN BY: B.K.

TEST REPORT SUMMARY:

- SINGLE UNIT, MAXIMUM BASIC UNIT FRAME SIZE:
OPERATING 35 1/2" (902mm) x 71 1/2" (1816mm)
FIXED 35 1/2" (902mm) x 23 1/2" (597mm)
- 3-WIDE UNIT, MAXIMUM BASIC UNIT FRAME SIZE:
OPERATING 107 1/2" (2731mm) x 71 1/2" (1816mm)
FIXED 107 1/2" (2731mm) x 23 1/2" (597mm)
- OVERALL DESIGN PRESSURE: ± 45.11 psf
- STRUCTURAL TEST PRESSURE: ± 67.67 psf
- RATING: **LC-PG35**

