

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER MASONRY/CONCRETE IS OPTIONAL.
4. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2” WINDOW UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
5. WHERE WOOD BUCK THICKNESS IS 1–1/2” OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. WINDOW UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS.
6. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
7. BUCKS SHALL EXTEND BEYOND WINDOW INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
8. FOR FIN INSTALLATION SHIM AS NEEDED. FOR FRAME INSTALLATION SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.
9. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
10. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
11. FRAME MATERIAL: EXTRUDED RIGID PVC.
12. UNITS MUST BE GLAZED PER ASTM E1300–04/09, WITH SAFETY GLAZING.
13. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
14. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

15. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2 1/2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. ALL FASTENERS TO BE CORROSION RESISTANT.
19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42

B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.

C. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.

D. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI OR ALUMINUM 6063–T5 FU=30KSI .048” THICK MINIMUM.

SIGNED: 09/28/2016

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2 – 3	ELEVATIONS & HARDWARE SCHEDULE
4 – 7	INSTALLATION DETAILS

WINDOW MART MFG., LLC.
5760 ALBERT PIKE, P.O. BOX 570
ROYAL, AR 71968

5901/5902 PATIO DOOR OX
72” X 96” – NON-IMPACT
NOTES

DRAWN:
V.L.

DWG NO.
08–02955


REV
—

SCALE
NTS

DATE
09/27/16

SHEET 1 OF 7



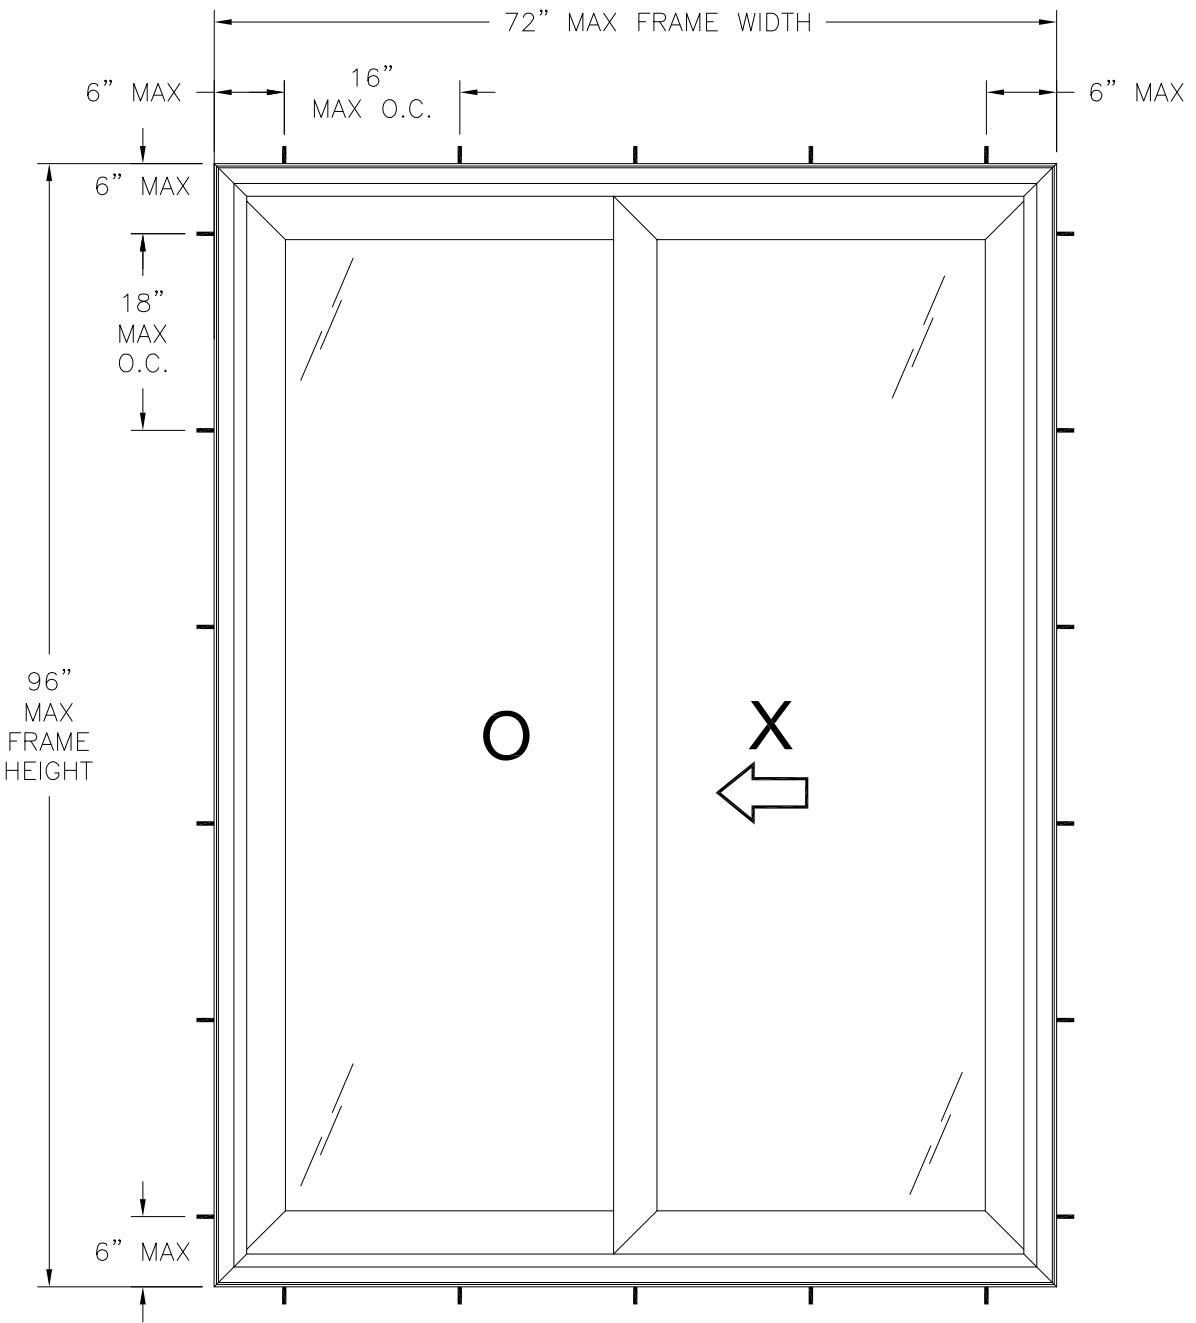

5901/5902 PATIO DOOR OX
EXTERIOR VIEW
FRAME INSTALLATION

DESIGN PRESSURE RATING	IMPACT RATING
±40.0PSF	NONE

NOTES:
1. MAXIMUM D.L.O.: 31 5/8" X 88 1/16"


HARDWARE SCHEDULE	
A.	(1) LOCK HANDLE ASSEMBLY W/ KEEPER AT LOCK STILE, 35 1/2" UP FROM BOTTOM
B.	(2) DUAL STEEL ADJUSTABLE ROLLER ASSEMBLY AT BOTTOM RAIL, ONE AT EACH END
C.	ROLL-FORMED STEEL REINFORCEMENT (A6617-C) AT JAMB AND MEETING STILES
D.	STEEL CHANNEL REINFORCEMENT (C111218) AT MEETING STILES

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

WINDOW MART MFG., LLC. 5760 ALBERT PIKE, P.O. BOX 570 ROYAL, AR 71968		
5901/5902 PATIO DOOR OX 72" X 96" – NON-IMPACT ELEVATION FRAME INSTALLATION		
DRAWN: V.L.	DWG NO. 08-02955	REV —
SCALE NTS	DATE 09/27/16	SHEET 2 OF 7

SIGNED: 09/28/2016



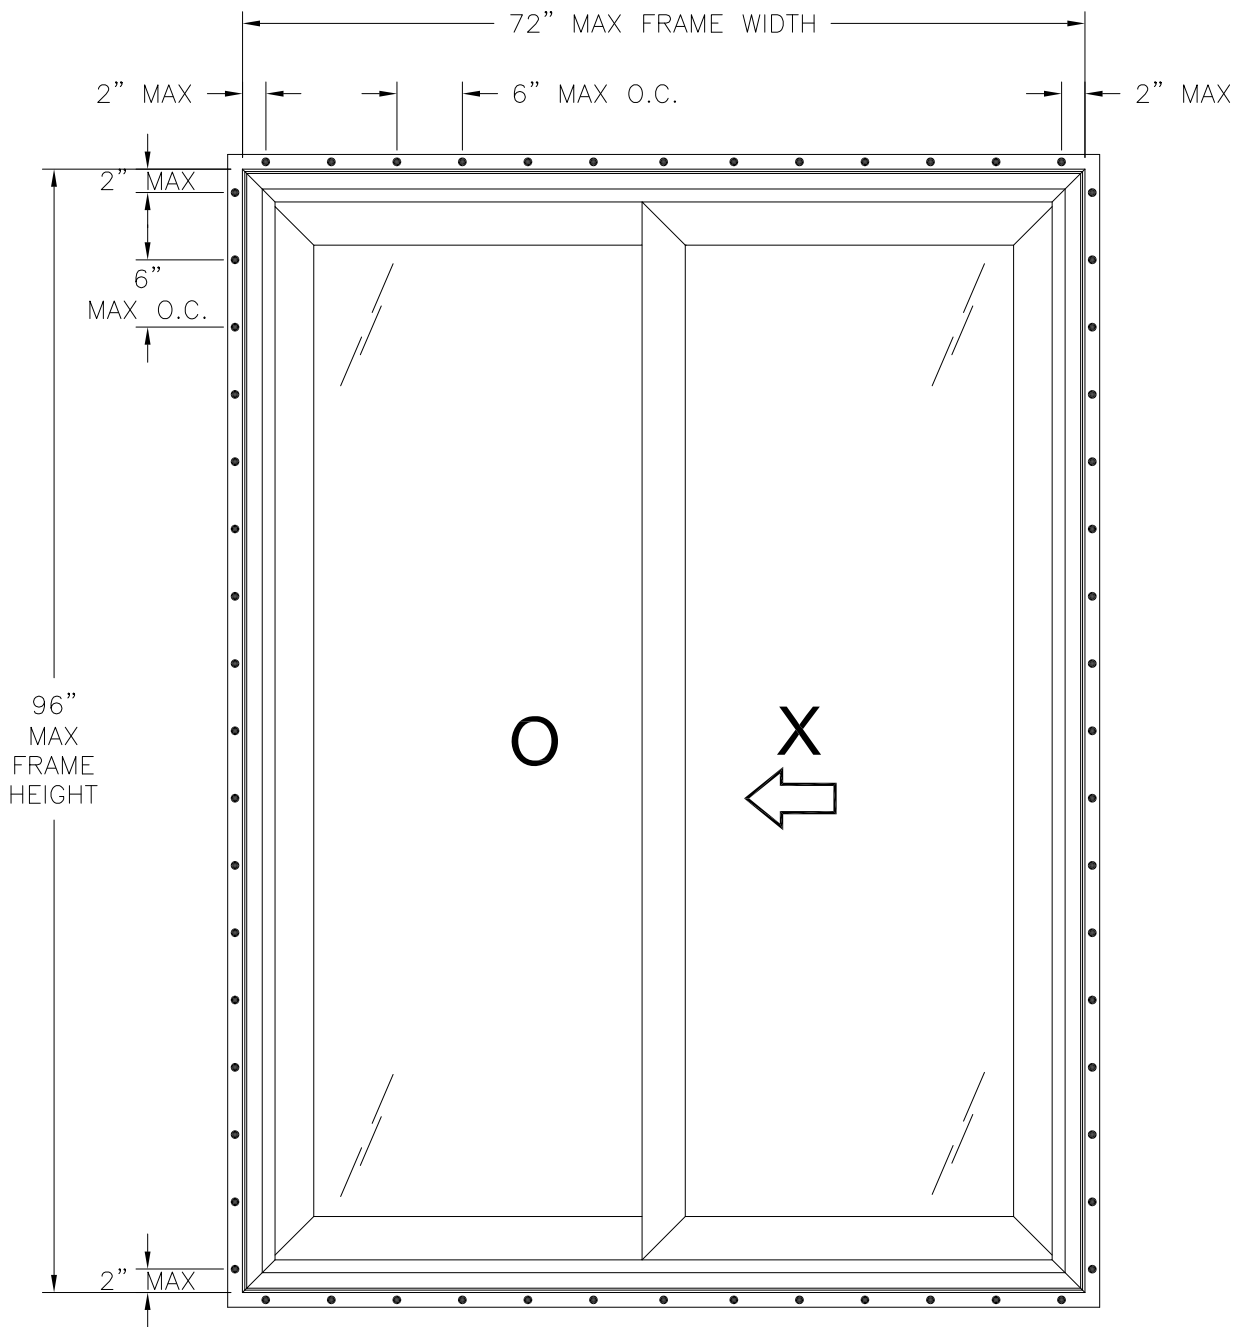

5901/5902 PATIO DOOR OX
EXTERIOR VIEW
FIN INSTALLATION

DESIGN PRESSURE RATING	IMPACT RATING
±40.0PSF	NONE


NOTES:
1. MAXIMUM D.L.O.: 31 5/8" X 88 1/16"

HARDWARE SCHEDULE	
A.	(1) LOCK HANDLE ASSEMBLY W/ KEEPER AT LOCK STILE, 35 1/2" UP FROM BOTTOM
B.	(2) DUAL STEEL ADJUSTABLE ROLLER ASSEMBLY AT BOTTOM RAIL, ONE AT EACH END
C.	ROLL-FORMED STEEL REINFORCEMENT (A6617-C) AT JAMB AND MEETING STILES
D.	STEEL CHANNEL REINFORCEMENT (C111218) AT MEETING STILES



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

WINDOW MART MFG., LLC. 5760 ALBERT PIKE, P.O. BOX 570 ROYAL, AR 71968		
5901/5902 PATIO DOOR OX 72" X 96" – NON-IMPACT FIN ELEVATION		
DRAWN: V.L.	DWG NO. 08-02955	REV —
SCALE NTS	DATE 09/27/16	SHEET 3 OF 7


SIGNED: 09/28/2016

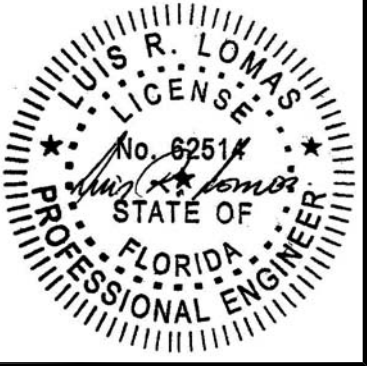

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

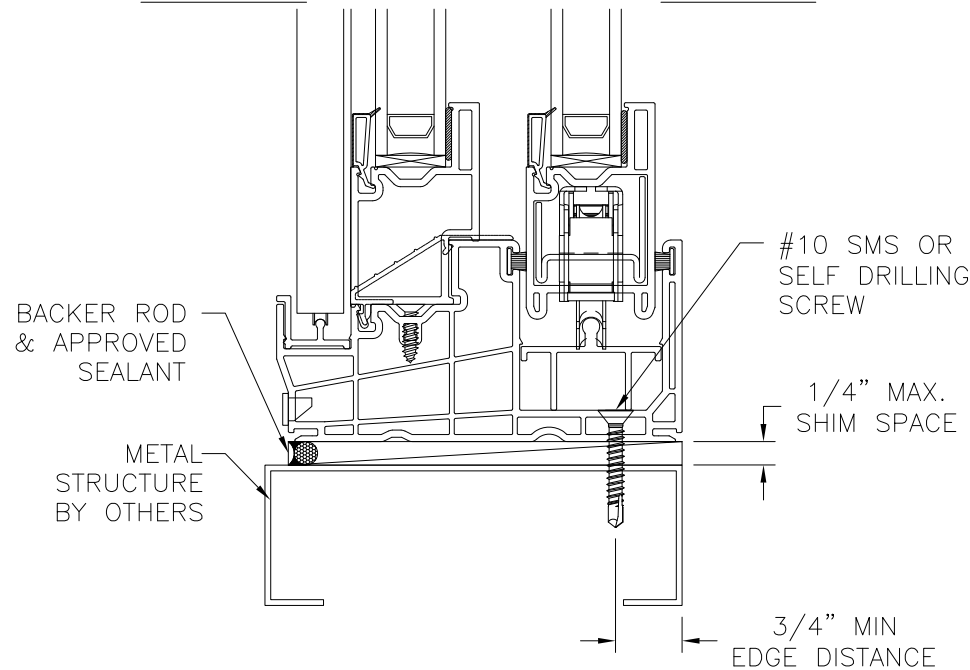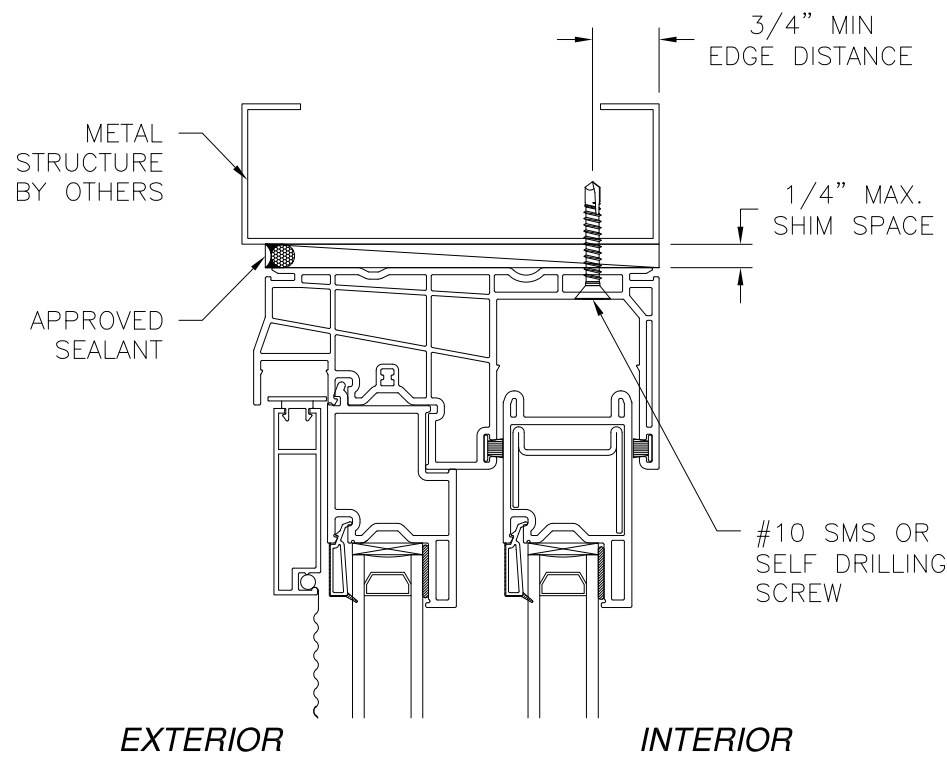

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

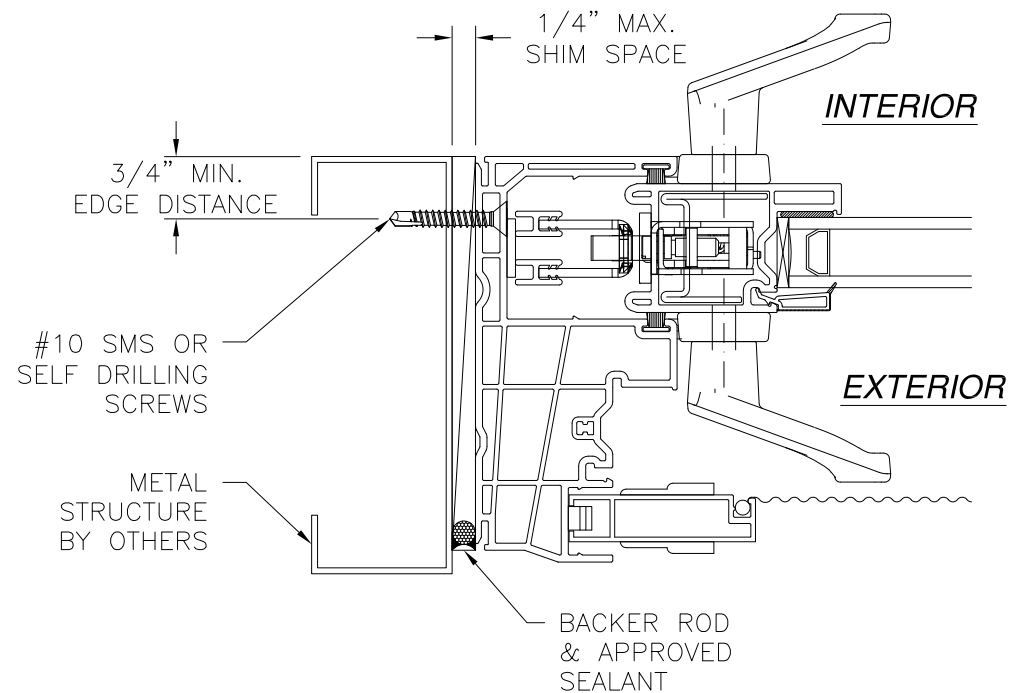



JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


WINDOW MART MFG., LLC. 5760 ALBERT PIKE, P.O. BOX 570 ROYAL, AR 71968			
5901/5902 PATIO DOOR OX 72" X 96" – NON-IMPACT INSTALLATION DETAILS			
DRAWN: V.L.	DWG NO. 08-02955	REV —	
SCALE NTS	DATE 09/27/16	SHEET 5 OF 7	

SIGNED: 09/28/2016

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

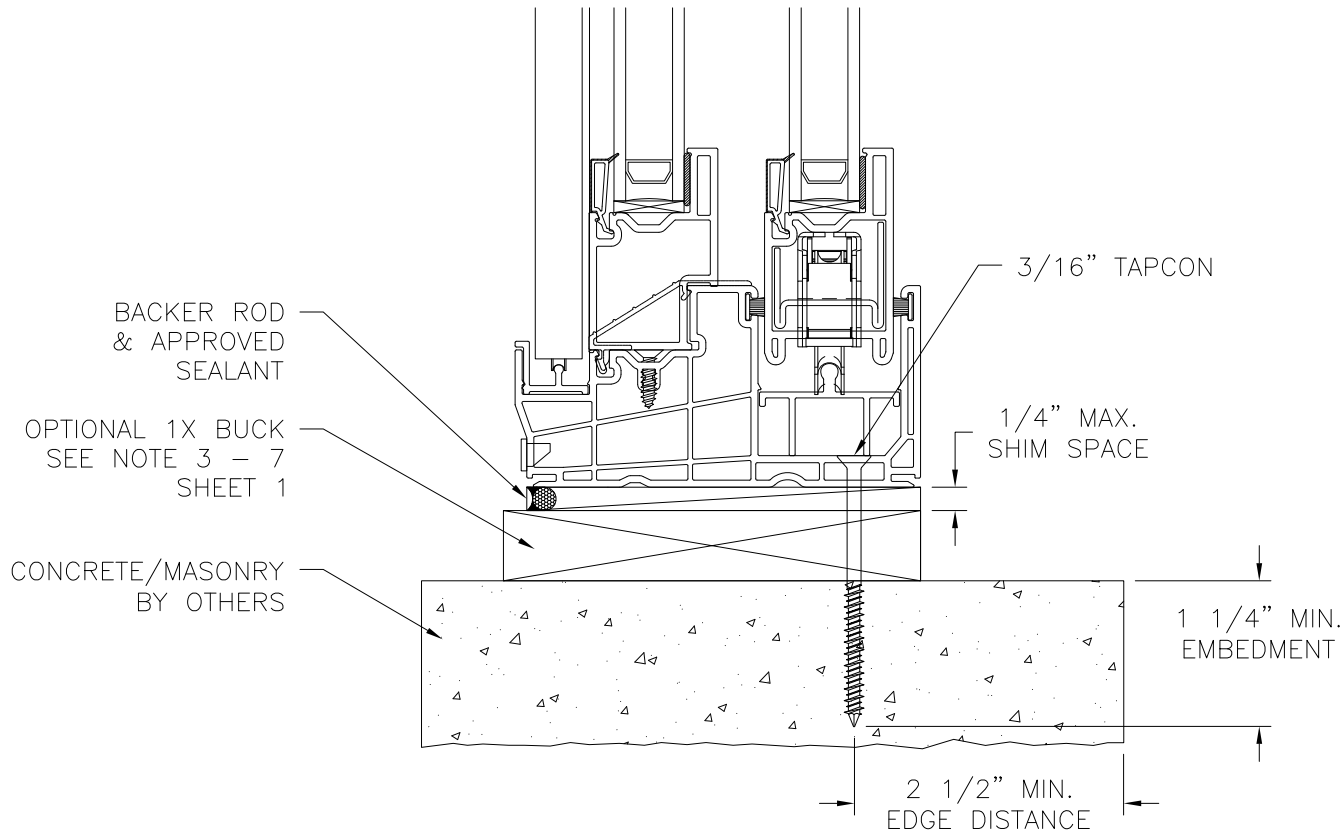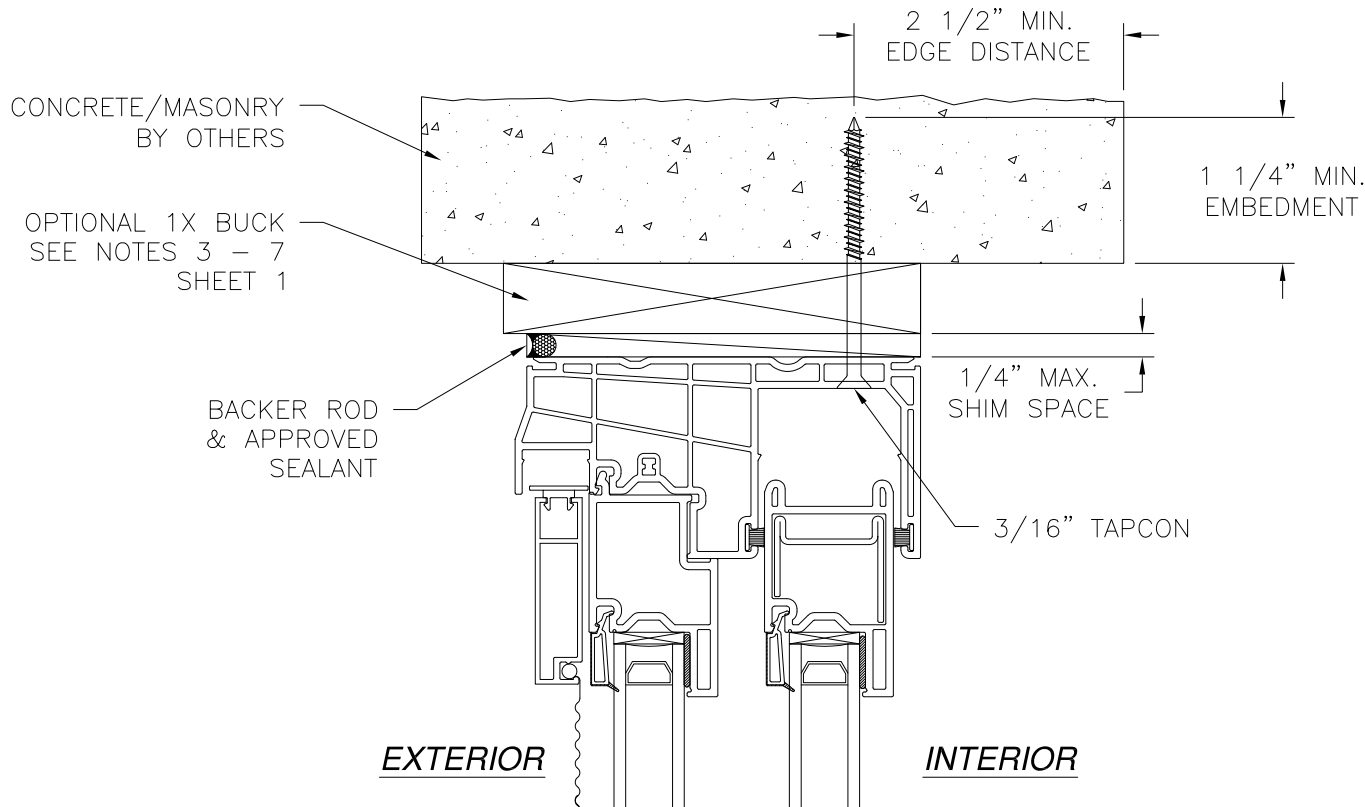

VERTICAL CROSS SECTION
CONCRETE/MASONRY INSTALLATION



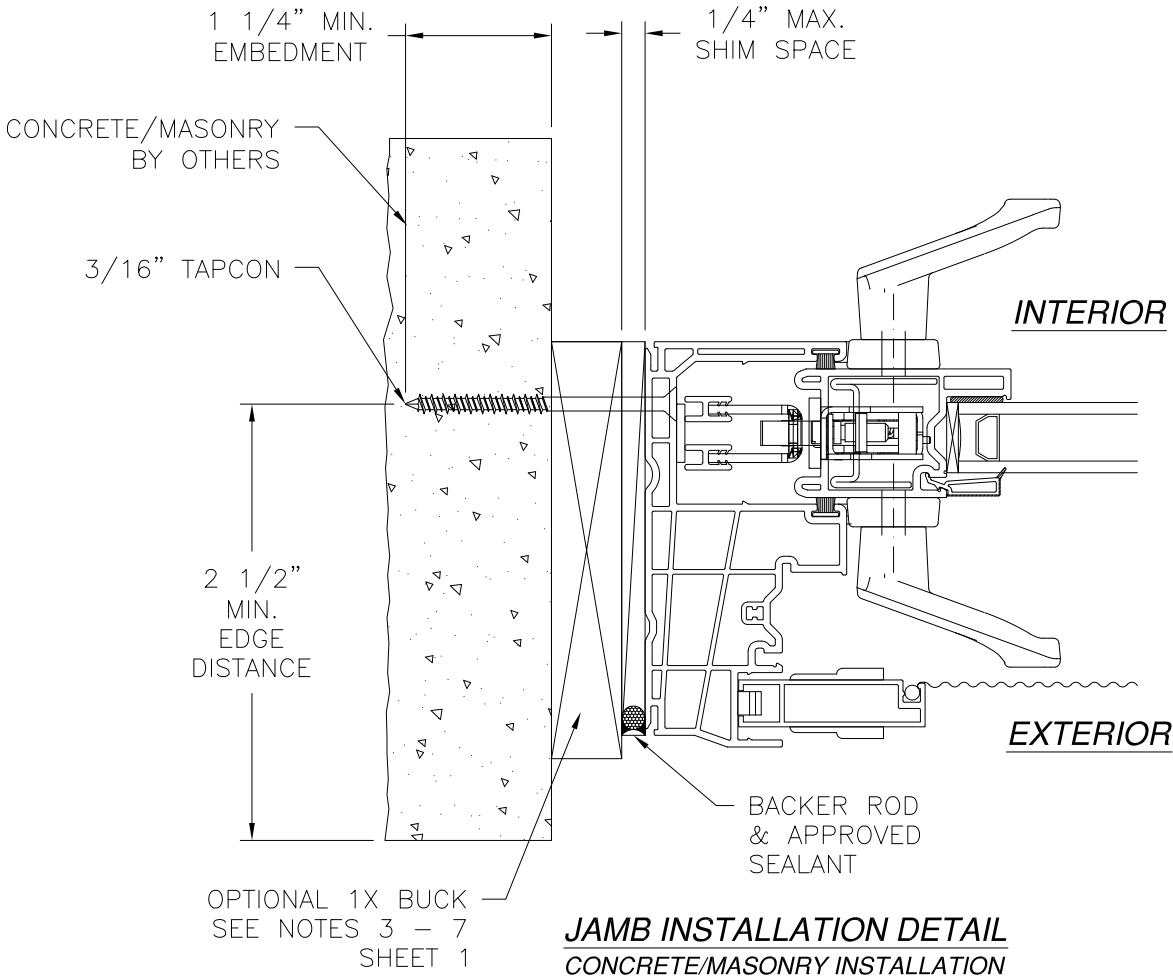


- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/28/2016

WINDOW MART MFG., LLC. 5760 ALBERT PIKE, P.O. BOX 570 ROYAL, AR 71968		
5901/5902 PATIO DOOR OX 72" X 96" – NON-IMPACT INSTALLATION DETAILS		
DRAWN: V.L.	DWG NO. 08-02955	REV —
SCALE NTS	DATE 09/27/16	SHEET 6 OF 7



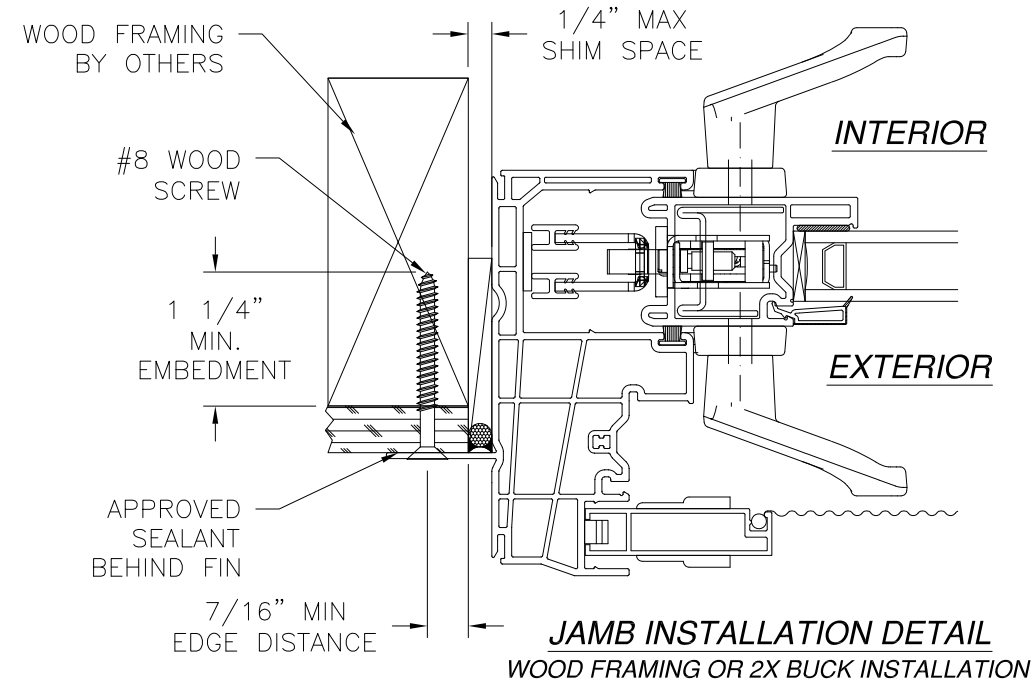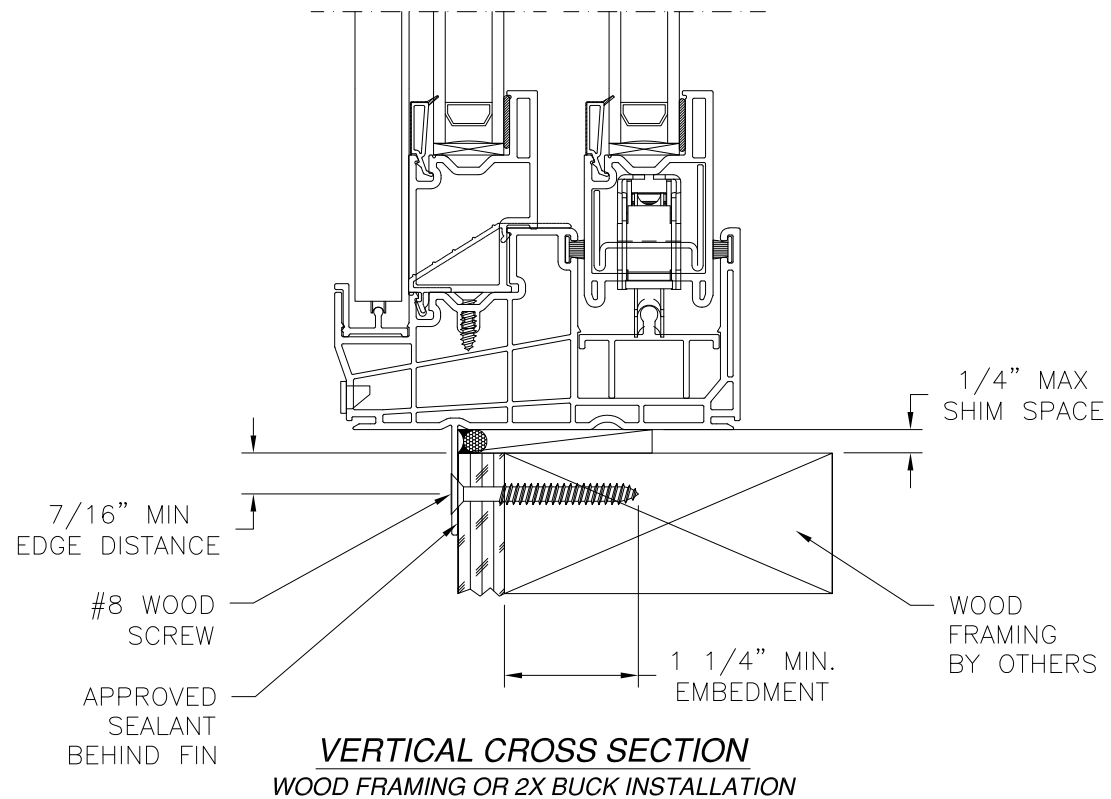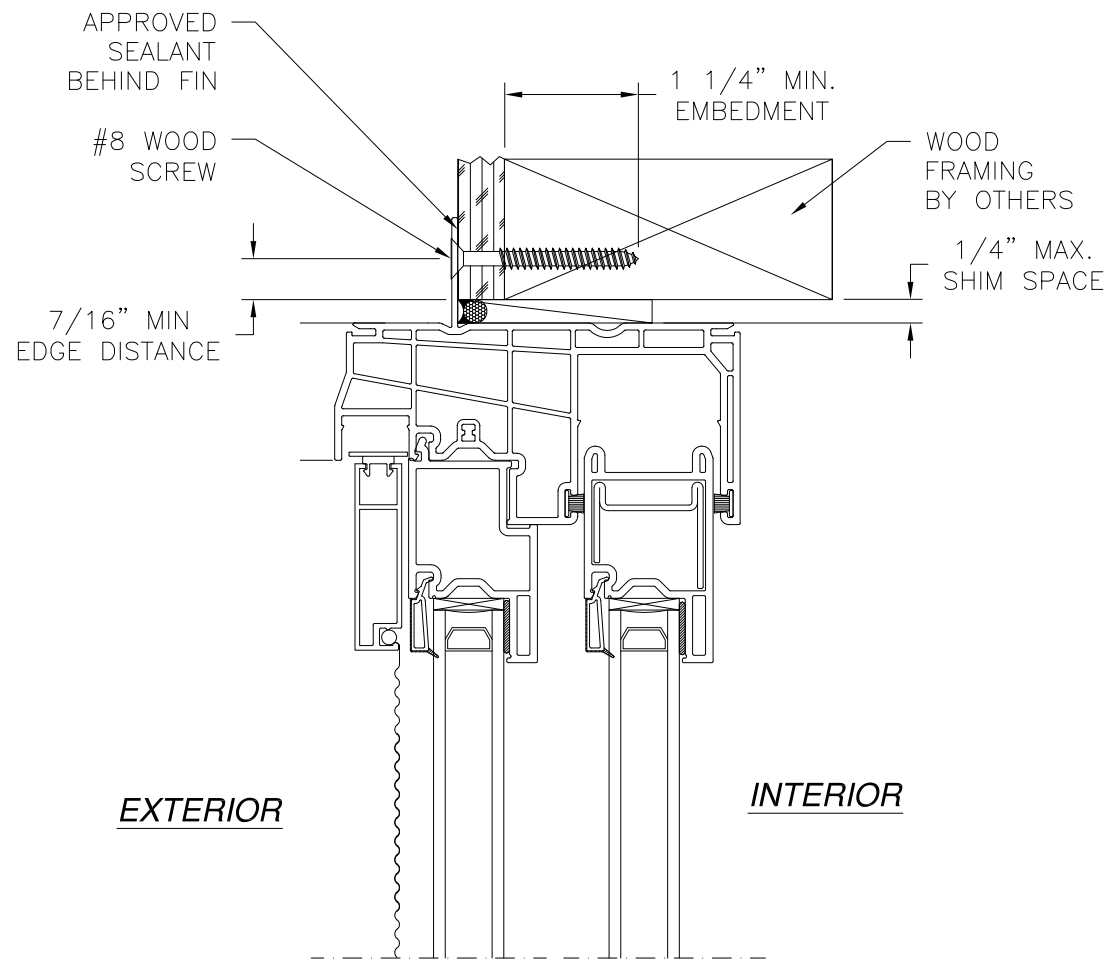

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

WINDOW MART MFG., LLC. 5760 ALBERT PIKE, P.O. BOX 570 ROYAL, AR 71968		
5901/5902 PATIO DOOR OX 72" X 96" – NON-IMPACT FIN INSTALLATION DETAILS		
DRAWN: V.L.	DWG NO. 08-02955	REV —
SCALE NTS	DATE 09/27/16	SHEET 7 OF 7

SIGNED: 09/28/2016

