



8000 Premium Vinyl Series Double Hung Op/Pic/Op
108" x 63 1/2" 3-Wide Overall Unit Frame Size
Thru Frame Installation / Non-Impact

CCL Listing# 448-H-003.08

ELEMENT TEST REPORT NUMBER: **ESP023857P-2048**

8000 Premium Vinyl Series Double Hung Window Op/Pic/Op
Thru Frame Installation / WDMA Instructions / Non-Impact

SHEET: 1 OF 3

DRAWN BY: B.K.

TEST REPORT SUMMARY:

- 3-WIDE MAXIMUM BASIC UNIT FRAME SIZE:
108" (2743mm) x 63 1/2" (1613mm)
- OVERALL DESIGN PRESSURE: ± 50.13 psf
- STRUCTURAL TEST PRESSURE: ± 75.19 psf
- RATING: **LC-PG50**

INSTALLATION NOTES:



1. USE 2" x _ PINE FOR WOOD BUCK
2. PLACE WOOD SHIMS EVERY 6-10"
3. 1/4" MAXIMUM SHIM SPACE AT HEAD, SILL AND EACH JAMB
4. APPLY A CONTINUOUS BEAD OF SEALANT BETWEEN THE FRAME AND ROUGH OPENING
5. PRE-DRILL. **CAUTION:** DO NOT OVER FASTEN. INSTALL #8 X 51MM (2") PPH SCREWS PLACED 102MM (4") FROM EACH CORNER AT THE SIDES AND HEAD, AND 102MM (4") AT THE MEETING RAIL LOCATION OF THE DOUBLE HUNG'S. AT THE TOP MULL LOCATION SCREWS WERE PLACED 102MM (4") ON CENTER EACH SIDE OF THE CENTER LINE AND (13"- 15") ON CENTER ACROSS THE TOP OF THE PICTURE WINDOW. AT THE BOTTOM MULL LOCATION SCREWS WERE PLACED 102MM (4") EACH CORNER OF THE PICTURE WINDOW ONLY AND (13"- 15") ON CENTER.
 - INSTALL CAP OVER HOLE
 - SILICONE SEAL OVER CAP
6. INSTALL BACKER ROD AND SEALANT AT THE EXTERIOR, BETWEEN UNIT & ROUGH OPENING.
7. MAXIMUM 3-WIDE OVERALL B.U.S. (Basic Unit Size) = **108" (2743mm) x 63 1/2" (1613mm)**

GENERAL INSTALLATION NOTES:

- Check rough opening for proper size, plumb, level and square.
- Make all necessary adjustments to ensure rough opening is plumb, level & square.
- Sill must be flat, level and capable of supporting the weight of the unit.
- Opening must allow a maximum of 1/4" shim space at head, sill and jambs.
- Wood buck, framing, fasteners, sealant and all wall system materials are provided by others

FLASHING

- For units that have to meet a specific DP (Design Pressure) rating, any kind of building wrap must be folded and taped away from each rough opening before the unit is installed. Unit must come in contact with the building's bare sheathing. A bead of silicone must be applied to the backside of the nail fin where it meets the unit, at head and jambs.
- Once unit is installed and flashed properly, the building wrap must be reapplied and trimmed flush with the unit's exterior. A bead of sealant must be placed along the seam joint of the building wrap and the unit. Tape the corner cuts in the building wrap.

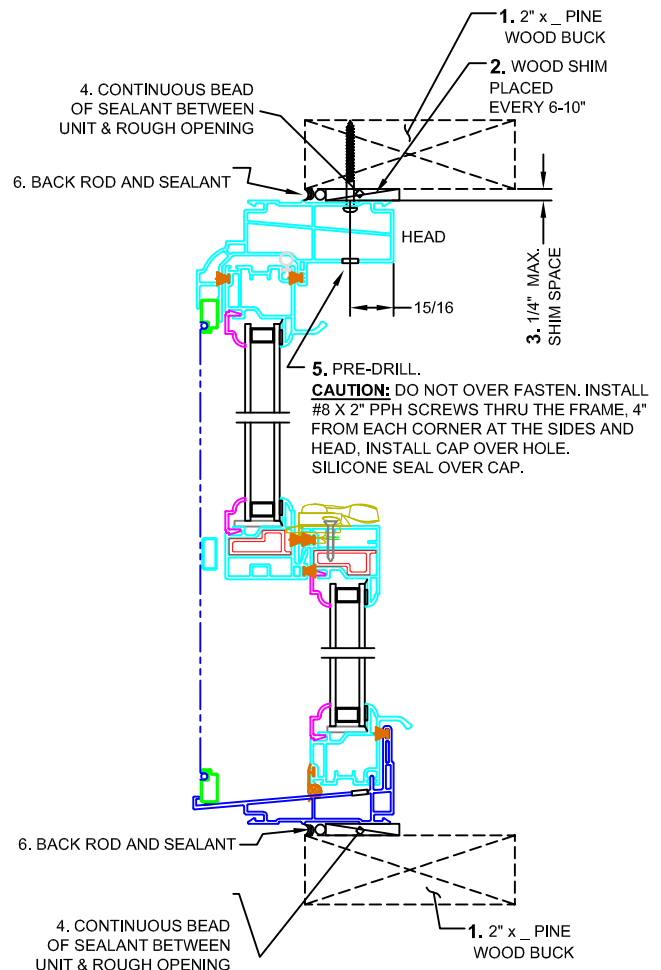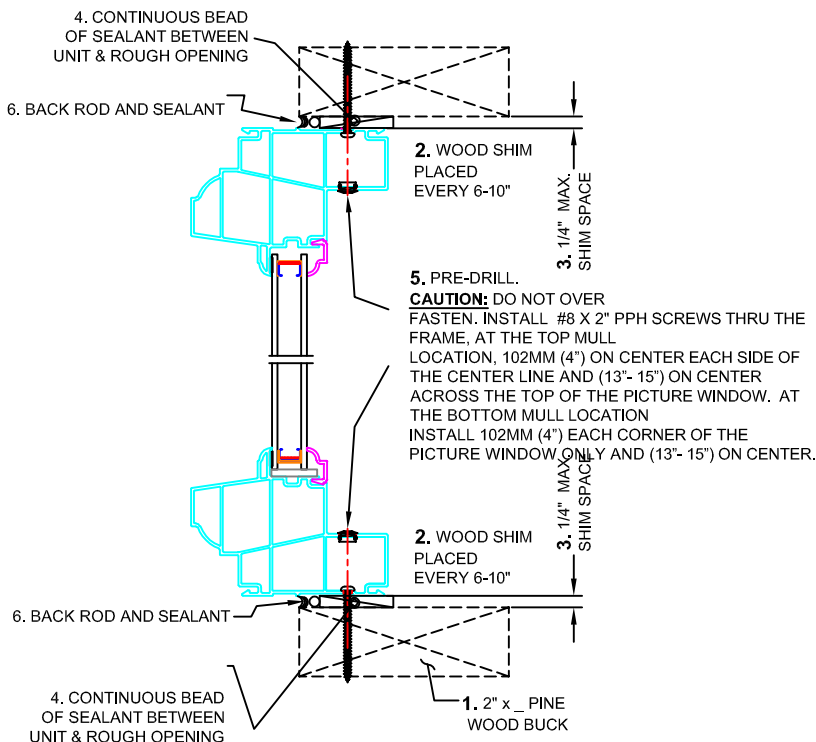

Installation requirements may vary in particular locations and in other types of construction. Proper installation is essential, and Sierra Pacific Windows, recommends consultation with an AAMA Certified Installer, or other qualified, registered building professional before installation of any Sierra Pacific product. Proper installation of Sierra Pacific products is the responsibility of the installer. Sierra Pacific is not responsible for proper installation. Sierra Pacific is not responsible for the design of, conditions in, or performance of building construction beyond the perimeters of the Sierra Pacific units. Sierra Pacific is not responsible for proper integration of the Sierra Pacific units with the weather-repellent systems of the building.



8000 Premium Vinyl Series Double Hung Op/Pic/Op
108" x 63 1/2" 3-Wide Overall Unit Frame Size
Thru Frame Installation / Non-Impact

CCL Listing# 448-H-003.08

ELEMENT TEST REPORT NUMBER: **ESP023857P-2048**


8000 Premium Vinyl Series Double Hung Window Op/Pic/Op
Thru Frame Installation / WDMA Instructions / Non-Impact

SHEET: 2 OF 3

DRAWN BY: B.K.

TEST REPORT SUMMARY:

- 3-WIDE MAXIMUM BASIC UNIT FRAME SIZE:
108" (2743mm) x 63 1/2" (1613mm)
- OVERALL DESIGN PRESSURE: ± 50.13 psf
- STRUCTURAL TEST PRESSURE: ± 75.19 psf
- RATING: **LC-PG50**

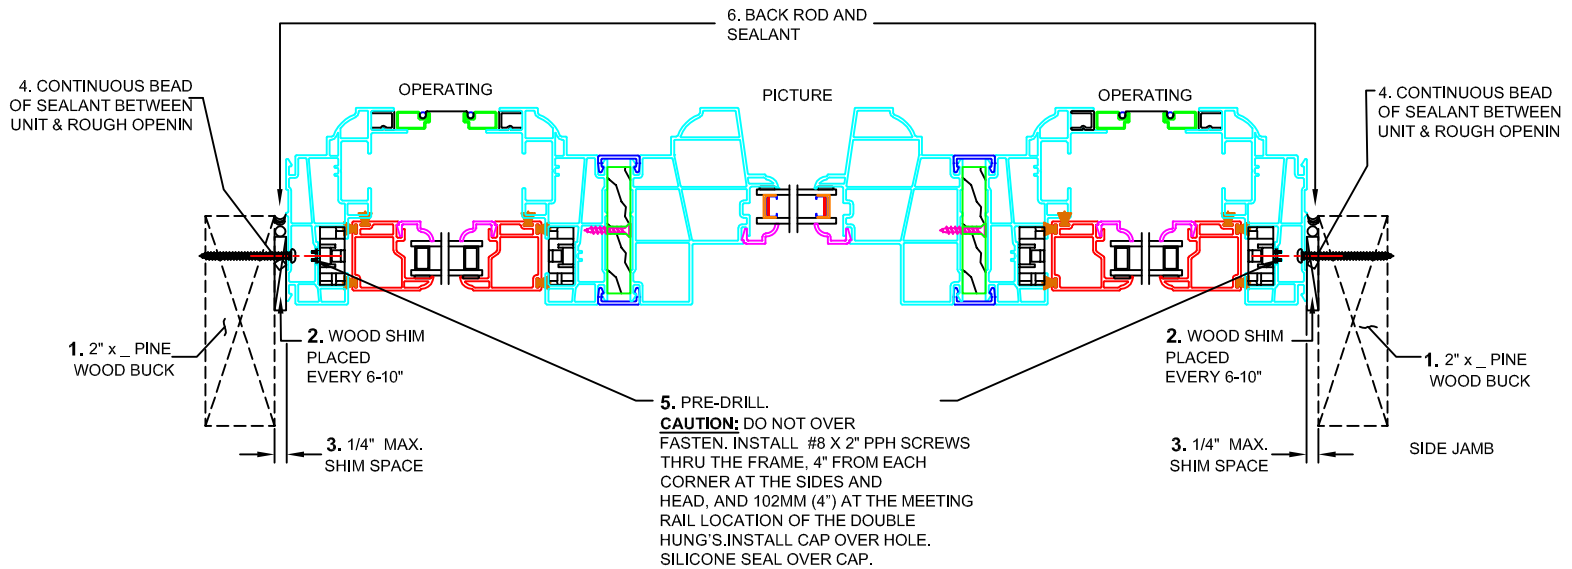



8000 Premium Vinyl Series Double Hung Op/Pic/Op
108" x 63 1/2" 3-Wide Overall Unit Frame Size
Thru Frame Installation / Non-Impact

CCL Listing# 448-H-003.08

ELEMENT TEST REPORT NUMBER: **ESP023857P-2048**

8000 Premium Vinyl Series Double Hung Window Op/Pic/Op
Thru Frame Installation / WDMA Instructions / Non-Impact

SHEET: 3 OF 3

DRAWN BY: B.K.

TEST REPORT SUMMARY:

- 3-WIDE MAXIMUM BASIC UNIT FRAME SIZE:
108" (2743mm) x 63 1/2" (1613mm)
- OVERALL DESIGN PRESSURE: ± 50.13 psf
- STRUCTURAL TEST PRESSURE: ± 75.19 psf
- RATING: **LC-PG50**

ELEVATION SHOWING
FASTENER LOCATION & SPACING
(TYP.)

EXTERIOR VIEW

