

Opaline



Product: OPW045, OPW046, OPM045
OPF040, OPF060

Materials: .030" Aluminum

Substrate: 3/4" THK Wood Furring Strip (min.)

Fasteners: #10 x 1.00" Pancake Head Screw

.032 Aluminum Opaline Panels		
Allowable Pressure Positive (psf)	Allowable Pressure Negative (psf)	#10 Screw Fastener Spacing
107	134	12"

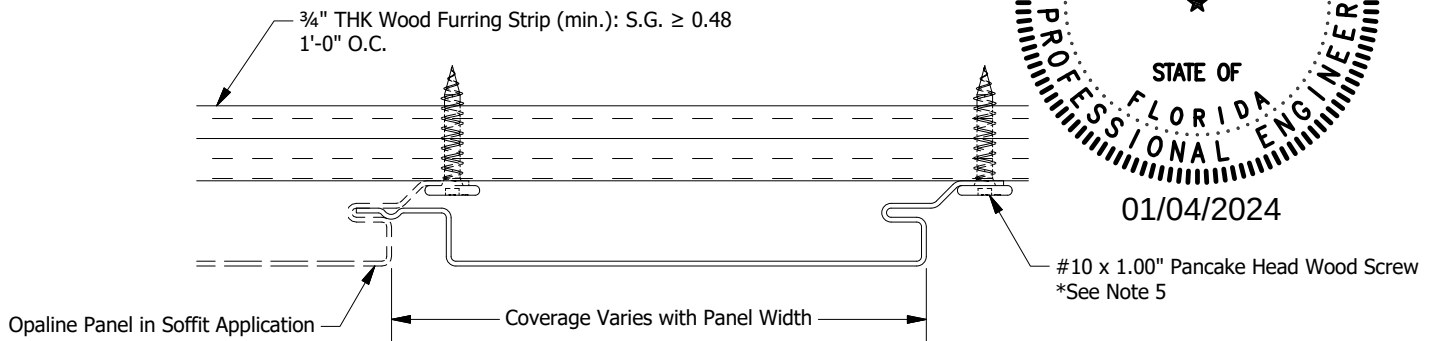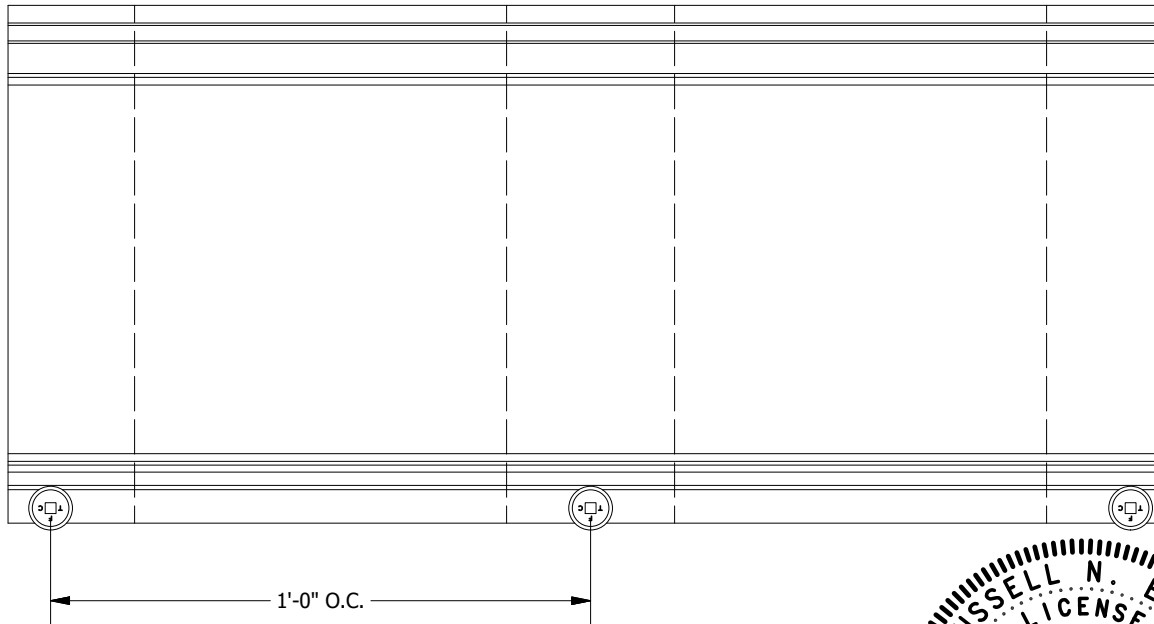

Installation Notes:

- 1) Published panel width dimensions are to be considered as nominal dimensions.
- 2) Variations in overall coverage may occur at installation due to typical manipulating of panels during attachment to the soffit assembly.
- 3) **Other substrates and fasteners may be used but must have allowable pullout and pullover values of 73 lbs or greater.
- 4) S.G. = Specific Gravity
- 5) A 3/4" minimum penetration is required when installing the #10 x 1.00" fastener into the Wood Furring Strip.

Russell N
Emery
2024.01.05
08:49:03-07'00'
Russell N. Emery
No. 71060

This item has been digitally signed and sealed by Russell N. Emery on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

1 of 1