


KP Building Products/CertainTeed

Digitally signed
by Robert J
Amoruso
Date: 2023.10.17
15:45:09 -04'00'


1 2 D4 CEDAR CREEK/D4 HUDSON BAY SIDING

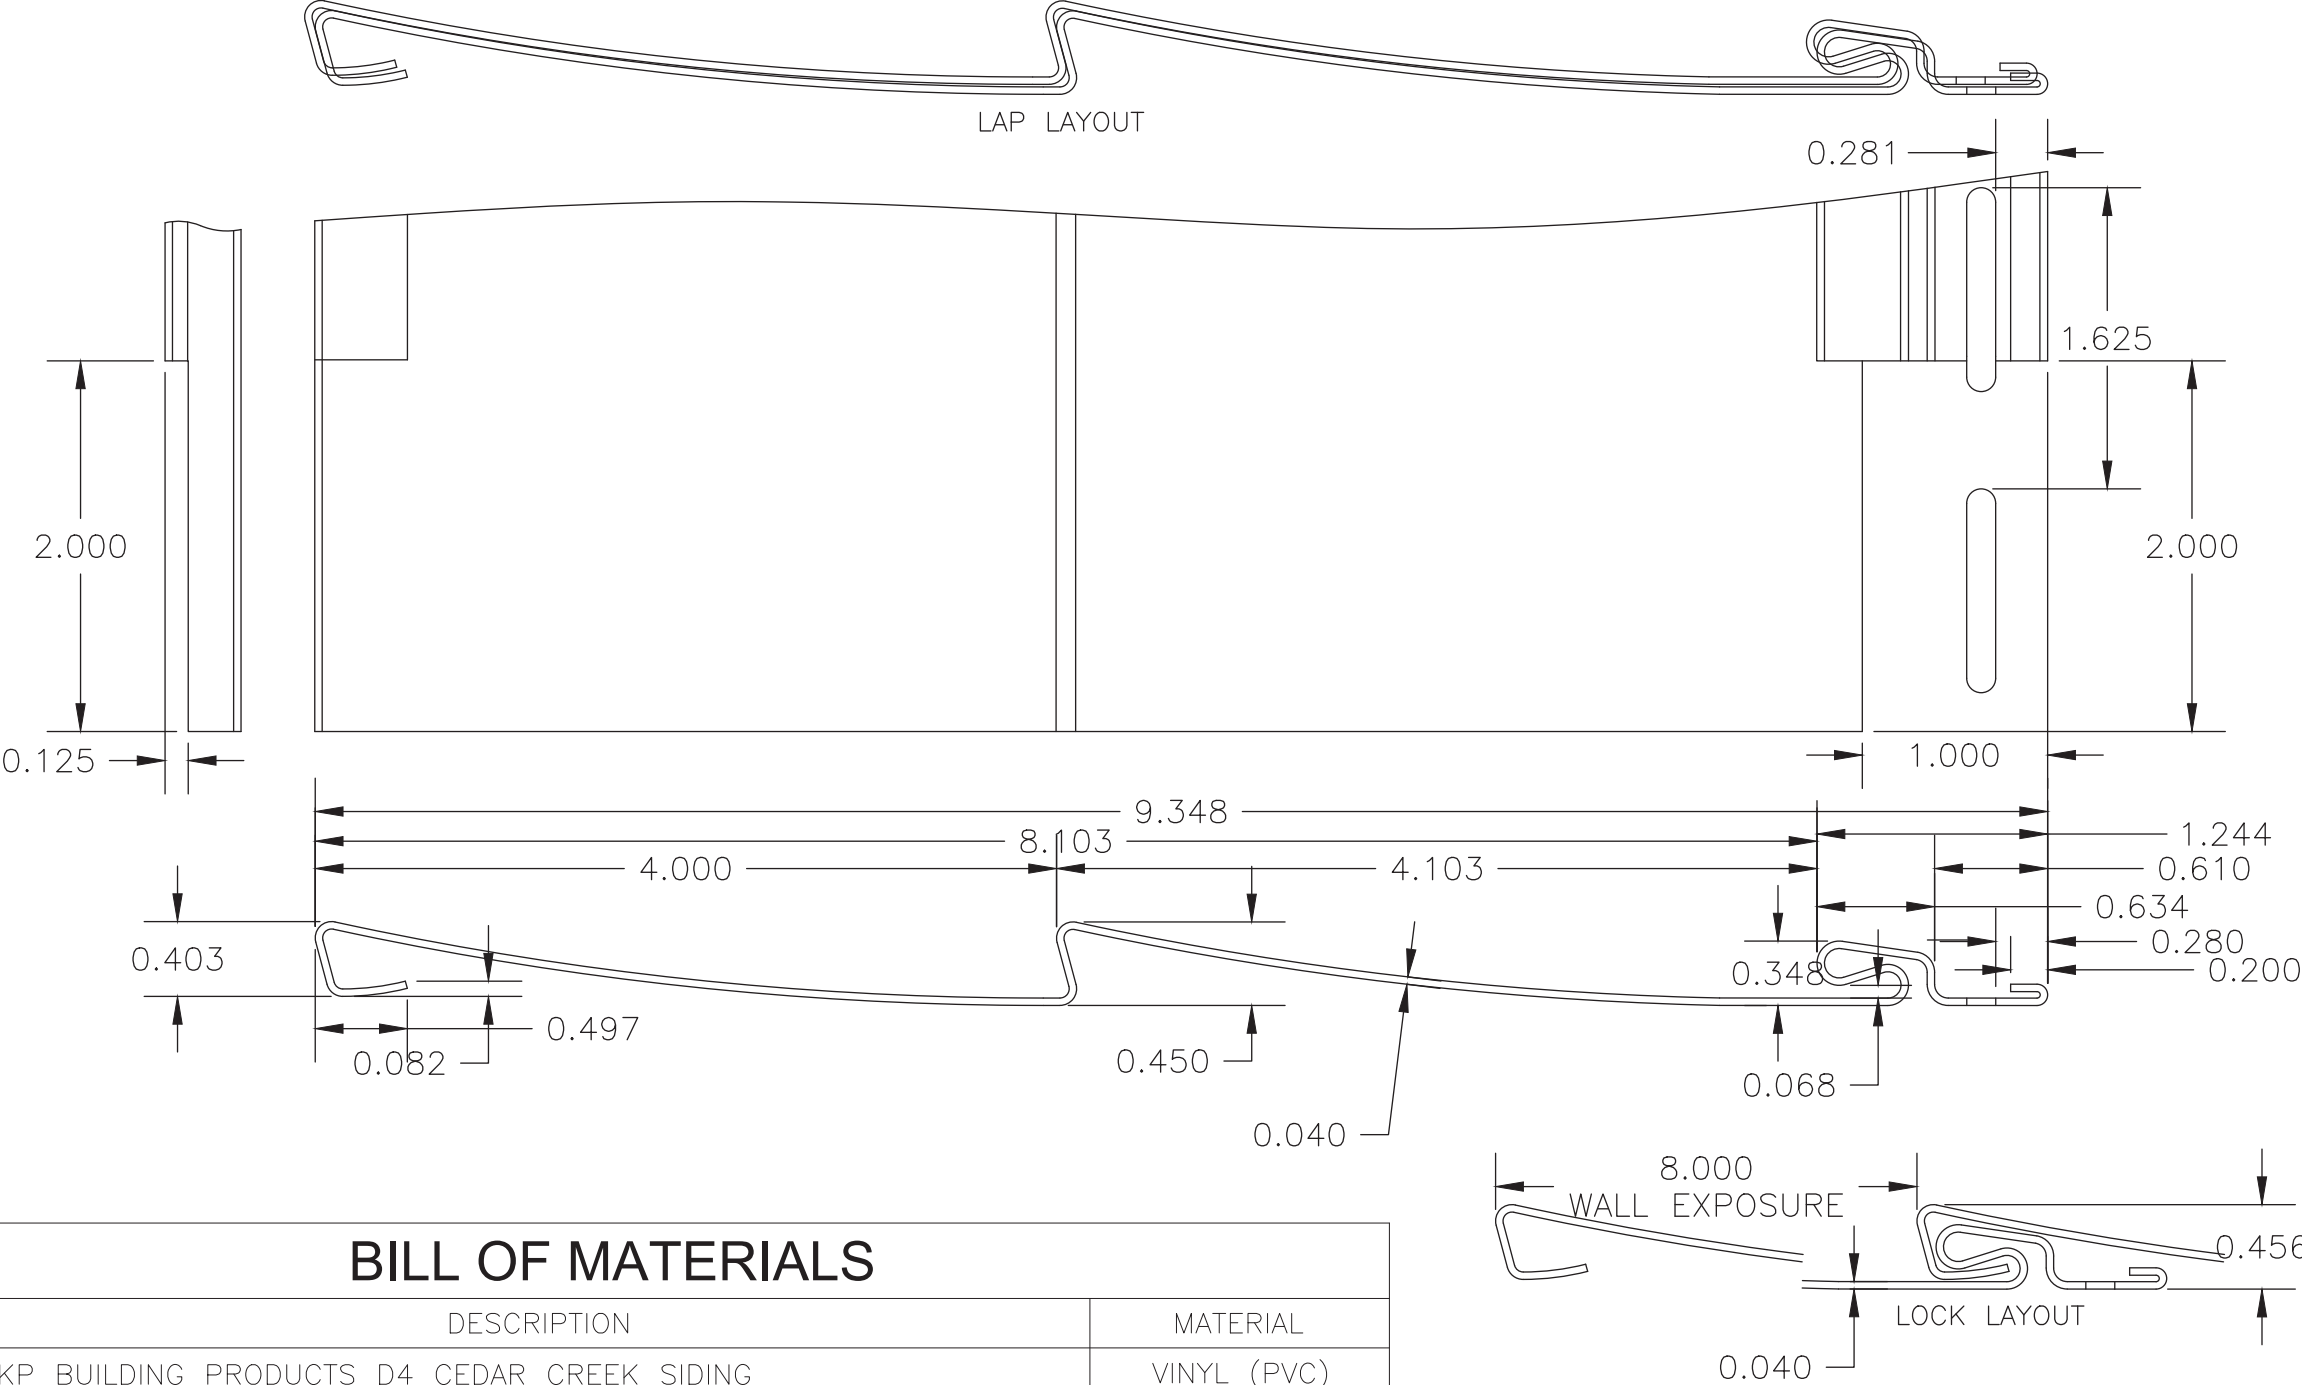

BILL OF MATERIALS

ITEM	DESCRIPTION	MATERIAL
1	KP BUILDING PRODUCTS D4 CEDAR CREEK SIDING	VINYL (PVC)
2	KP BUILDING PRODUCTS D4 HUDSON BAY SIDING	VINYL (PVC)
7	KP BUILDING PRODUCTS STARTER STRIP	VINYL (PVC)
8	KP BUILDING PRODUCTS J-CHANNEL	VINYL (PVC)
9	VINYL SIDING INSTALLATION ANCHOR: 0.125" DIA. x 1-1/2" LONG RING SHANK ROOFING NAIL WITH 0.375" DIA. HEAD MIN.	GALV. STEEL OR STAINLESS STEEL
10	2X FURRING INSTALLATION ANCHOR: 3/16" DIAMETER FLAT HEAD ITW ADVANCED THREADFORM CONCRETE SCREW	BLUE CLIMASEAL
11	KP BUILDING PRODUCTS UTILITY TRIM	VINYL (PVC)

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

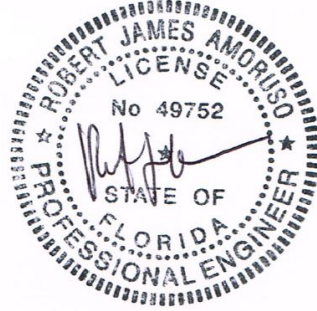

Digitally signed
by Robert J
Amoruso
Date: 2023.10.17
15:45:27 -04'00'

KP Building Products/CertainTeed

402 BOYER CIRCLE

WILLISTON, VT 05495

D4, D5 & D5D CEDAR CREEK AND HUDSON BAY VINYL (PVC) SIDING

D4 SIDING AND BILL OF MATERIALS

PREPARED BY:

DRAWN BY: RJA

DATE: 01/09/17

DRAWING NO: KPB0004

SCALE: N.T.S.

REV: C

SHEET: 2 OF 9

DESCRIPTION

DATE

BY

REV

ADD D5 AND D5D SIDING

UPDATED TO CURRENT EDITION OF THE FBC

UPDATED TO CURRENT EDITION OF THE FBC


10/14/23

11/27/17


PROJECT #422-0910

3

4

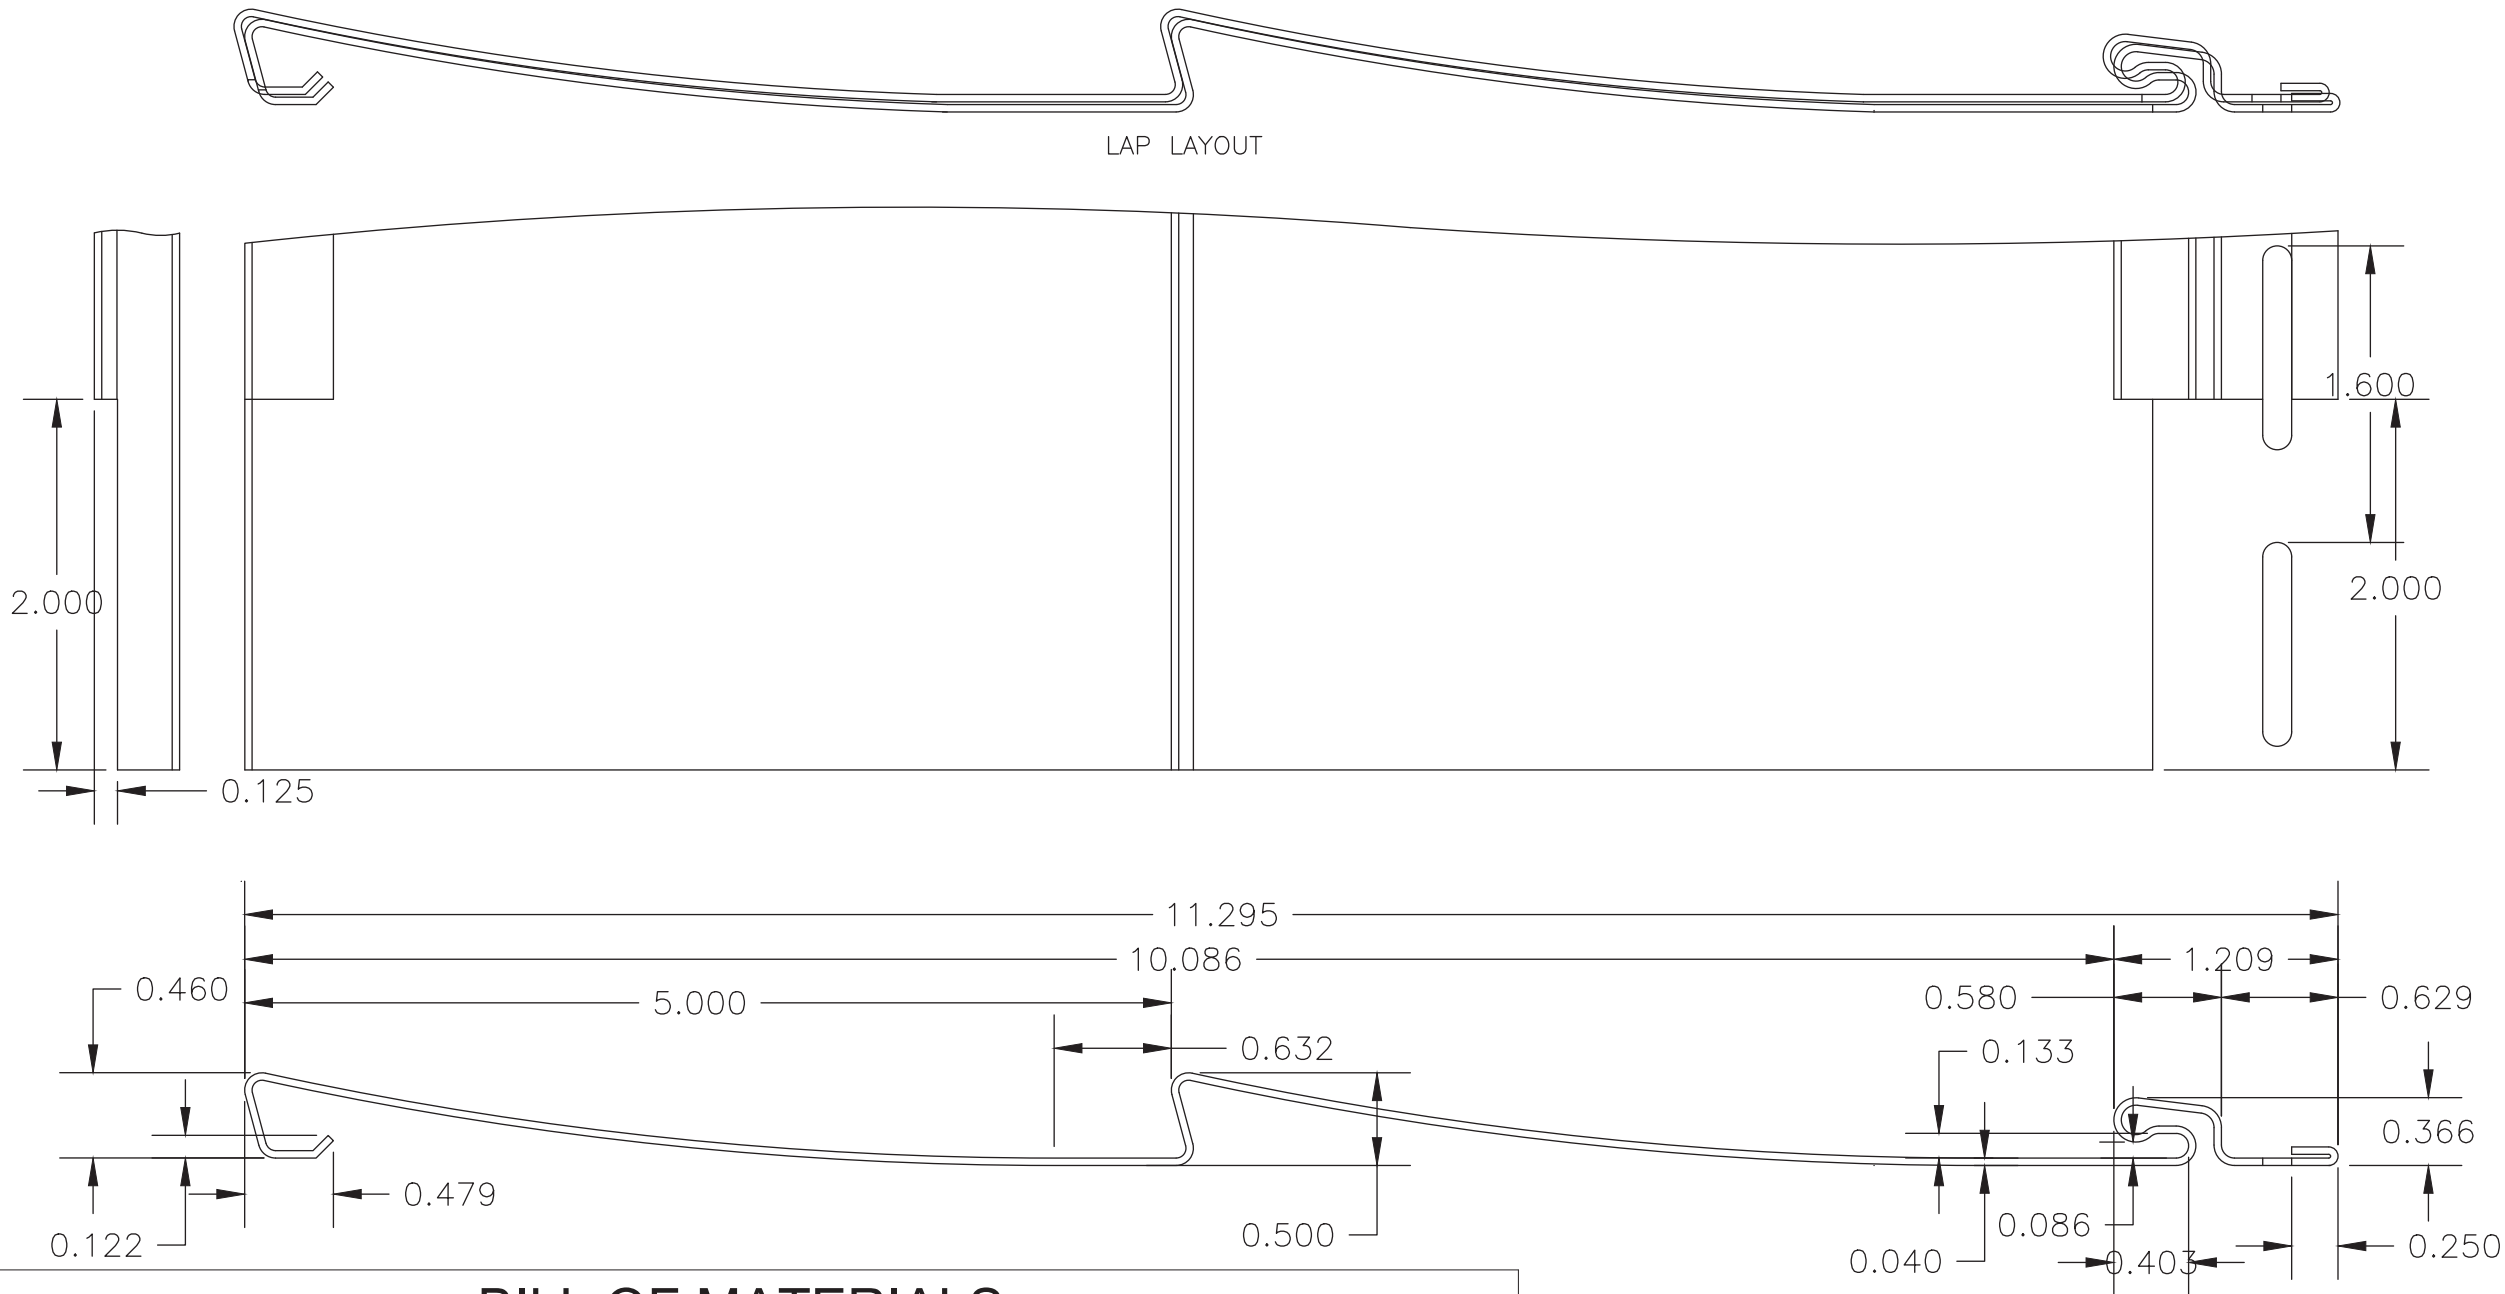D5 CEDAR CREEK/D5 HUDSON BAY SIDING

BILL OF MATERIALS		
ITEM	DESCRIPTION	MATERIAL
3	KP BUILDING PRODUCTS D5 CEDAR CREEK SIDING	VINYL (PVC)
4	KP BUILDING PRODUCTS D5 HUDSON BAY SIDING	VINYL (PVC)
7	KP BUILDING PRODUCTS STARTER STRIP	VINYL (PVC)
8	KP BUILDING PRODUCTS J-CHANNEL	VINYL (PVC)
9	VINYL SIDING INSTALLATION ANCHOR: 0.125" DIA. x 1-1/2" LONG <u>RING SHANK</u> ROOFING NAIL WITH 0.375" DIA. HEAD MIN.	GALV. STEEL OR STAINLESS STEEL
10	2X FURRING INSTALLATION ANCHOR: 3/16" DIAMETER FLAT HEAD ITW ADVANCED THREADFORM CONCRETE SCREW	BLUE CLIMASEAL
11	KP BUILDING PRODUCTS UTILITY TRIM	VINYL (PVC)

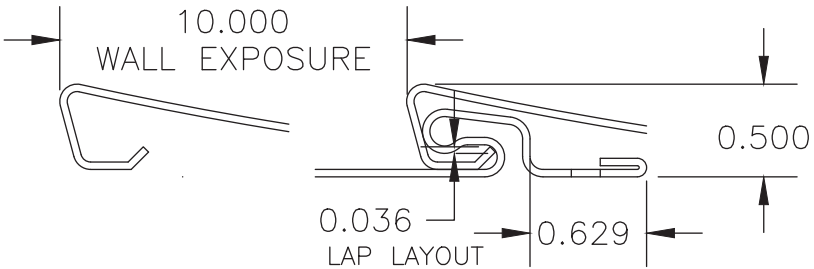

PROJECT #422-0910

C	UPDATED TO CURRENT EDITION OF THE FBC	10/14/23	RJA
B	UPDATED TO CURRENT EDITION OF THE FBC	11/27/17	RJA
A	ADD D5 AND D5D SIDING	7/26/17	RJA
REV	DESCRIPTION	DATE	BY

KP Building Products/CertainTeed

402 BOYER CIRCLE

WILLISTON, VT 05495

D4, D5 & D5D CEDAR CREEK AND HUDSON BAY VINYL (PVC) SIDING

D5 SIDING AND BILL OF MATERIALS

PREPARED BY:

DRAWN BY: RJA

DATE: 01/09/17

SCALE: N.T.S.

DRAWING NO: KPBP0004

REV: C

SHEET: 3 OF 9

PTC PRODUCT DESIGN GROUP, LLC

P.O. Box 520775


Longwood, FL 32752-0775

FBPE Cert. of Auth. No. 25935

Phone: 321.690.1788



Fax: 321.690.1789

Email: info@ptc-corp.com

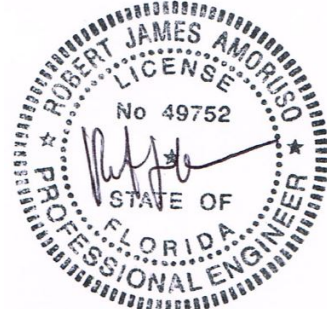Robert J. Amoruso, P.E.
Florida P.E. No. 49752Digitally signed
by Robert J
AmorusoDate: 2023.10.17
15:45:43 -04'00'

56

D5D CEDAR CREEK/D5D HUDSON BAY SIDING

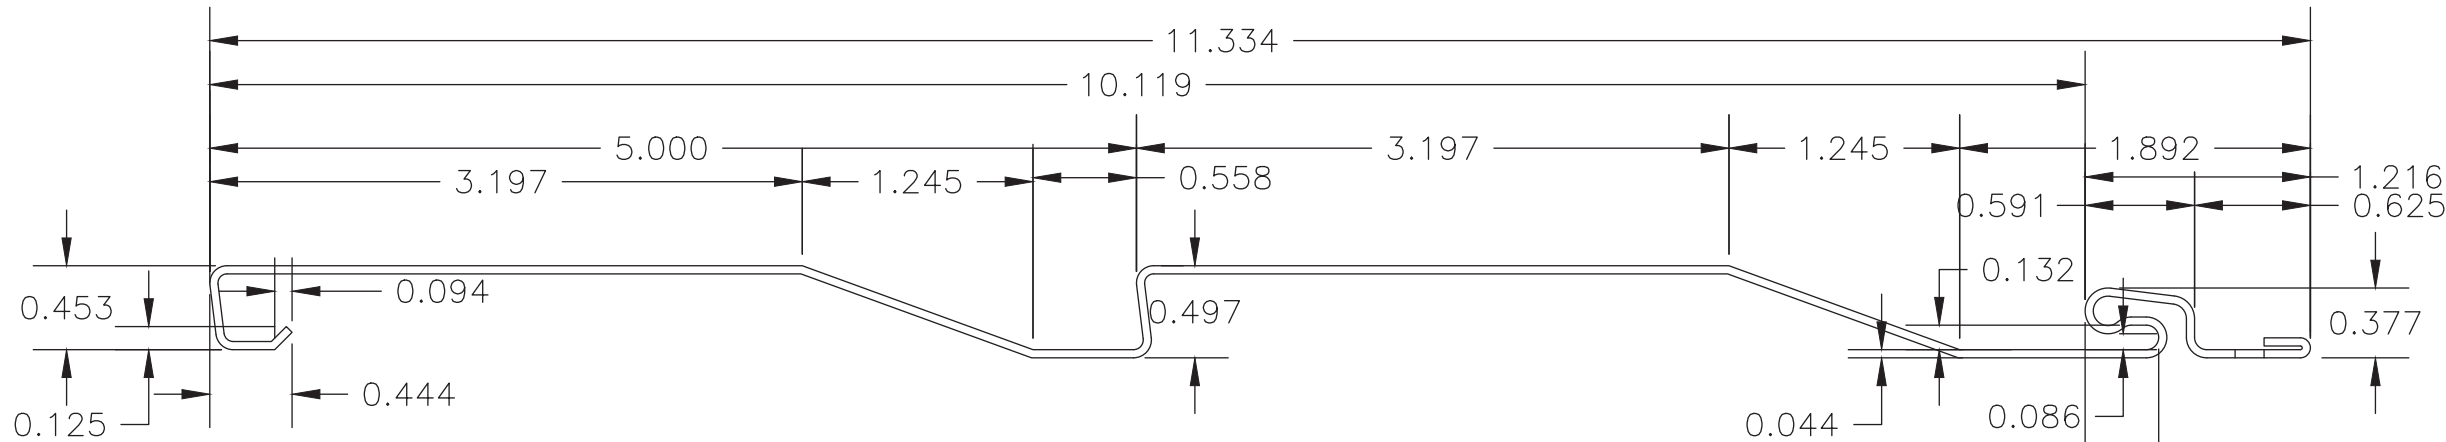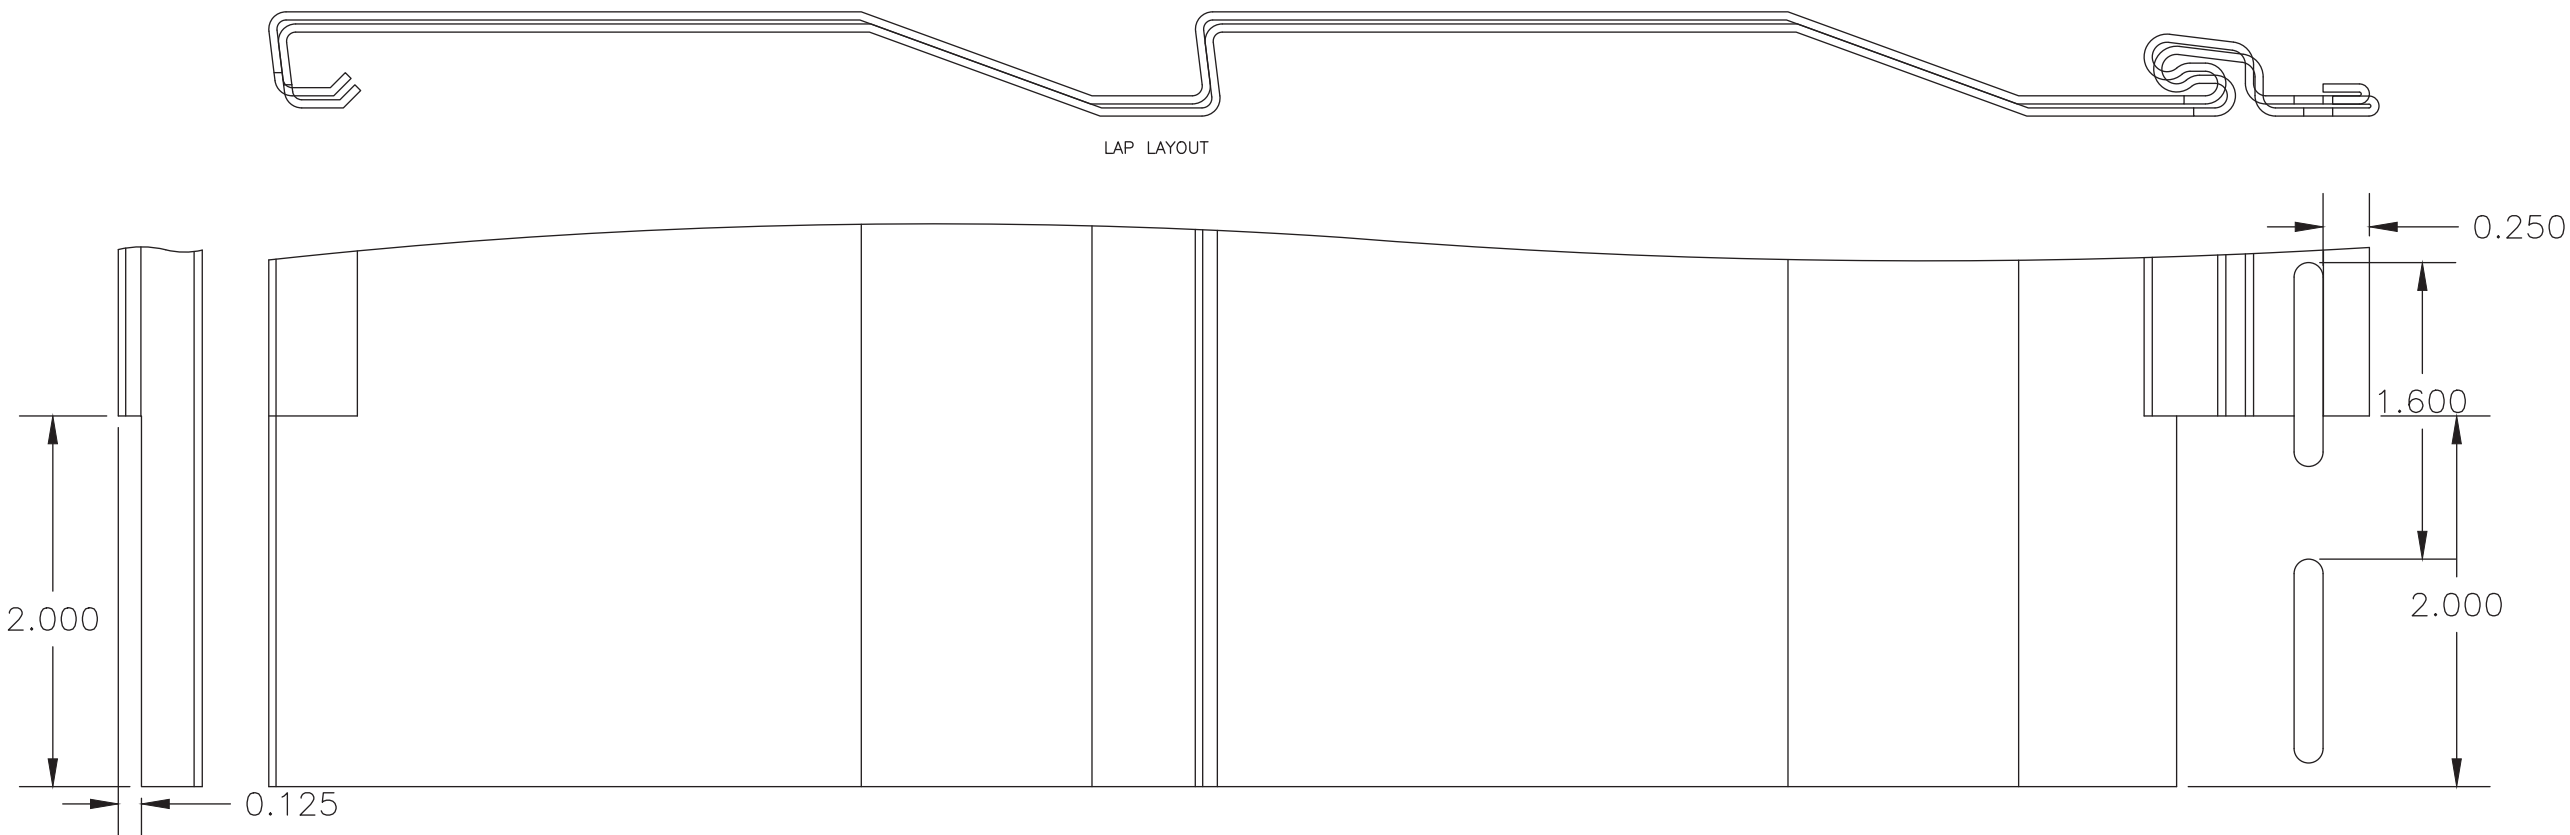

BILL OF MATERIALS		
ITEM	DESCRIPTION	MATERIAL
5	KP BUILDING PRODUCTS D5D CEDAR CREEK SIDING	VINYL (PVC)
6	KP BUILDING PRODUCTS D5D HUDSON BAY SIDING	VINYL (PVC)
7	KP BUILDING PRODUCTS STARTER STRIP	VINYL (PVC)
8	KP BUILDING PRODUCTS J-CHANNEL	VINYL (PVC)
9	VINYL SIDING INSTALLATION ANCHOR: 0.125" DIA. x 1-1/2" LONG RING SHANK ROOFING NAIL WITH 0.375" DIA. HEAD MIN.	GALV. STEEL OR STAINLESS STEEL
10	2X FURRING INSTALLATION ANCHOR: 3/16" DIAMETER FLAT HEAD ITW ADVANCED THREADFORM CONCRETE SCREW	BLUE CLIMASEAL
11	KP BUILDING PRODUCTS UTILITY TRIM	VINYL (PVC)

PROJECT #422-0910

C	UPDATED TO CURRENT EDITION OF THE FBC	10/14/23	RJA
B	UPDATED TO CURRENT EDITION OF THE FBC	11/27/17	RJA
A	ADD D5 AND D5D SIDING	7/26/17	RJA
REV	DESCRIPTION	DATE	BY

KP Building Products/CertainTeed

402 BOYER CIRCLE
WILLISTON, VT 05495


D4, D5 & D5D CEDAR CREEK AND HUDSON BAY VINYL (PVC) SIDING
D5D SIDING AND BILL OF MATERIALS

DRAWN BY:	RJA	DATE:	01/09/17
SCALE:	N.T.S.	DRAWING NO:	KPBP0004
REV:	C	SHEET:	4 OF 9




PTC PRODUCT DESIGN GROUP, LLC
P.O. Box 520775
Longwood, FL 32752-0775
Phone: 321.690.1788
Fax: 321.690.1789
Email: info@ptc-corp.com
FBPE Cert. of Auth. No. 25935

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

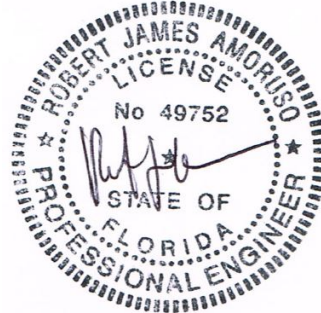


Digitally signed
by Robert J
Amoruso

Date: 2023.10.17
15:45:56 -04'00'

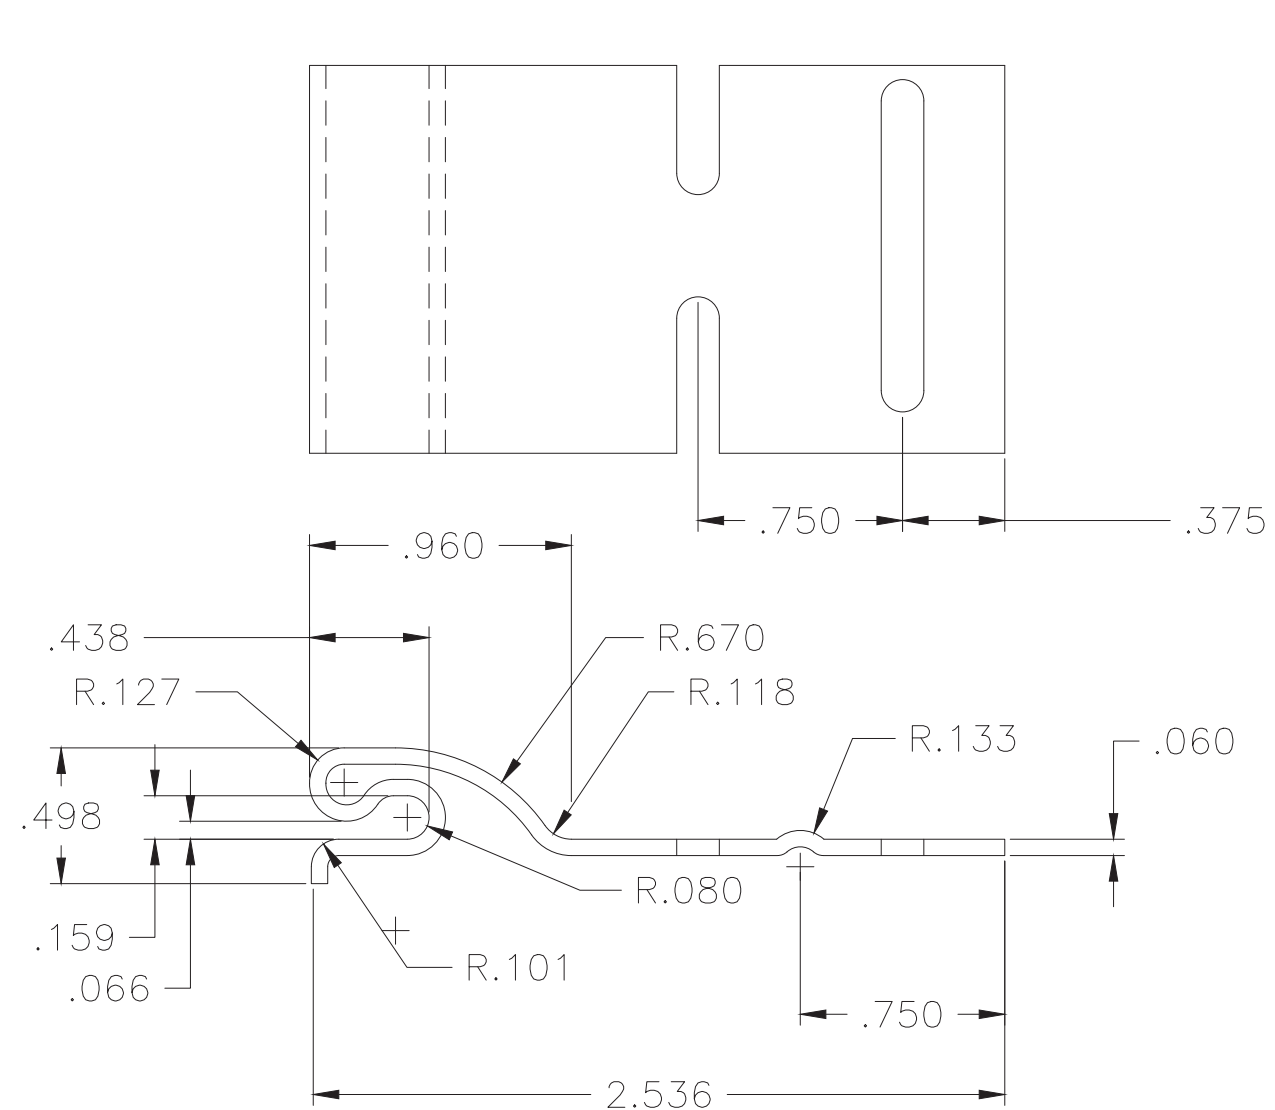


7

KP BUILDING PRODUCTS
1/2" VINYL STARTER STRIP

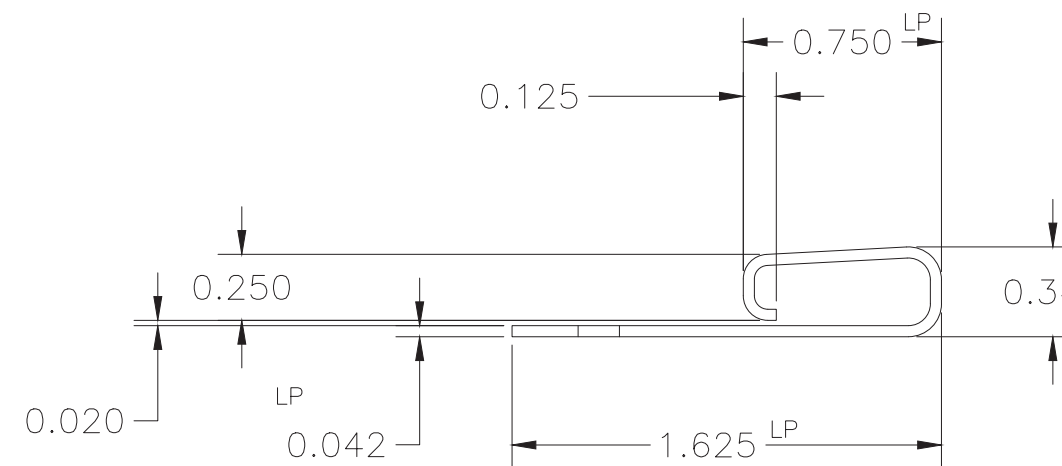

11

) KP BUILDING
 PRODUCTS VINYL
 UTILITY TRIM

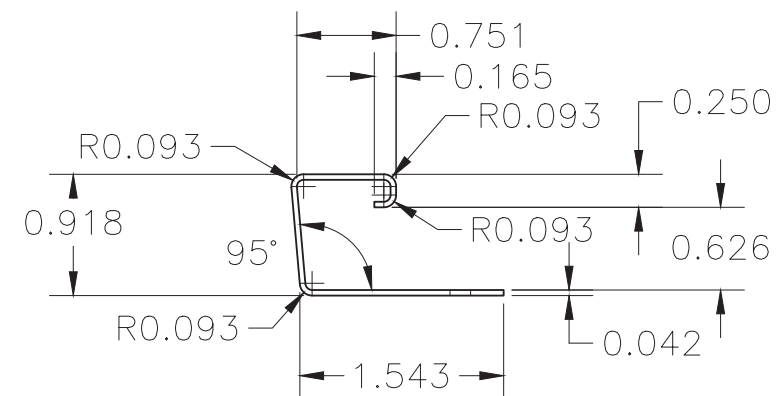


8

) KP BUILDING
 PRODUCTS 5/8"
 VINYL J-CHANNEL

KP Building Products/CertainTeed 402 BOYER CIRCLE WILLISTON, VT 05495		PROJECT #422-0910			
D4, D5 & D5D CEDAR CREEK AND HUDSON BAY VINYL (PVC) SIDING COMPONENTS		C	UPDATED TO CURRENT EDITION OF THE FBC	10/14/23	RJA
		B	UPDATED TO CURRENT EDITION OF THE FBC	11/27/17	RJA
		A	ADD D5 AND D5D SIDING	7/26/17	RJA
		REV	DESCRIPTION	DATE	BY
PREPARED BY:	DRAWN BY: RJA	DATE: 01/09/17			
	SCALE: N.T.S.	DRAWING NO: KPBP0004			
	REV: C	SHEET: 5 OF 9			
 PVC PRODUCT DESIGN GROUP, LLC P.O. Box 3200, 1788 Longwood, FL 32745 FBPE Cert. of Auth. No. 25935 Email: info@pvc-corp.com Phone: 321.690.1788 Fax: 321.690.1789					

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

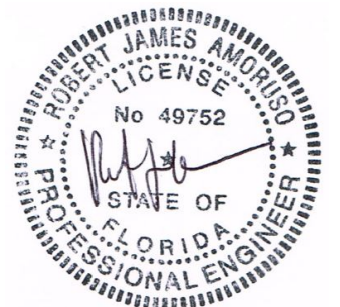


Digitally signed
by Robert J
Amoruso
Date: 2023.10.17
15:46:09 -04'00'

SIDING INSTALLATION DETAIL
SHEATHING OVER
2X WOOD FRAMING

EXTERIOR


INTERIOR

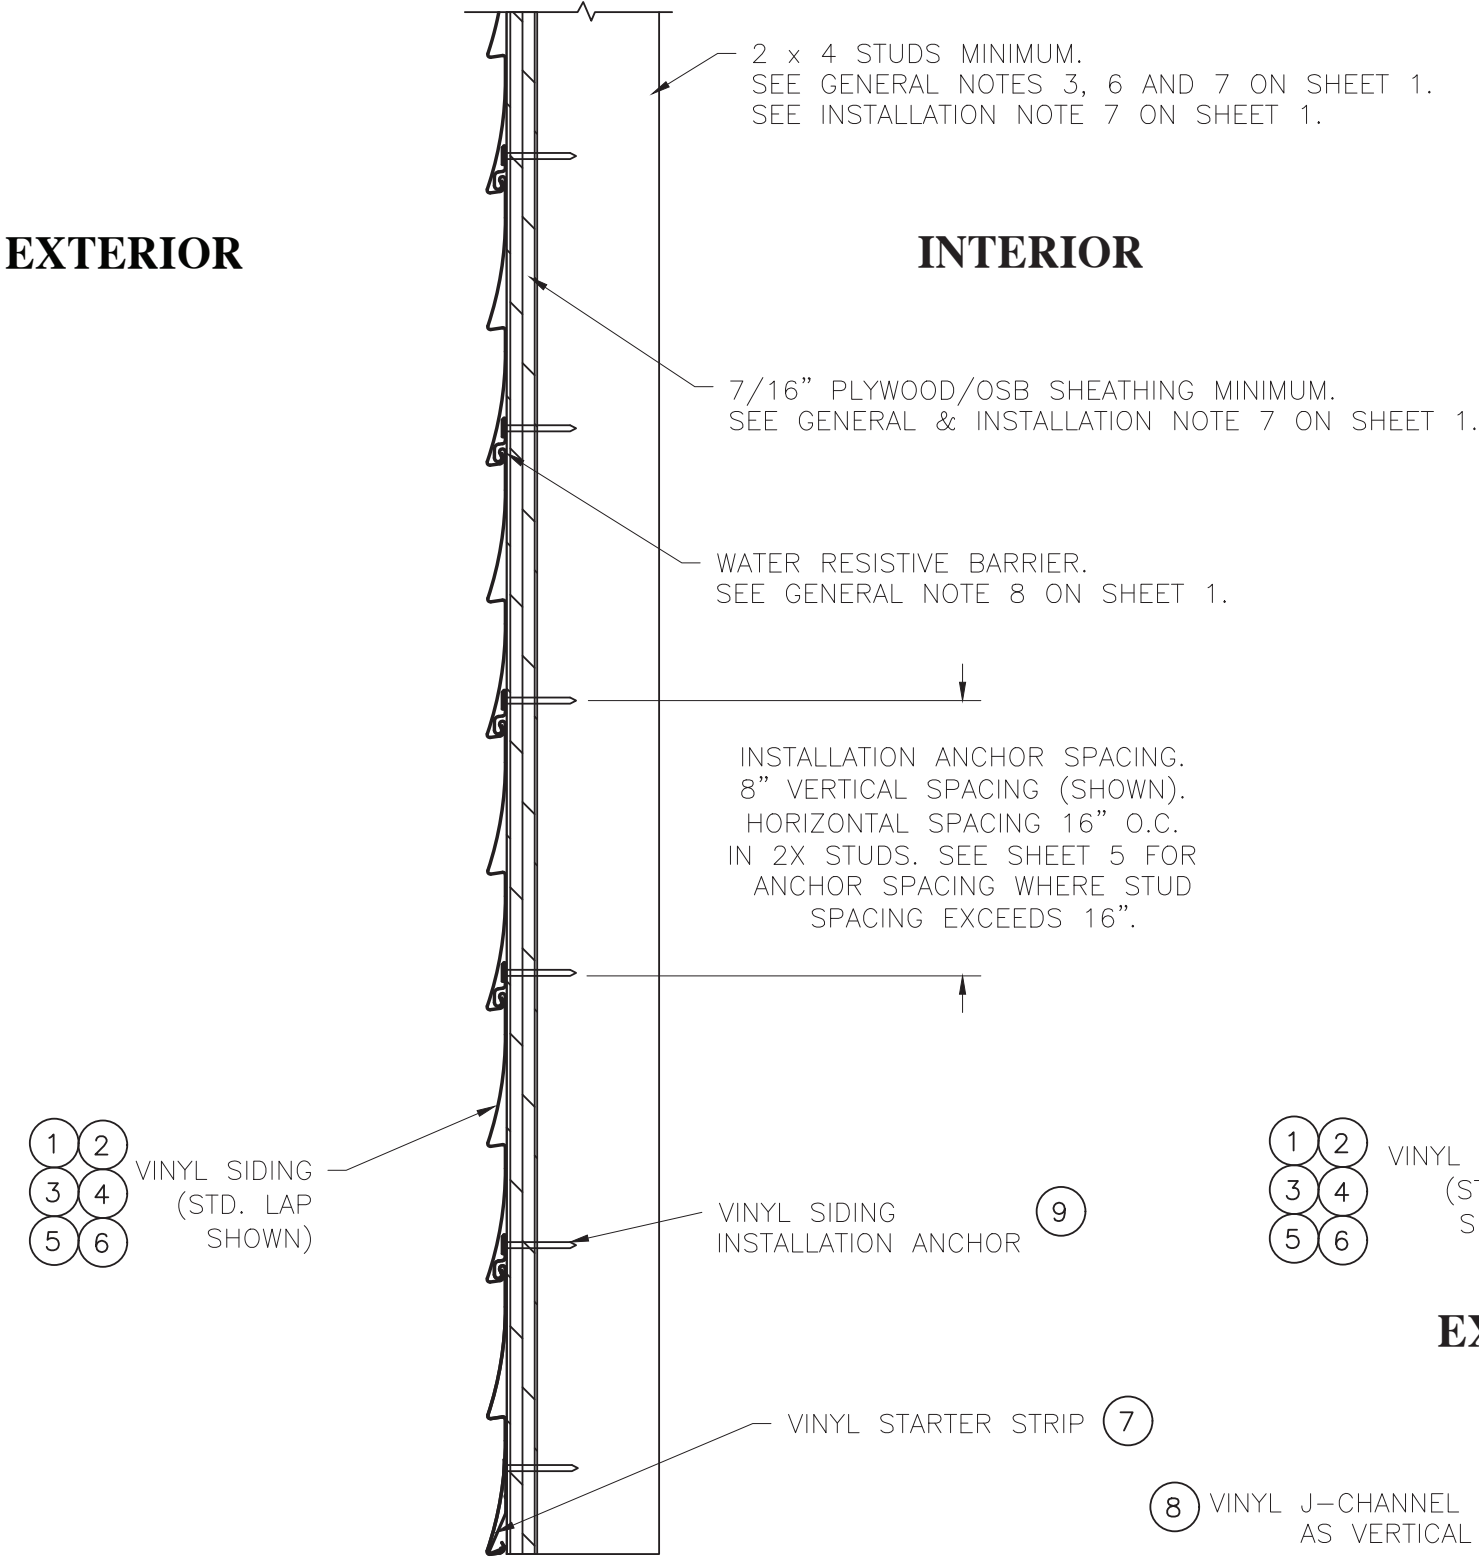

**D4 INSTALLATION
STARTER STRIP INSTALLATION**

EXTERIOR

INTERIOR

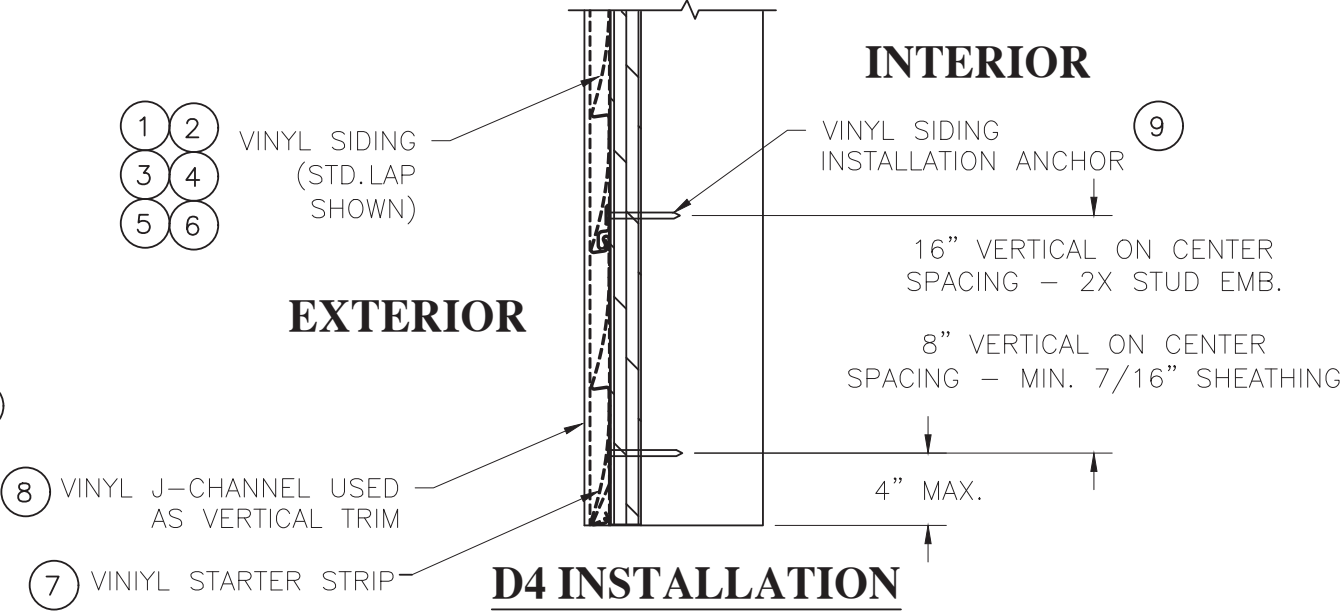

**D4 INSTALLATION
J-CHANNEL VERTICAL TRIM
SEE STARTER STRIP INSTALLATION
FOR ADDITIONAL DETAILS**

PROJECT #422-0910

REV	DESCRIPTION	DATE	BY
C	UPDATED TO CURRENT EDITION OF THE FBC	10/14/23	RJA
B	UPDATED TO CURRENT EDITION OF THE FBC	11/27/17	RJA
A	ADD D5 AND D5D SIDING	7/26/17	RJA

KP Building Products/CertainTeed

402 BOYER CIRCLE
WILLISTON, VT 05495


D4, D5 & D5D CEDAR CREEK AND HUDSON BAY VINYL (PVC) SIDING
SIDING INSTALLATION - SHEATHING

DATE:	01/09/17
DRAWN BY:	RJA
SCALE:	N.T.S.
DRAWING NO:	KPBP0004
SHEET:	6 OF 9
REV:	C




PTC PRODUCT DESIGN GROUP, LLC
P.O. Box 520775
Longwood, FL 32752-0775
Phone: 321.690.1788
Fax: 321.690.1789
Email: info@kpbpcorp.com
FBPE Cert. of Auth. No. 25935

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

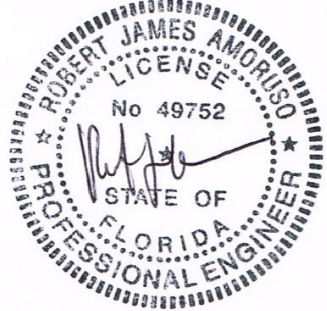


Digitally signed
by Robert J
Amoruso
Date: 2023.10.17
15:46:20 -04'00'

SIDING INSTALLATION DETAIL
SHEATHING OVER 2X WOOD FRAMING

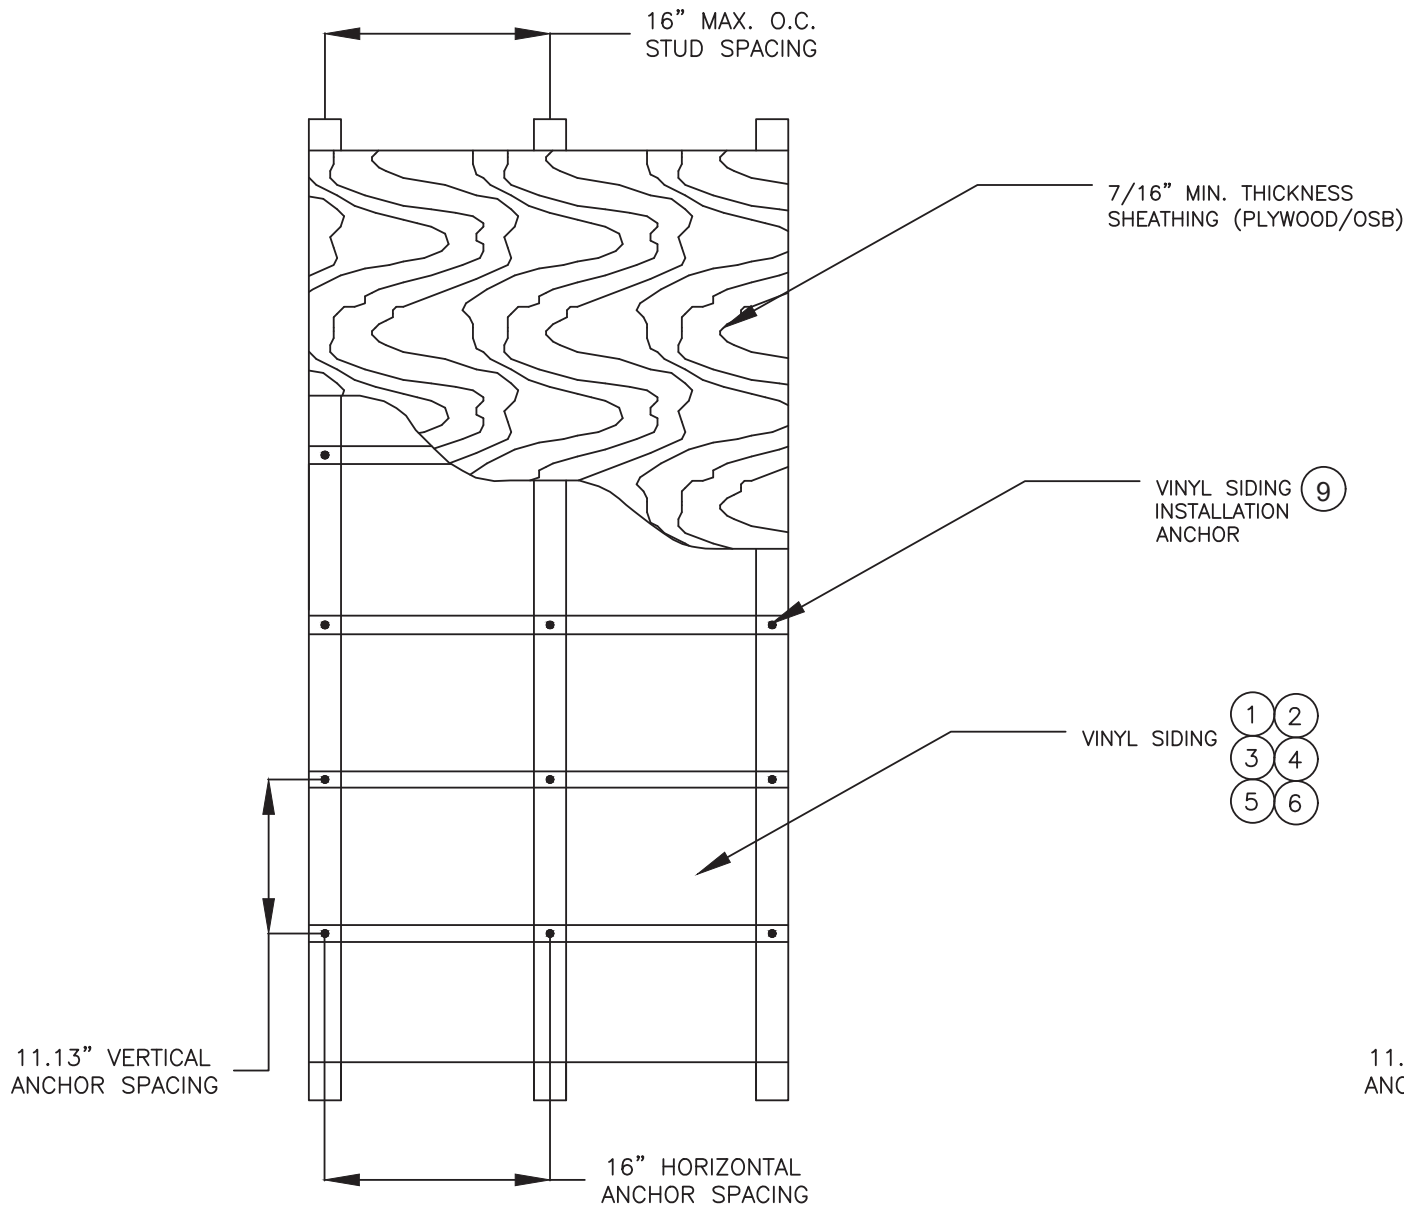

INSTALLATION ANCHORING FOR
16" MAXIMUM STUD SPACING
(INSTALLATION ANCHOR
EMMBEDMENT INTO 2X STUBS)

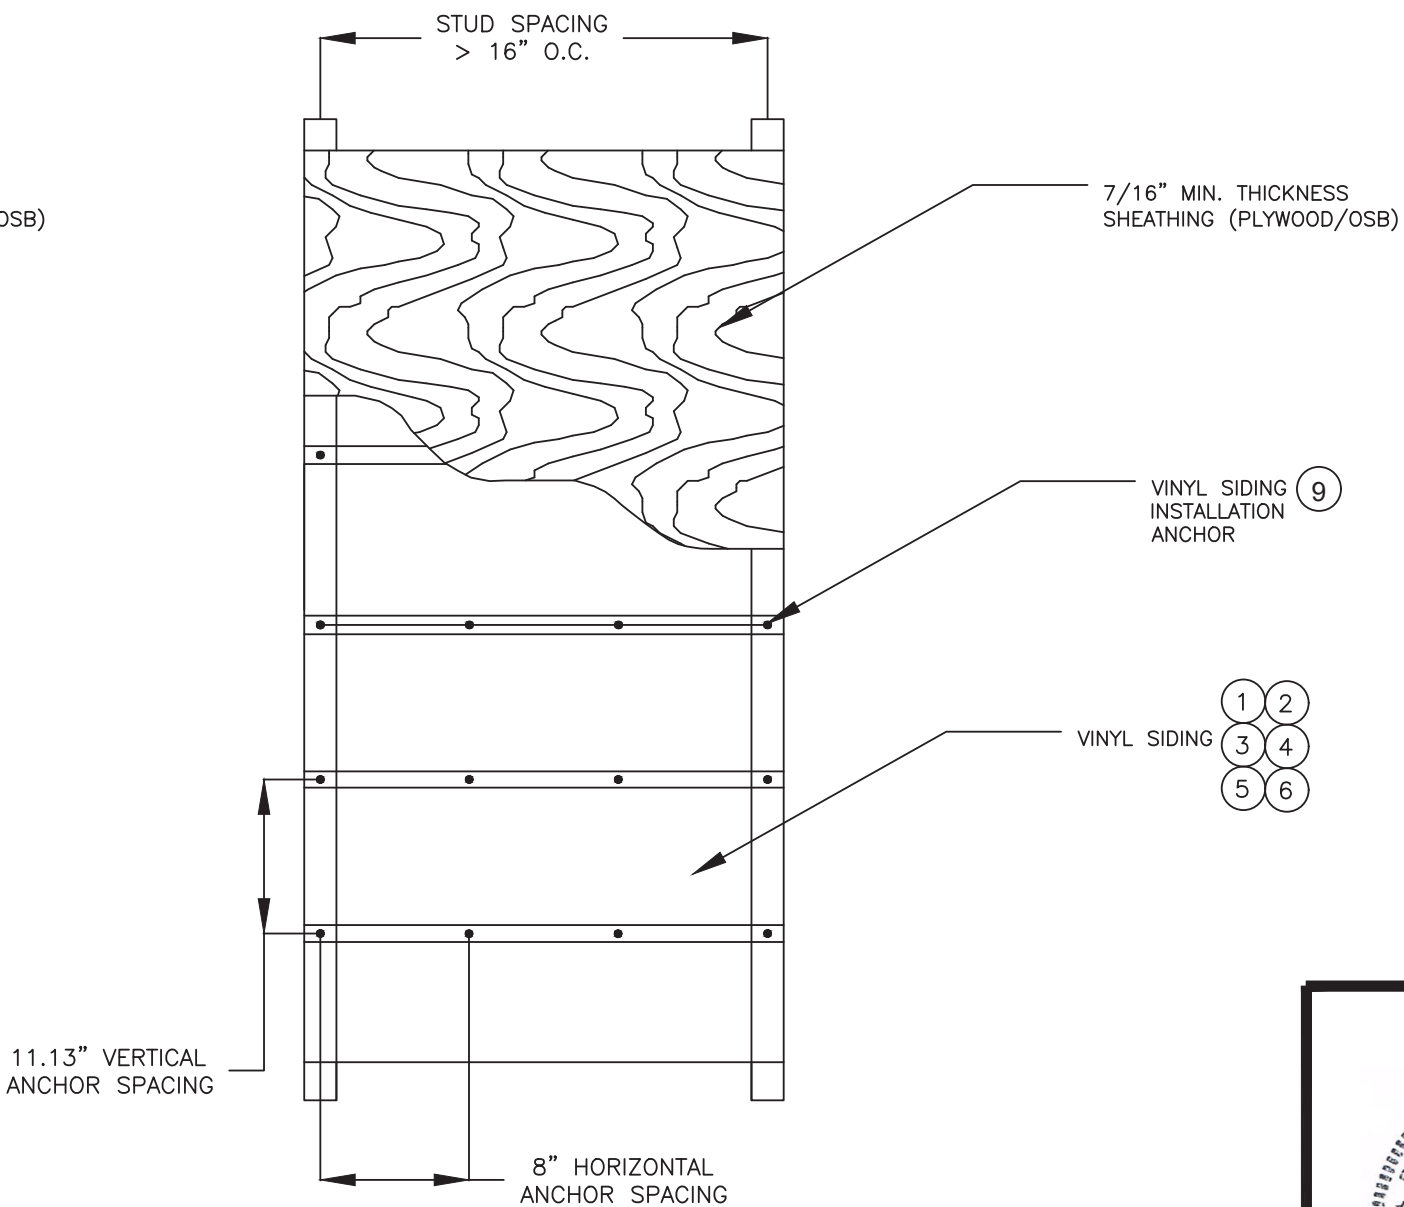

INSTALLATION ANCHORING FOR
STUD SPACING EXCEEDING 16"
MAXIMUM (24" O.C. SHOWN)
(INSTALLATION ANCHOR
EMBEDMENT INTO SHEATHING)

PROJECT #422-0910

REV	DESCRIPTION	DATE	BY
C	UPDATED TO CURRENT EDITION OF THE FBC	10/14/23	RJA
B	UPDATED TO CURRENT EDITION OF THE FBC	11/27/17	RJA
A	ADD D5 AND D5D SIDING	7/26/17	RJA

KP Building Products/CertainTeed

402 BOYER CIRCLE
WILLISTON, VT 05495


D4, D5 & D5D CEDAR CREEK AND HUDSON BAY VINYL (PVC) SIDING
SIDING INSTALLATION - SHEATHING (CONT)

DATE:	01/09/17
DRAWING NO:	KPBP0004
SHEET:	7 OF 9
DRAWN BY:	RJA
SCALE:	N.T.S.
REV:	C



PTC PRODUCT DESIGN GROUP, LLC
P.O. Box 520775
Longwood, FL 32752-0775
Phone: 321.690.1788
Fax: 321.690.1789
Email: info@ptc-corp.com

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

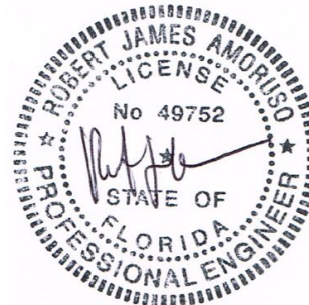


Digitally signed
by Robert J
Amoruso
Date: 2023.10.17
15:46:33 -04'00'

SIDING INSTALLATION DETAIL

2X FURRING STRIP OVER CONCRETE/MASONRY WALL


EXTERIOR

INTERIOR

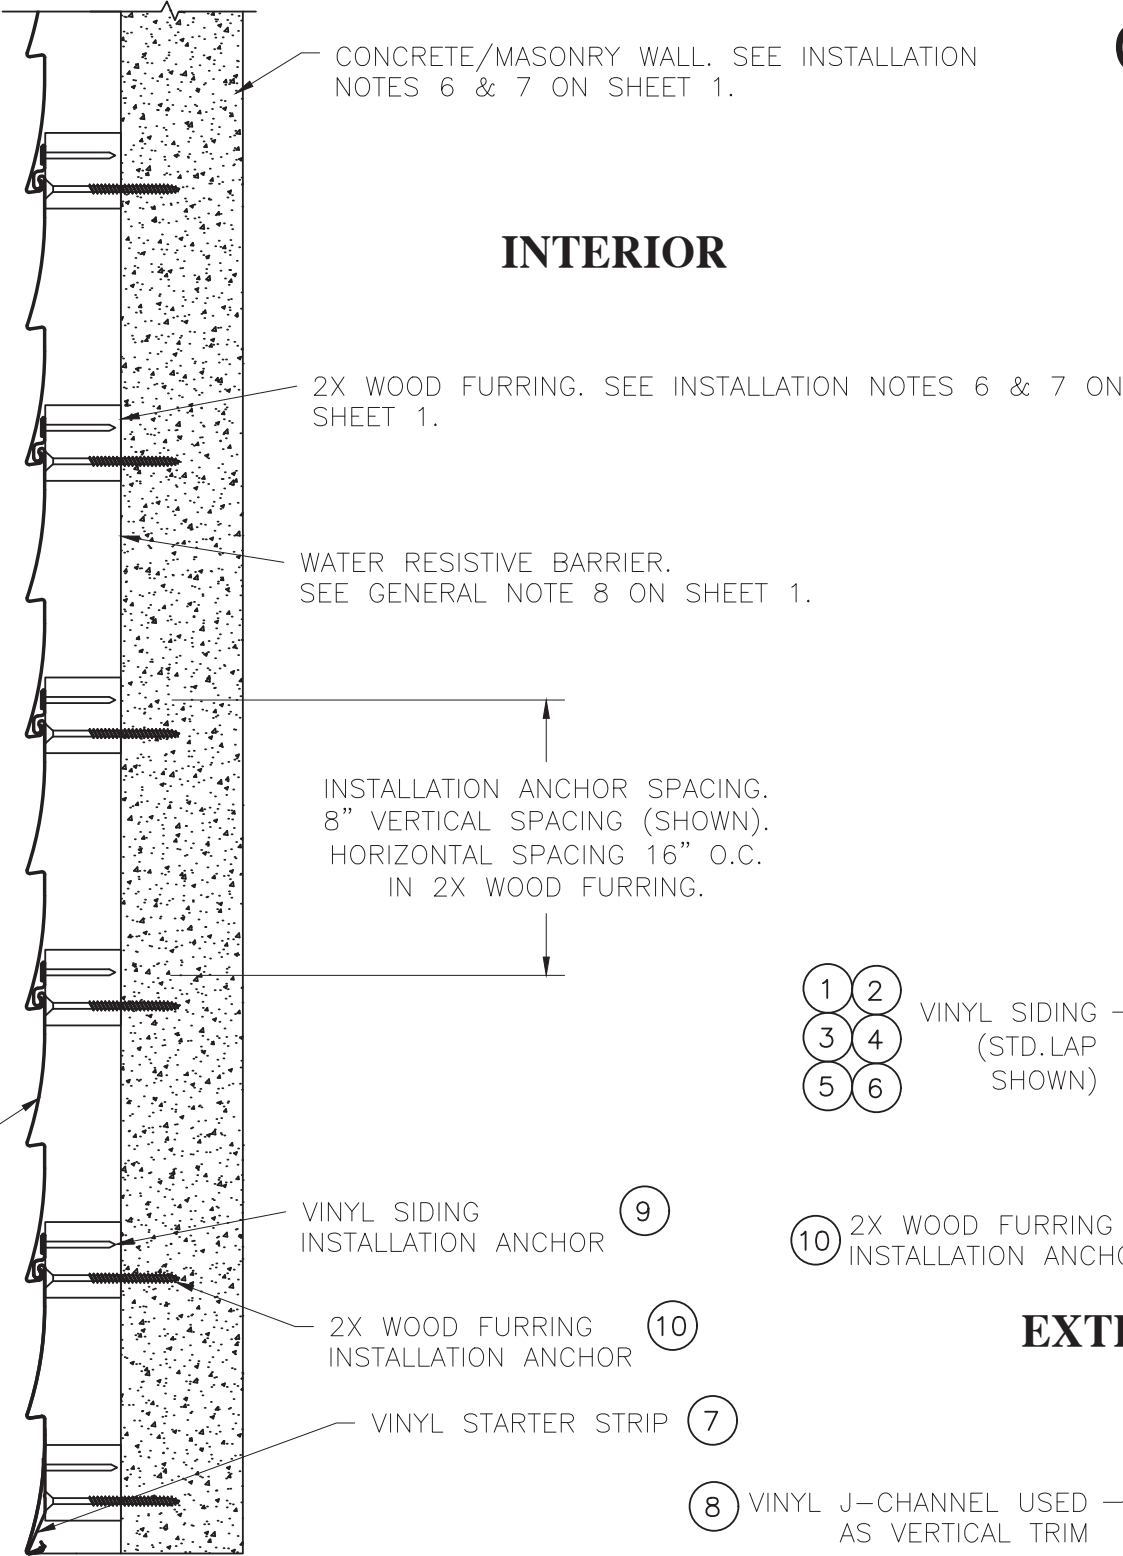

FURRING INSTALLATION NOTES:

1. FURRING SPACING TO BE DETERMINED BY HEIGHT OF SIDING TO BE INSTALLED. FURRING STRIPS CAN BE INSTALLED VERTICALLY OR HORIZONTALLY.
2. INSTALL FURRING STRIPS INTO CONCRETE/MASONRY WALLS USING 3/16" ITW ADVANCED THREADFORM TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE 1-1/2" MINIMUM EMBEDMENT AND 1-1/8" MINIMUM EDGE DISTANCE IN CONCRETE OR 1" MINIMUM EMBEDMENT AND 2" MINIMUM EDGE DISTANCE IN MASONRY.
3. LOCATE TAPCONS 4" FROM CORNER OF BUILDING AND 24" MAX. O.C. THEREAFTER.



VINYL SIDING
(STD. LAP
SHOWN)

CONCRETE/MASONRY WALL. SEE INSTALLATION
NOTES 6 & 7 ON SHEET 1.

INTERIOR

VINYL SIDING
INSTALLATION ANCHOR

2X WOOD FURRING
INSTALLATION ANCHOR

EXTERIOR

16" MAXIMUM VERTICAL ON CENTER
SPACING - 2X WOOD FURRING

4" MAX.

**D4 INSTALLATION
J-CHANNEL VERTICAL TRIM**
SEE STARTER STRIP INSTALLATION
FOR ADDITIONAL DETAILS

**D4 INSTALLATION
STARTER STRIP INSTALLATION**

PROJECT #422-0910

REV	DESCRIPTION	DATE	BY
C	UPDATED TO CURRENT EDITION OF THE FBC	10/14/23	RJA
B	UPDATED TO CURRENT EDITION OF THE FBC	11/27/17	RJA
A	ADD D5 AND D5D SIDING	7/26/17	RJA

KP Building Products/CertainTeed


402 BOYER CIRCLE
WILLISTON, VT 05495

D4, D5 & D5D CEDAR CREEK AND HUDSON BAY VINYL (PVC) SIDING
SIDING INSTALLATION - 2X FURRING/MASONRY



DATE:	01/09/17
DRAWING NO:	KPBP0004
SCALE:	N.T.S.
REV:	C
SHEET:	8 OF 9

PTC PRODUCT DESIGN GROUP, LLC
P.O. Box 520775
Longwood, FL 32752-0775
Phone: 321.690.1788
Fax: 321.690.1789
Email: info@ptc-corp.com
FBPE Cert. of Auth. No. 25935

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

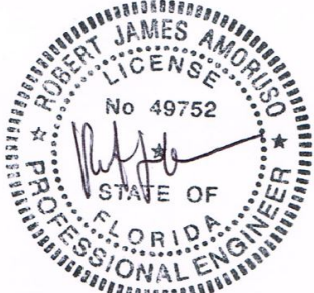

Digitally signed
by Robert J
Amoruso
Date: 2023.10.17
15:46:52 -04'00'

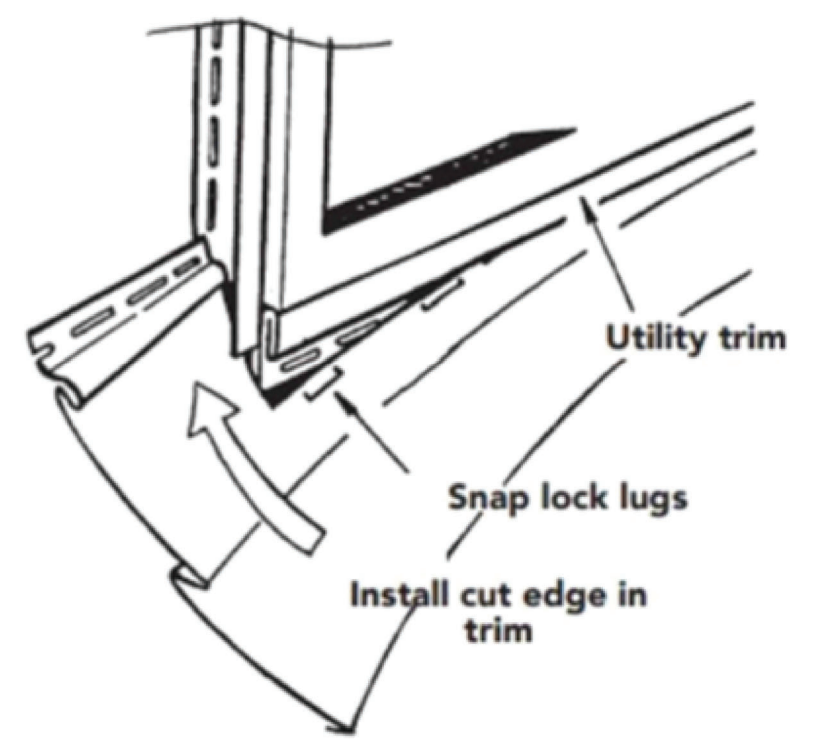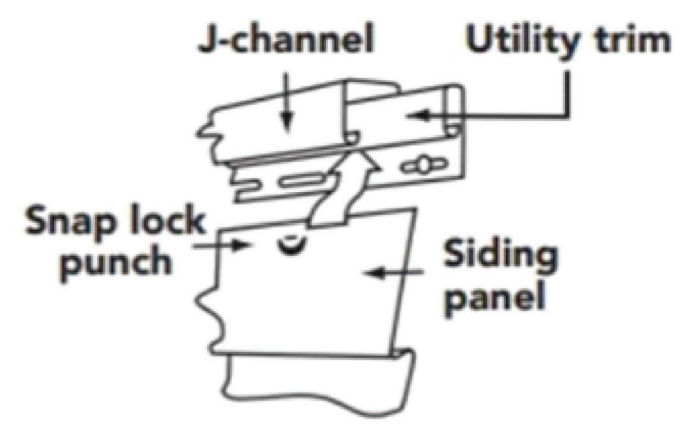

**UTILITY TRIM INSTALLATION DETAIL PER 2023 FBC,
SECTION 1405.14.2.2 AND 2023 FRC, SECTION R703.11.1.5.
(ILLUSTRATION FROM 2023 FRC, SECTION R703.11.1.5)**

UTILITY TRIM (ITEM NO. 11) SHALL BE ATTACHED
USING 0.125" DIAMETER ROOFING NAIL (BOM ITEM
NO. 9) 8" O.C. SPACING. FASTENER SPACING SHALL
BE THE SAME AS SHOWN ON SHEET 7 FOR STARTER
STRIP.


FOR ADDITIONAL DETAILS, SEE KP BUILDING PRODUCTS
VINYL SIDING ESTIMATING & INSTALLATION GUIDE,
KP-EIG21A (101-7383) OR LATER EDITIONS.

PROJECT #422-0910			
C	UPDATED TO CURRENT EDITION OF THE FBC	10/14/23	RJA
B	UPDATED TO CURRENT EDITION OF THE FBC	11/27/17	RJA
A	ADD D5 AND D5D SIDING	7/26/17	RJA
REV	DESCRIPTION	DATE	BY

KP Building Products/CertainTeed 402 BOYER CIRCLE WILLISTON, VT 05495		DRAWN BY: RJA	DATE: 01/09/17
D4, D5 & D5D CEDAR CREEK AND HUDSON BAY VINYL (PVC) SIDING UTILITY TRIM INSTALLATION DETAIL		SCALE: N.T.S.	DRAWING NO: KPBP0004
PREPARED BY:		REV: C	SHEET: 9 OF 9

PTC PRODUCT DESIGN GROUP, LLC P.O. Box 520775 Longwood, FL 32752-0775 FBPE Cert. of Auth. No. 25935		Phone: 321.690.1788 Fax: 321.690.1789 Email: info@ptc-corp.com	
--	--	--	--

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

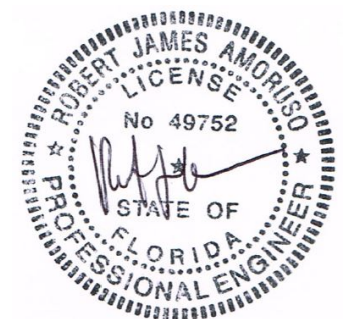

Digitally signed
by Robert J
Amoruso
Date: 2023.10.17
15:47:06 -04'00'