

SERIES 5600 SYSTEM
CURTAIN WALL
EXT./INT. GLAZED
MOCK-UP

ERASE NOTE FOR
LAB COPY



DESIGN TEST CRITERIA

D.P.= 60 PSF/INCREASE BY 5 PSF UNTILL MAXED OUT
DEFLECTION = L/175
ALLOWABLE OF .82 INCHES
WATER= 15 LB
MAX. DP = 70 PSF

TEST NO: XX-XXXX

5	7" HEAD HORIZ.
4	1/4" INFILL

16	SPLICE
4	1" INFILL

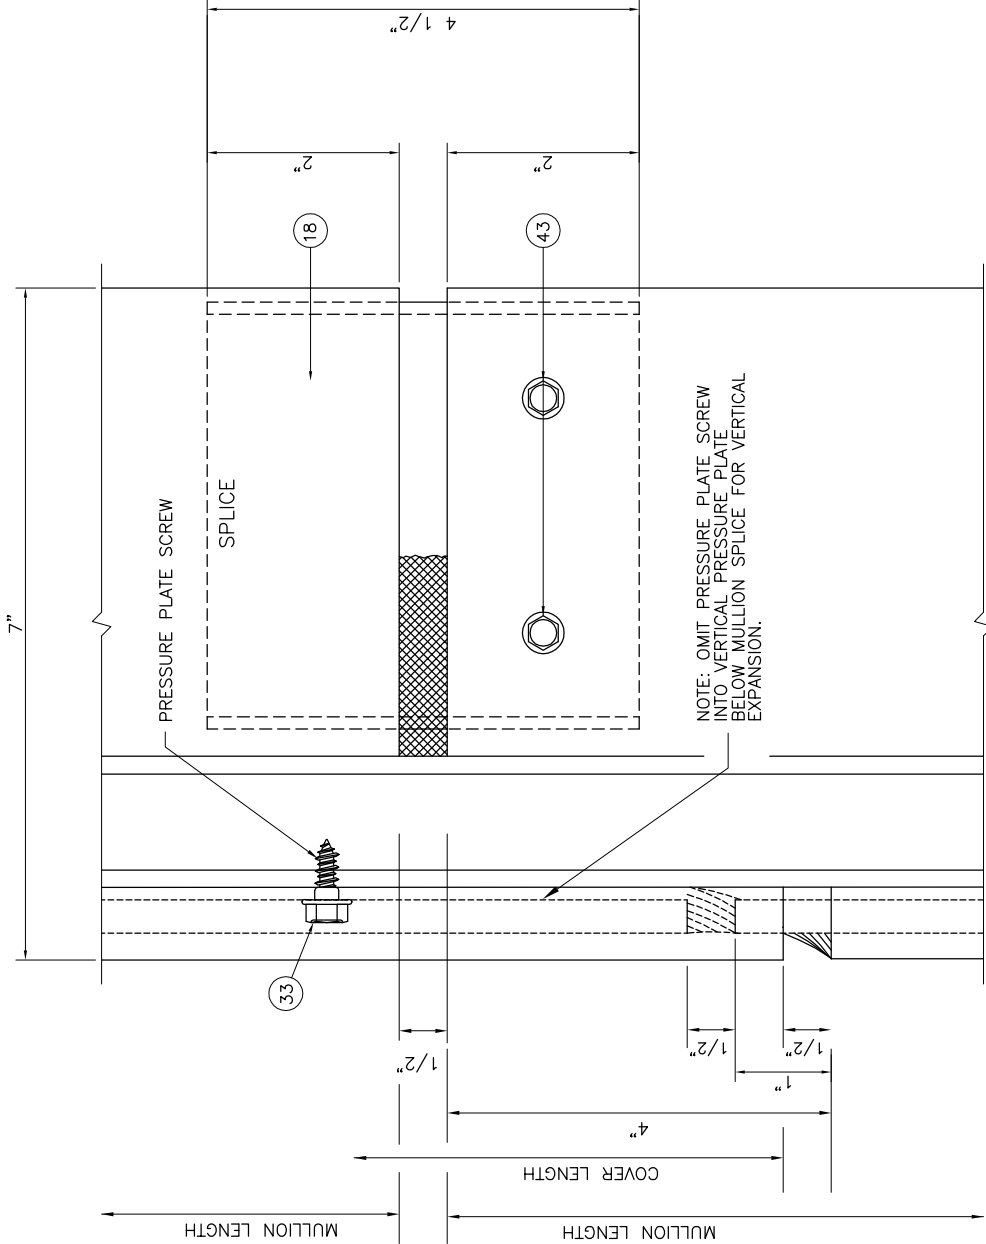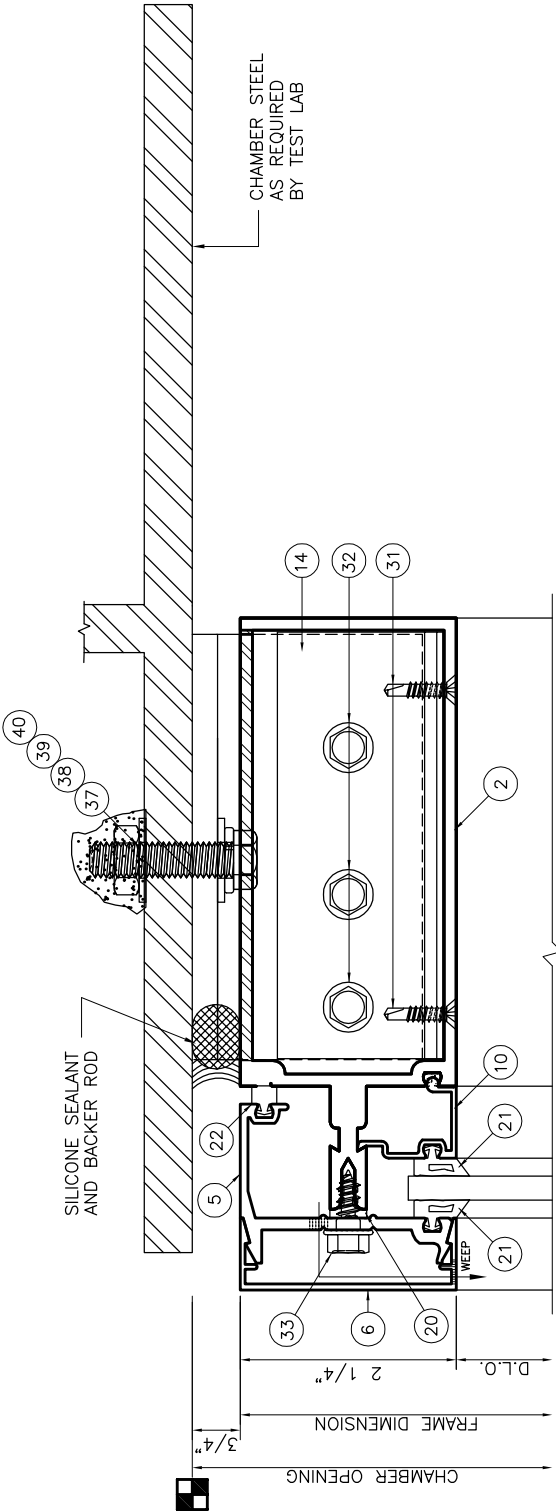

NOTE:

FABRICATOR AND OR ERECTOR, THIS MOCK-UP IS TO BE FABRICATED AND SEALED AS NOTED PER GENERAL INSTALLATION INSTRUCTIONS FOR S5600 EXTERIOR GLAZED CURTAIN WALL. AS NOTED IN PART #Y302 & 304.


ITEM	# REQD	PART #	DESCRIPTION	MFG.
1	4	5027	MULLION	EFCO
2	12	6094	HORIZONTAL MULL	EFCO
3	6	4595	HORIZONTAL MULL	EFCO
4	2	5959	PRESSURE PLATE	EFCO
5	8	5977	PERIMETER PRESSURE PLATE	EFCO
6	22	5882	COVER	EFCO
7	3	4591	1/4" 2 PC. BEAD	EFCO
8	3	3656	1" 2 PC. BEAD	EFCO
9	6	4593	GLAZING STOP COVER	EFCO
10	9	EP80	1/4" ADAPTER	EFCO
11	9	5756	1/4" ADAPTER	EFCO
12	12	5755	1/4" ADAPTER	EFCO
13	12	KW03	SHEAR BLOCK 5879 @ 5.375"	EFCO
14	12	KY49/KY50	SHEAR BLOCK 6333 @ 4.375"	EFCO
15	12	KZ69	SHEAR BLOCK 3658 @ 1.125"	EFCO
16	4	KW32	F ANCHOR 19Y8 @ 4.5625"	EFCO
17	4	KW34	M ANCHOR 19Y7 @ 4.5625"	EFCO
18	4	KW36	SPLICE 5918 @ 4.5"	EFCO
19	4	EY03	ALUMINUM FLAT BAR	EFCO
20	AS REQD	WV80	ISOLATOR	CENTRAL PLASTICS
21	AS REQD	WNEO	PRESET GLAZING GASKET	CENTRAL PLASTICS
22	AS REQD	WEP7	PERIMETER GASKET (HEAD/SILL)	CENTRAL PLASTICS
23	AS REQD	WEQ2	PERIMETER GASKET (JAMBS)	EPG
24	AS REQD	WT60	WEDGE GASKET	EPG
25	4	HN81	ANTI WALK BLOCK	EPG
26	17	HN52	ANTI WALK BLOCK	EPG
27	6	HN79	ANTI WALK BLOCK	EPG
28	6	HN15	SETTING BLOCK	CENTRAL PLASTICS
29	6	HN60	SETTING BLOCK	EPG
30	12	HN61	SETTING BLOCK	EPG
31	36	STK4	#8-18 X 3/4 PL-FH-SMS	PRO FAS
32	72	STV2	#14-10 X 1/2 HW-SMS	PRO FAS
33	350	STC0	13-16 X 5/8HW-SMS	PRO FAS
34	36	SFQ5	1/4" - 14 X 1 1/2 HW-SMS	PRO FAS
35	24	SFQ1	10-16 X 5/8" HW-SMS	PRO FAS
36	AS REQD	SDR7	#1/4-20 X 1 1/8 HW- SMS	PRO FAS
37	16	IHP8	#3/8-16 X 1 1/2HX-MS	PRO FAS
38	48	ILK2	#3/8W 7/16-ID.,1-OD. FWSHR	PRO FAS
39	24	ILK8	3/8-ID.,11/16-OD. SPRGLW	PRO FAS
40	24	IHQ2	#3/8-16 HEX NUT-ZC	PRO FAS
41	8	IHP1	3/8-16 X 3 1/2 HX-MS 18-8	PRO FAS
42	6	HN91	SETTING BLOCK	EPG
43	12	STK1	#12-14 X 1" HW-SMS	PRO FAS
44	AS REQD	HS01	1/16" HORSE SHOE SHIM	SOMMER & ASSOC

F.O. NOTE:
PERIMETER GASKET
TO BE 8" X .062"

F.O. NOTE:
ORDER ENOUGH WEP7
TO REPLACE WEQ2
IN FIELD IF NECESSARY.

NOTE:

FABRICATOR AND OR ERECTOR, THIS MOCK-UP
IS TO BE FABRICATED AND SEALED AS NOTED
PER GENERAL INSTALLATION INSTRUCTIONS
FOR S5600 EXTERIOR GLAZED CURTAIN WALL.
AS NOTED IN PART #Y302 & 304.

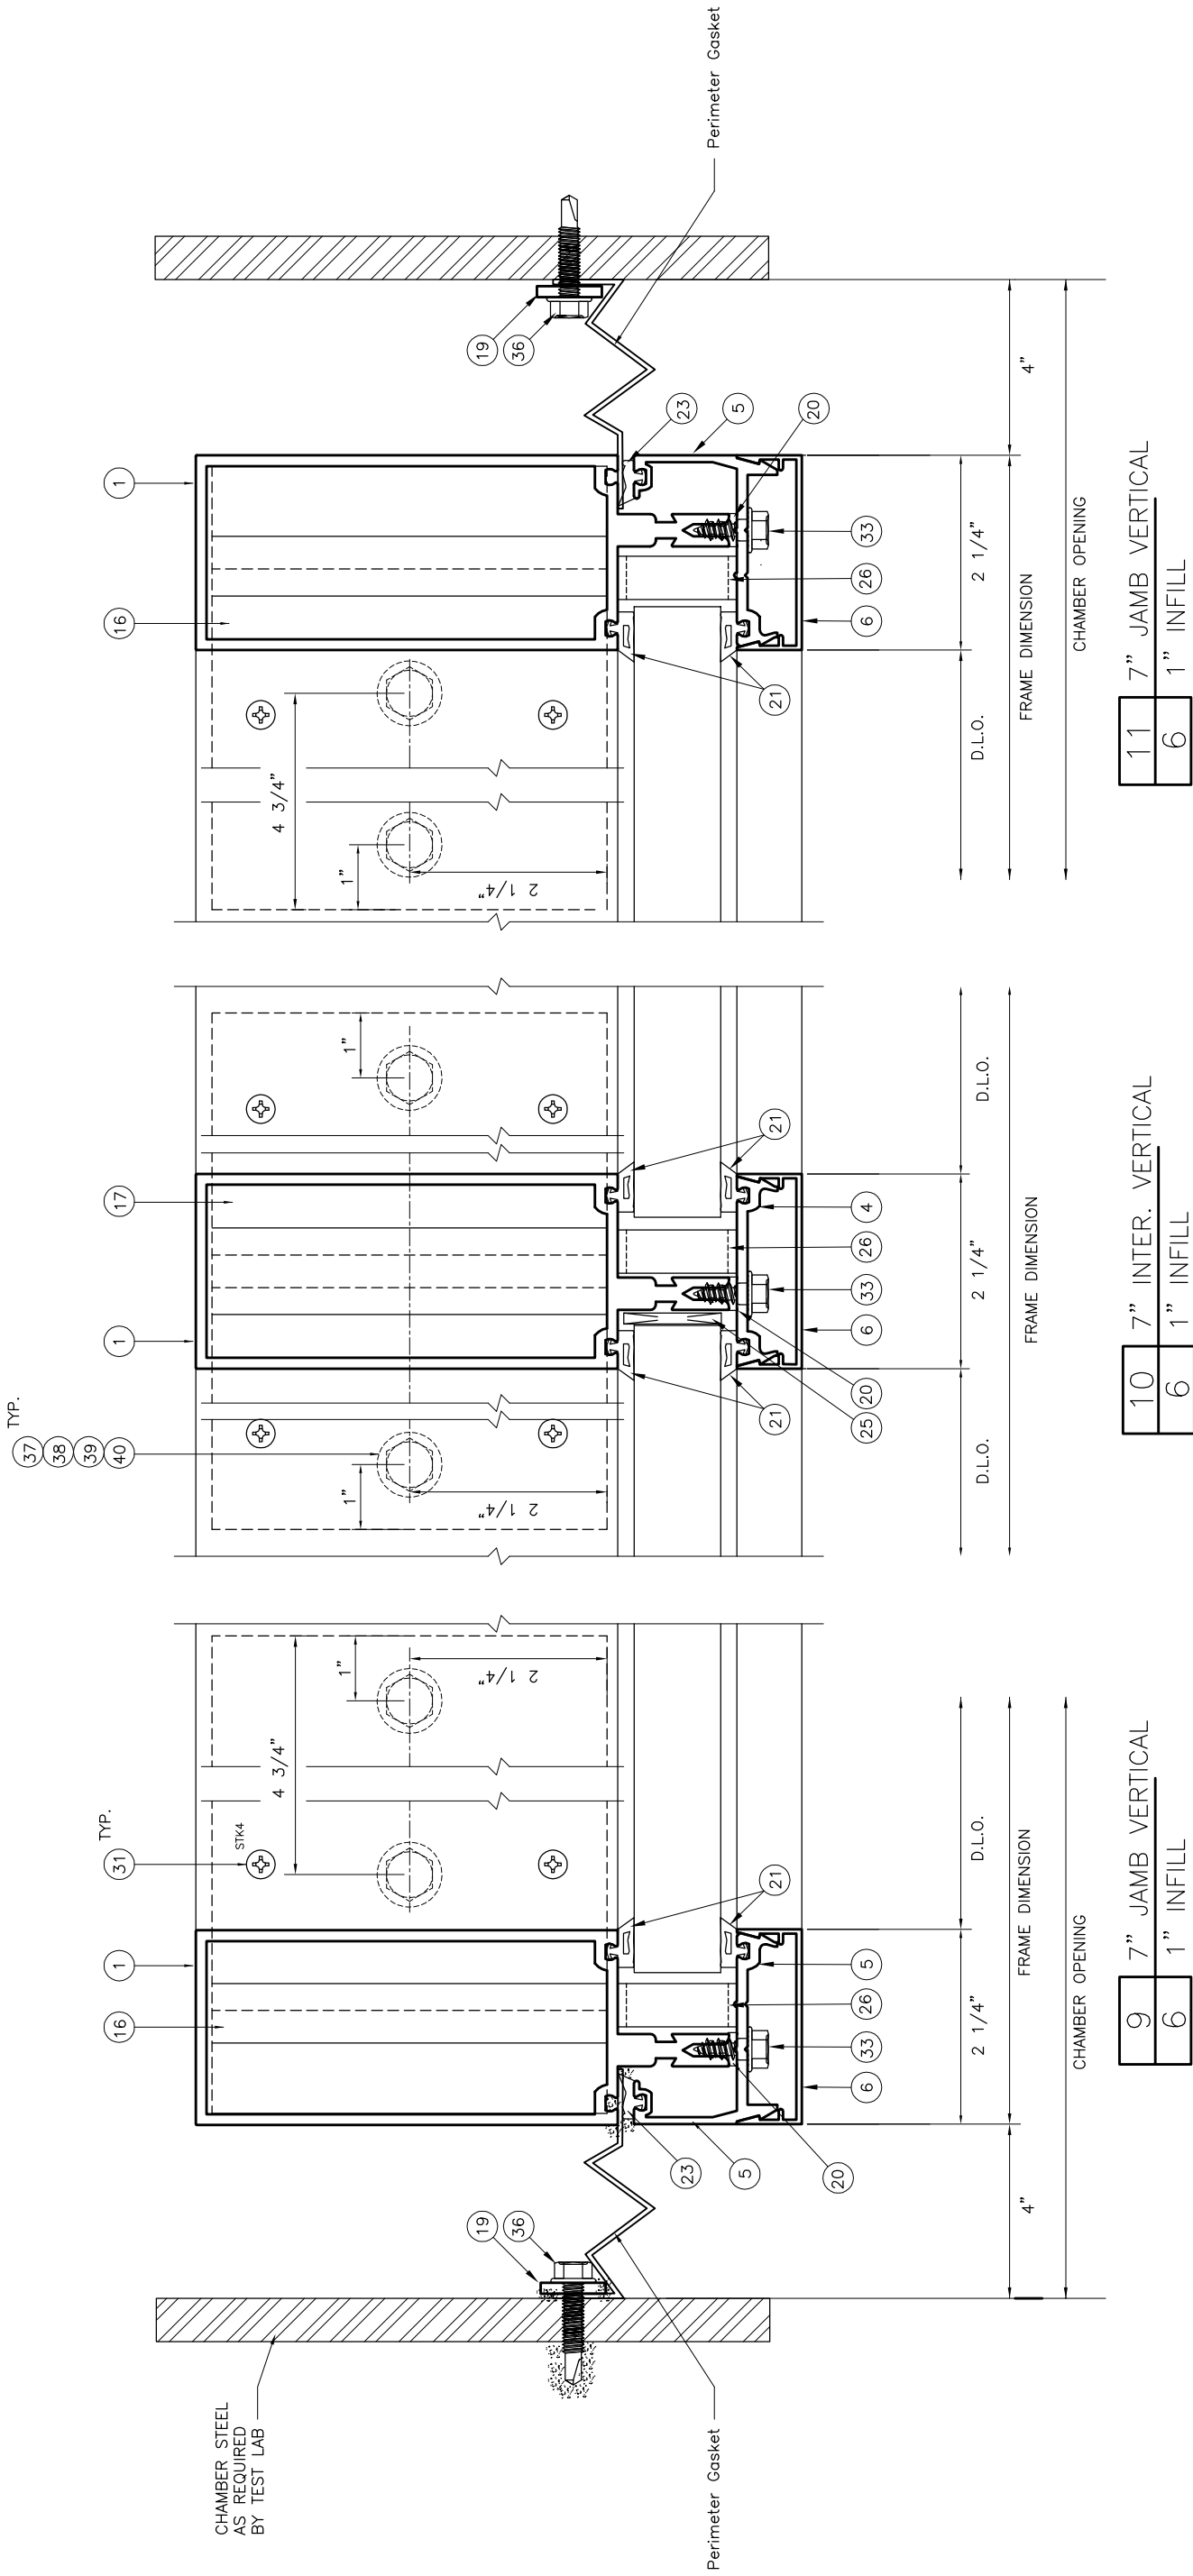


F.O. NOTE:
ORDER ENOUGH WEPT
TO REPLACE WEQ2
IN FIELD IF NECESSARY.

F.O. NOTE:
PERIMETER GASKET
TO BE 8" X .062"

NOTE:

FABRICATOR AND OR ERECTOR, THIS MOCK-UP
IS TO BE FABRICATED AND SEALED AS NOTED
PER GENERAL INSTALLATION INSTRUCTIONS
FOR S5600 EXTERIOR GLAZED CURTAIN WALL.
AS NOTED IN PART #Y302 & 304.

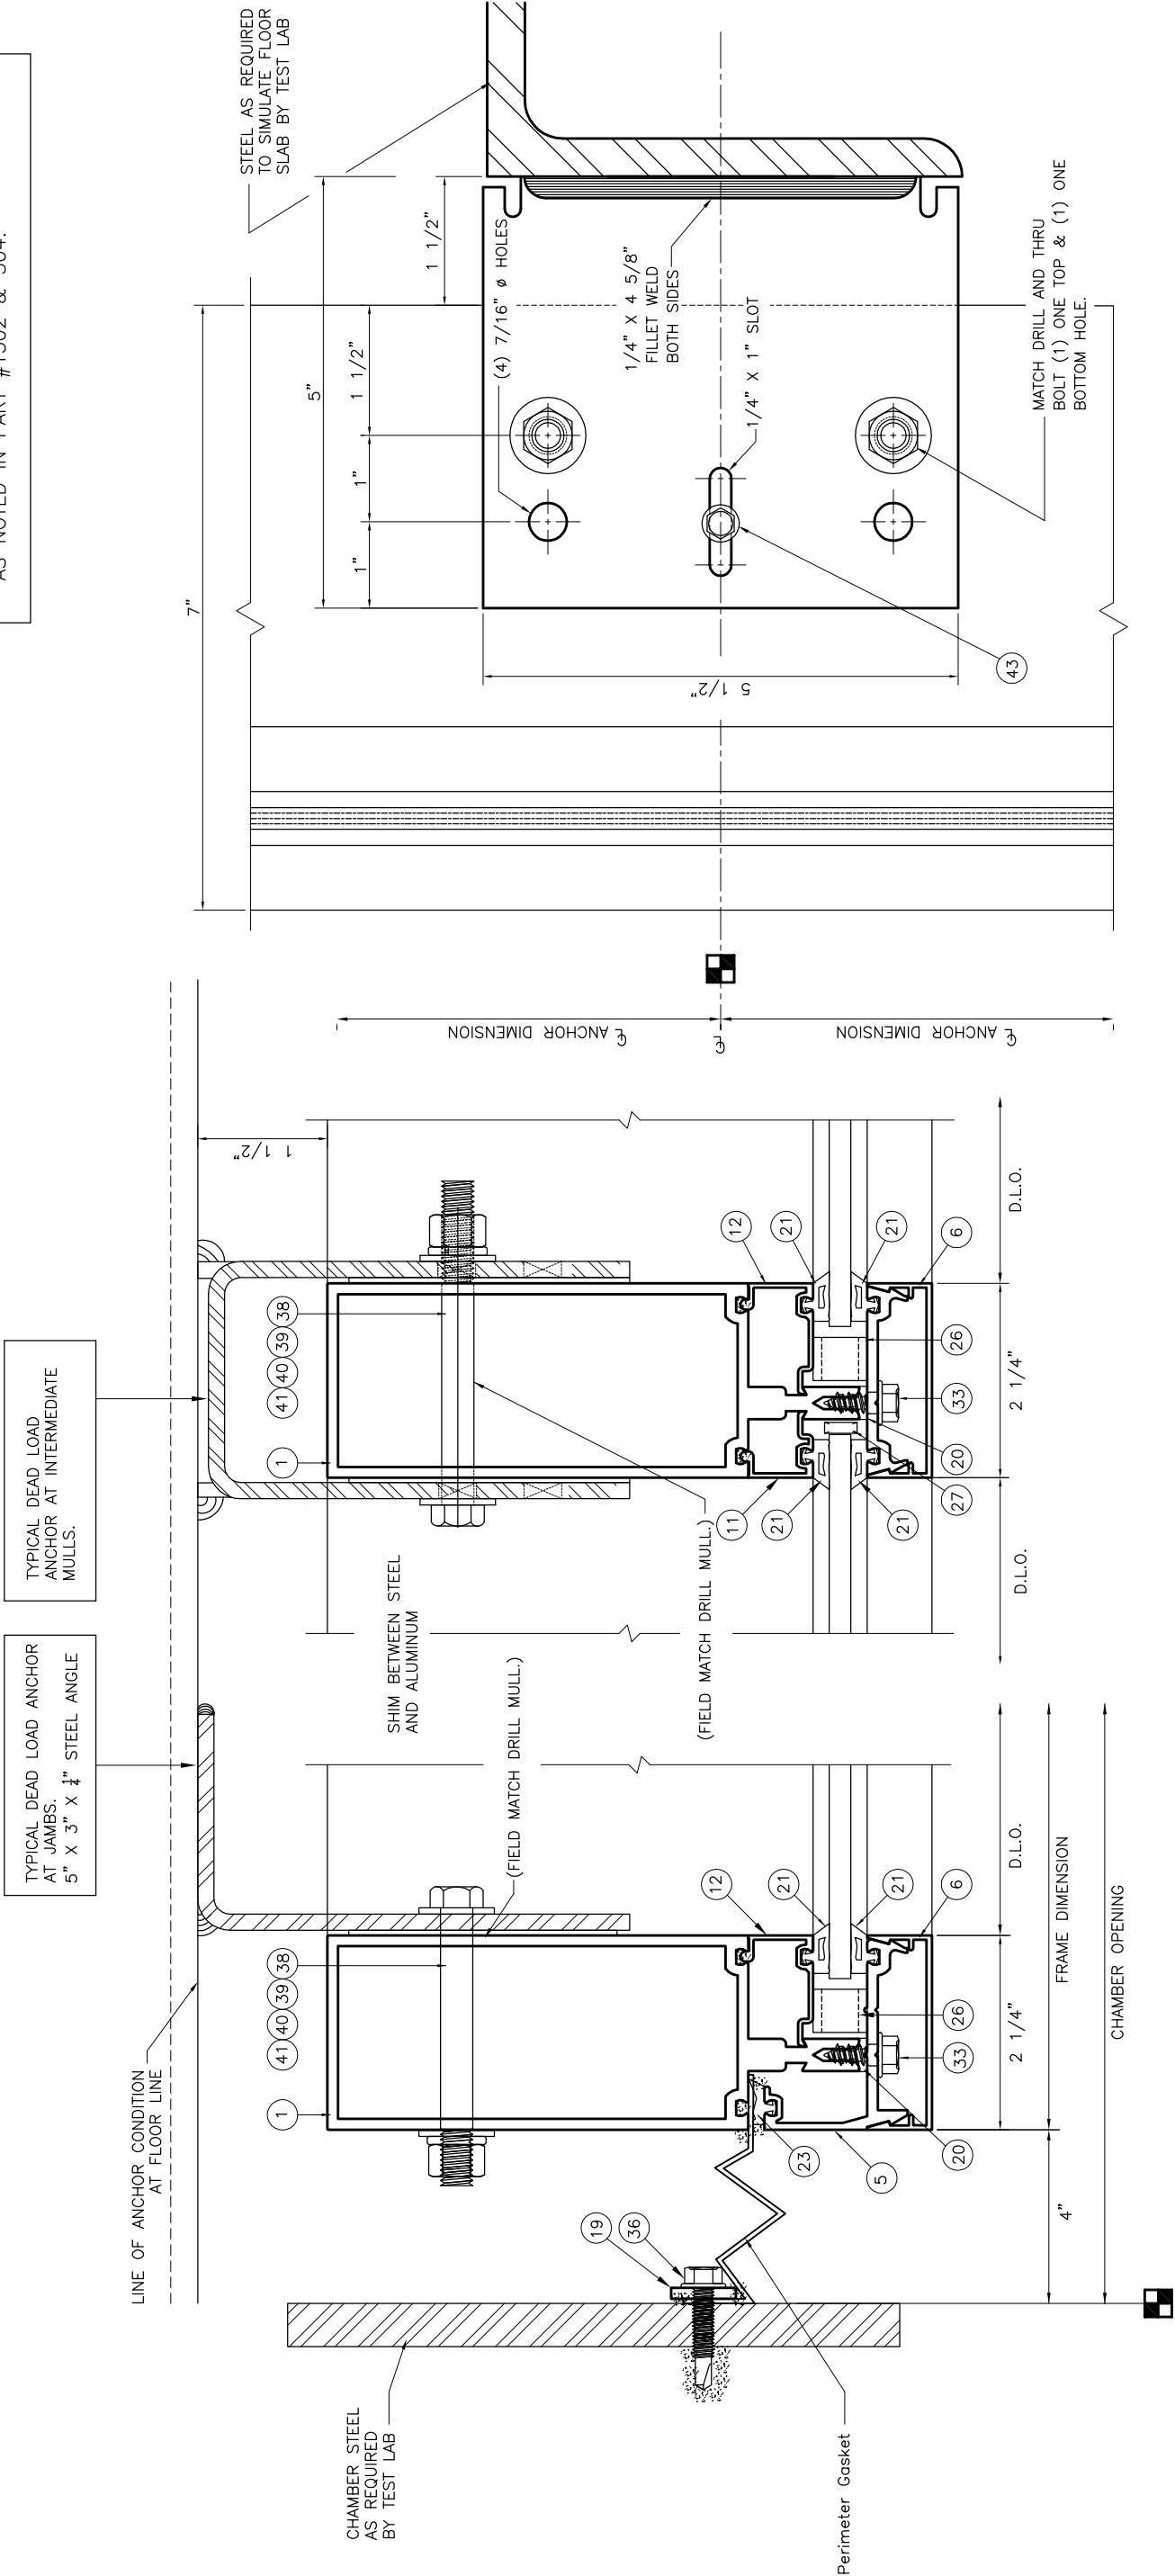

12	7" JAMB VERTICAL
7	1/4" INFILL W/ ANCHOR

13	7" INTER. VERTICAL
7	1/4" INFILL W/ ANCHOR

14	SPANDREL ANCHOR
7	DEAD LOAD (FIXED)