

Z:\2023 FBC Drawings\MasterGrain\FL-21852 R8\FL-21852.19.dwg

FIBERGLASS OPAQUE

SINGLE DOOR


OUTSWING

HVHZ "IMPACT"


GENERAL NOTES

1. This product has been evaluated and is in compliance with the 8th Edition (2023) Florida Building Code (FBC) structural requirements including the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in the "HVHZ" this product complies with Section 1626 of the Florida Building Code and does not require an impact resistant covering.
4. When used in areas outside of the "HVHZ" requiring wind borne debris protection, this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
5. For 2x stud construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
6. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
7. Outswing configurations meet water infiltration requirements for "HVHZ".

TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical Elevations, Design Pressures & General Notes
2	Door Panel Details
3	Elevations
4	Horizontal & Vertical Cross Sections (2X Buck)
5	Horizontal & Vertical Cross Sections (1X Buck)
6	Buck & Frame Anchoring
7	Bill of Materials & Components

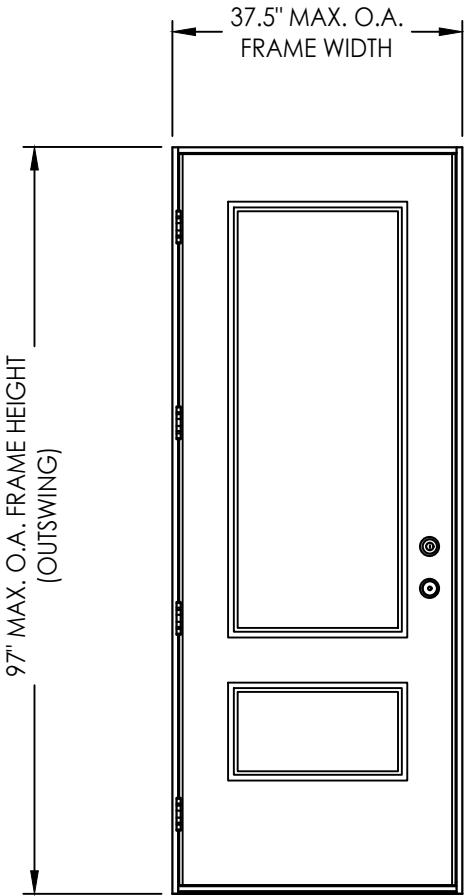

CONFIGURATION	DESIGN PRESSURE (PSF) (Water Infiltration Required)		DESIGN PRESSURE (PSF) (Water Infiltration Not Required)	
	POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
X	+50.0	-75.0	+75.0	-75.0

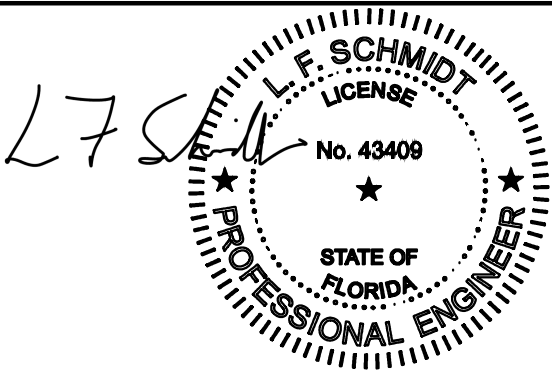


Digitally signed by Lyndon F Schmidt
Date: 2023.07.03 09:39:13 -04'00'

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.


THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry License No. 9813	
PRODUCT: MASTERGRAIN FIBERGLASS DOOR		PART OR ASSEMBLY: TYPICAL ELEVATION, DESIGN PRESSURES & GENERAL NOTES	
		LFS	
	UPDATE TO 8TH ED. (2023) FBC	LFS	
	UPDATE TO 7TH ED. (2020) FBC	TRJ	
	ADD DOOR PANEL OPTIONS	LFS	
	ADD FIBERGLASS TENSILE STR.	BY	
	NO.	DATE	REVISIONS
4	7/01/23		
3	7/09/20		
2	10/14/19		
1	9/11/18		
DATE: 10/14/19			
SCALE: N.T.S.			
DWG. BY: TRJ			
CHK. BY: LFS			
DRAWING NO.: FL-21852.19			
SHEET 1 OF 7			

Z:\2023 FBC Drawings\MasterGrain\FL-21852 R8\FL-21852.19.dwg

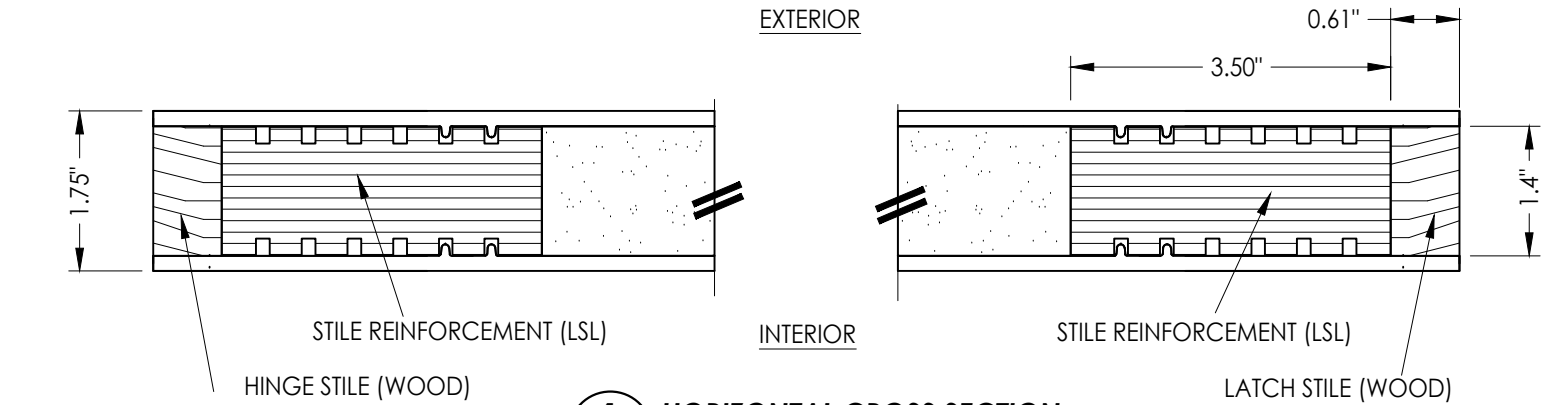

1
2 **HORIZONTAL CROSS SECTION**


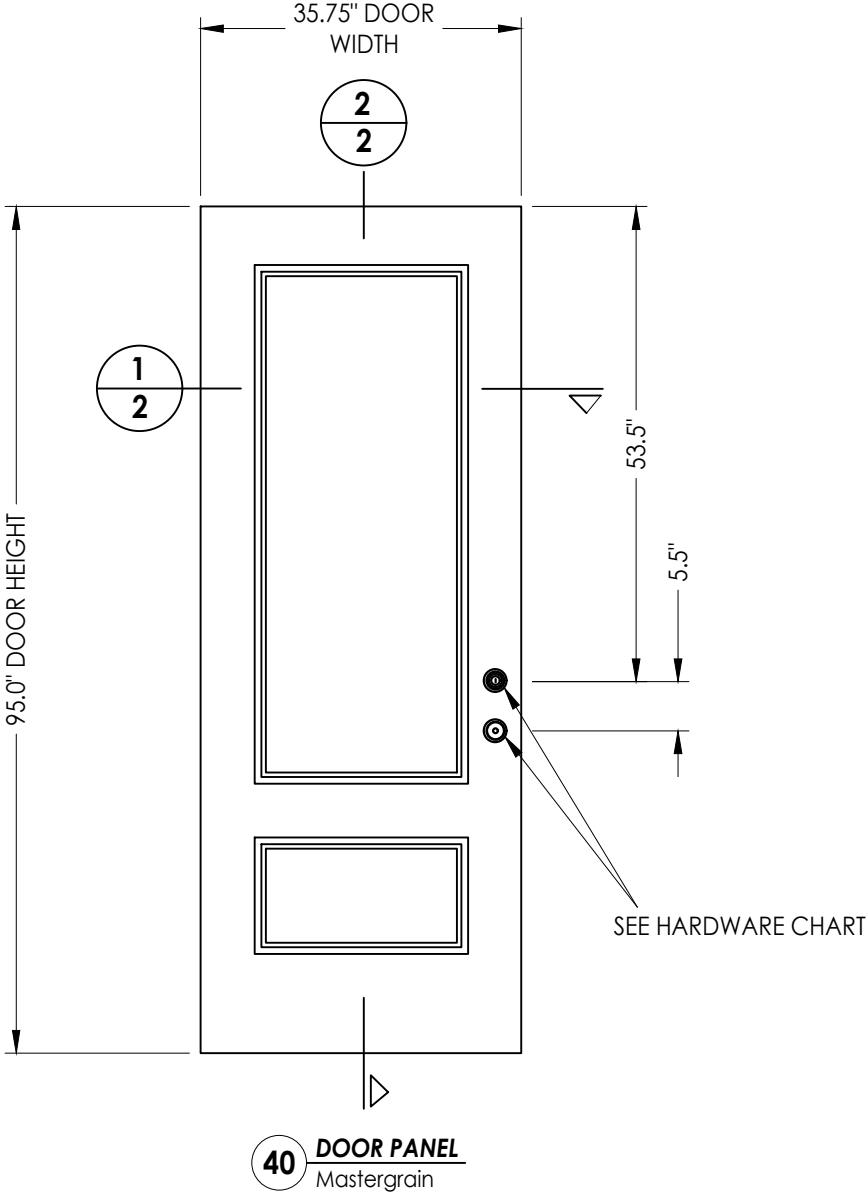


2
2 **VERTICAL CROSS SECTION**

HARDWARE TABLE		
MANUFACTURER	MODEL	
KWIKSET	KNOB:	SIGNATURE SERIES
	DEADBOLT:	SIGNATURE SERIES (980)

FIBERGLASS DOOR SKIN: 0.175" MIN. THK. (MIN. F_T = 8520 PSI)
FOAM CORE: POLYURETHANE - 1.9 PCF MIN.


Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry License No. 9813	
PRODUCT: MASTERGRAIN FIBERGLASS DOOR		PART OR ASSEMBLY: DOOR PANEL DETAILS	
4	7/01/23	UPDATE TO 8TH ED. (2023)	FBC
3	7/09/20	UPDATE TO 7TH ED. (2020)	FBC
2	10/14/19	ADD DOOR PANEL OPTIONS	TRJ
1	9/11/18	ADD FIBERGLASS TENSILE STR.	LFS
NO.	DATE		BY
REVISIONS			
DATE: 10/14/19			
SCALE: N.T.S.			
DWG. BY: TRJ			
CHK. BY: LFS			
DRAWING NO.: FL-21852.19			
SHEET 2 OF 7			

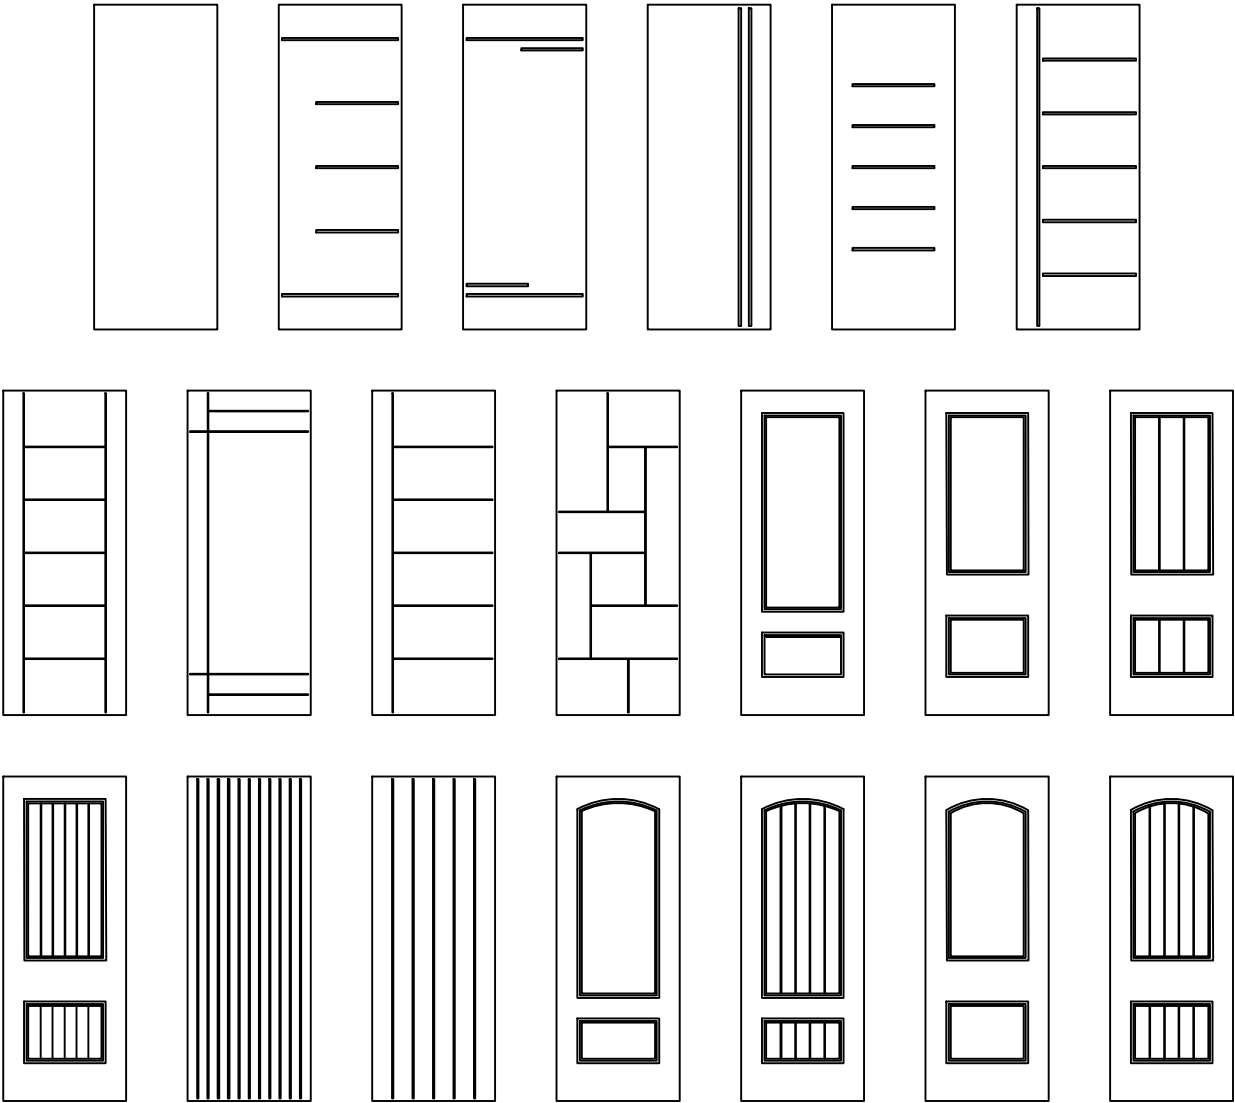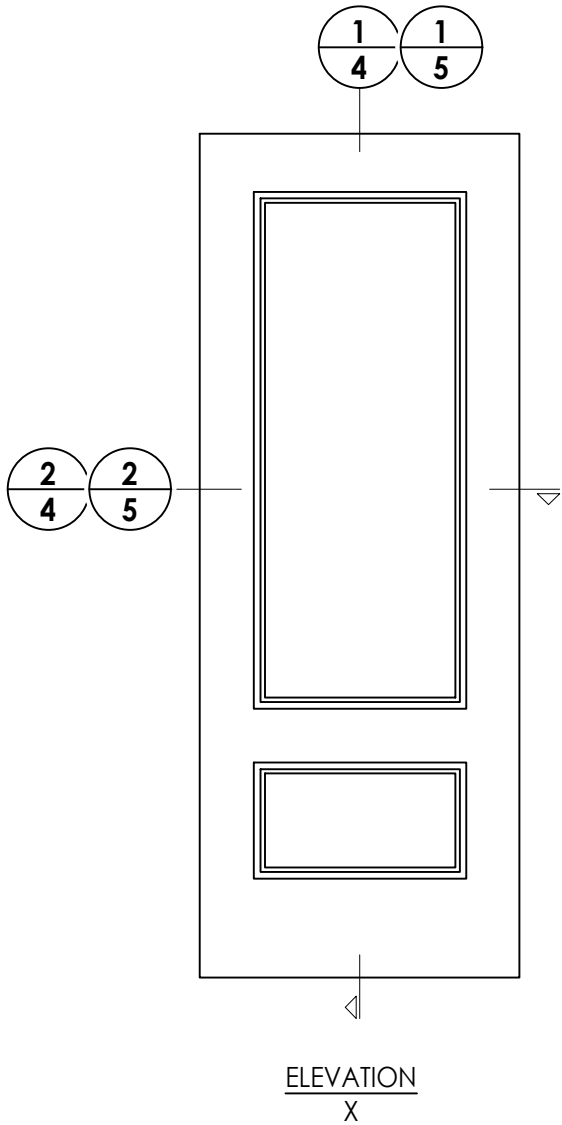


Mastergrain Door Panel Options
Panel options shown are for illustration and are representative only,
Panels shown are 8'-0", similar 6'-8" panels are also available.
(similar opaque panel configurations are allowed)

DATE: 10/14/19		PRODUCT:		Documents Prepared By:	
SCALE: N.T.S.		MASTERGRAIN FIBERGLASS DOOR		Lyndon F. Schmidt P.E. No. 43409	
DWG. BY: TRJ		PART OR ASSEMBLY: ELEVATIONS		<i>R^gW</i> BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry License No. 9813	
CHK. BY: LFS					
DRAWING NO.: FL-21852.19					
SHEET 3 OF 7					

Z:\2023 FBC Drawings\MasterGrain\FL-21852 R8\FL-21852.19.dwg

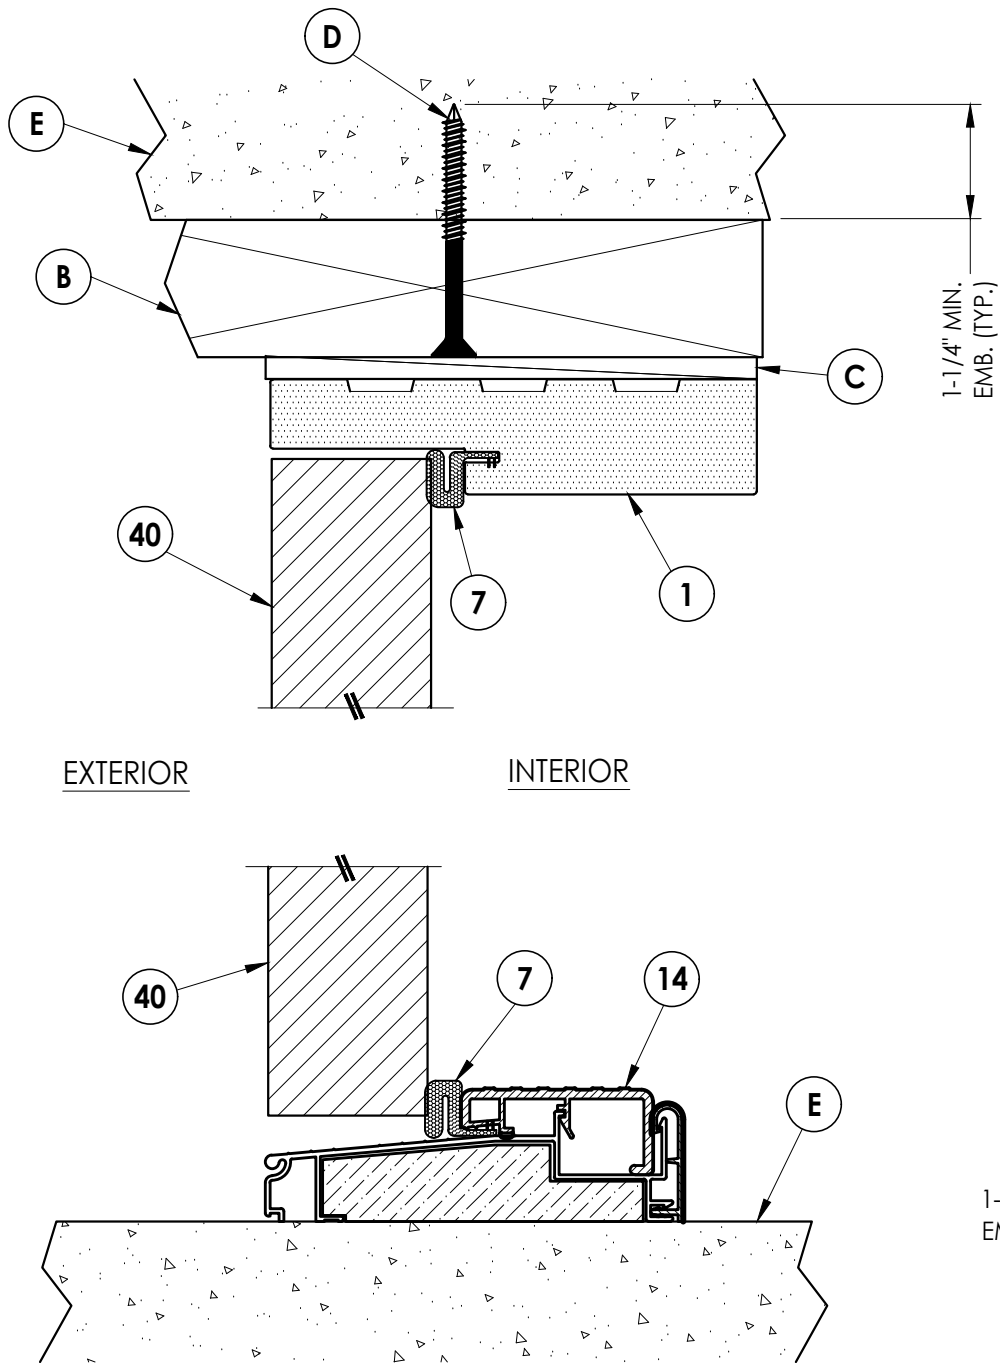


1
4 **VERTICAL CROSS SECTION**
Shown w/ 2X Buck

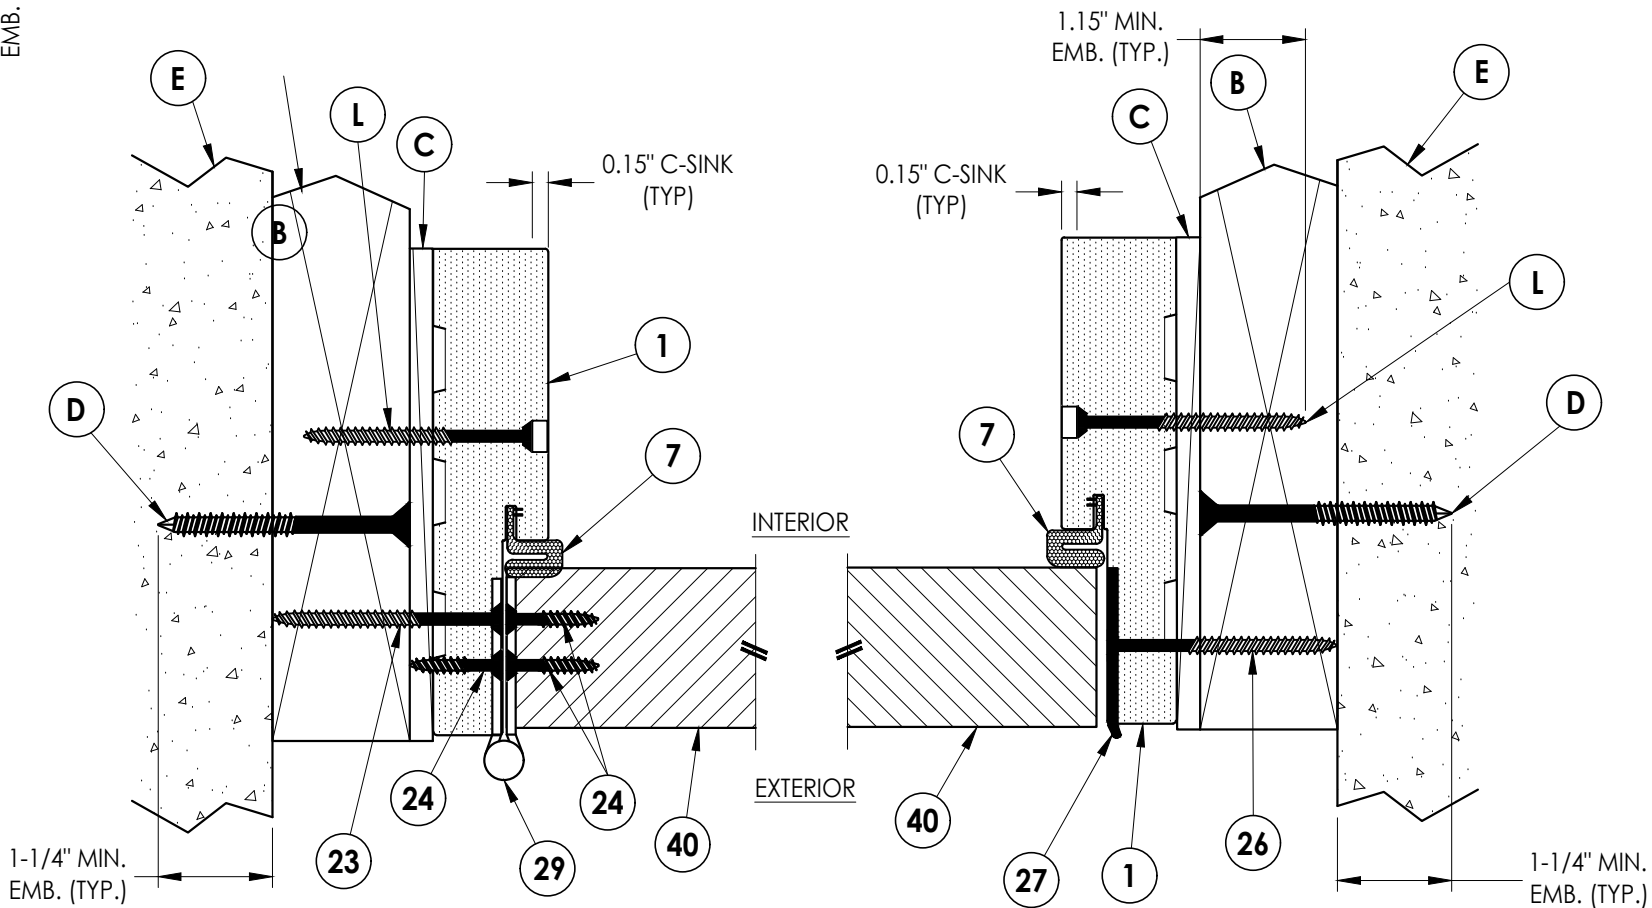


2
4 **HORIZONTAL CROSS SECTION**
Shown w/ 2X Buck

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409				BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry License No. 9813			
PRODUCT: MASTERGRAIN FIBERGLASS DOOR				PART OR ASSEMBLY: HORIZONTAL & VERTICAL CROSS SECTIONS (2X BUCK)			
4	7/01/23	UPDATE TO 8TH ED. (2023)	FBC	LFS			
3	7/09/20	UPDATE TO 7TH ED. (2020)	FBC	LFS			
2	10/14/19	ADD DOOR PANEL OPTIONS	TRJ	LFS			
1	9/11/18	ADD FIBERGLASS TENSILE STR.	BY				
NO.	DATE	REVISIONS					
DATE: 10/14/19							
SCALE: N.T.S.							
DWG. BY: TRJ							
CHK. BY: LFS							
DRAWING NO.: FL-21852.19							
SHEET 4 OF 7							


Z:\2023 FBC Drawings\MasterGrain\FL-21852 R8\FL-21852.19.dwg

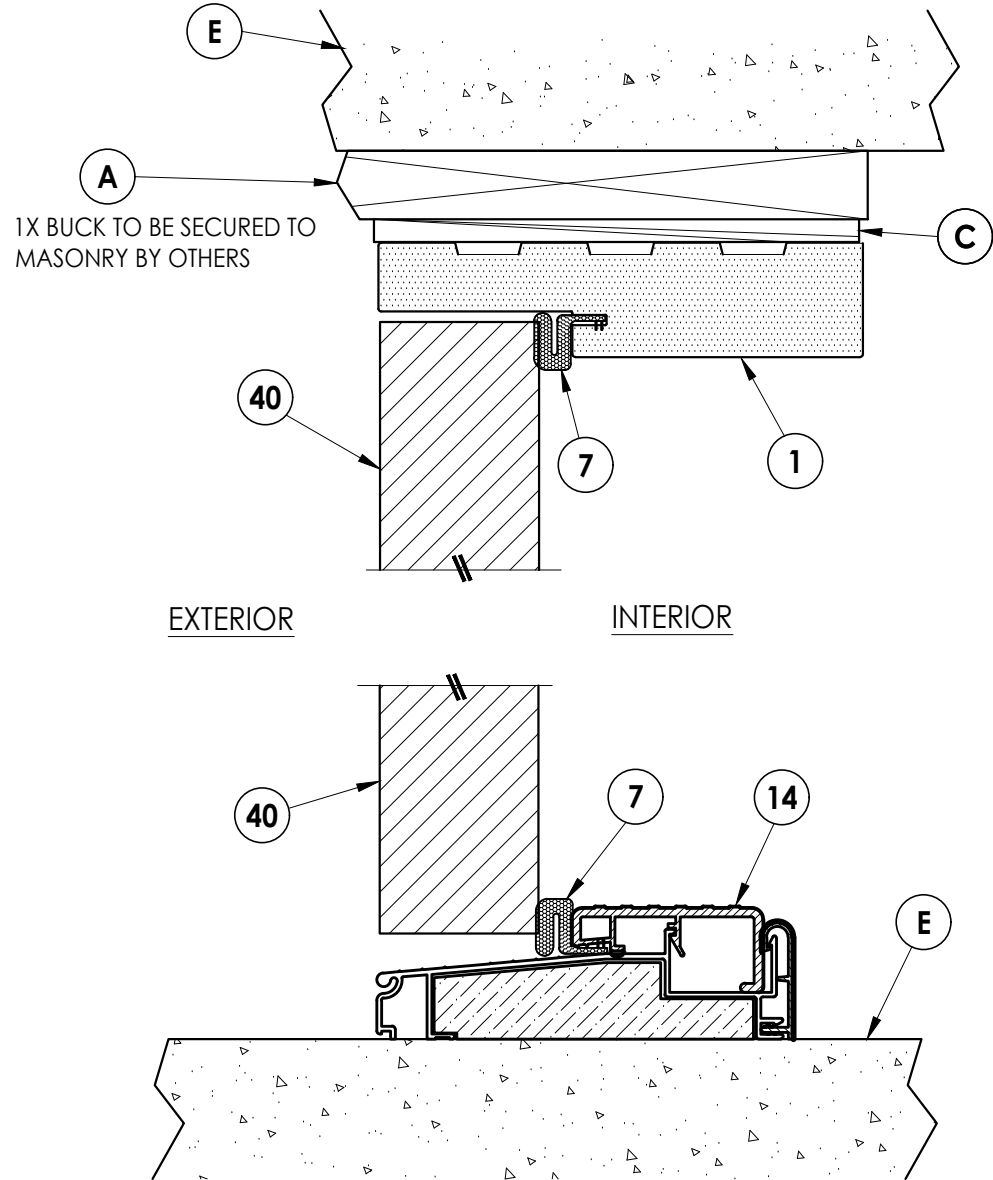

1 VERTICAL CROSS SECTION
5 Shown w/ 1X Buck

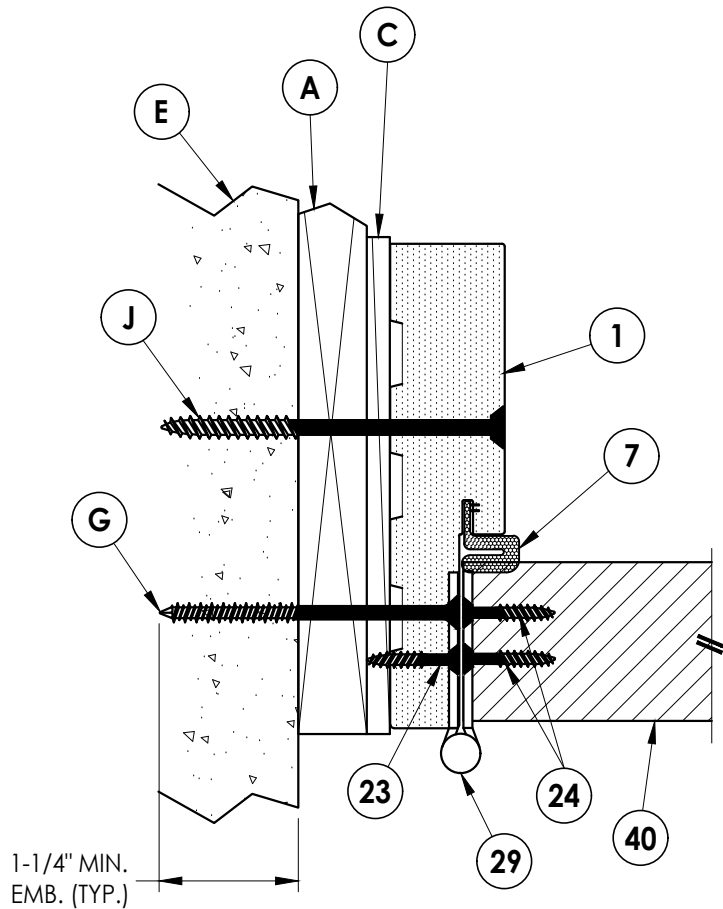


2 HORIZONTAL CROSS SECTION
5 Shown w/ 1X Buck

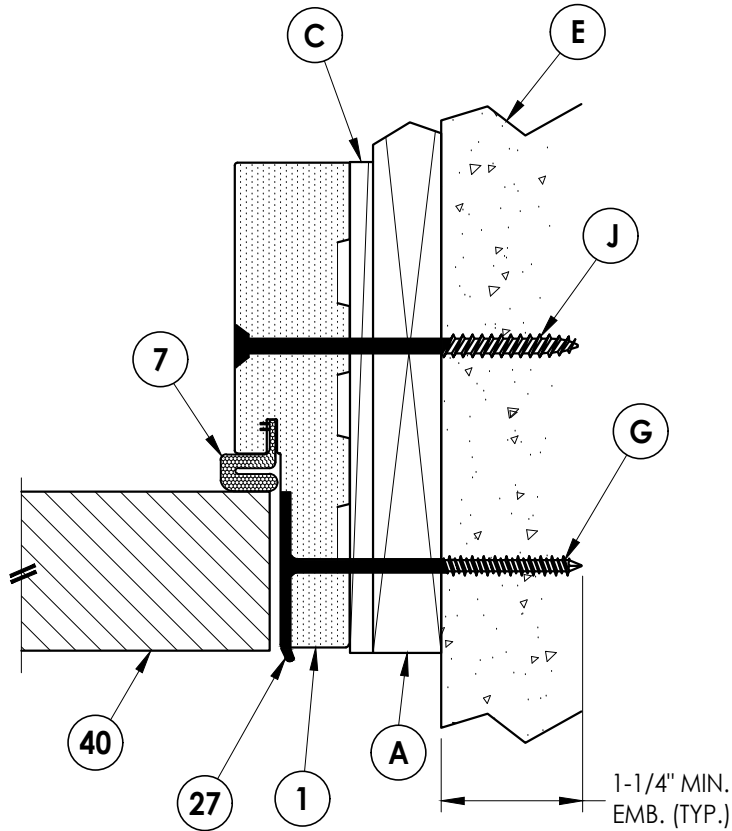


Documents Prepared By:		Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry License No. 9813	
PRODUCT:		MASTERGRAIN FIBERGLASS DOOR		PART OR ASSEMBLY: HORIZONTAL & VERTICAL CROSS SECTIONS (1X BUCK)	
4	7/01/23	UPDATE TO 8TH ED. (2023)	FBC	LFS	
3	7/09/20	UPDATE TO 7TH ED. (2020)	FBC	LFS	
2	10/14/19	ADD DOOR PANEL OPTIONS	TRJ		
1	9/11/18	ADD FIBERGLASS TENSILE STR.	LFS		
NO.	DATE	REVISIONS			
DATE: 10/14/19					
SCALE: N.T.S.					
DWG. BY: TRJ					
CHK. BY: LFS					
DRAWING NO.: FL-21852.19					
SHEET 5 OF 7					




Z:\2023 FBC Drawings\MasterGrain\FL-21852 R8\FL-21852.19.dwg

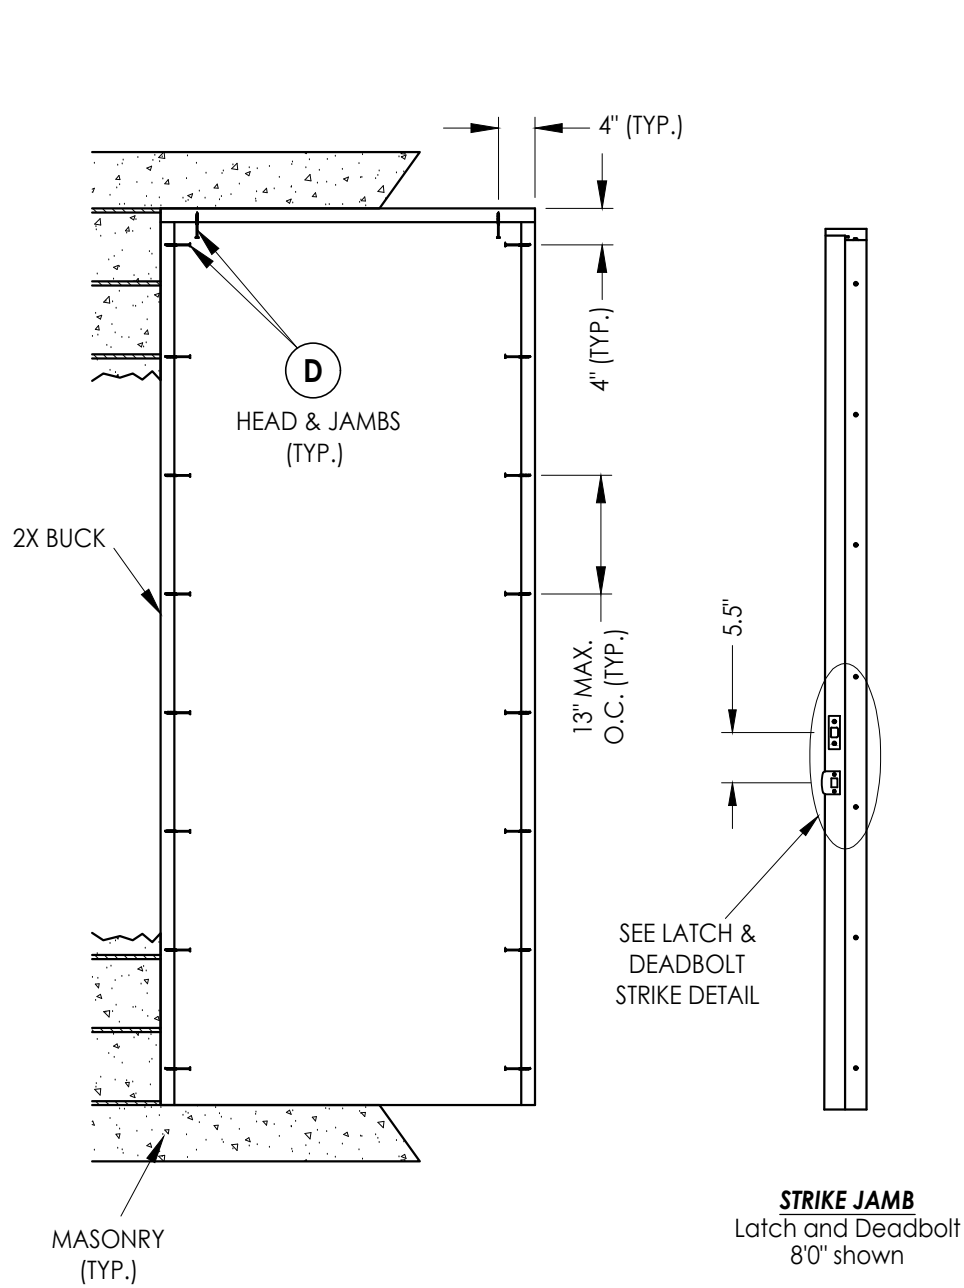

2X BUCK ANCHORING

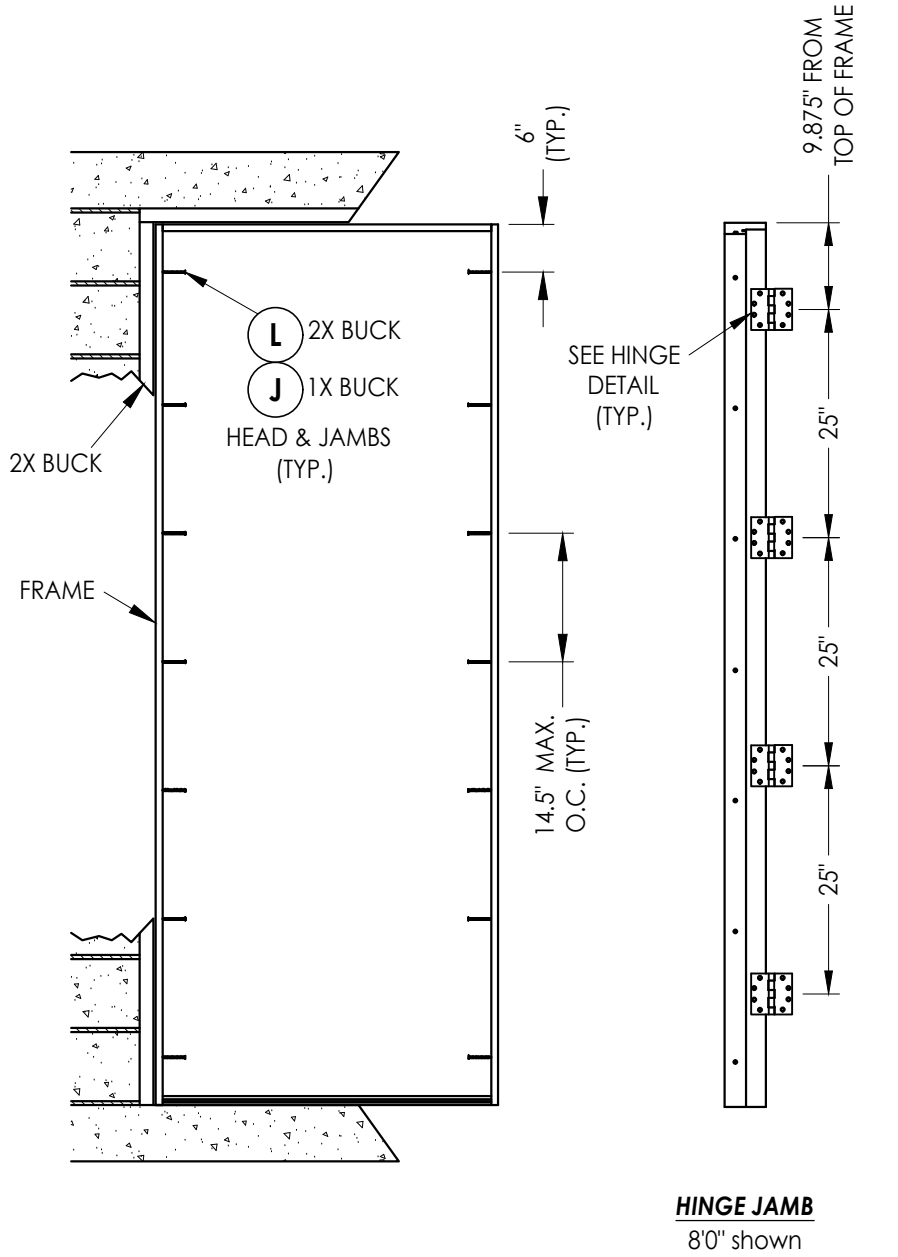

FRAME ANCHORING

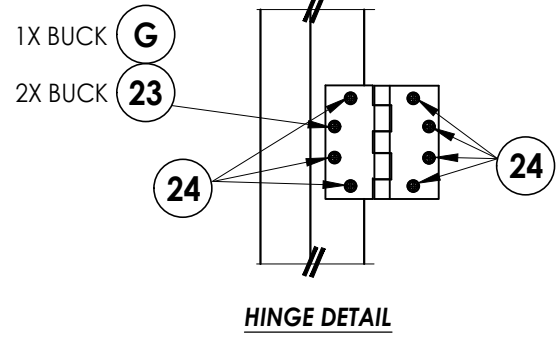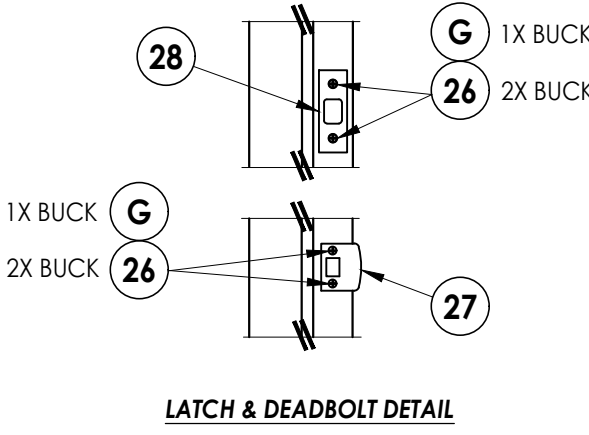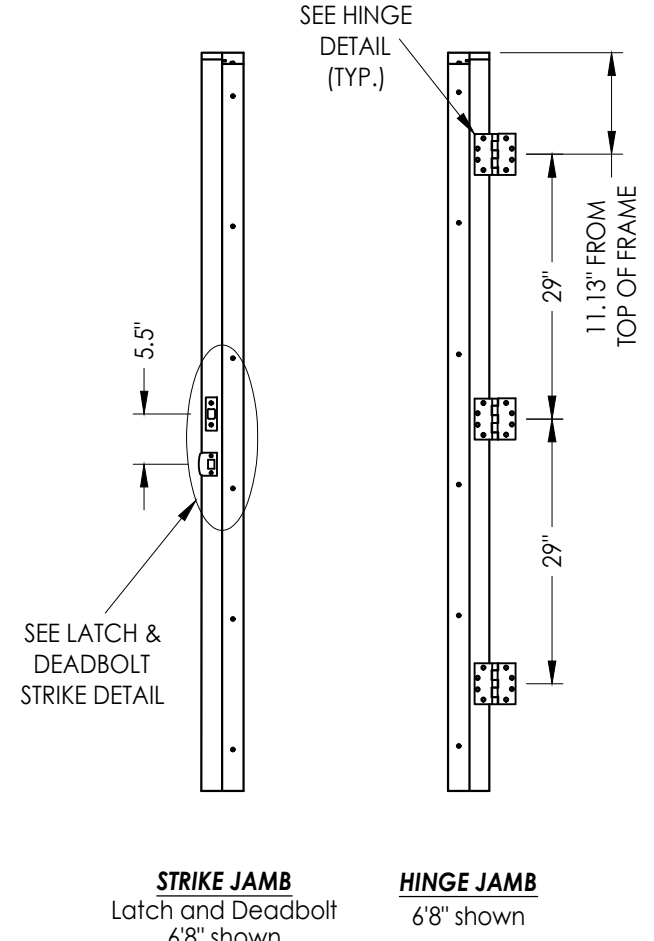

NOTE:
1. ALL FRAME CORNERS SECURED WITH (3) #8 X 2-1/2" FH DEEP THREAD WOOD SCREWS @ HEAD & SILL.

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry License No. 9813	
PRODUCT: MASTERGRAIN FIBERGLASS DOOR		PART OR ASSEMBLY: BUCK & FRAME ANCHORING	
4	7/01/23	UPDATE TO 8TH ED. (2023)	FBC
3	7/09/20	UPDATE TO 7TH ED. (2020)	FBC
2	10/14/19	ADD DOOR PANEL OPTIONS	TRJ
1	9/11/18	ADD FIBERGLASS TENSILE STR.	LFS
NO.	DATE	REVISIONS	
DATE: 10/14/19		SCALE: N.T.S.	
DWG. BY: TRJ		CHK. BY: LFS	
DRAWING NO.: FL-21852.19		SHEET 6 OF 7	

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (SG >= 0.55)	WOOD
B	2X BUCK (SG >= 0.55)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
G	3/16" X 3-1/4" PFH ITW CONCRETE SCREW	STEEL
J	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL
1	COMPOSITE JAMB	COMP
7	WEATHERSTRIP	FOAM
8	SWEEP	VINYL
14	OUTSWING BUMP THRESHOLD	ALUM/COMP
23	#12 X 2-1/2" PFH WOOD SCREW	STEEL
24	#12 x 1-1/4" PFH WOOD SCREW	STEEL
26	#8 X 2-1/2" PFH WOOD SCREW	STEEL
27	LATCH STRIKE PLATE	STEEL
28	DEADBOLT STRIKE PLATE	STEEL
29	4.5" X 4.5" HINGE	STEEL
40	DOOR PANEL	-


CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:


ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON+	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	3"	1-1/2"

WOOD SCREW INSTALLATION NOTES:

1. Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

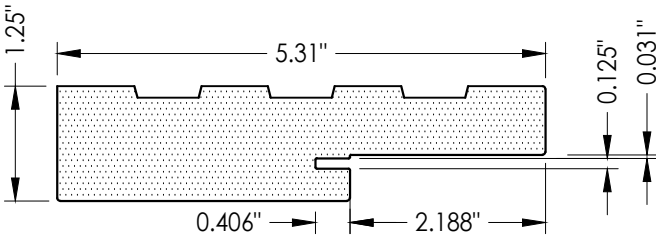

1 COMPOSITE JAMB

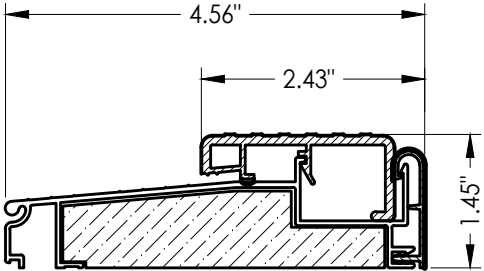

14 OUTSWING THRESHOLD

DATE: 10/14/19		DOCUMENTS PREPARED BY: Lyndon F. Schmidt P.E. No. 43409	
SCALE: N.T.S.		RW BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry License No. 9813	
DWG. BY: TRJ			
CHK. BY: LFS			
DRAWING NO.: FL-21852.19			
SHEET 7 OF 7			
		PRODUCT: MASTERGRAIN FIBERGLASS DOOR	
		PART OR ASSEMBLY: BILL OF MATERIALS & COMPONENTS	
4	7/01/23	UPDATE TO 8TH ED. (2023)	FBC LFS
3	7/09/20	UPDATE TO 7TH ED. (2020)	FBC LFS
2	10/14/19	ADD DOOR PANEL OPTIONS	TRJ
1	9/11/18	ADD FIBERGLASS TENSILE STR.	LFS
NO.	DATE		BY
		REVISIONS	