MASONITE.

3/4-LITE FIBERGLASS WITH MULTIPOINT HARDWARE 6'-8" DOUBLE DOOR WITH / WITHOUT SIDELITES

GENERAL NOTES


1. EVALUATED FOR USE IN LOCATIONS ADHERING TO THE FLORIDA BUILDING CODE AND WHERE PRESSURE REQUIREMENTS AS DETERMINED BY ASCE 7, MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES, DOES NOT EXCEED THE DESIGN PRESSURES LISTED.
2. WHEN INSTALLED IN THE HIGH VELOCITY HURRICANE ZONE (HVHZ), HURRICANE PROTECTIVE SYSTEM (SHUTTERS) IS REQUIRED.
3. WHEN INSTALLED IN THE WIND-BORNE DEBRIS REGION, HURRICANE PROTECTIVE SYSTEM (SHUTTERS) IS REQUIRED.
4. POLYURETHANE CORE FLAME SPREAD INDEX OF 50 AND SMOKE DEVELOPED INDEX OF 60 PER ASTM E84.
5. PLASTICS TESTING:

TEST DESCRIPTION	DESIGNATION	FACING	LITE FRAME
SELF IGNITION TEMP	ASTM D1929	752 °F > 650 °F	740 °F > 650 °F
RATE OF BURNING	ASTM D635	0.56 IN/MIN	0.77 IN/MIN
SMOKE DENSITY	ASTM D2843	53.4%	13.4%
TENSILE STRENGTH*	ASTM D638	3.2% DIFF	7.1% DIFF


6. PLASTICS TESTING OF WORLDWIDE COMPOSITE FRAME (WHERE USED):

TEST DESCRIPTION	DESIGNATION	RESULT
SELF IGNITION TEMP	ASTM D1929	779 °F > 650 °F
RATE OF BURNING	ASTM D635	0.0 IN/MIN
SMOKE DENSITY	ASTM D2843	39.0%
TENSILE STRENGTH*	ASTM D638	3.6% DIFF


* COMPARATIVE TENSILE STRENGTH AFTER WEATHERING 4500 HOURS XENON ARC METHOD 1

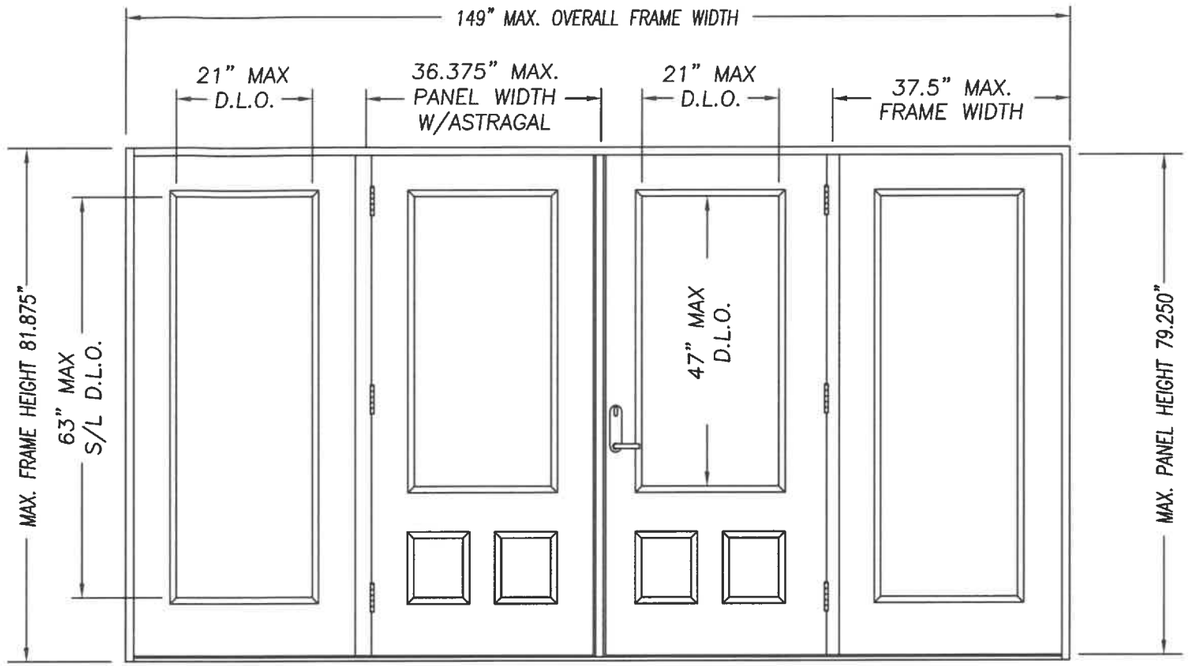


DOUBLE DOOR UNIT W/SIDELITES

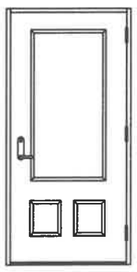

SINGLE DOOR UNIT

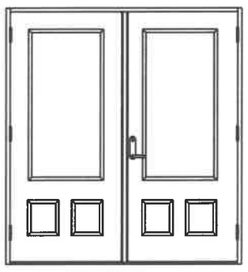


DOUBLE DOOR UNIT

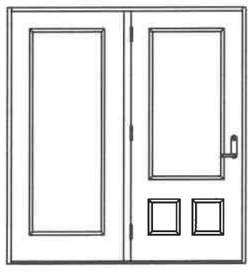


SINGLE DOOR UNIT WITH SIDELITE



SINGLE DOOR UNIT WITH SIDELITE

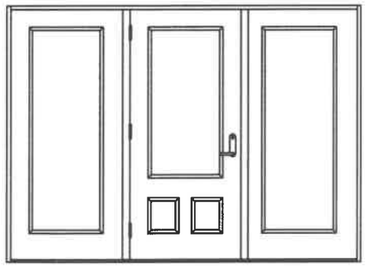

SINGLE DOOR UNIT W/SIDELITES

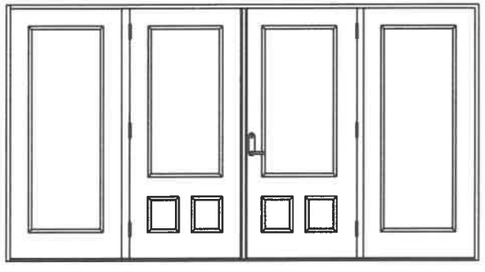

DOUBLE DOOR UNIT W/SIDELITES

CONFIG	MAX WIDTH	DESIGN PRESSURE RATING (1:1 OVERHANG OR WHERE NO WATER REQUIRED) INSWING	DESIGN PRESSURE RATING (1:1 OVERHANG OR WHERE NO WATER REQUIRED) OUTSWING	WHERE WATER INFILTRATION PERFORMANCE IS REQUIRED TO BE 15% OF DESIGN PRESSURE BUMPER O/S	Z-SERIES O/S	T4 O/S	HIGH DAM O/S
X	37.5"	+50.0 / -50.0	+50.0 / -50.0	+25.0 / -25.0	+40.0 / -40.0	+50.0 / -50.0	+50.0 / -50.0
XX	74"	+50.0 / -50.0	+50.0 / -50.0	+25.0 / -25.0	+40.0 / -40.0	+50.0 / -50.0	+50.0 / -50.0
OX or XO	75"	+50.0 / -50.0	+50.0 / -50.0	+25.0 / -25.0	+40.0 / -40.0	+50.0 / -50.0	+50.0 / -50.0
OXO	112.5"	+50.0 / -50.0	+50.0 / -50.0	+25.0 / -25.0	+40.0 / -40.0	+50.0 / -50.0	+50.0 / -50.0
OXXO	149"	+50.0 / -50.0	+50.0 / -50.0	+25.0 / -25.0	+40.0 / -40.0	+50.0 / -50.0	+50.0 / -50.0

TABLE OF CONTENTS

SHEET #	DESCRIPTION
1	TYPICAL ELEVATIONS & GENERAL NOTES
2	ANCHORING LOCATIONS & DETAILS
3	ANCHORING LOCATIONS & DETAILS



KURT BALTHAZOR
FLORIDA P.E.
#56533


MASONITE INTERNATIONAL CORP.
1955 POWIS ROAD
WEST CHICAGO, IL 60185


PRODUCT: "EXTERIOR DOOR PRODUCT" DOUBLE 6'8" GLAZED FIBERGLASS DOOR


PART OR ASSEMBLY: TYPICAL ELEVATIONS & GENERAL NOTES

NO.	DATE	REVISIONS	BY
C	11/21/23	ADDED PANOLOCK	SWS
B	7/18/20	MISC EDITS	SWS
A	11/27/17	MISC UPDATES	SWS


DATE: 4/26/17
SCALE: N.T.S.
DWG. BY: SWS
CHK. BY:
DRAWING NO.: DWG-MA-FL0203-17
SHEET 1 OF 3

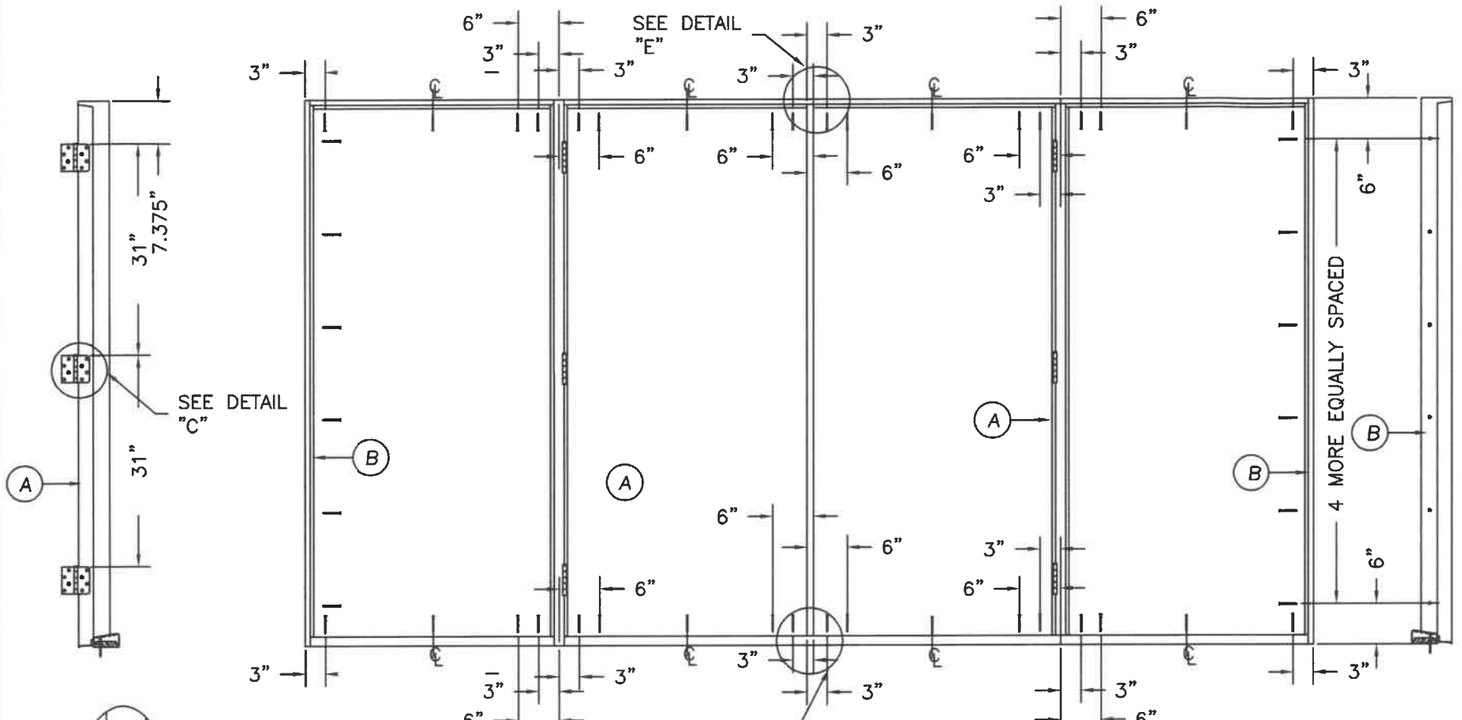

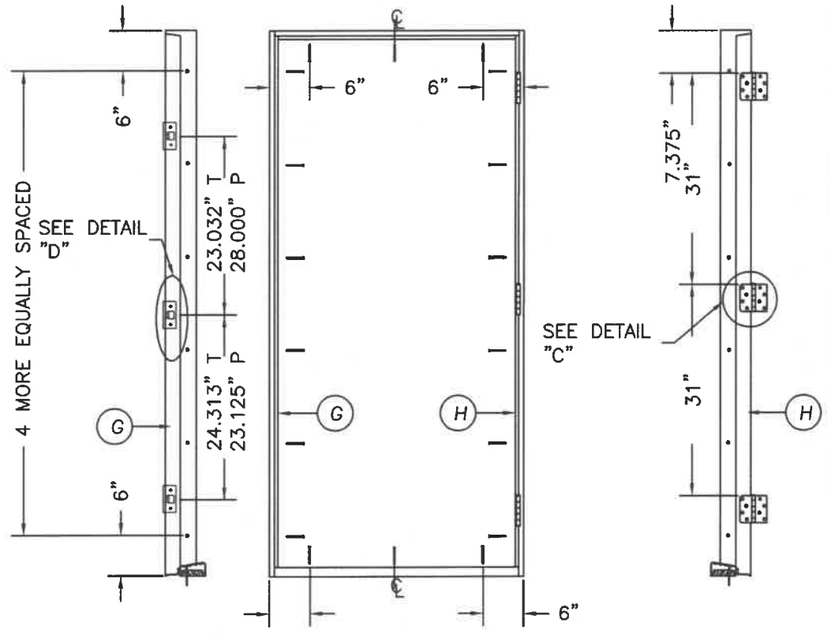


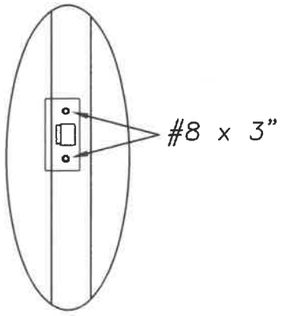

DETAIL "D"

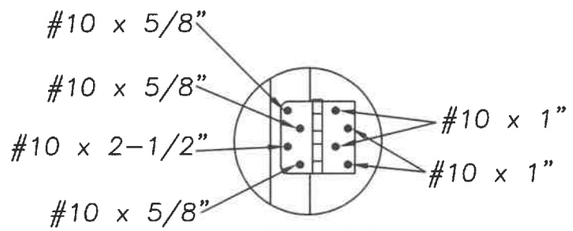


DETAIL "C"

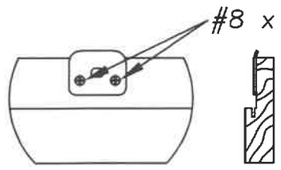


DETAIL "E" ASTRAGAL

ATTACH ASTRAGAL RETAINER BOLT STRIKE PLATE TO FRAME AS SHOWN.




ASTRAGAL RETAINER BOLT HOLE MUST BE DRILLED THROUGH THE THRESHOLD & INTO THE STRUCTURE DEEP ENOUGH FOR A 1.375" THROW


DETAIL "F" ASTRAGAL

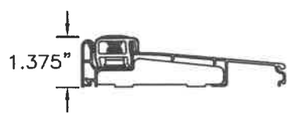


INSWING THRESHOLD

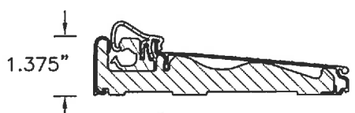

ZAC I/S THRESHOLD

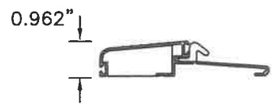


BUMPER O/S THRESHOLD

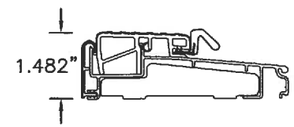


Z-SERIES O/S THRESHOLD



HIGH DAM O/S THRESHOLD

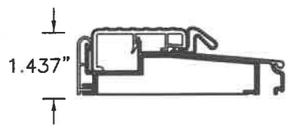


T4 O/S THRESHOLD

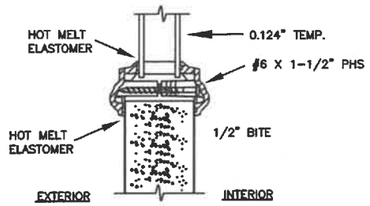

TYPICAL GLAZING DETAIL
NON-IMPACT GLASS

MAX GLASS SIZES COMPLY WITH ASTM E1300 FOR DESIGN PRESSURES LISTED ON PAGE 1

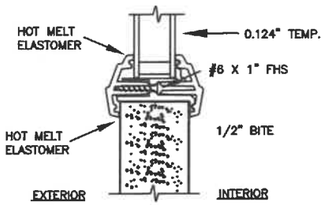

ALTERNATE GLAZING DETAIL
NON-IMPACT GLASS

MAX GLASS SIZES COMPLY WITH ASTM E1300 FOR DESIGN PRESSURES LISTED ON PAGE 1


MASONITE INTERNATIONAL CORP.
1955 POWIS ROAD
WEST CHICAGO, IL 60185


PRODUCT: "EXTERIOR DOOR PRODUCT" 6'-8" FIBERGLASS GLAZED DOUBLE DOOR UNIT


PART OR ASSEMBLY: ANCHORING LOCATIONS & DETAILS


NO.	DATE	REVISIONS	BY
C	11/21/23	ADDED PANOLOCK	SWS
B	7/18/20	ANCHOR CORRECTIONS	SWS
A	11/27/17	MISC UPDATES	SWS

DATE: 4/26/17
SCALE: N.T.S.
DWG. BY: SWS
CHK. BY:
DRAWING NO.: DWG-MA-FL0203-17

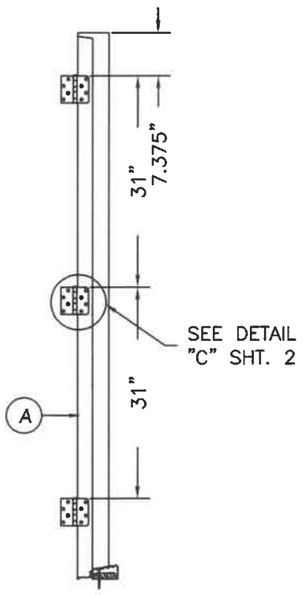

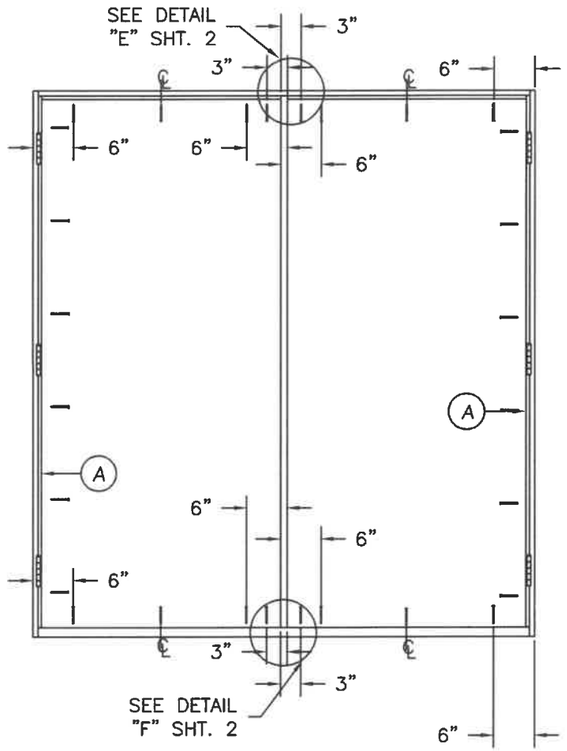


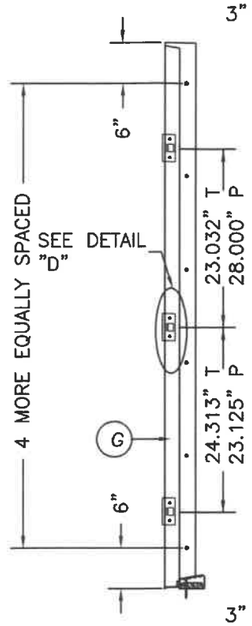

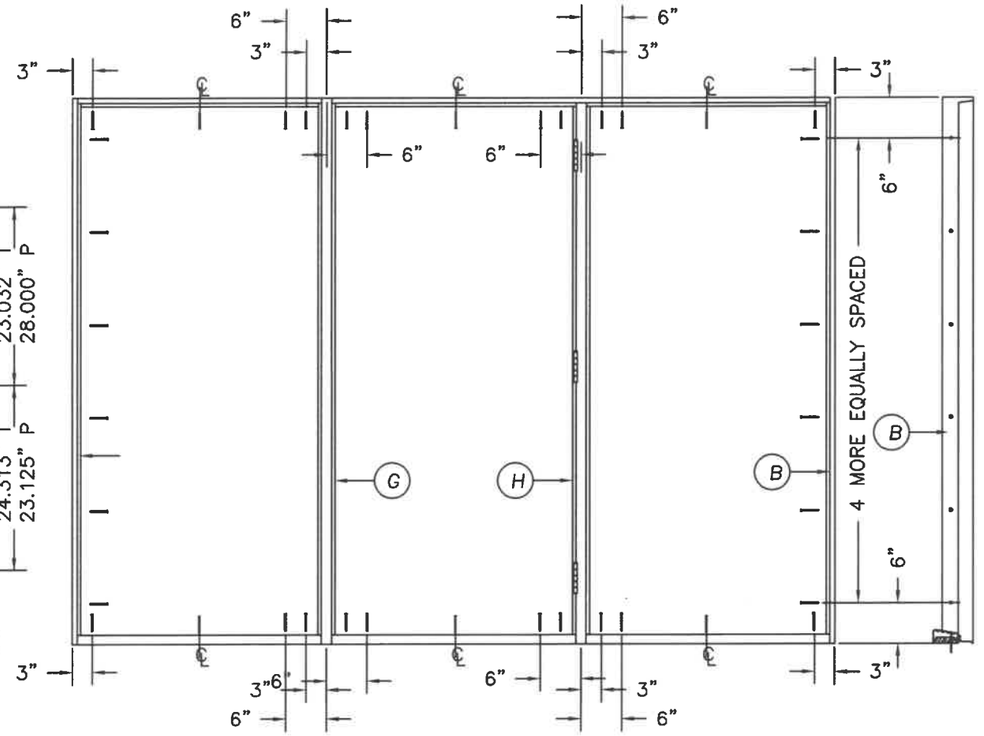


ATTACHMENT DETAIL


1. ANCHOR ANALYSIS FOR LOADING CONDITIONS PREPARED, SIGNED AND SEALED BY ROBERTO LOMAS, PE (FLORIDA #62514) WITH THE LOWEST (LEAST) FASTENER RATING FROM THE DIFFERENT FASTENERS BEING CONSIDERED FOR USE. JAMB, HEAD, AND THRESHOLD FASTENERS ANALYZED FOR THIS UNIT INCLUDE #10 WOOD SCREWS, 1/4" TAPCONS, AND #10 TEK SCREWS. A PHYSICAL SHIM MUST BE PLACED IN SHIM SPACE AT EACH ANCHOR LOCATION. TAPCON EDGE DISTANCE MIN 2-1/2". WOOD SCREW EDGE DISTANCE MIN 3/4". TEK SCREW EDGE DISTANCE MIN 1/2".
2. ANCHORING INTO STEEL STRUCTURE MUST BE SUFFICIENT TO ACHIEVE 3 THREADS MINIMUM BEYOND STEEL INTERIOR SURFACE.
3. THE WOOD SCREW SINGLE SHEAR DESIGN VALUES COME FROM ANSI/AF&PA NDA FOR SOUTHERN PINE LUMBER AND ACHEIVEMENT OF 1-1/2" MINIMUM EMBEDMENT. THE TAPCON MUST ACHIEVE MINIMUM EMBEDMENT OF 1-1/4".
4. WOOD BUCKS BY OTHERS MUST BE ANCHORED PROPERLY TO TRANSFER LOADS TO STRUCTURE.
5. MINIMUM DESIGN VALUE STRENGTH OF ANCHORS 155 LBS.

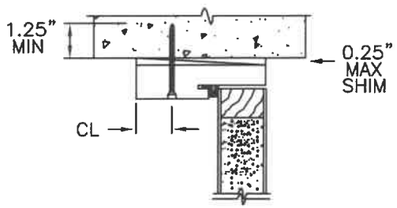

TYPICAL MASONRY
ANCHOR INSTALLATION

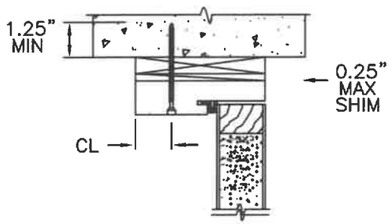


1X BUCK MASONRY
ANCHOR INSTALLATION

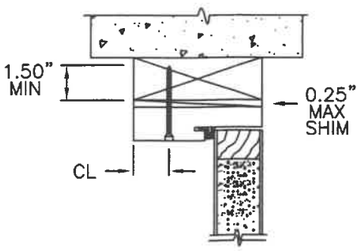


TYPICAL WOOD BUCK
ANCHOR INSTALLATION

HARDWARE SCHEDULE


1.	ENDURA PANOLOCK OR TRILENNIUM MULTIPOINT LOCKING HARDWARE FACTORY INSTALLED.
2.	4" X 4" FULL MORTISE BUTT HINGES.




COMBINATION WOOD
MULLION (BOXED)

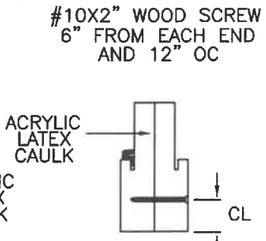

COMBINATION WOOD
MULLION (BOXED)



INTEGRAL WOOD
MULLION (CHS)



INTEGRAL WW
MULLION (CHS)

MASONITE INTERNATIONAL CORP.
1955 POWIS ROAD
WEST CHICAGO, IL 60185

PRODUCT:
"EXTERIOR DOOR PRODUCT"
6'-8" FIBERGLASS GLAZED
DOUBLE DOOR UNIT

PART OR ASSEMBLY:
ANCHORING LOCATIONS
& DETAILS

NO.	DATE	REVISIONS	BY
C	11/21/23	ADDED PANOLOCK	SWS
B	7/18/20	ANCHOR CORRECTIONS	SWS
A	11/27/17	MISC UPDATES	SWS

DATE: 4/26/17
SCALE: N.T.S.
DWG. BY: SWS
CHK. BY:
DRAWING NO.: DWG-MA-FL0203-17
SHEET 3 OF 3