+55/-65 PSF

DESIGN PRESSURE RATING

**RATED FOR LARGE & SMALL** 

IMPACT RATING

MISSILE IMPACT RESISTANCE

35-1/8"

FRAME

**VISIBLE** 

LIGHT

77"


BUCK

HEIGHT


6" MAX. O.C.

## SERIES 4100A IMPACT RESISTANT SINGLE HUNG **WINDOW**

- 1) THIS PRODUCT HAS BEEN DESIGNED & TESTED TO COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE. INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ).
- 2) SHUTTERS ARE NOT REQUIRED WHEN USED IN WIND-BORNE DEBRIS REGIONS.
- 3) MASONRY ANCHORS MAY BE USED INTO WOOD AS PER TABLE 2. ALL WOOD BUCKS LESS THAN 1-1/2" THICK ARE TO BE CONSIDERED 1X INSTALLATIONS. 1X WOOD BUCKS ARE OPTIONAL IF UNIT IS INSTALLED DIRECTLY TO SUBSTRATE. WOOD BUCKS DEPICTED AS 2X ARE 1-1/2" THICK OR GREATER. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED TO PROPERLY TRANSFER LOADS TO THE STRUCTURE, WOOD BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD.
- 4) ANCHOR EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO. USE ANCHORS OF SUFFICIENT LENGTH. INSTALLATION ANCHORS SHOULD BE SEALED. OVERALL SEALING/FLASHING STRATEGY FOR WATER RESISTANCE OF INSTALLATION SHALL BE DONE BY OTHERS AND IS BEYOND THE SCOPE OF THESE INSTRUCTIONS.
- 5) SHIMS ARE REQUIRED AT EACH FLANGE ANCHOR LOCATION WHERE THE PRODUCT IS NOT FLUSH TO THE SUBSTRATE, USE SHIMS CAPABLE OF TRANSFERRING APPLIED LOADS. WOOD BUCKS, BY OTHERS, MUST BE SUFFICIENTLY ANCHORED TO RESIST LOADS IMPOSED ON THEM BY THE WINDOW.
- 6) THE ANCHORAGE METHODS SHOWN HAVE BEEN DESIGNED TO RESIST THE WIND LOADS CORRESPONDING TO THE REQUIRED DESIGN PRESSURE, THE 33-1/3% STRESS INCREASE HAS NOT BEEN USED IN THE DESIGN OF THIS PRODUCT. THE 1.6 LOAD DURATION FACTOR WAS USED FOR THE EVALUATION OF ANCHORS INTO WOOD. ANCHORS THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE FLORIDA BUILDING CODE FOR CORROSION RESISTANCE.

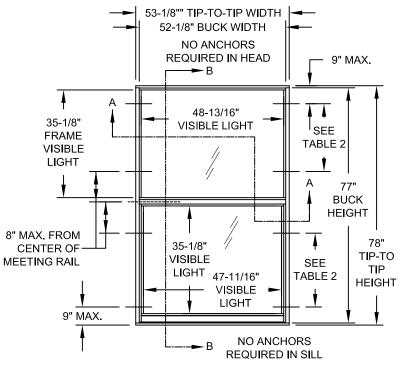


TYP. FLANGE FRAME ANCHOR LOCATIONS @ MAX. SIZE

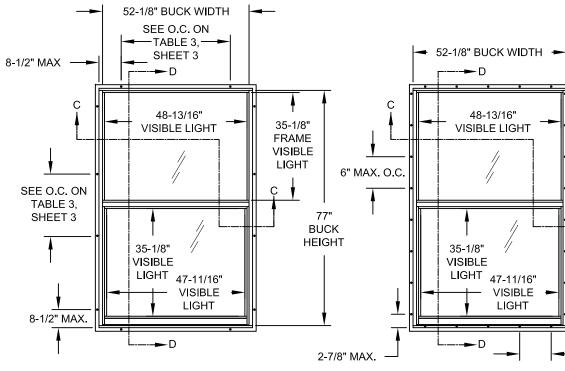



TYP. INTEGRAL FIN FRAME ANCHOR LOCATIONS @ MAX. SIZE (INSTALLED WITH SCREWS)

TYP. INTEGRAL FIN FRAME ANCHOR LOCATIONS @ MAX. SIZE (INSTALLED WITH NAILS



**GLASS TYPE 2** 

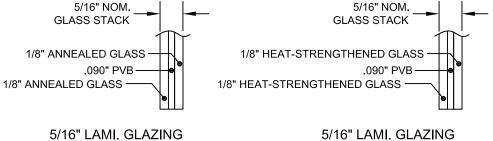

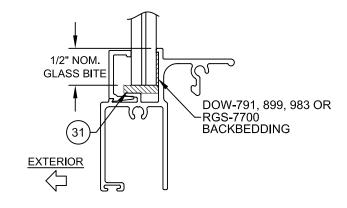

TYP. GLAZING DETAIL

**ORIEL CONFIGURATION** ALLOWED PROVIDED THAT THE FRAME VISIBLE LIGHT HEIGHT OF 35-1/8" AND THE FRAME HEIGHT, AS SHOWN ABOVE, IS NOT EXCEEDED.

## TABLE 1:

**GLASS TYPE 1** 

	Laminated Glass Types						
1	1/8" Annealed, 0.090" PVB, 1/8" Annealed						
2	1/8" Heat-strengthened, 0.090" PVB, 1/8" Heat-strengthened						
INTERLAYER MAY BE SAFLEX PVB OR TROSIFOL PVB							

Title:				Drawn By	y:		
SH WINDOW IN	STALLA	ATION		JRO	DSOW	/SKI	3780 W
Description:					Date:		3780 W Tel: 30
GENERAL NOTI	ES & El	LEVATION			09/20	0/17	PREI 1070
Revision:				Rev. By:	Rev. Dat	e:	N. VE
ADDED ULTRAG	CON+ A	NCHOR		JR	08/27	7/20	(941)
Series/Model:	Scale:	Sheet:	Drawing N		<u> </u>	Rev:	COPYF DOOF
SH-4100A	NTS	1 OF 4	5H4	100FL	.PA		RE




) W. 104th Street, Hialeah, FL 33018 305.593.6590 | Fax: 305.593.6592 EPARED BY LYNN MILLER '0 TECHNOLOGY DRIVE


VENICE, FL 34275 1) 480-1600 YRIGHT © 2020 CGI WINDOWS &

ORS, LIMITED LICENSE TO MAKE COPIES FOR PERMITTING. REGISTRATION #29296



MILLIAM

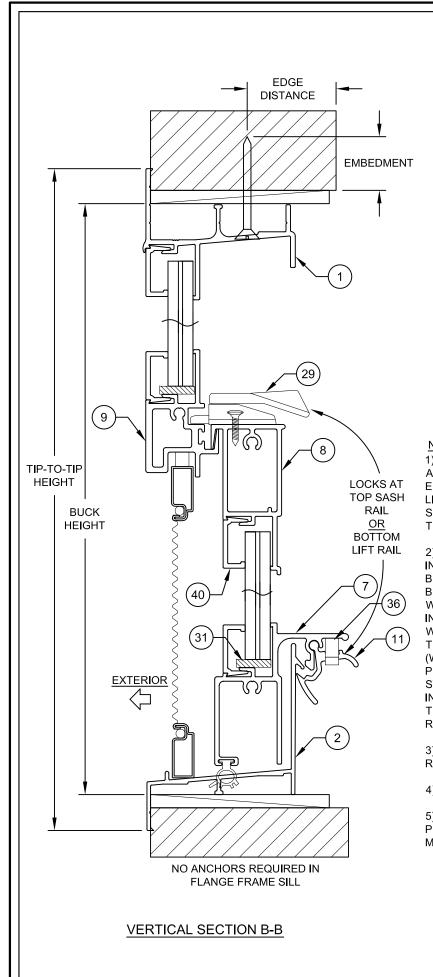

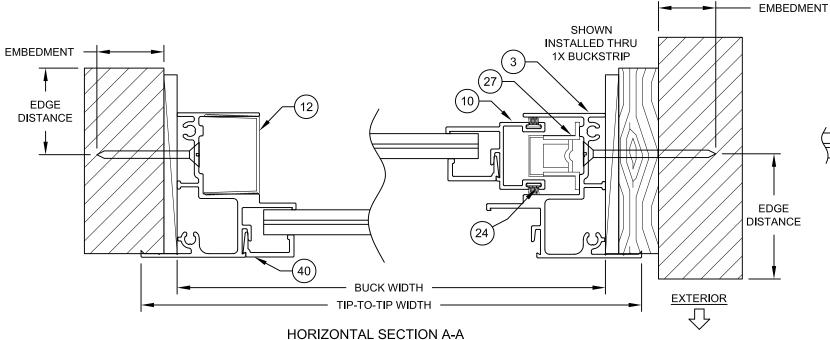

**NOTES** 

1) USE ONLY SUBSTRATE APPROPRIATE ANCHORS LISTED IN TABLE 2. FOLLOW EMBEDMENT AND EDGE DISTANCE LIMITS. ANY INSTALLATION OPTION SHOWN MAY BE USED ON ANY SIDE OF THE WINDOW.

2) MASONRY ANCHORS MAY BE USED INTO WOOD AS PER TABLE 2. ALL WOOD BUCKS LESS THAN 1-1/2" THICK ARE TO BE CONSIDERED 1X INSTALLATIONS. 1X WOOD BUCKS ARE OPTIONAL IF UNIT IS INSTALLED DIRECTLY TO SUBSTRATE. WOOD BUCKS DEPICTED AS 2X ARE 1-1/2" THICK OR GREATER. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED TO PROPERLY TRANSFER LOADS TO THE STRUCTURE. WOOD BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF


- 3) SEE SHEET 1 & TABLE 2 FOR SPACING REQUIREMENTS.
- 4) MAX. SHIM THICKNESS TO BE 1/4".
- 5) GLASS SHOWN IS FOR ILLUSTRATIVE PURPOSES ONLY AND MAY DIFFER TO MEET DESIGN REQUIREMENTS.

TABLE 2: THROUGH-FRAME ANCHORS

Anchor	Substrate	Minimum Edge Distance	Minimum Embedment	Max. O.C. (Above / Below Meeting Rail)
"40 01 1	P.T. Southern Pine (SG = .55)	9/16"	1-3/8"	21" / 23"
#12 Steel SMS	Aluminum, 6063-T5 min.	3/8"	0.078"	21" / 23"
Screw (G5)	Steel Stud, Gr. 33 min.	3/8"	0.045" (20 Ga)	21" / 23"
20.011 (20)	A36 Steel	3/8"	0.050"	21" / 23"
	P.T. Southern Pine (SG = .55)	1"	1-3/8"	21" / 23"
1/4" Steel	Concrete (min. 2.9 ksi)	1-1/8"	1-3/8"	21" / 23"
Ultracon	Grouted CMU, (ASTM C-90)	2-1/2"	1-3/4"	21" / 23"
	Ungrouted CMU, (ASTM C-90)	1-1/8"	1-1/4"	12-1/4" / 12-1/4"
	P.T. Southern Pine (SG = .55)	1"	1-3/8"	21" / 23"
1/4" Steel	Concrete (min. 3.0 ksi)	1-7/8"	1-3/8"	21" / 23"
Ultracon+	Grouted CMU, (ASTM C-90)	2-1/2"	1-3/4"	21" / 23"
	Ungrouted CMU, (ASTM C-90)	1"	1-1/4"	12-1/4" / 12-1/4"
	P.T. Southern Pine (SG = .55)	1"	1-3/8"	21" / 23"
1/4" 410 SS	Concrete (min. 3.35 ksi)	1"	1-3/4"	21" / 23"
CreteFlex	Concrete (min. 3.35 ksi)	2-1/2"	1"	21" / 23"
	Ungrouted CMU, (ASTM C-90)	1-3/4"	1-1/4"	21" / 23"

1) ANCHOR MUST EXTEND A MIMIMUM OF 3 THREADS BEYOND ANY METAL SUBSTRATE. 2) "UNGROUTED CMU" VALUES MAY BE USED FOR GROUTED CMU APPLICATIONS.

> Drawn By: J ROSOWSKI SH WINDOW INSTALLATION INSTALLATION FOR FLANGE WINDOWS 09/20/17 Rev. By: Rev. Date: ADDED ULTRACON+ ANCHOR 08/27/20 Series/Model: Sheet: Scale: Drawing No. Rev: SH-4100A

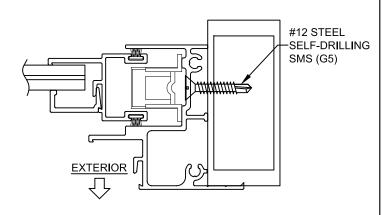

INSTALLED INTO APPROVED

ALUMINUM, STEEL FRAMING

OR STEEL STUD.

**MULLION SECTION** APPROVED MULLION, MAY BE VERTICAL OR HORIZONTAL.



3780 W. 104th Street, Hialeah, FL 33018 Tel: 305.593.6590 | Fax: 305.593.6592

PREPARED BY LYNN MILLER 1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941) 480-1600

COPYRIGHT © 2020 CGI WINDOWS & DOORS, LIMITED LICENSE TO MAKE COPIES FOR PERMITTING.

9/3/20 STATE OF MORIDA. SONAL ENGIN SONAL ENGLIS A. LYNN MILLER, P.E. P.E.# 58705

#12 STEEL SELF-DRILLING SMS (G5)

SHOWN INSTALLED

**DIRECTLY INTO** 

METAL.

Ε NTS 2 OF 4 SH4100FLPA

REGISTRATION #29296

