

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	01/04/2024	R.L.

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" WINDOW UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. WINDOW UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND WINDOW INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. FOR FIN INSTALLATION SHIM AS NEEDED. FOR FRAME INSTALLATION SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: EXTRUDED RIGID PVC.
11. UNITS MUST BE GLAZED PER ASTM E1300.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.

13. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE ROOFING NAILS (.105" Ø MINIMUM) WITH SUFFICIENT LENGTH TO ACHIEVE A 3/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. ALL FASTENERS TO BE CORROSION RESISTANT.
19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - 19.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - 19.2. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - 19.3. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
 - 19.4. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR ALUMINUM 6063-T5 FU=30KSI 1/8" THICK MINIMUM

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	ELEVATION, ANCHORING AND NOTES
2	CROSS SECTIONS AND B.O.M.
3	DESIGN PRESSURE CHARTS
4 – 11	INSTALLATION DETAILS

ALL AMERICAN WINDOW COMPANY, LLC

PO BOX 80039
CHARLESTON, SC 29416

1900 SH SINGLE HUNG WINDOW
40"X63" NON-IMPACT
NOTES

DRAWN:
R.L.

DWG NO.
08-03176

REV
A

SCALE NTS

DATE 10/02/2017

SHEET 1 OF 11


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 01/04/2024




Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	01/04/2024	R.L.

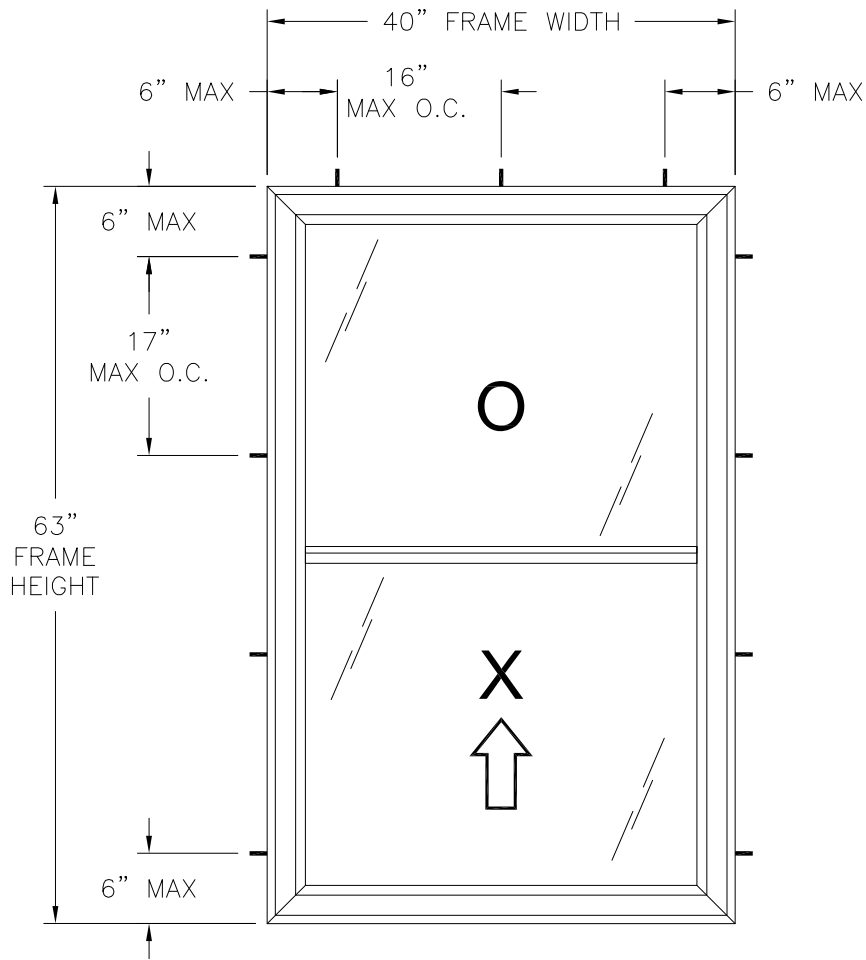

1900 SH SINGLE HUNG WINDOW
EXTERIOR VIEW
FRAME INSTALLATION
FOR OTHER UNIT SIZES SEE CHARTS #1, #2 & #3

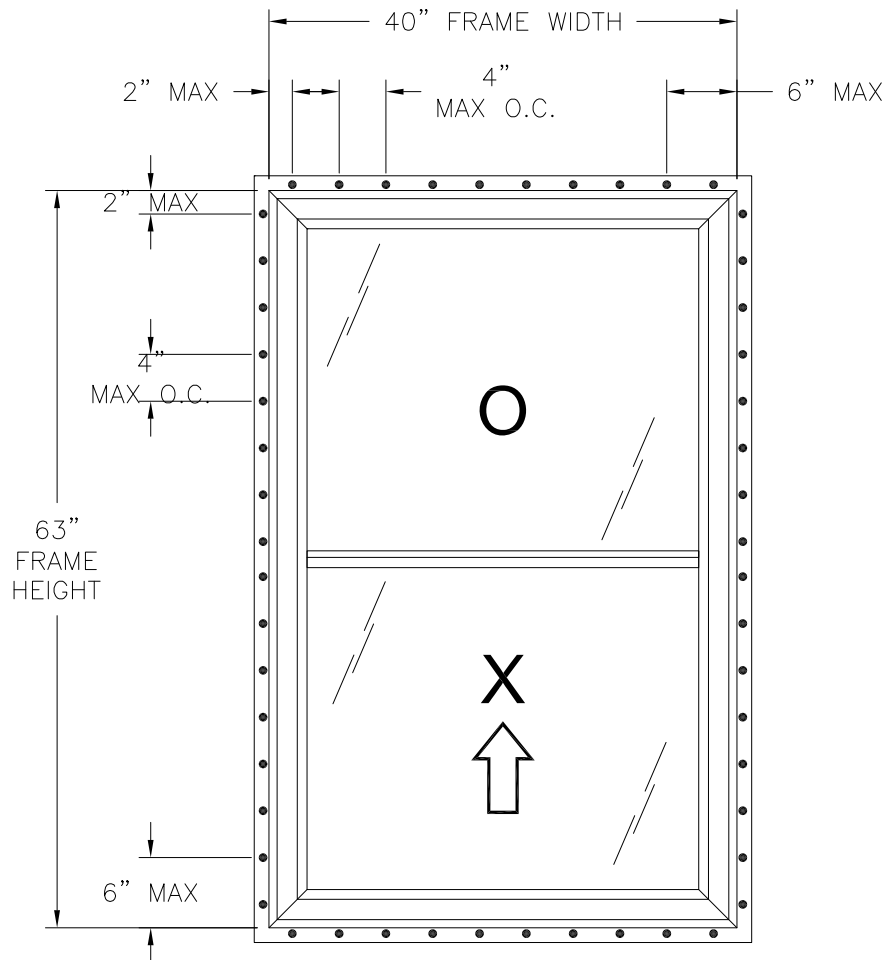

1900 SH SINGLE HUNG WINDOW
EXTERIOR VIEW
FIN INSTALLATION
FOR OTHER UNIT SIZES SEE CHARTS #1, #2 & #3

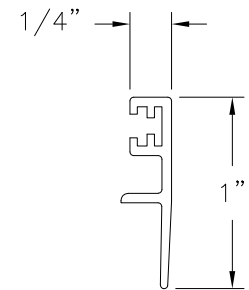

SILL EXTENSION

DESIGN PRESSURE RATING	IMPACT RATING
+35.0/-44.4PSF	NONE

WITH STANDARD SILL
SEE CHART #1, SHEET 3

DESIGN PRESSURE RATING	IMPACT RATING
±44.4PSF	NONE

WITH SILL EXTENSION
SEE CHARTS #2 AND #3, SHEET 3

NOTES:

1. MAXIMUM SASH SIZE: 38" X 31 1/2"
2. MAXIMUM D.L.O.: 37 1/4" X 28 3/4"

HARDWARE SCHEDULE

A.	(1) CAM LOCK WITH KEEPER AT MEETING RAIL MIDSPAND
B.	(2) ULTRALIFT SASH BALANCE ONE PER JAMB
C.	EXTRUDED ALUMINUM REINFORCEMENT (500125) AT FIXED MEETING RAIL


ALL AMERICAN WINDOW COMPANY, LLC

PO BOX 80039
CHARLESTON, SC 29416

1900 SH SINGLE HUNG WINDOW
40"X63" NON-IMPACT
ELEVATION FRAME INSTALLATION

DRAWN: R.L.	DWG NO. 08-03176	REV A
SCALE NTS	DATE 10/02/2017	SHEET 2 OF 11
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 01/04/2024

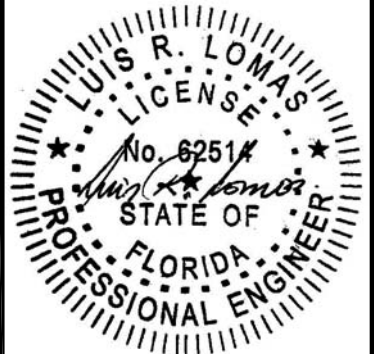

Luis R. Lomas P.E.
FL No.: 62514

Chart #1, Standard Sill
Where water penetration resistance is required
Design pressure rating (psf)

Frame Height (in)	Frame width (in)															
	24.00		30.00		36.00		40.00		42.00		48.00		52.00		56.00	
	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg
30.0	35.0	60.0	35.0	60.0	35.0	60.0	35.0	60.0	35.0	60.0	35.0	55.9	35.0	50.9	35.0	46.7
36.0	35.0	60.0	35.0	60.0	35.0	60.0	35.0	60.0	35.0	57.1	35.0	48.4	35.0	43.9	35.0	40.1
42.0	35.0	60.0	35.0	60.0	35.0	60.0	35.0	54.8	35.0	51.3	35.0	43.1	35.0	39.0	35.0	35.5
48.0	35.0	60.0	35.0	60.0	35.0	58.9	35.0	50.5	35.0	47.1	35.0	39.3	35.0	35.4	32.1	32.1
54.0	35.0	60.0	35.0	60.0	35.0	55.9	35.0	47.4	35.0	44.1	35.0	36.4	32.7	32.7	29.6	29.6
60.0	35.0	60.0	35.0	60.0	35.0	53.9	35.0	45.3	35.0	41.9	34.3	34.3	30.6	30.6	27.6	27.6
63.0	35.0	60.0	35.0	60.0	35.0	53.2	35.0	44.4	35.0	41.1	33.4	33.4	29.7	29.7	26.8	26.8
66.0	35.0	60.0	35.0	60.0	35.0	52.8	35.0	43.8	35.0	40.3	32.7	32.7	29.0	29.0	26.0	26.0
72.0	35.0	60.0	35.0	60.0	35.0	52.4	35.0	42.9	35.0	39.3	31.4	31.4	27.7	27.7	-	-
78.0	35.0	60.0	35.0	60.0	35.0	52.4	35.0	42.5	35.0	38.7	30.5	30.5	-	-	-	-
84.0	35.0	60.0	35.0	60.0	35.0	52.4	35.0	42.4	35.0	38.5	-	-	-	-	-	-
90.0	35.0	60.0	35.0	60.0	35.0	52.4	35.0	42.4	35.0	38.5	-	-	-	-	-	-
96.0	35.0	60.0	35.0	60.0	35.0	52.4	35.0	42.4	-	-	-	-	-	-	-	-
102.0	35.0	60.0	35.0	60.0	35.0	52.4	-	-	-	-	-	-	-	-	-	-

Chart #2, Standard Sill
Where water penetration resistance is NOT required
Design pressure rating (psf)

Frame Height (in)	Frame width (in)															
	24.00		30.00		36.00		40.00		42.00		48.00		52.00		56.00	
	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg
30.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	55.9	55.9	50.9	50.9	46.7	46.7
36.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	57.1	57.1	48.4	48.4	43.9	40.1	40.1
42.0	60.0	60.0	60.0	60.0	60.0	60.0	54.8	54.8	51.3	51.3	43.1	43.1	39.0	39.0	35.5	35.5
48.0	60.0	60.0	60.0	60.0	58.9	58.9	50.5	50.5	47.1	47.1	39.3	39.3	35.4	35.4	32.1	32.1
54.0	60.0	60.0	60.0	60.0	55.9	55.9	47.4	47.4	44.1	44.1	36.4	36.4	32.7	32.7	29.6	29.6
60.0	60.0	60.0	60.0	60.0	53.9	53.9	45.3	45.3	41.9	41.9	34.3	34.3	30.6	30.6	27.6	27.6
63.0	60.0	60.0	60.0	60.0	53.2	53.2	44.4	44.4	41.1	41.1	33.4	33.4	29.7	29.7	26.8	26.8
66.0	60.0	60.0	60.0	60.0	52.8	52.8	43.8	43.8	40.3	40.3	32.7	32.7	29.0	29.0	26.0	26.0
72.0	60.0	60.0	60.0	60.0	52.4	52.4	42.9	42.9	39.3	39.3	31.4	31.4	27.7	27.7	-	-
78.0	60.0	60.0	60.0	60.0	52.4	52.4	42.5	42.5	38.7	38.7	30.5	30.5	-	-	-	-
84.0	60.0	60.0	60.0	60.0	52.4	52.4	42.4	42.4	38.5	38.5	-	-	-	-	-	-
90.0	60.0	60.0	60.0	60.0	52.4	52.4	42.4	42.4	38.5	38.5	-	-	-	-	-	-
96.0	60.0	60.0	60.0	60.0	52.4	52.4	42.4	42.4	-	-	-	-	-	-	-	-
102.0	60.0	60.0	60.0	60.0	52.4	52.4	-	-	-	-	-	-	-	-	-	-

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	01/04/2024	R.L.

Chart #3, Sill Extension
Where water penetration resistance is required
Design pressure rating (psf)

Frame Height (in)	Frame width (in)															
	24.00		30.00		36.00		40.00		42.00		48.00		52.00		56.00	
	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg
30.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	55.9	50.0	50.9	46.7	46.7
36.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	57.1	48.4	48.4	43.9	43.9	40.1	40.1
42.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	54.8	50.0	51.3	43.1	43.1	39.0	39.0	35.5	35.5
48.0	50.0	60.0	50.0	60.0	50.0	58.9	50.0	50.5	47.1	47.1	39.3	39.3	35.4	35.4	32.1	32.1
54.0	50.0	60.0	50.0	60.0	50.0	55.9	47.4	47.4	44.1	44.1	36.4	36.4	32.7	32.7	29.6	29.6
60.0	50.0	60.0	50.0	60.0	50.0	53.9	45.3	45.3	41.9	41.9	34.3	34.3	30.6	30.6	27.6	27.6
63.0	50.0	60.0	50.0	60.0	50.0	53.2	44.4	44.4	41.1	41.1	33.4	33.4	29.7	29.7	26.8	26.8
66.0	50.0	60.0	50.0	60.0	50.0	52.8	43.8	43.8	40.3	40.3	32.7	32.7	29.0	29.0	26.0	26.0
72.0	50.0	60.0	50.0	60.0	50.0	52.4	42.9	42.9	39.3	39.3	31.4	31.4	27.7	27.7	-	-
78.0	50.0	60.0	50.0	60.0	50.0	52.4	42.5	42.5	38.7	38.7	30.5	30.5	-	-	-	-
84.0	50.0	60.0	50.0	60.0	50.0	52.4	42.4	42.4	38.5	38.5	-	-	-	-	-	-
90.0	50.0	60.0	50.0	60.0	50.0	52.4	42.4	42.4	38.5	38.5	-	-	-	-	-	-
96.0	50.0	60.0	50.0	60.0	50.0	52.4	42.4	42.4	-	-	-	-	-	-	-	-
102.0	50.0	60.0	50.0	60.0	50.0	52.4	-	-	-	-	-	-	-	-	-	-

ALL AMERICAN WINDOW COMPANY, LLC

PO BOX 80039
CHARLESTON, SC 29416

1900 SH SINGLE HUNG WINDOW
40”X63” NON-IMPACT
DESIGN PRESSURE CHARTS

DRAWN:
R.L.

DWG NO.
08-03176

REV
A


SCALE NTS

DATE 10/02/2017

SHEET 3 OF 11


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 01/04/2024

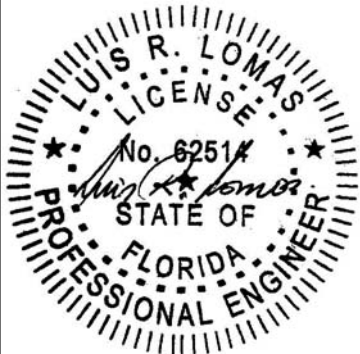


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	01/04/2024	R.L.

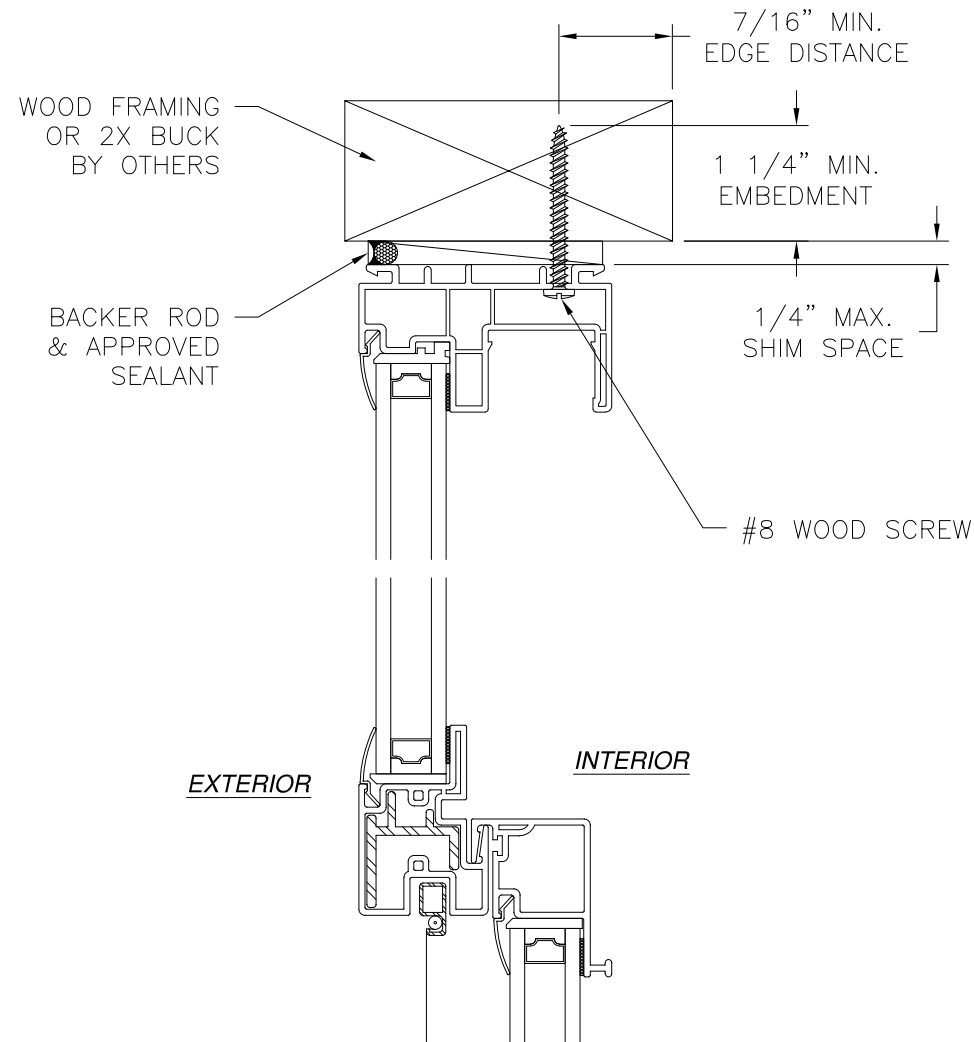


EXTERIOR

INTERIOR

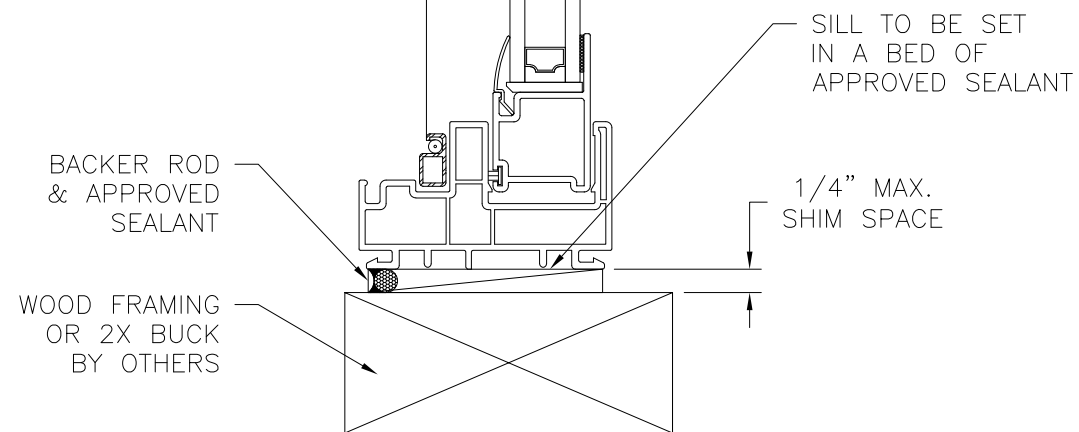

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

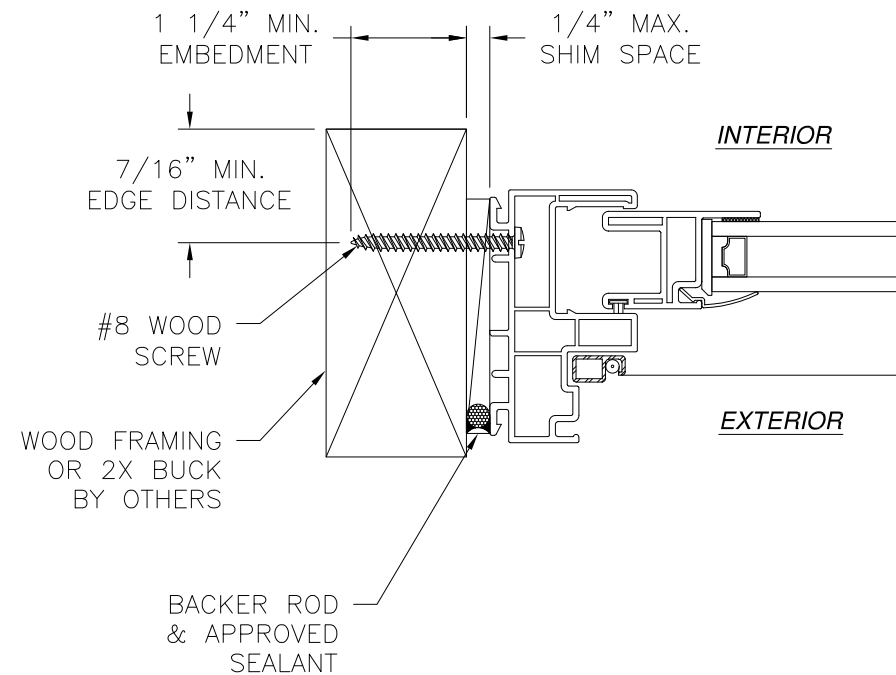

INTERIOR

EXTERIOR

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 01/04/2024


ALL AMERICAN WINDOW COMPANY, LLC

PO BOX 80039
CHARLESTON, SC 29416

1900 SH SINGLE HUNG WINDOW
40"X63" NON-IMPACT
INSTALLATION DETAILS




DRAWN: R.L.	DWG NO. 08-03176	REV A
SCALE NTS	DATE 10/02/2017	SHEET 4 OF 11

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

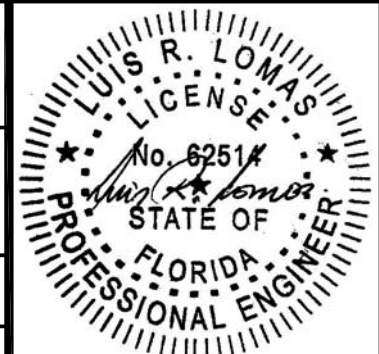

Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	01/04/2024	R.L.

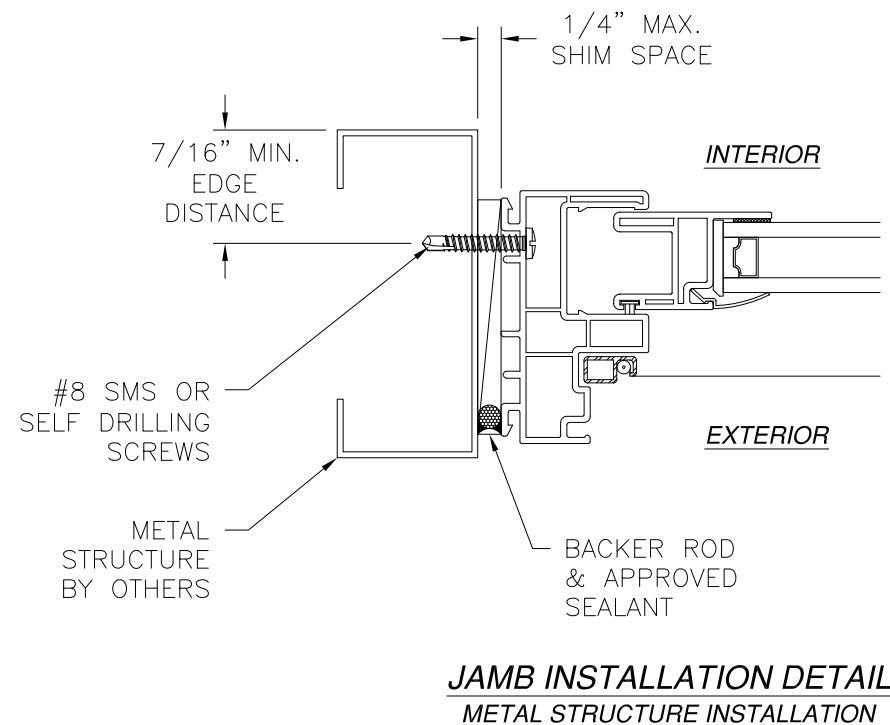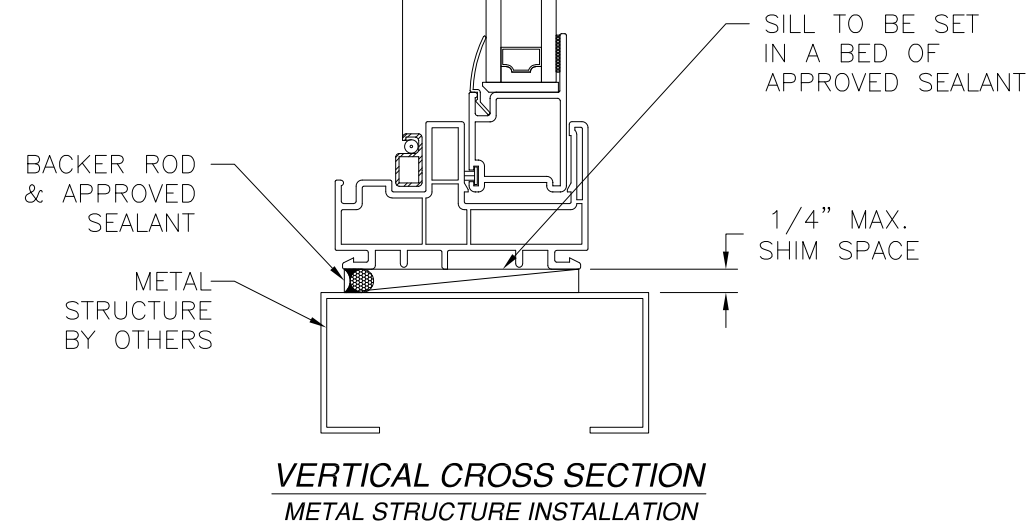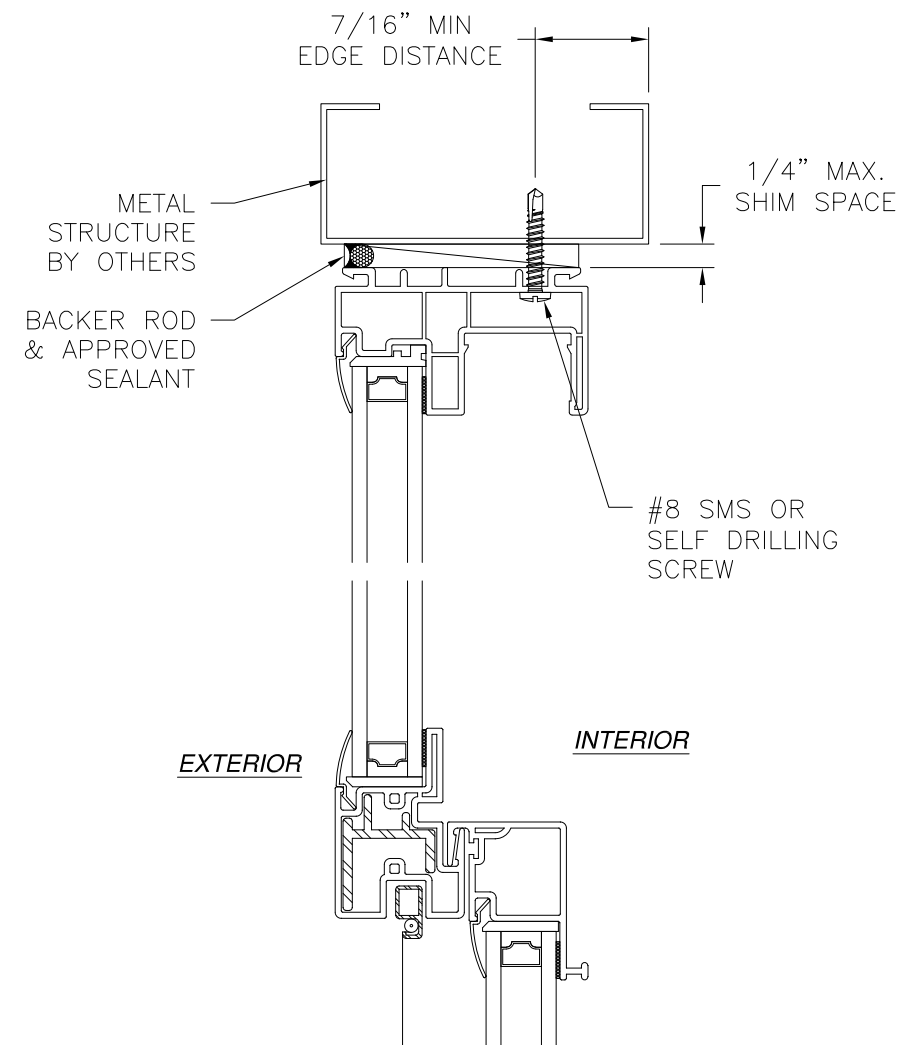



- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 01/04/2024

ALL AMERICAN WINDOW COMPANY, LLC		
PO BOX 80039 CHARLESTON, SC 29416		
1900 SH SINGLE HUNG WINDOW 40"X63" NON-IMPACT INSTALLATION DETAILS		
DRAWN: R.L.	DWG NO. 08-03176	REV A
SCALE NTS	DATE 10/02/2017	SHEET 5 OF 11
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

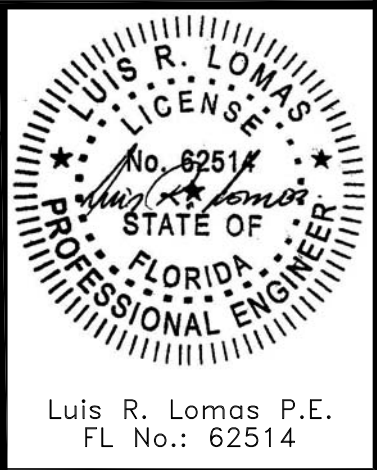


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	01/04/2024	R.L.

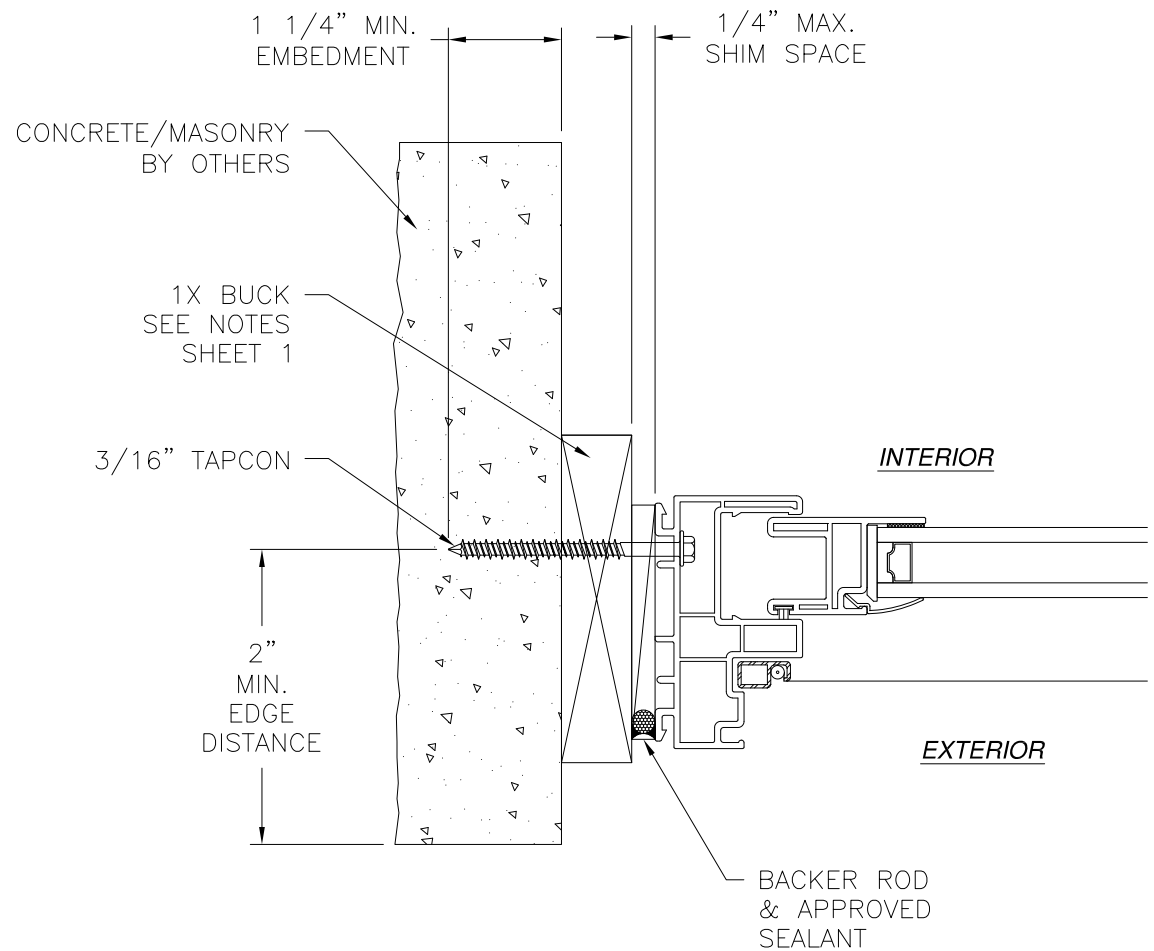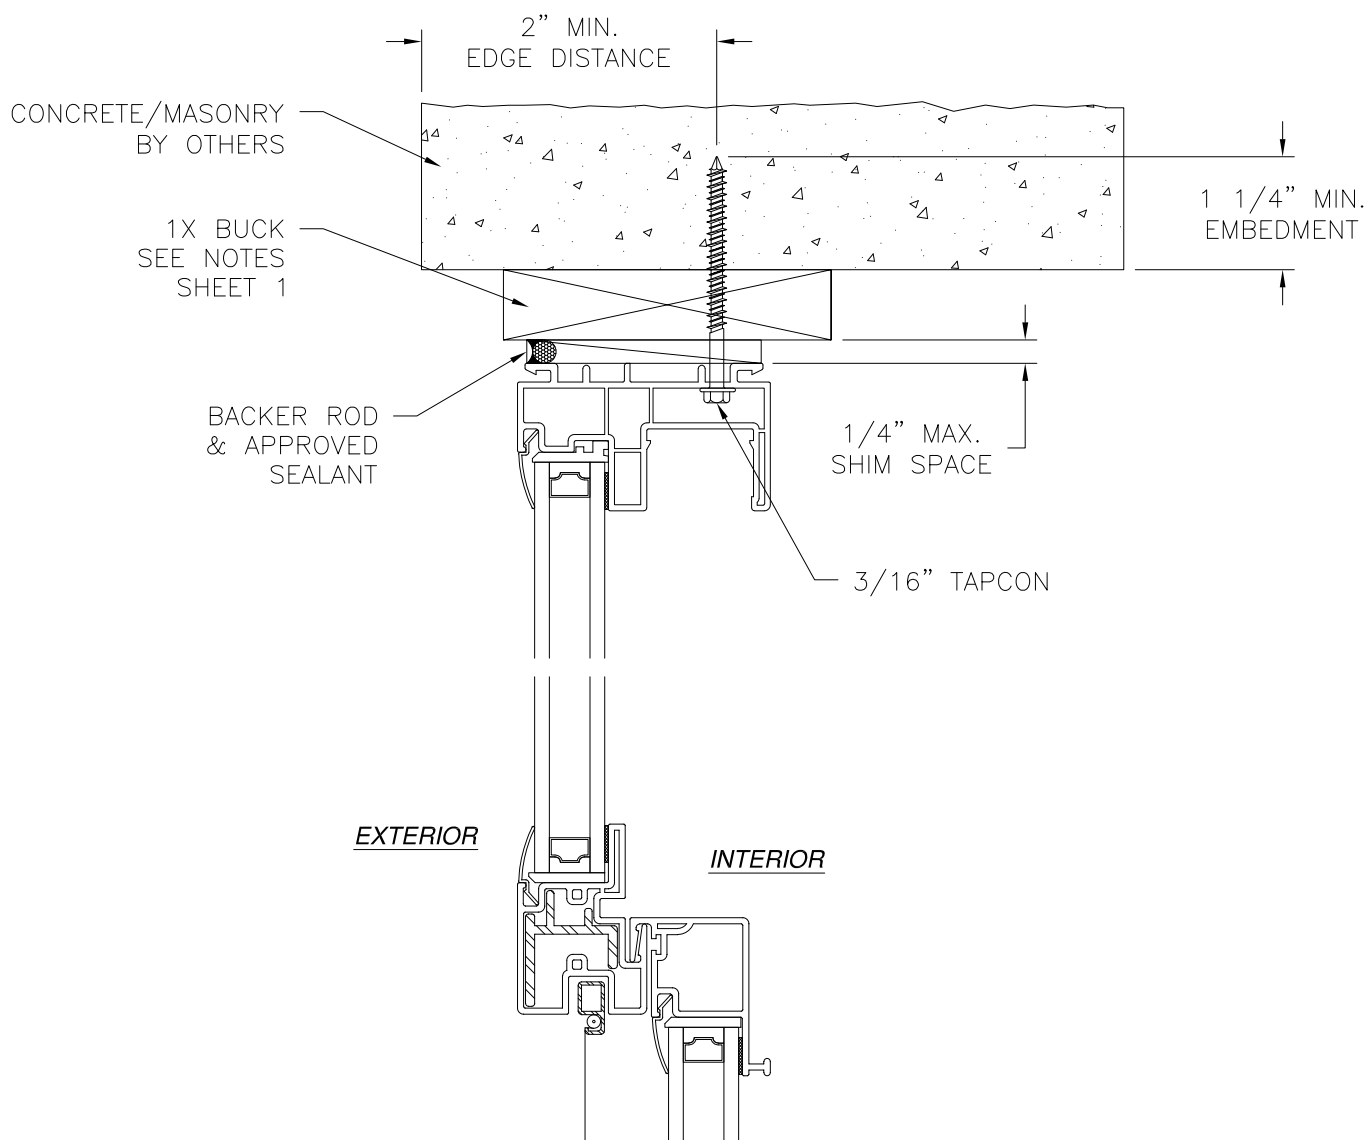


JAMB INSTALLATION DETAIL
CONCRETE/MASONRY INSTALLATION

- NOTES:**
1. **INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.**
 2. **PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112**

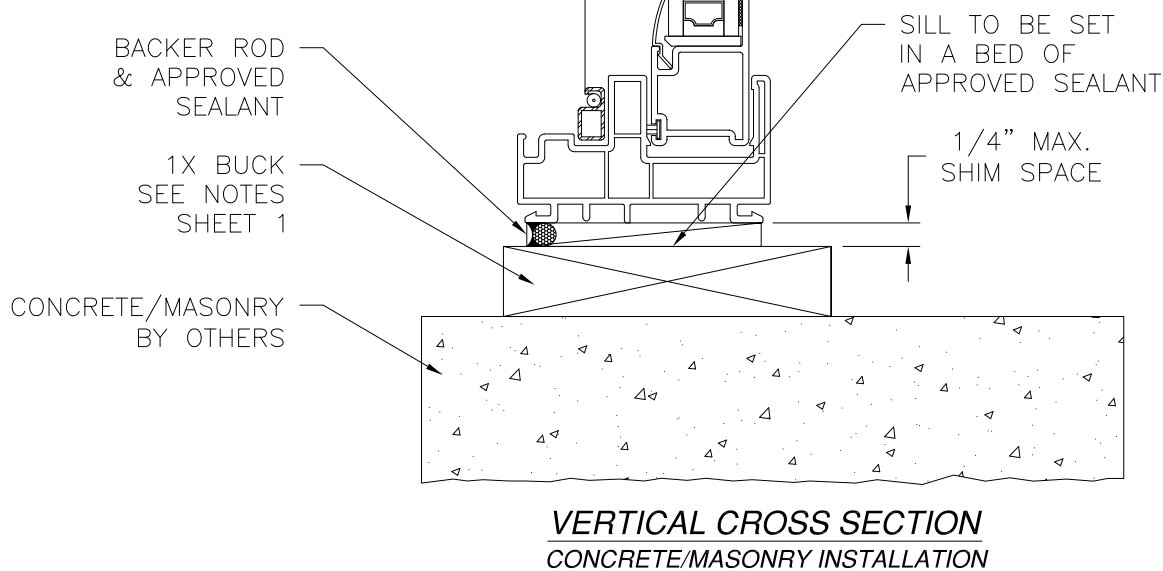


SIGNED: 01/04/2024



ALL AMERICAN WINDOW COMPANY, LLC		
PO BOX 80039 CHARLESTON, SC 29416		
1900 SH SINGLE HUNG WINDOW 40"X63" NON-IMPACT INSTALLATION DETAILS		
DRAWN: R.L.	DWG NO. 08-03176	REV A
SCALE NTS	DATE 10/02/2017	SHEET 6 OF 11
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

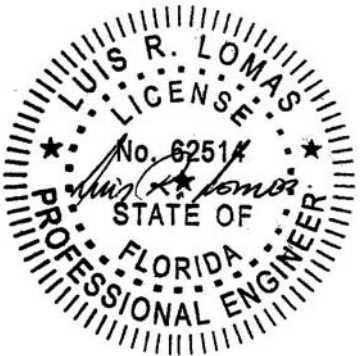

Luis R. Lomas P.E.
FL No.: 62514

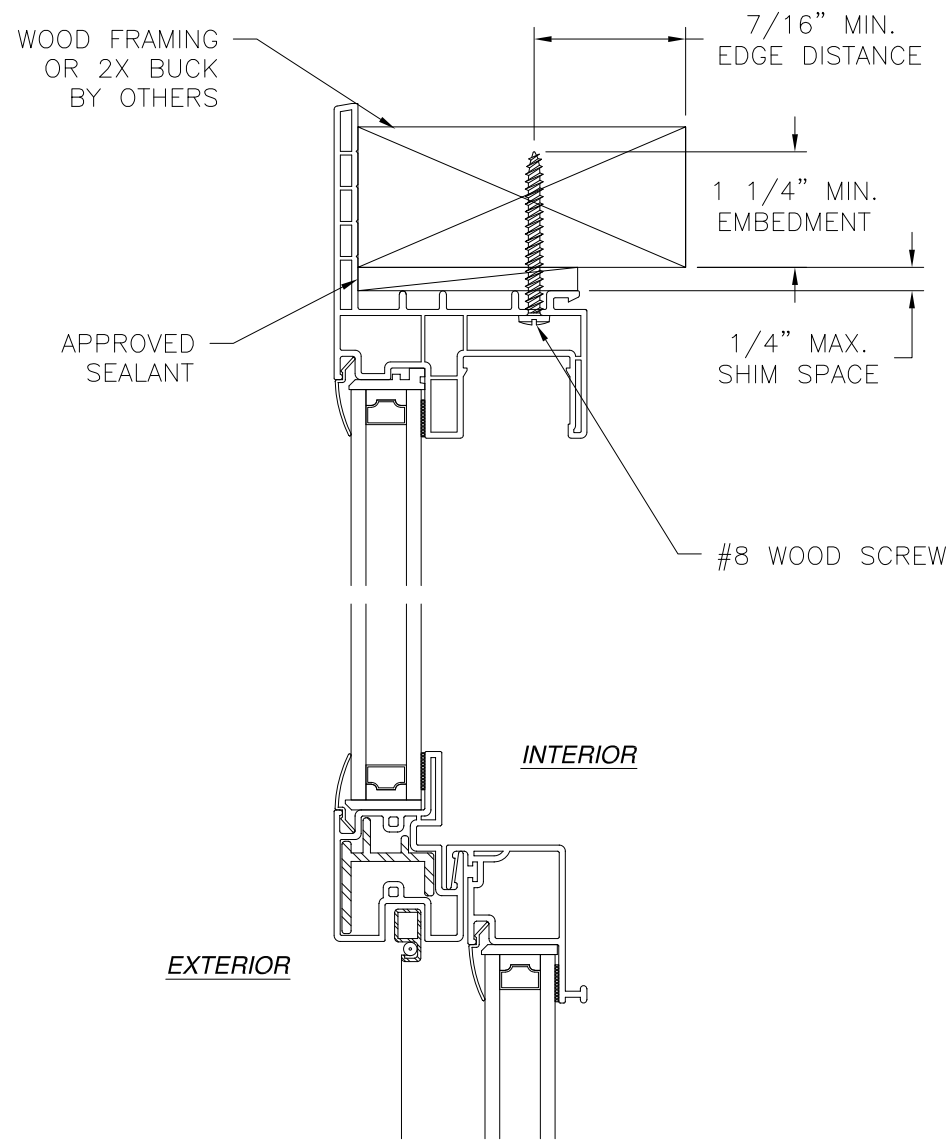

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

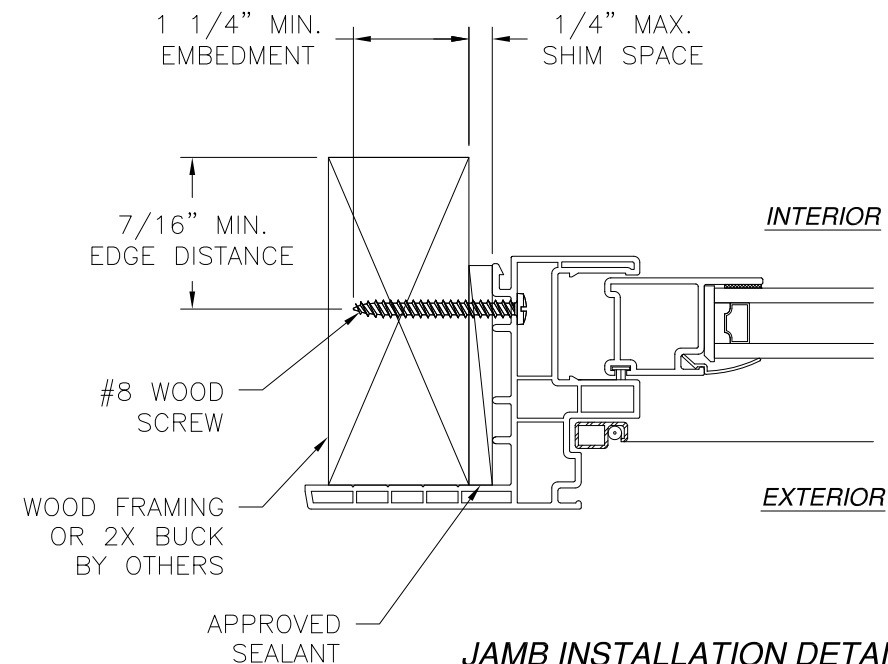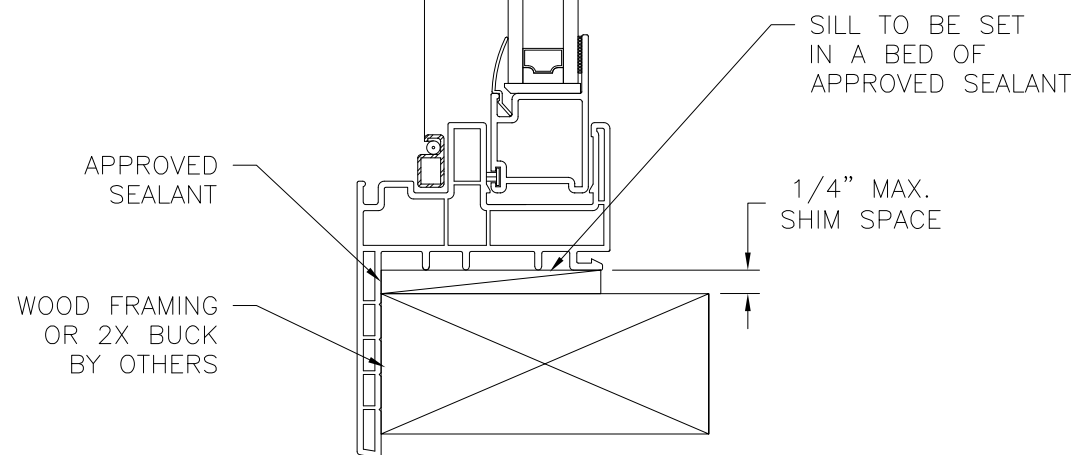

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	01/04/2024	R.L.

ALL AMERICAN WINDOW COMPANY, LLC


PO BOX 80039
CHARLESTON, SC 29416

1900 SH SINGLE HUNG WINDOW
40"X63" NON-IMPACT
FLANGE INSTALLATION DETAILS



DRAWN: R.L.	DWG NO. 08-03176	REV A
SCALE NTS	DATE 10/02/2017	SHEET 7 OF 11

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com


SIGNED: 01/04/2024

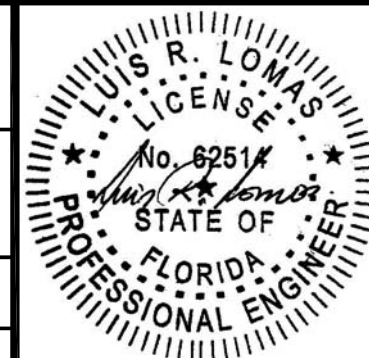

Luis R. Lomas P.E.
FL No.: 62514

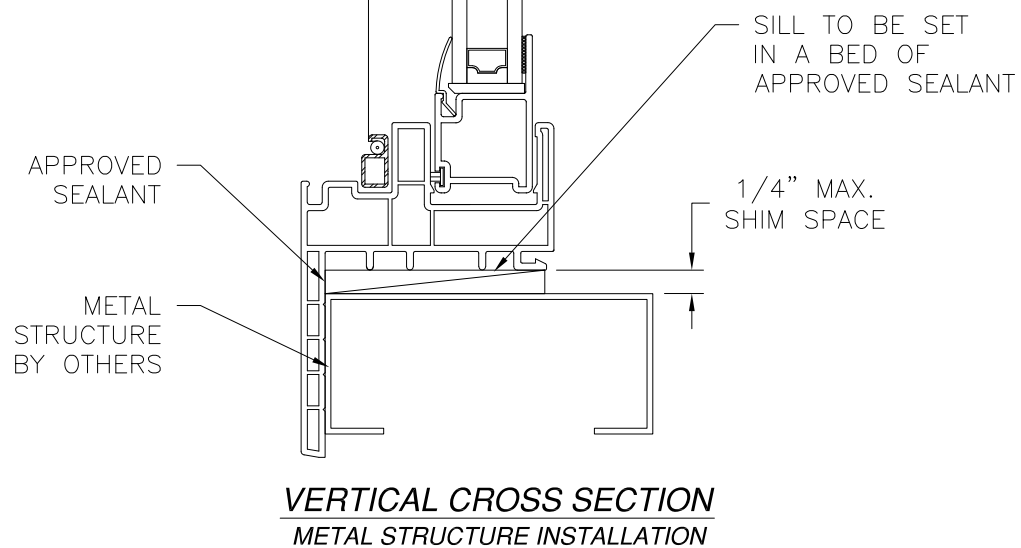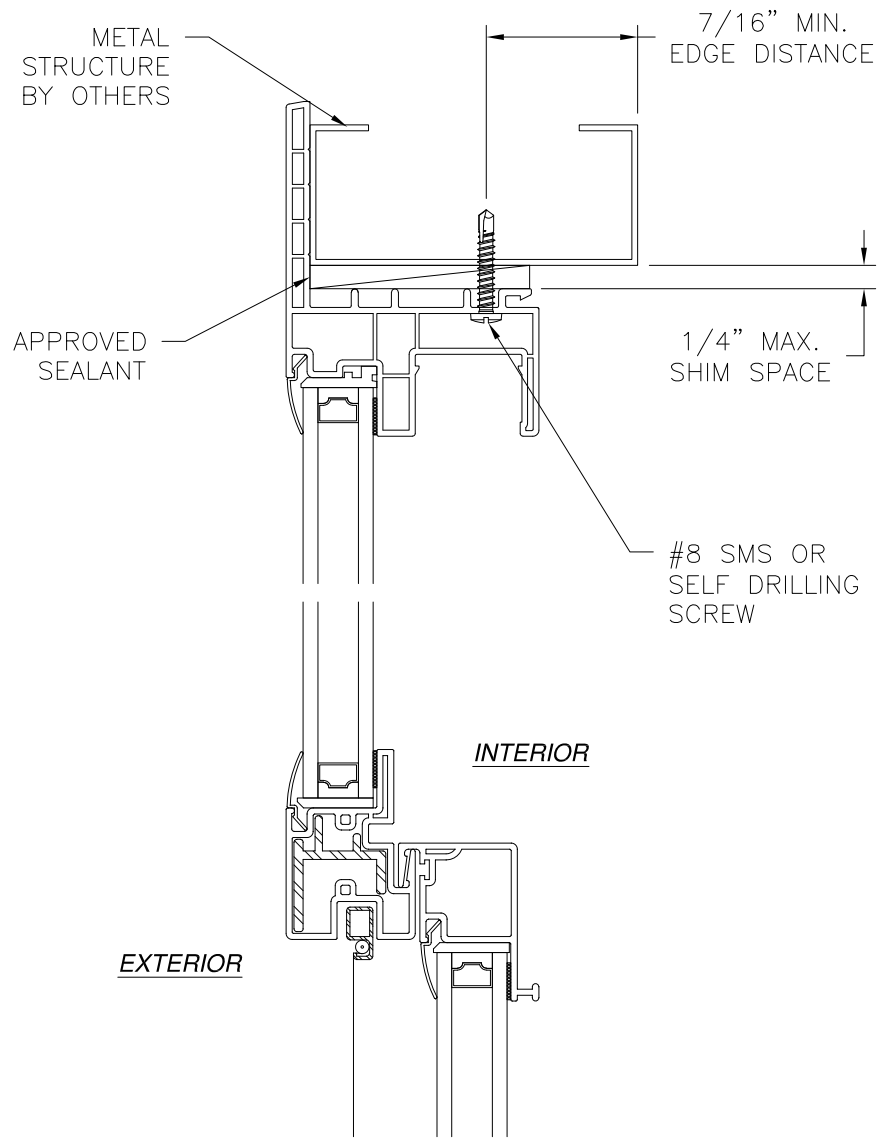


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	01/04/2024	R.L.

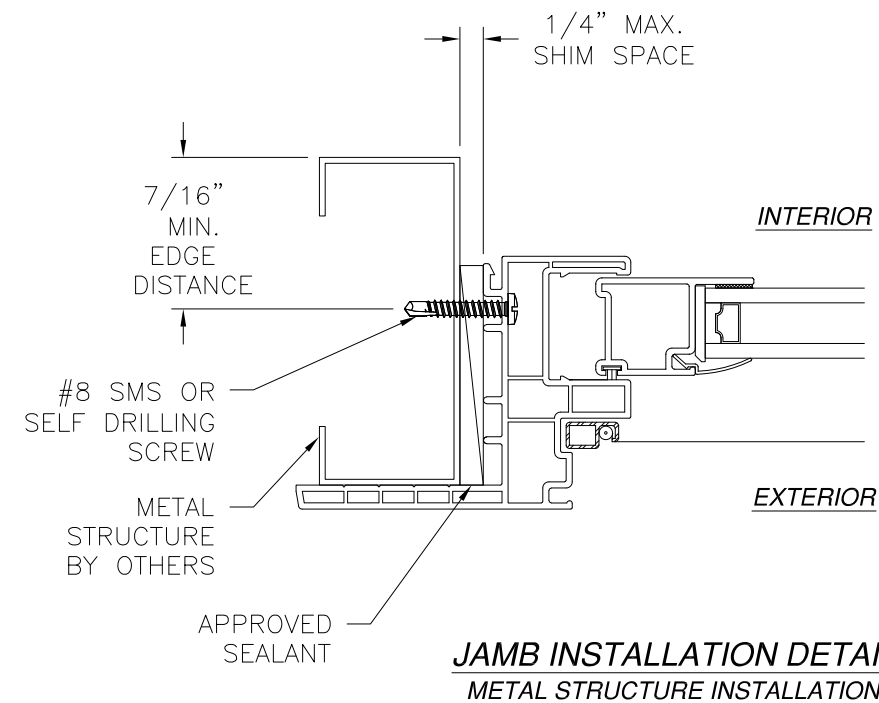



ALL AMERICAN WINDOW COMPANY, LLC PO BOX 80039 CHARLESTON, SC 29416		
1900 SH SINGLE HUNG WINDOW 40"X63" NON-IMPACT FLANGE INSTALLATION DETAILS		
DRAWN: R.L.	DWG NO. 08-03176	REV A
SCALE NTS	DATE 10/02/2017	SHEET 8 OF 11
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 01/04/2024

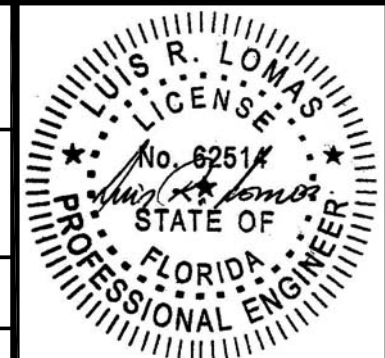

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	01/04/2024	R.L.

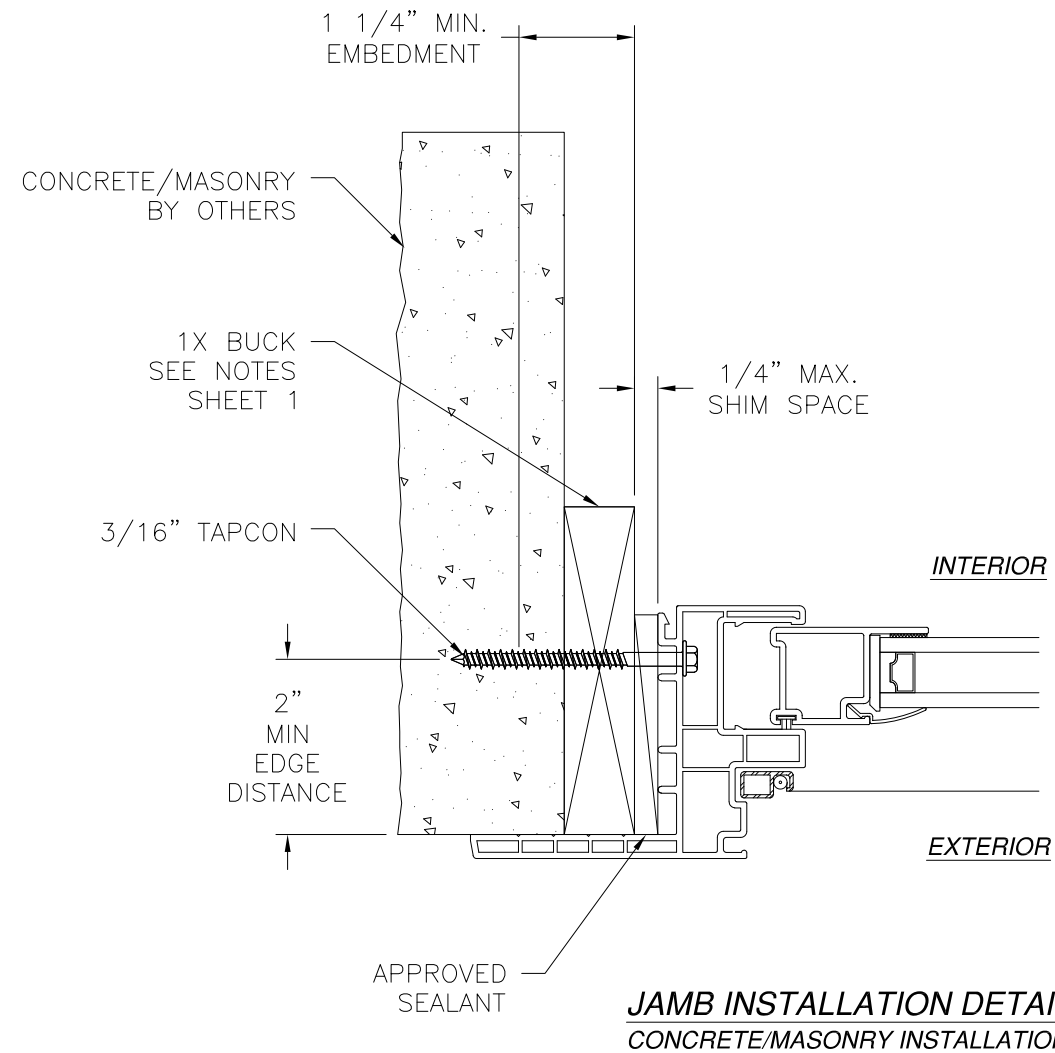
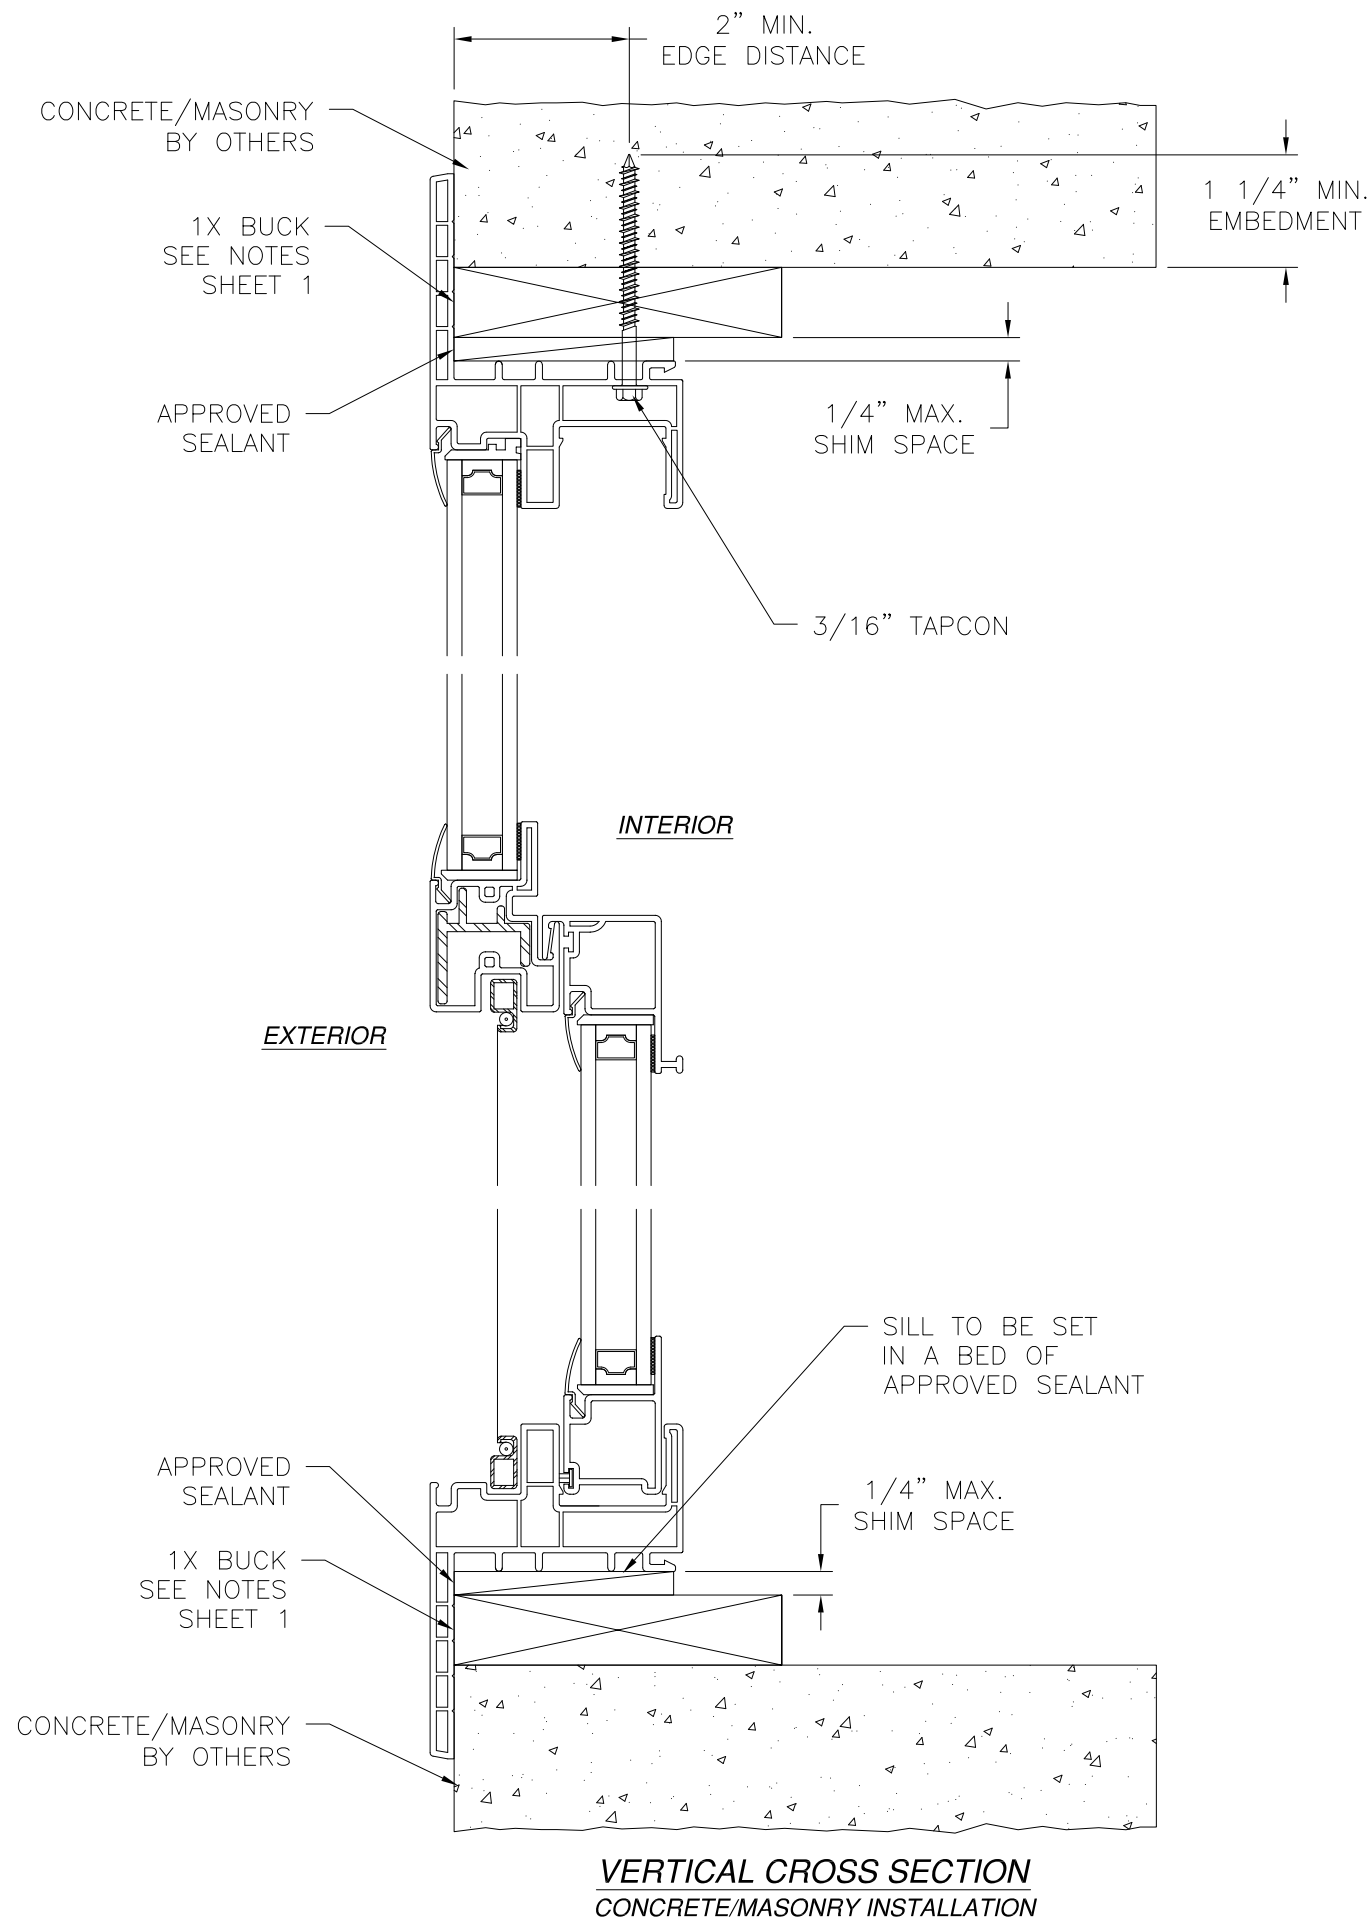


SIGNED: 01/04/2024

ALL AMERICAN WINDOW COMPANY, LLC		
PO BOX 80039 CHARLESTON, SC 29416		
1900 SH SINGLE HUNG WINDOW 40"X63" NON-IMPACT FLANGE INSTALLATION DETAILS		
DRAWN: R.L.	DWG NO. 08-03176	REV A
SCALE NTS	DATE 10/02/2017	SHEET 9 OF 11
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	01/04/2024	R.L.

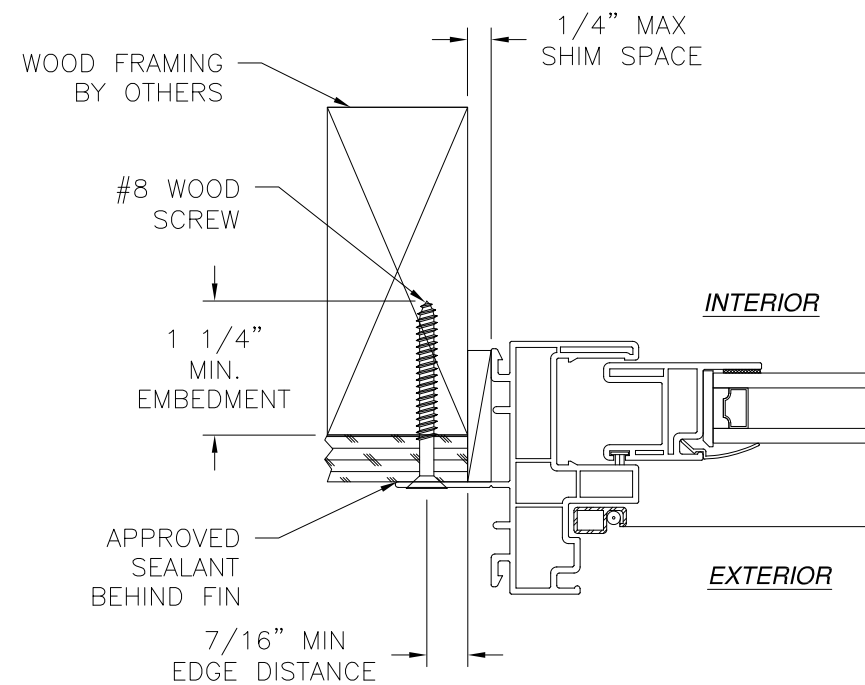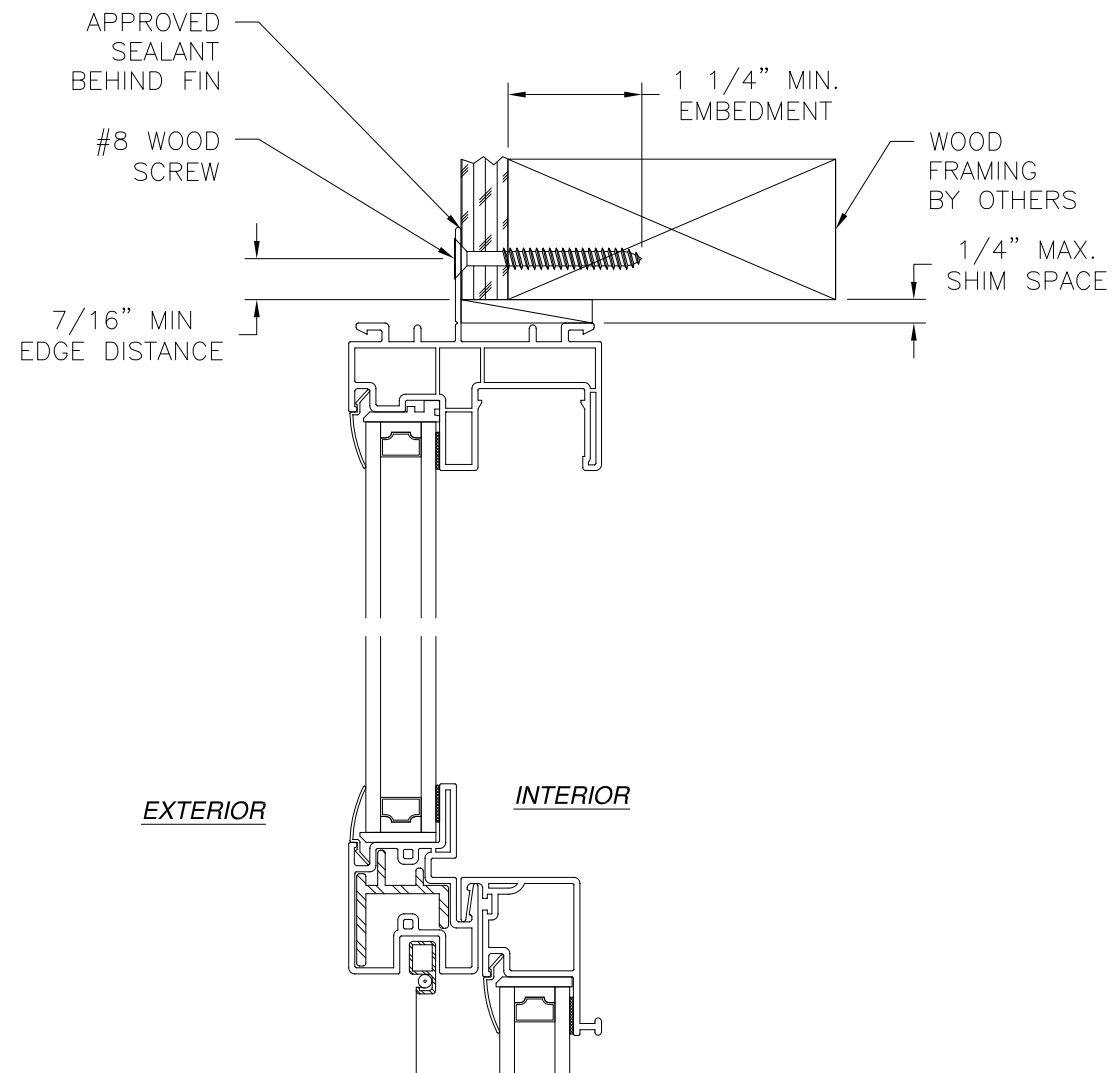

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

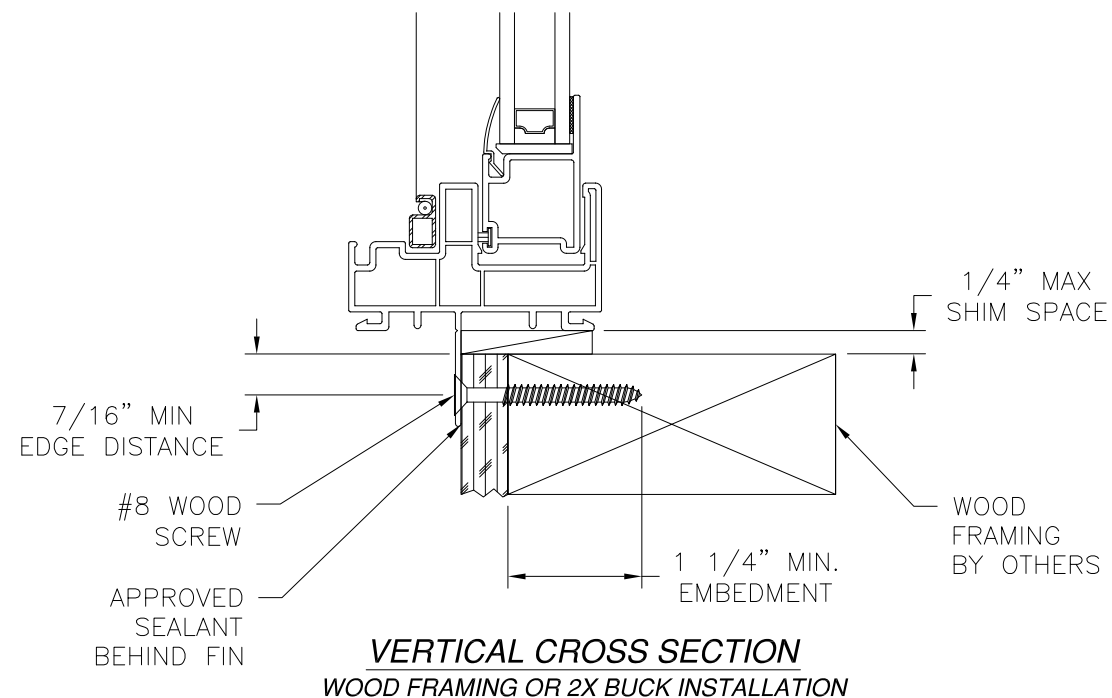

ALL AMERICAN WINDOW COMPANY, LLC


PO BOX 80039
CHARLESTON, SC 29416

1900 SH SINGLE HUNG WINDOW
40"X63" NON-IMPACT
FIN INSTALLATION DETAILS

DRAWN: R.L.	DWG NO. 08-03176	REV A
SCALE NTS	DATE 10/02/2017	SHEET 10 OF 11



L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 01/04/2024

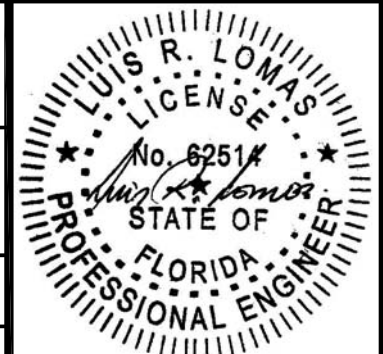


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	01/04/2024	R.L.

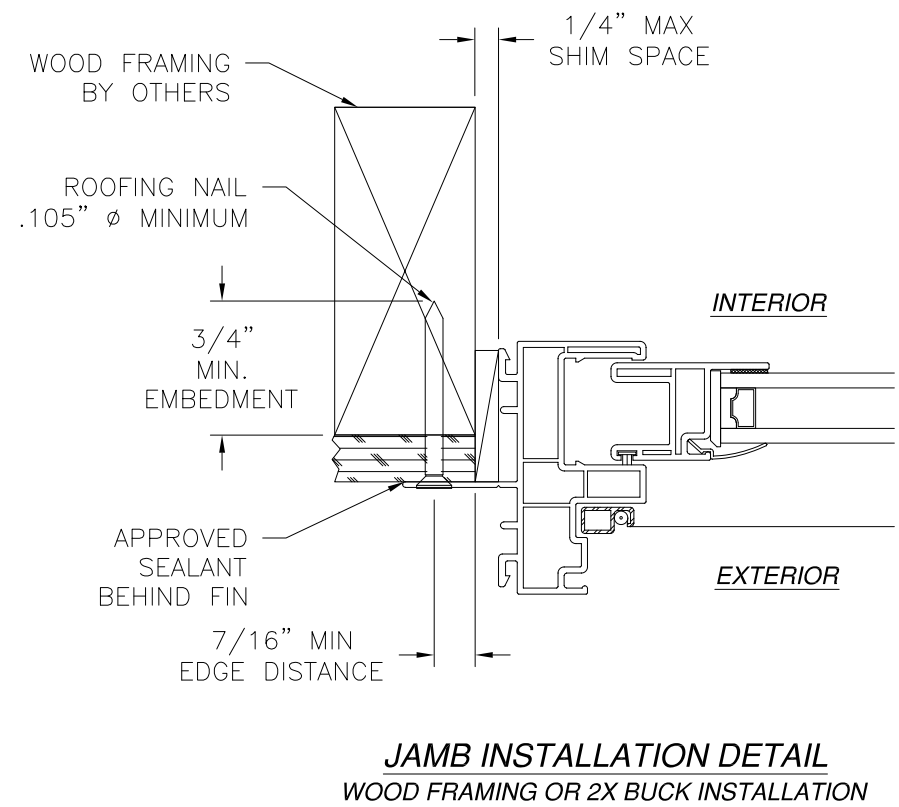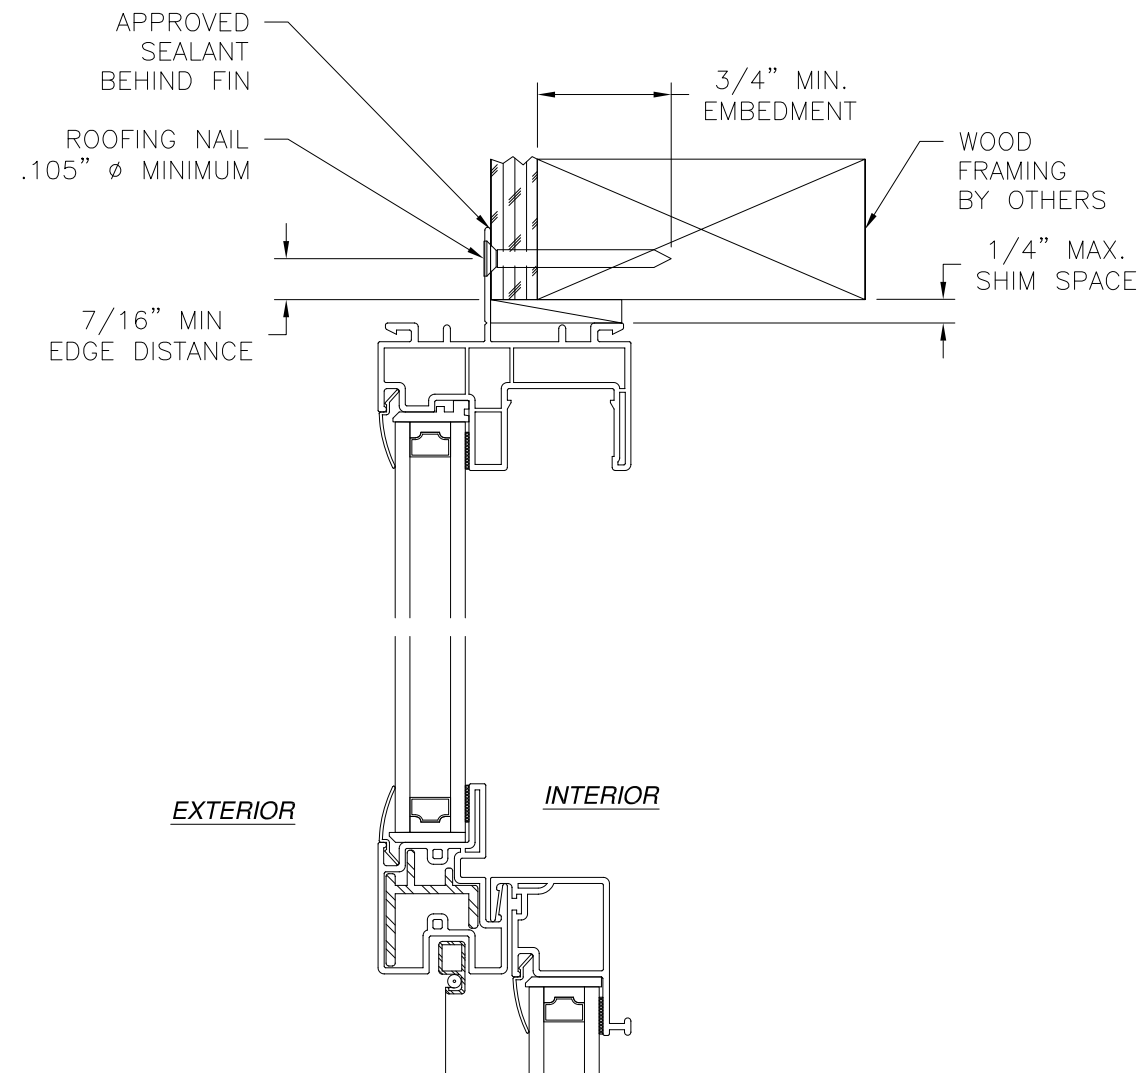

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

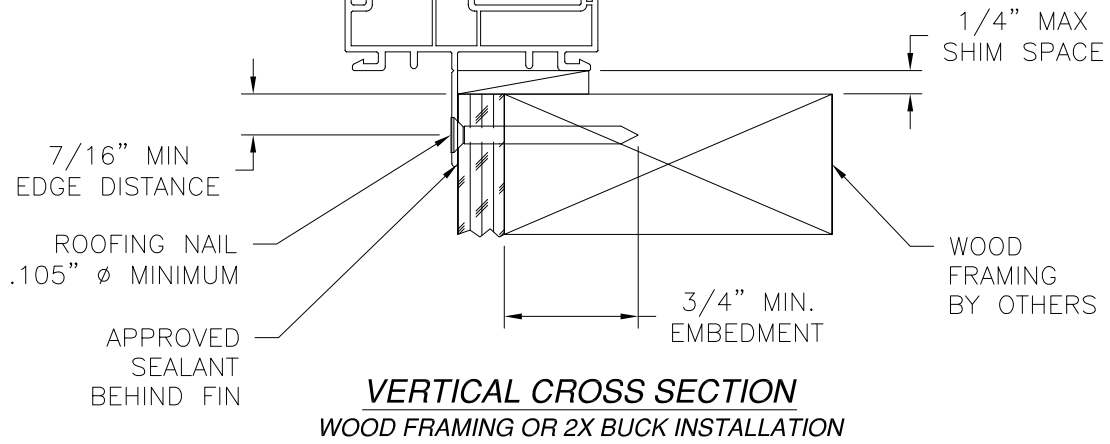

ALL AMERICAN WINDOW COMPANY, LLC		
PO BOX 80039 CHARLESTON, SC 29416		
1900 SH SINGLE HUNG WINDOW 40"X63" NON-IMPACT FIN INSTALLATION DETAILS		
DRAWN: R.L.	DWG NO. 08-03176	REV A
SCALE NTS	DATE 10/02/2017	SHEET 11 OF 11
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 01/04/2024

Luis R. Lomas P.E.
FL No.: 62514