

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

- NOTES:
1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
 2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
 3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" WINDOW UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
 4. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. WINDOW UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
 5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
 6. BUCKS SHALL EXTEND BEYOND WINDOW INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
 7. FOR FIN INSTALLATION SHIM AS NEEDED. FOR FRAME INSTALLATION SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
 8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
 9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
 10. FRAME MATERIAL: EXTRUDED RIGID PVC.
 11. UNITS MUST BE GLAZED PER ASTM E1300.
 12. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS. REFER TO HORIZONTAL CROSS SECTIONS FOR IMPACT PROTECTIVE SYSTEM ATTACHMENT.

13. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #6 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/2" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE 8GA ROOFING NAILS (Ø.164" MINIMUM) WITH SUFFICIENT LENGTH TO ACHIEVE A 3/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. ALL FASTENERS TO BE CORROSION RESISTANT.
19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - C. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
 - D. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR ALUMINUM 6063-T5 FU=30KSI 1/8" THICK MINIMUM

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3	DESIGN PRESSURE CHARTS
4	HORIZONTAL CROSS SECTIONS
5 – 22	INSTALLATION DETAILS
23	COMPONENTS

ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
NOTES

DRAWN:
A.R.

DWG NO.
08-03179B

REV
B


SCALE NTS

DATE 10/04/2017

SHEET 1 OF 23


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/02/2026

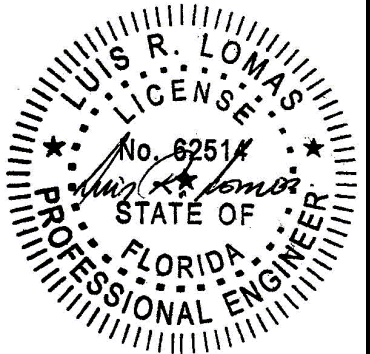


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

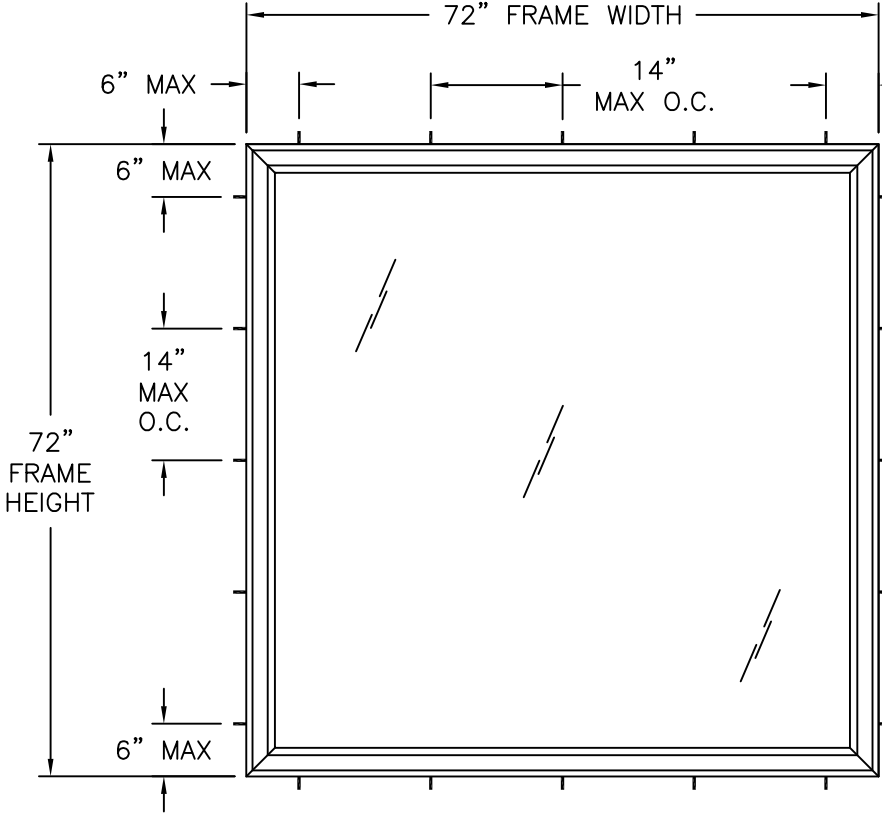

1970 FIXED WINDOW
EXTERIOR VIEW
FRAME INSTALLATION

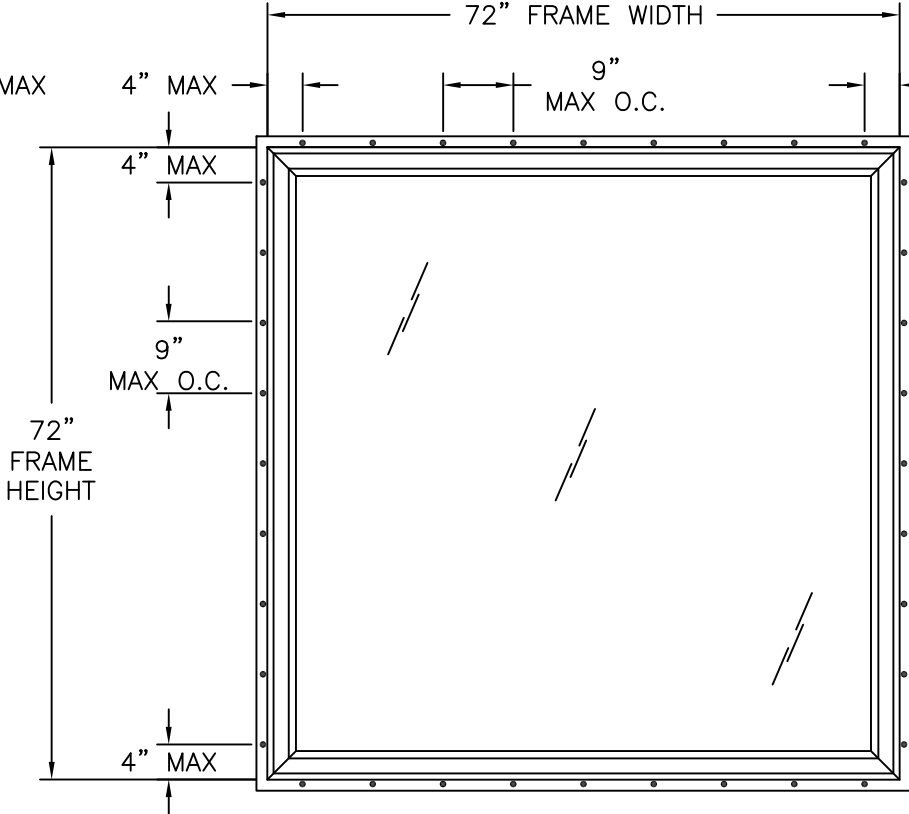

1970 FIXED WINDOW
EXTERIOR VIEW
FIN INSTALLATION WITH ROOFING NAILS

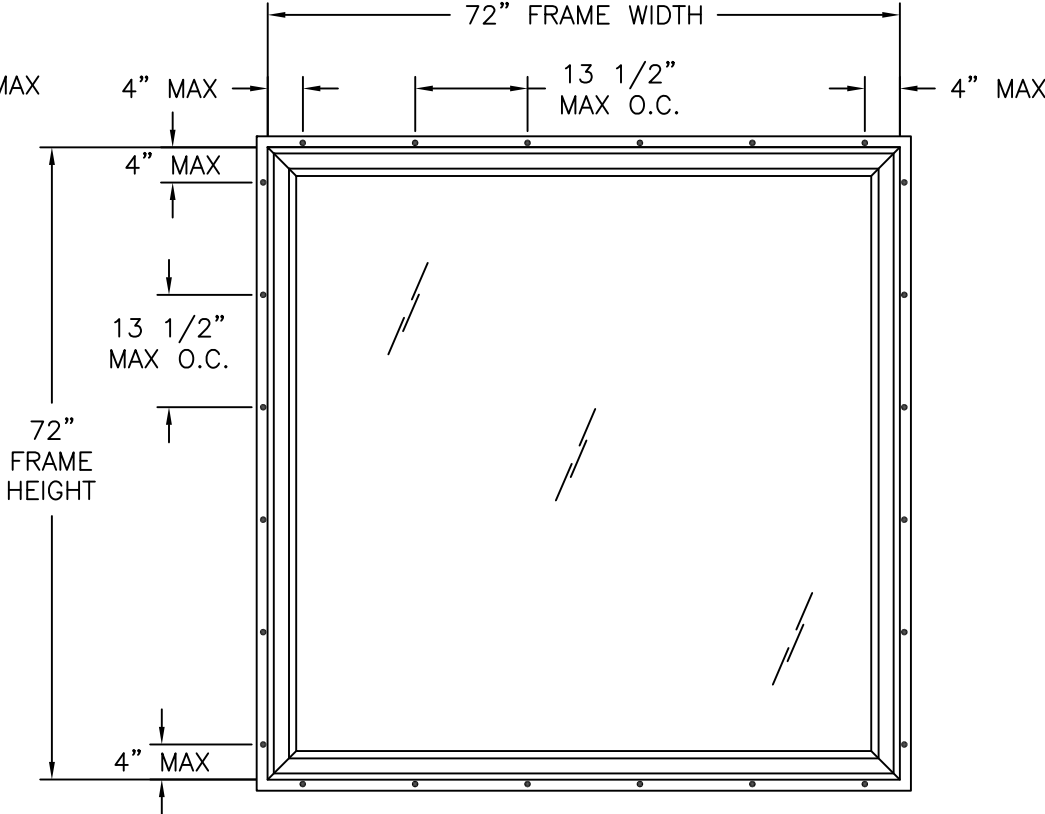

1970 FIXED WINDOW
EXTERIOR VIEW
FIN INSTALLATION WITH WOOD SCREWS

DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	NONE

NOTES:
1. D.L.O.: 69 1/4" x 69 1/4"

72" X 72" UNIT SHOWN. OTHER SIZES APPROVED AS LONG AS
FRAME AREA DOES NOT EXCEED 36.0 FT²
SEE CHART #1, SHEET 3 FOR OTHER SIZE RATINGS

SIGNED: 09/02/2026

ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
ELEVATIONS

DRAWN:
A.R.

DWG NO.
08-03179B

REV
B

SCALE
NTS

DATE
10/04/2017

SHEET
2 OF 23

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

CHART #1
Maximum design pressure capacity chart (psf)

Maximum design pressure capacity chart (psf)																																			
Frame Height (in)	Frame width (in)																																		
	24.0		30.0		36.0		42.0		48.0		54.0		60.0		66.0		72.0		78.0		84.0		90.0		96.0		102.0		108.0		114.0		120.0		
	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	
24.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	
30.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	74.3	74.3	73.0	73.0	72.0	72.0	71.1	71.1	70.3	70.3	69.7	69.7	69.1	69.1	68.6	68.6	
36.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	71.4	71.4	68.8	68.8	66.7	66.7	65.0	65.0	63.6	63.6	62.5	62.5	61.5	61.5	60.7	60.7	60.0	60.0	59.4	59.4	58.8	58.8
42.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	70.1	70.1	65.9	65.9	62.9	62.9	60.5	60.5	58.6	58.6	57.1	57.1	55.9	55.9	54.9	54.9	54.0	54.0	53.2	53.2	52.5	52.5	51.4	51.4	
48.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	67.5	67.5	62.5	62.5	58.9	58.9	56.3	56.3	54.2	54.2	52.5	52.5	51.1	51.1	50.0	50.0	49.0	49.0	48.2	48.2	-	-	-	-	
54.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	70.1	70.1	67.5	67.5	66.7	66.7	60.6	60.6	56.4	56.4	53.3	53.3	51.0	51.0	49.1	49.1	47.6	47.6	46.4	46.4	-	-	-	-	-	-	-	
60.0	75.0	75.0	75.0	75.0	71.4	71.4	65.9	65.9	62.5	62.5	60.6	60.6	60.0	60.0	55.0	55.0	51.4	51.4	48.8	48.8	46.7	46.7	-	-	-	-	-	-	-	-	-	-	-	-	
66.0	75.0	75.0	75.0	75.0	68.8	68.8	62.9	62.9	58.9	58.9	56.4	56.4	55.0	55.0	54.5	54.5	50.3	50.3	47.3	47.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
72.0	75.0	75.0	75.0	75.0	66.7	66.7	60.5	60.5	56.3	56.3	53.3	53.3	51.4	51.4	50.3	50.3	50.0	50.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
78.0	75.0	75.0	74.3	74.3	65.0	65.0	58.6	58.6	54.2	54.2	51.0	51.0	48.8	48.8	47.3	47.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
84.0	75.0	75.0	73.0	73.0	63.6	63.6	57.1	57.1	52.5	52.5	49.1	49.1	46.7	46.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
90.0	75.0	75.0	72.0	72.0	62.5	62.5	55.9	55.9	51.1	51.1	47.6	47.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
96.0	75.0	75.0	71.1	71.1	61.5	61.5	54.9	54.9	50.0	50.0	46.4	46.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
102.0	75.0	75.0	70.3	70.3	60.7	60.7	54.0	54.0	49.0	49.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
108.0	75.0	75.0	69.7	69.7	60.0	60.0	53.2	53.2	48.2	48.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
114.0	75.0	75.0	69.1	69.1	59.4	59.4	52.5	52.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
120.0	75.0	75.0	68.6	68.6	58.8	58.8	51.4	51.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

SIGNED: 09/02/2026

ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
DESIGN PRESSURE CHART

DRAWN:
A.R.

DWG NO.
08-03179B


REV
B

SCALE
NTS

DATE
10/04/2017


SHEET
3 OF 23

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

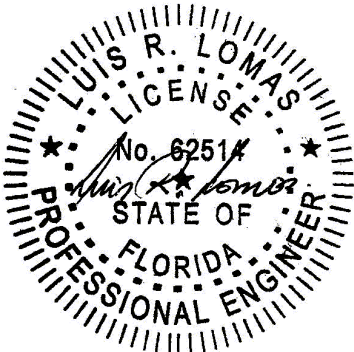


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

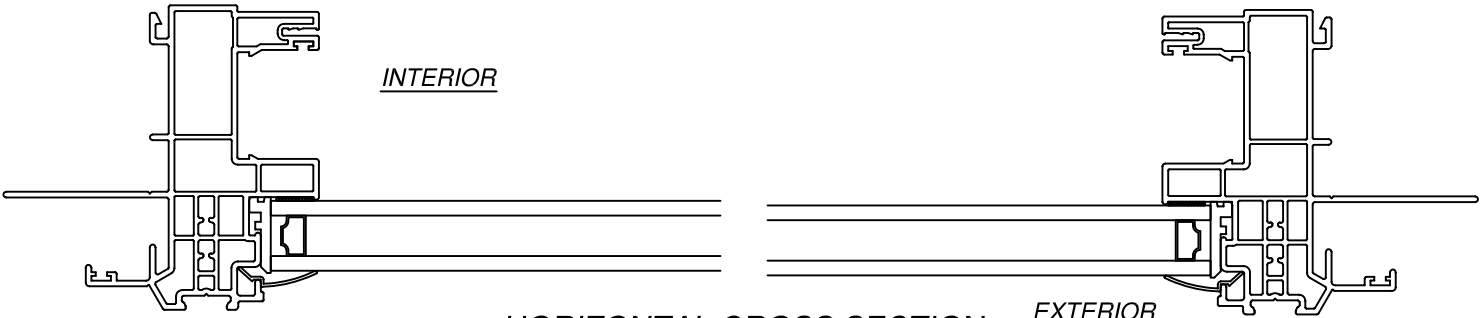

HORIZONTAL CROSS SECTION
FIN INSTALLATION WITH J-CHANNEL

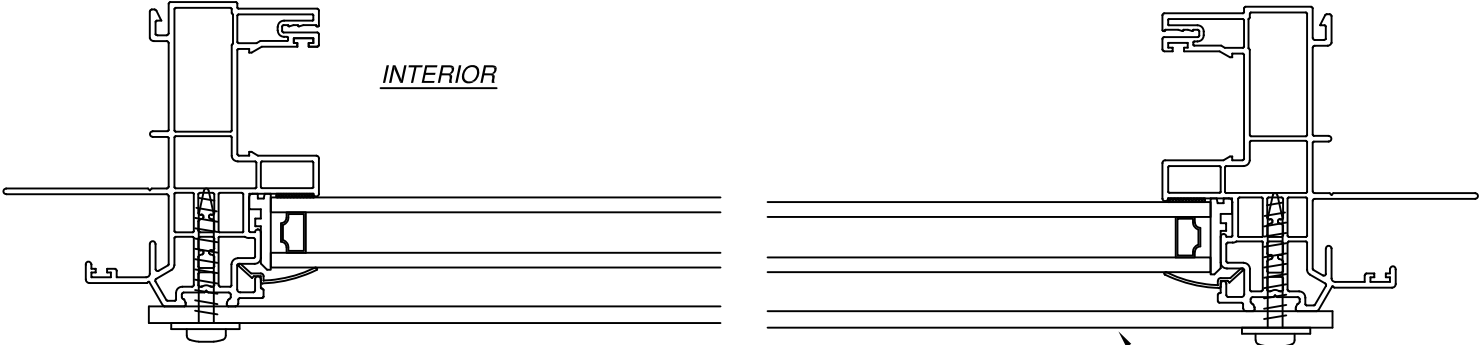


HORIZONTAL CROSS SECTION
FIN INSTALLATION WITH J-CHANNEL
WITH IMPACT PROTECTIVE SYSTEM (REFERENCE ONLY)
HORIZONTAL INSTALLATION SHOWN, VERTICAL INSTALLATION SIMILAR

IMPACT PROTECTIVE SYSTEM BY OTHERS
MUST HAVE APPROPRIATE PRODUCT APPROVAL
SHOWN FOR REFERENCE ONLY
SEE NOTE 12 FOR ATTACHMENTS




HORIZONTAL CROSS SECTION
FIN INSTALLATION WITHOUT J-CHANNEL

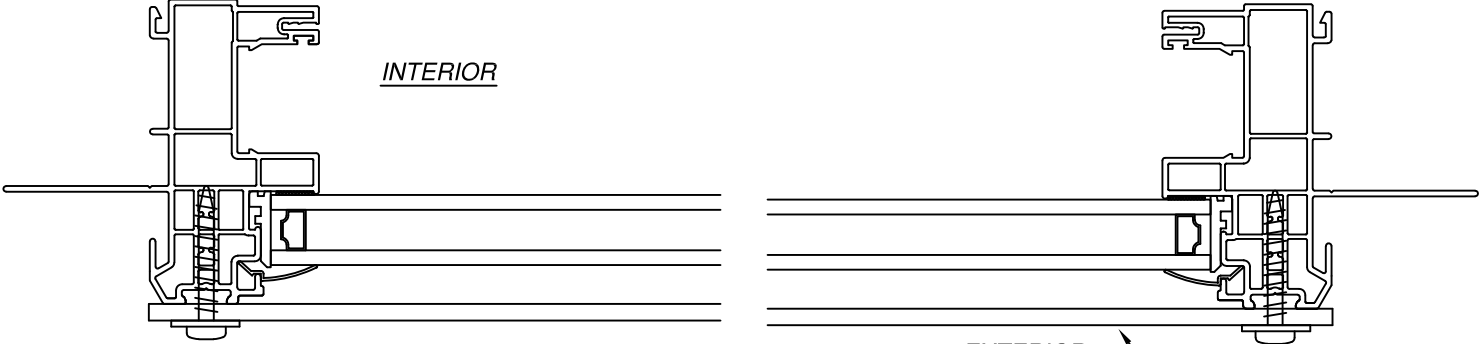


HORIZONTAL CROSS SECTION
FIN INSTALLATION WITHOUT J-CHANNEL
WITH IMPACT PROTECTIVE SYSTEM (REFERENCE ONLY)
HORIZONTAL INSTALLATION SHOWN, VERTICAL INSTALLATION SIMILAR

IMPACT PROTECTIVE SYSTEM BY OTHERS
MUST HAVE APPROPRIATE PRODUCT APPROVAL
SHOWN FOR REFERENCE ONLY
SEE NOTE 12 FOR ATTACHMENTS

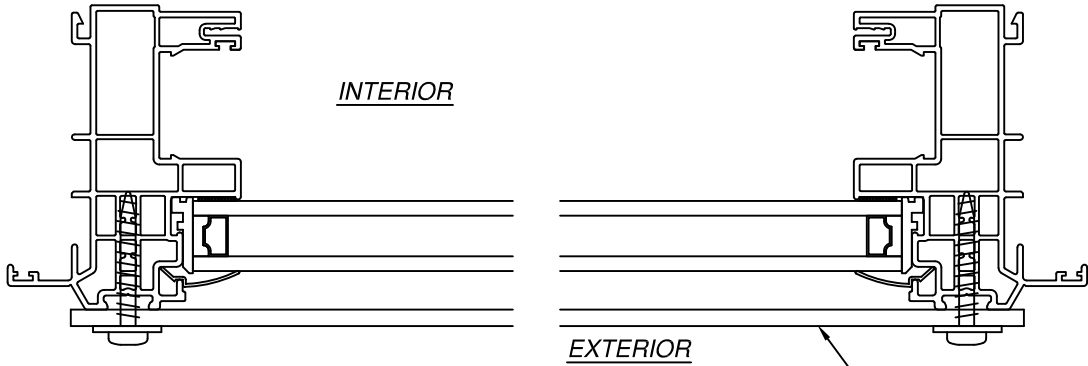

HORIZONTAL CROSS SECTION
FRAME INSTALLATION
WITH IMPACT PROTECTIVE SYSTEM (REFERENCE ONLY)
HORIZONTAL INSTALLATION SHOWN, VERTICAL INSTALLATION SIMILAR

IMPACT PROTECTIVE SYSTEM
BY OTHERS
MUST HAVE APPROPRIATE
PRODUCT APPROVAL
SHOWN FOR REFERENCE ONLY
SEE NOTE 12 FOR ATTACHMENTS

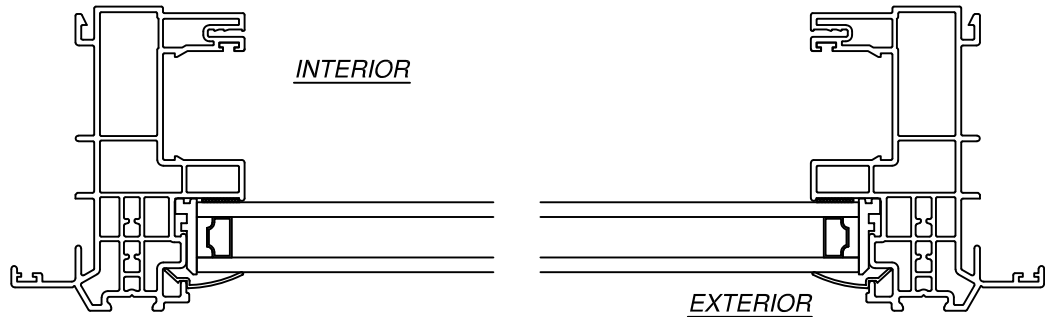


HORIZONTAL CROSS SECTION
FRAME INSTALLATION

SIGNED: 09/02/2026


ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
HORIZONTAL CROSS SECTIONS


DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 4 OF 23
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

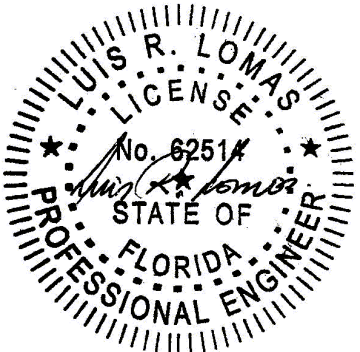

Luis R. Lomas P.E.
FL No.: 62514

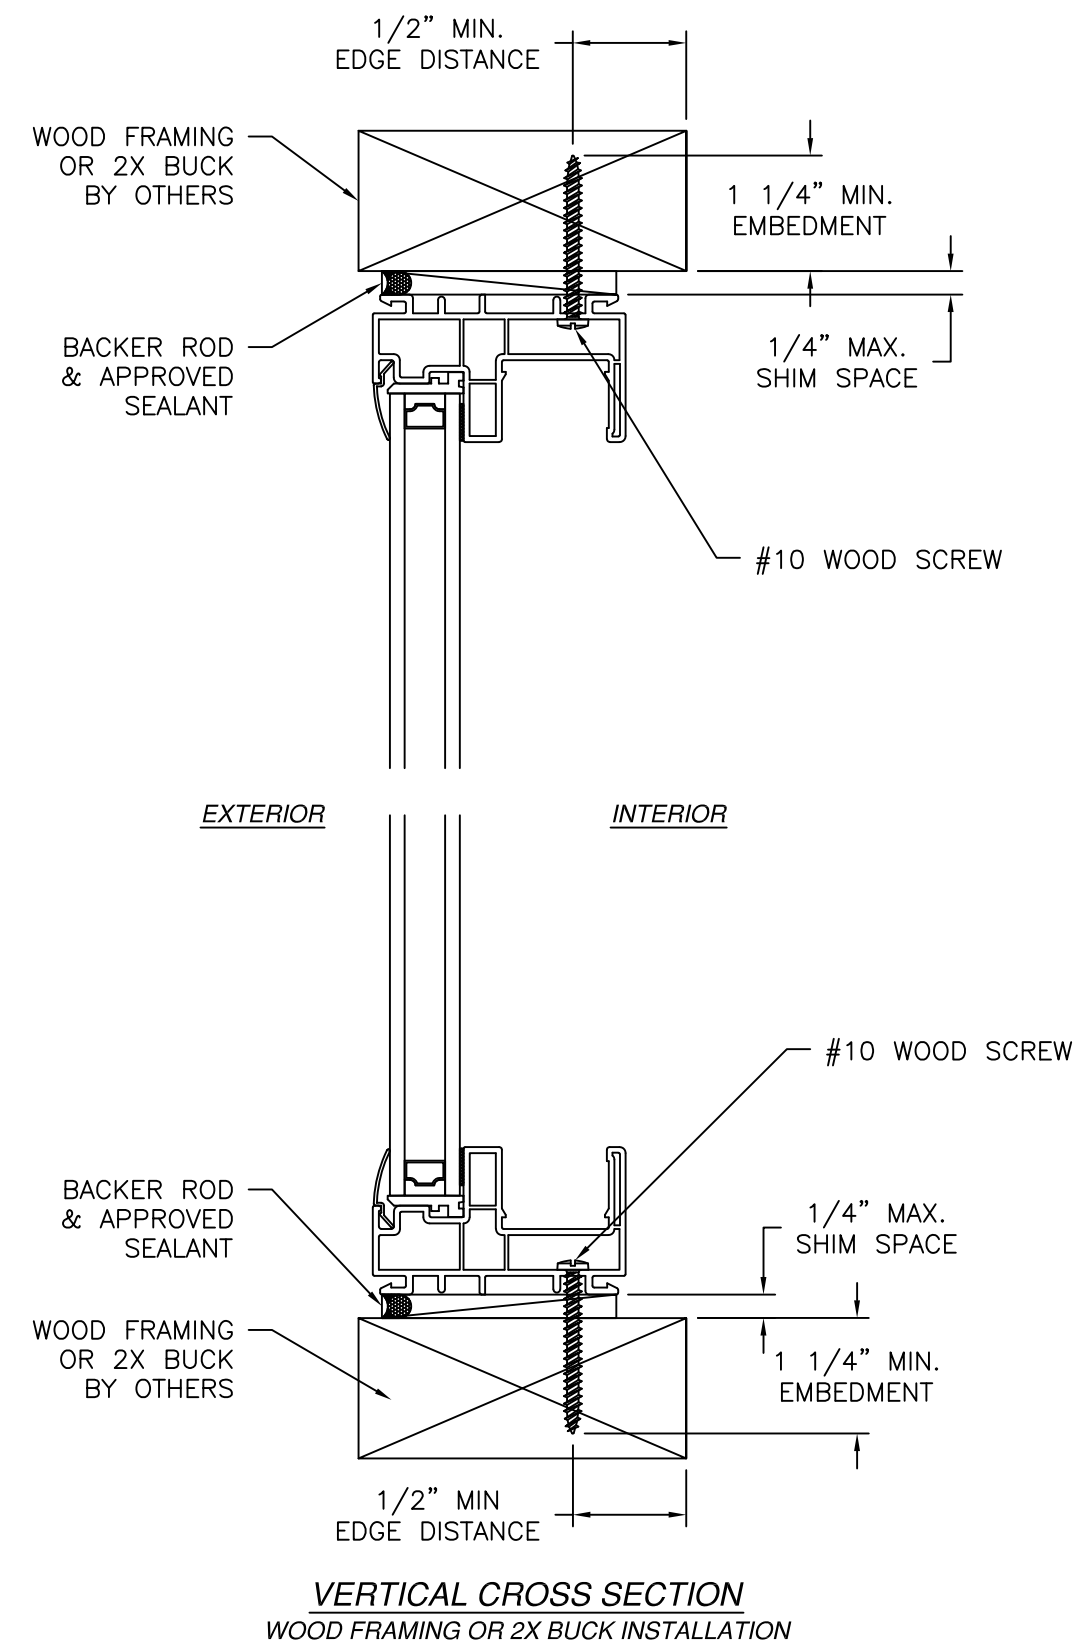

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

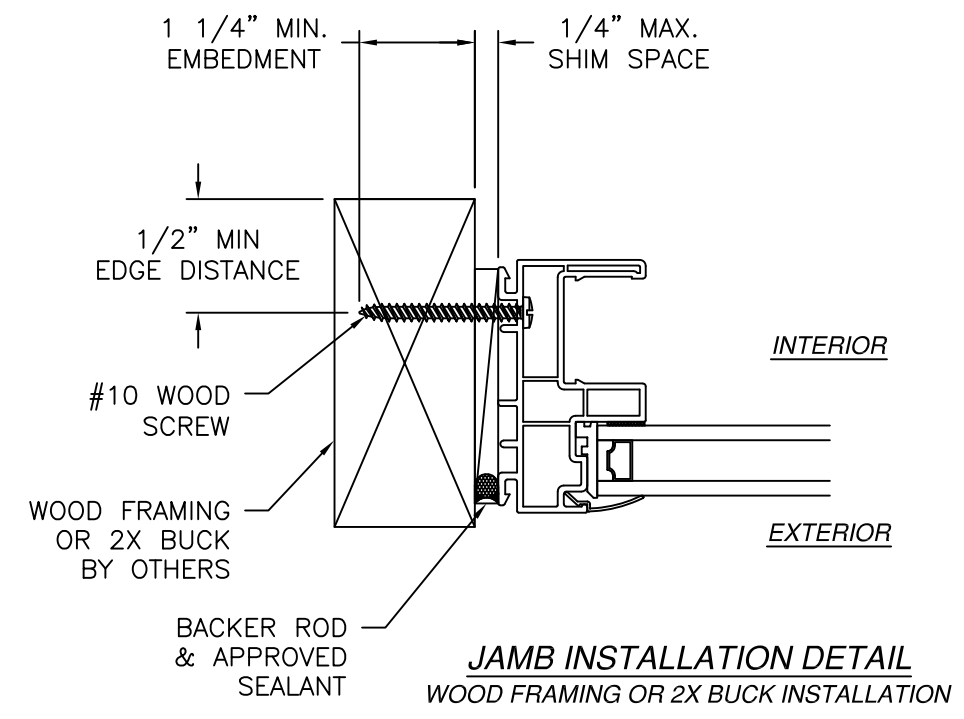

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-03179B

REV
B

SCALE NTS

DATE 10/04/2017



SHEET 5 OF 23

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com


SIGNED: 09/02/2026

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

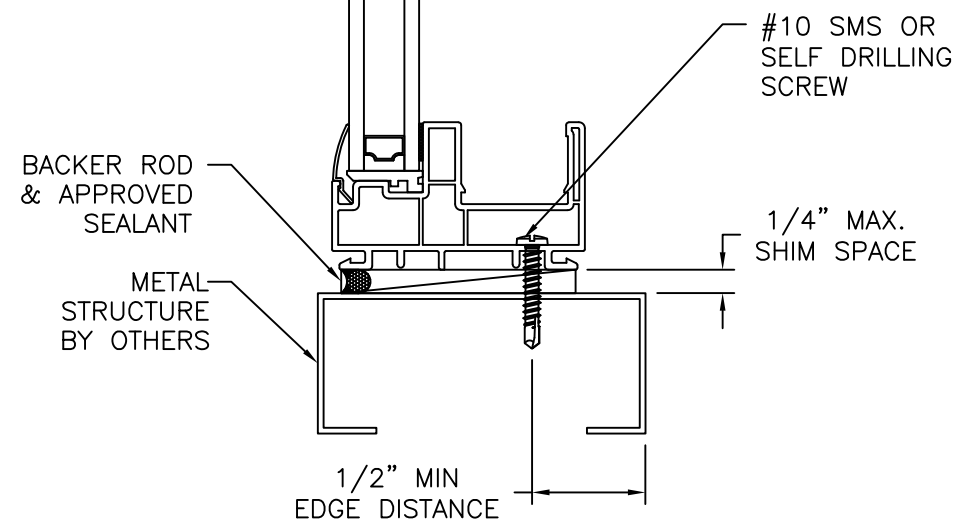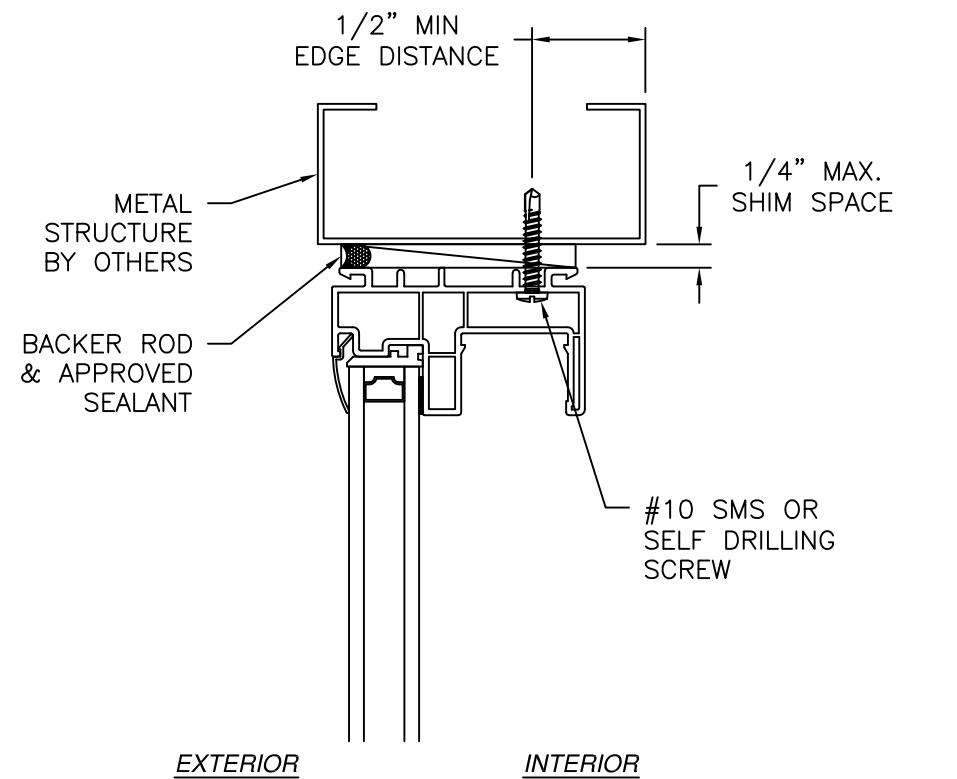

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

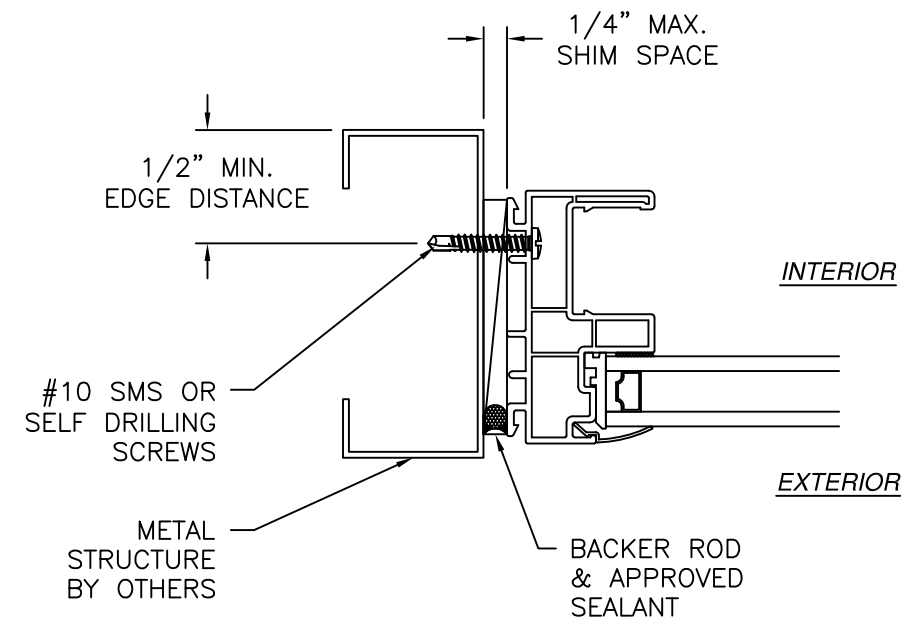

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

NOTES:

- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 09/02/2026

ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406




1970 FIXED WINDOW
NON-IMPACT
INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 6 OF 23

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

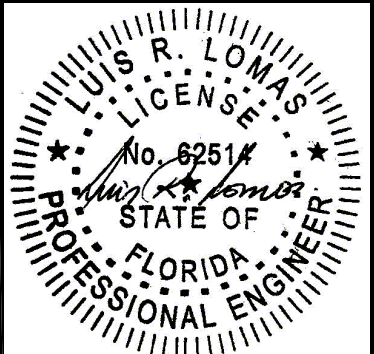

Luis R. Lomas P.E.
FL No.: 62514

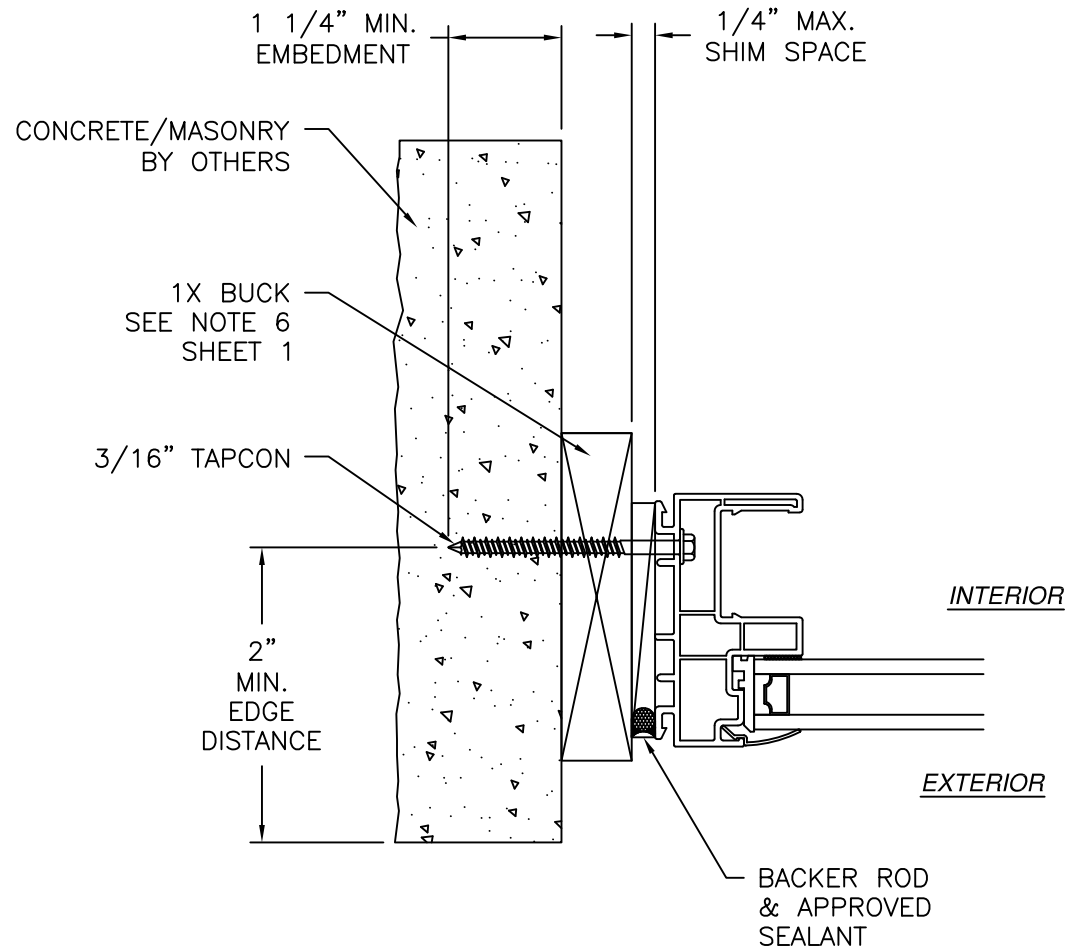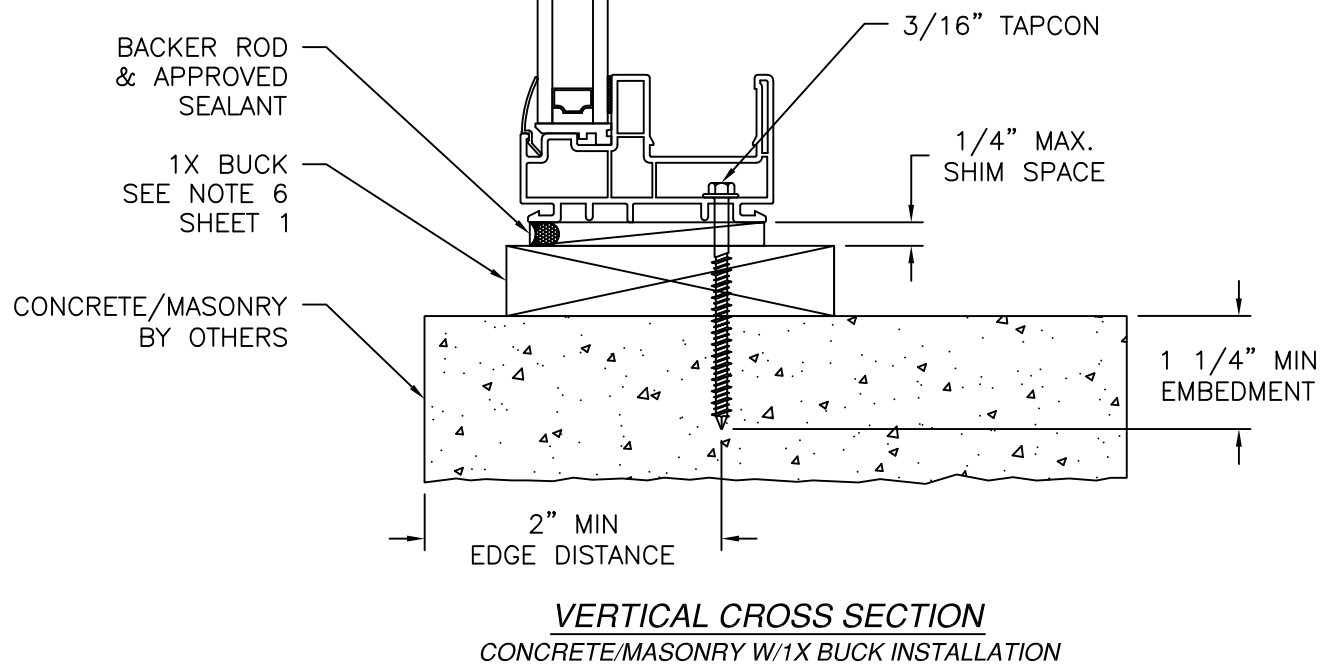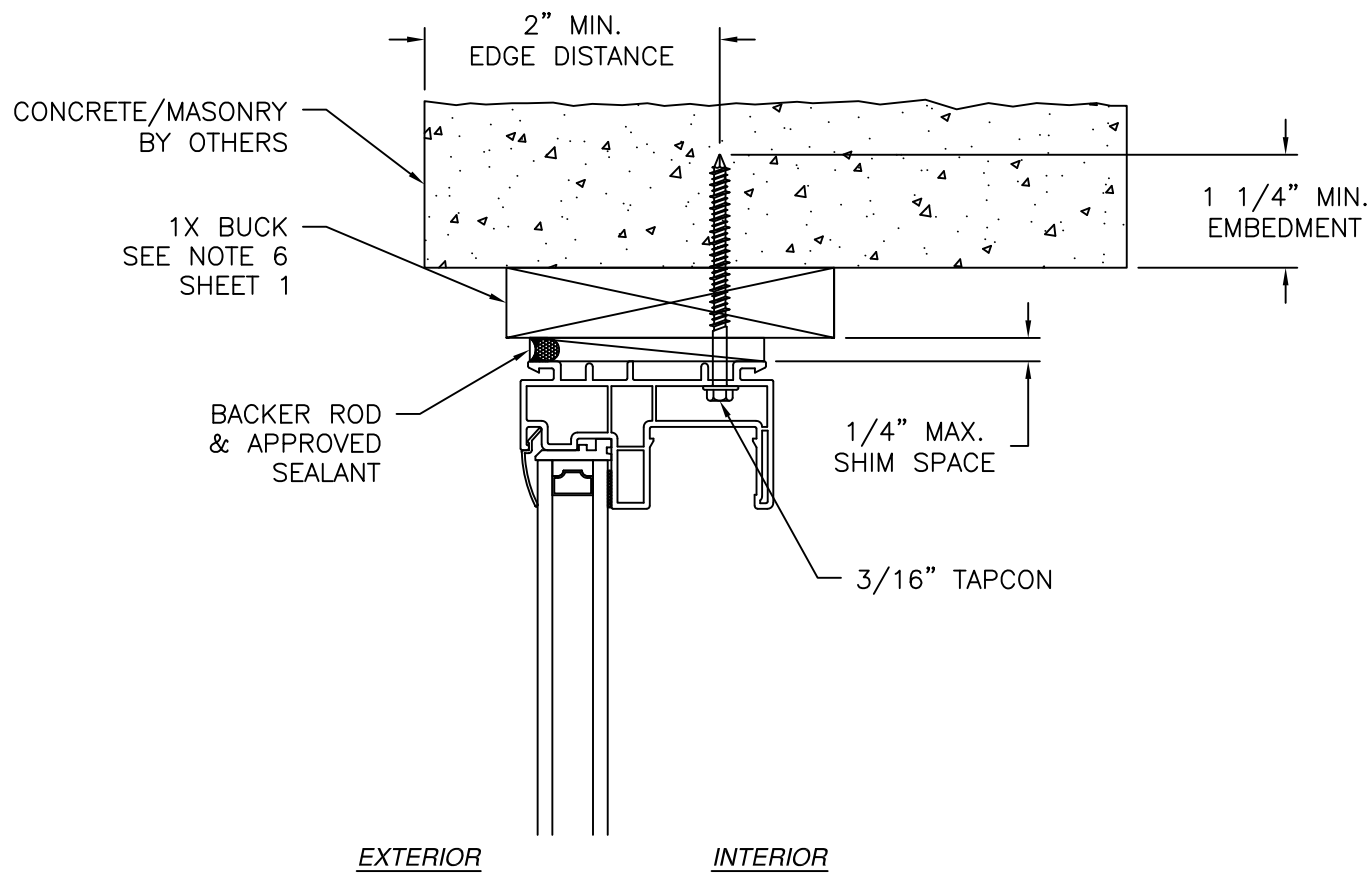

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY W/1X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.


ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 7 OF 23



L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/02/2026

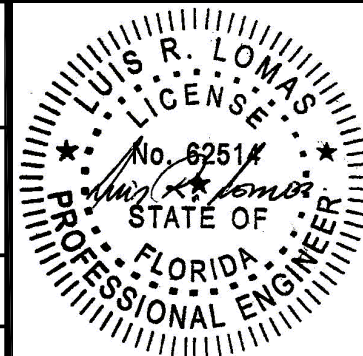

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

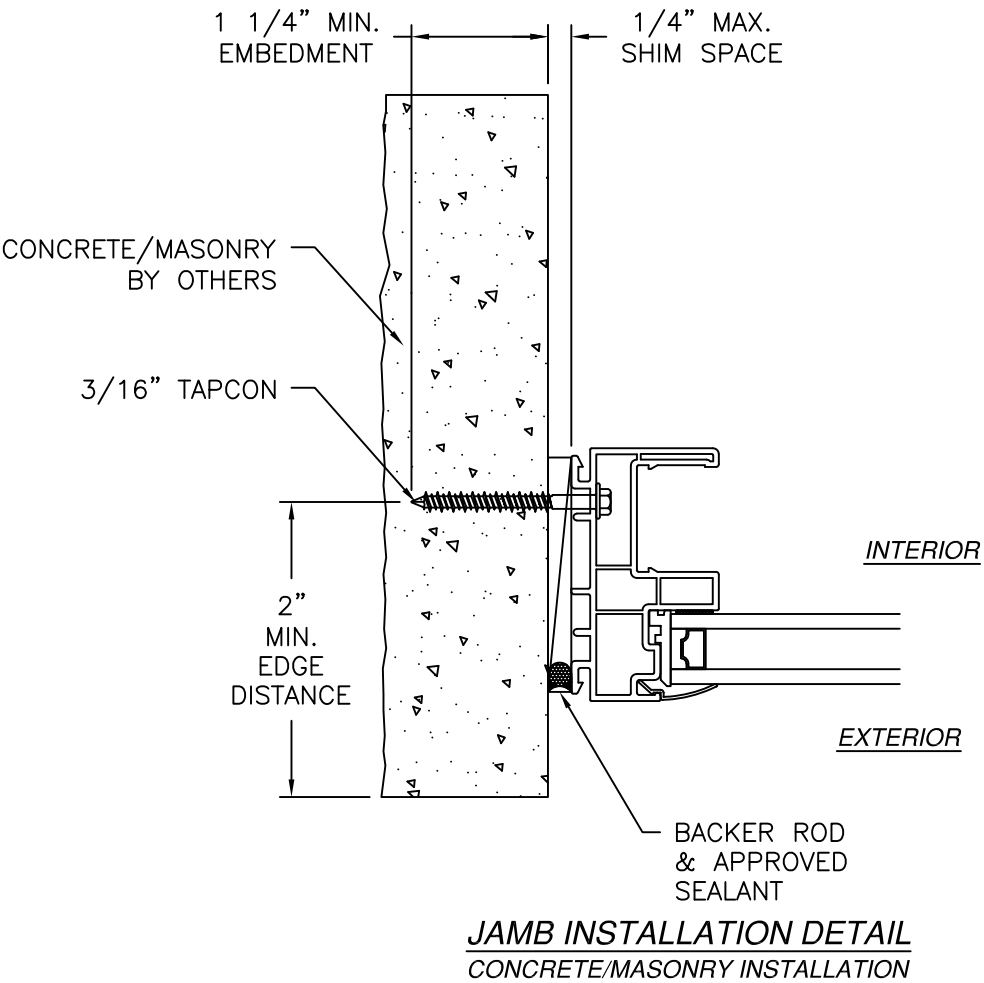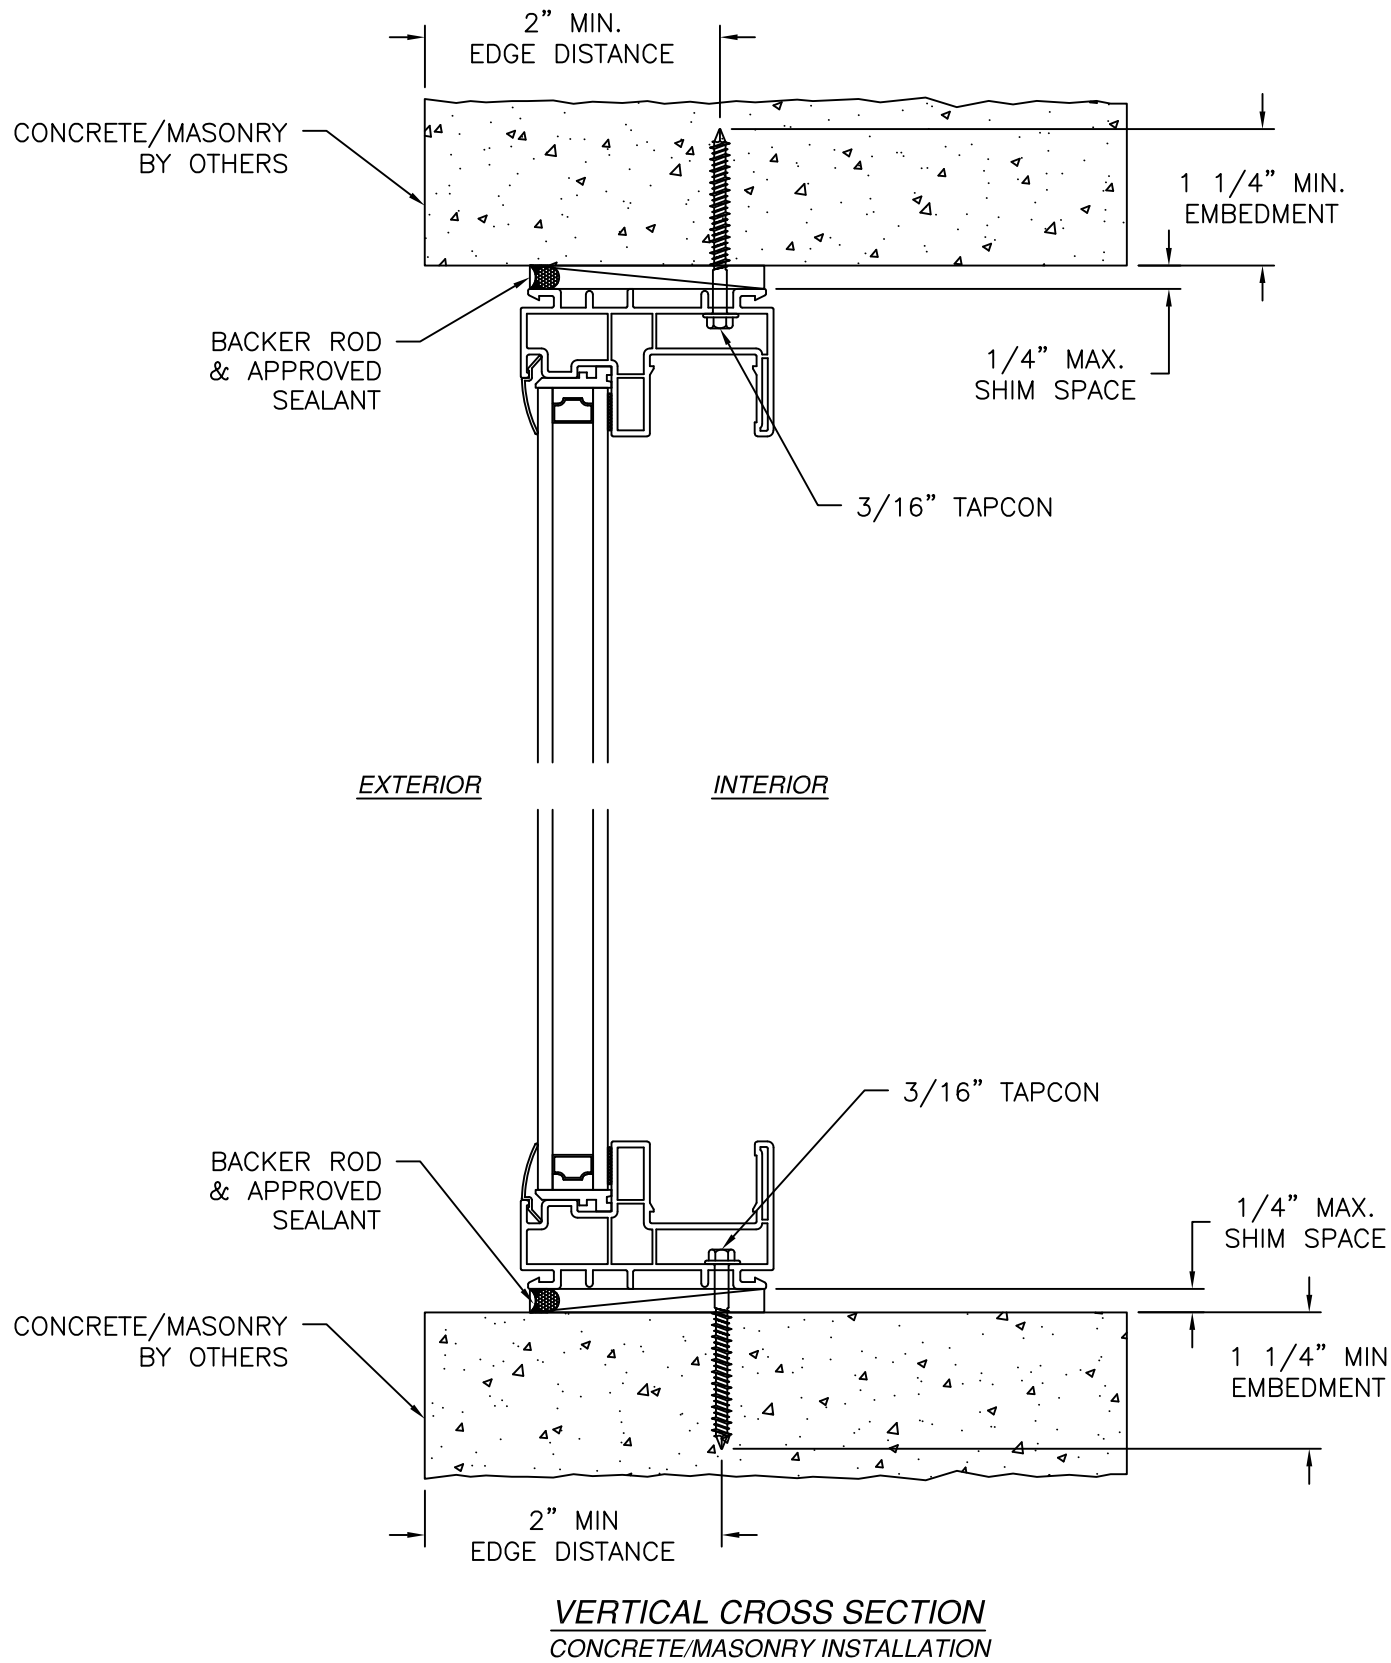

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/02/2026

ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-03179B


REV
B

SCALE NTS


DATE 10/04/2017

SHEET 8 OF 23


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

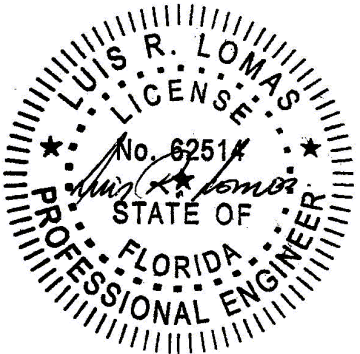


Luis R. Lomas P.E.
FL No.: 62514

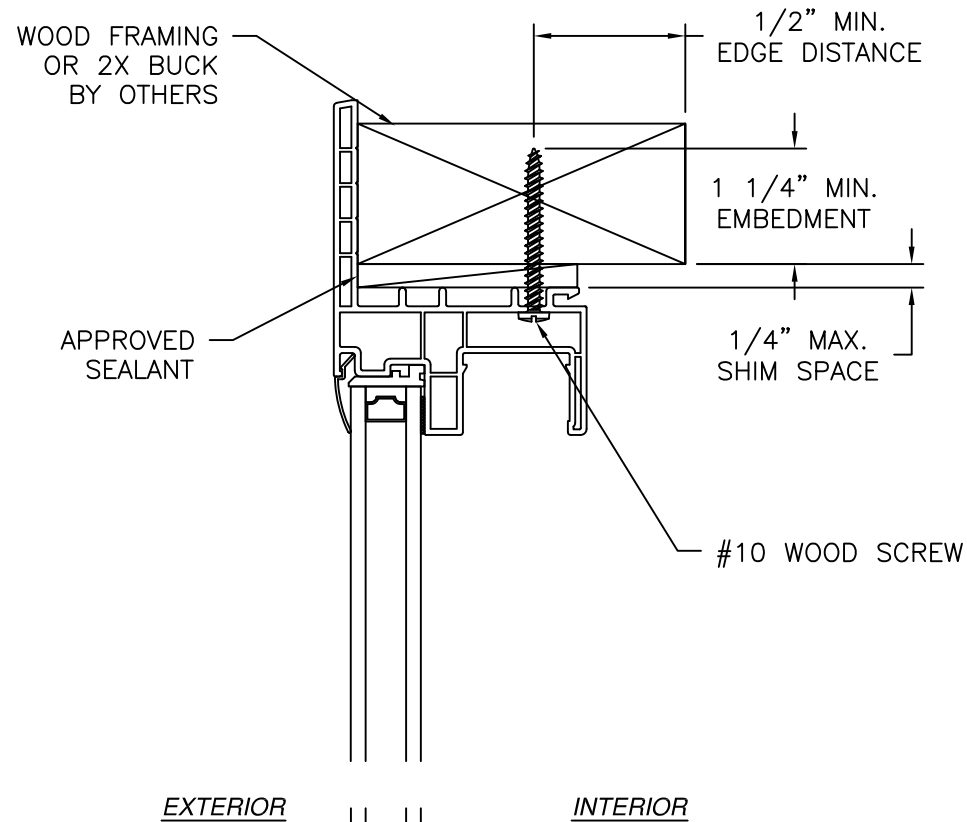

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

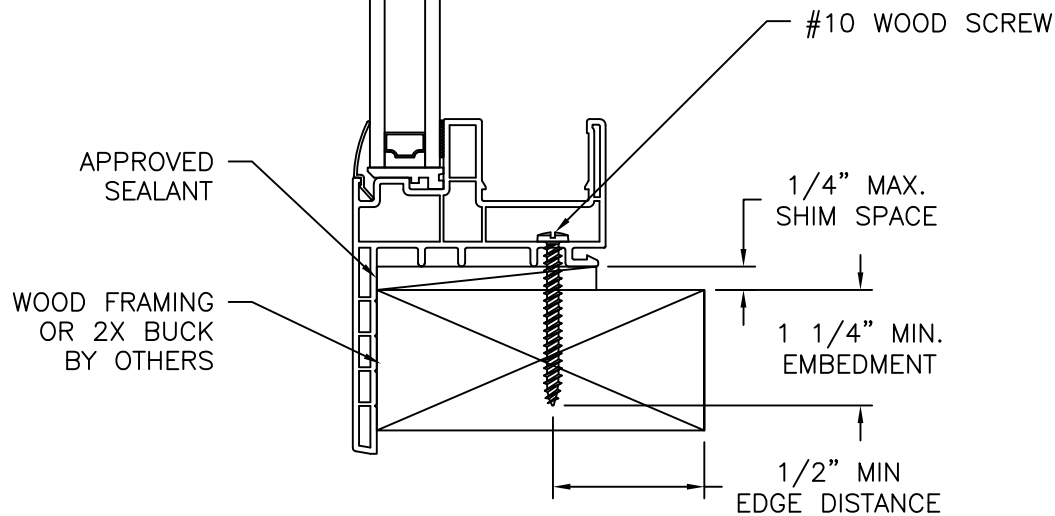


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

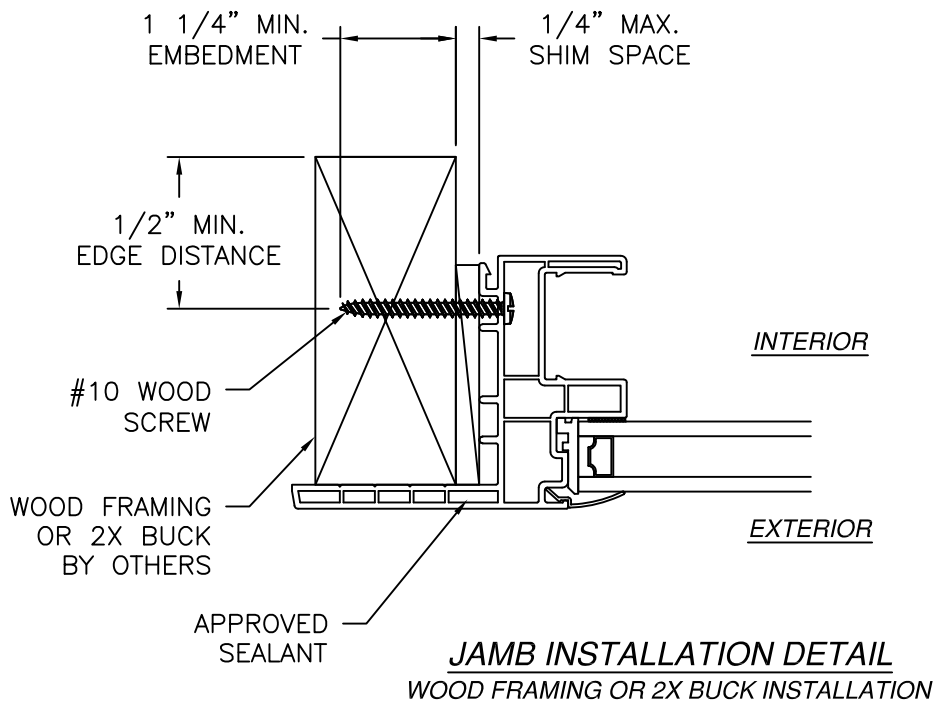


- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/02/2026



ALL AMERICAN WINDOW COMPANY, LLC 1930 HANAHAN RD. SUITE 1400A NORTH CHARLESTON, SC 29406		
1970 FIXED WINDOW NON-IMPACT FLANGE INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 9 OF 23
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

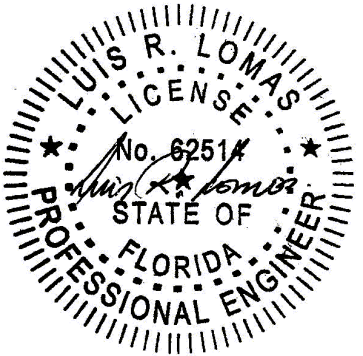

Luis R. Lomas P.E.
FL No.: 62514

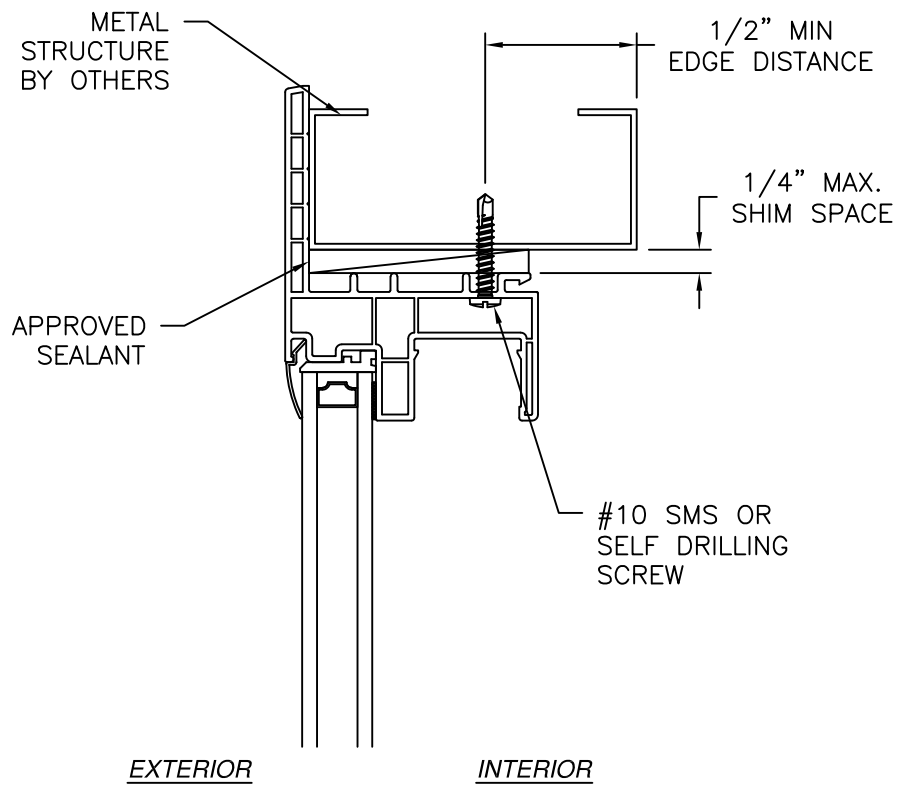

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

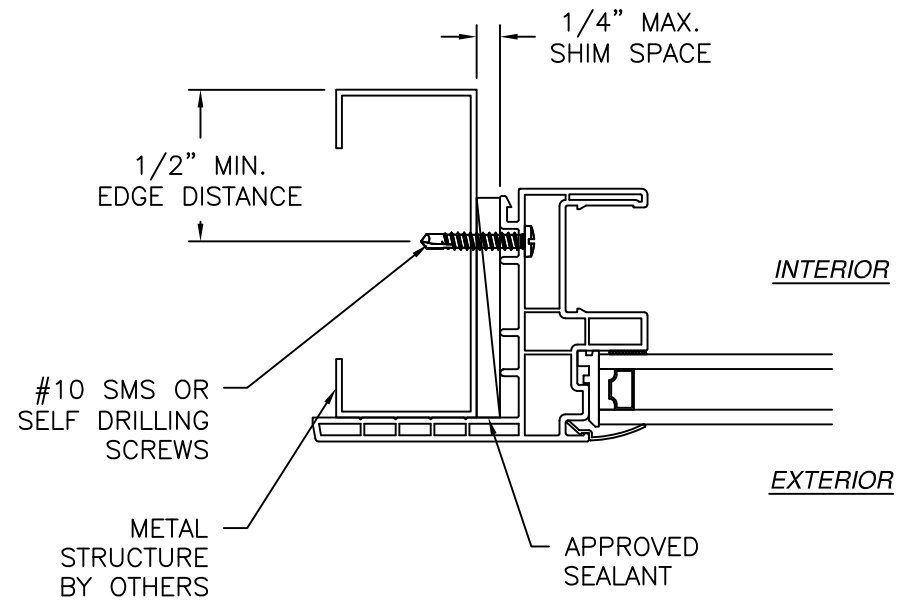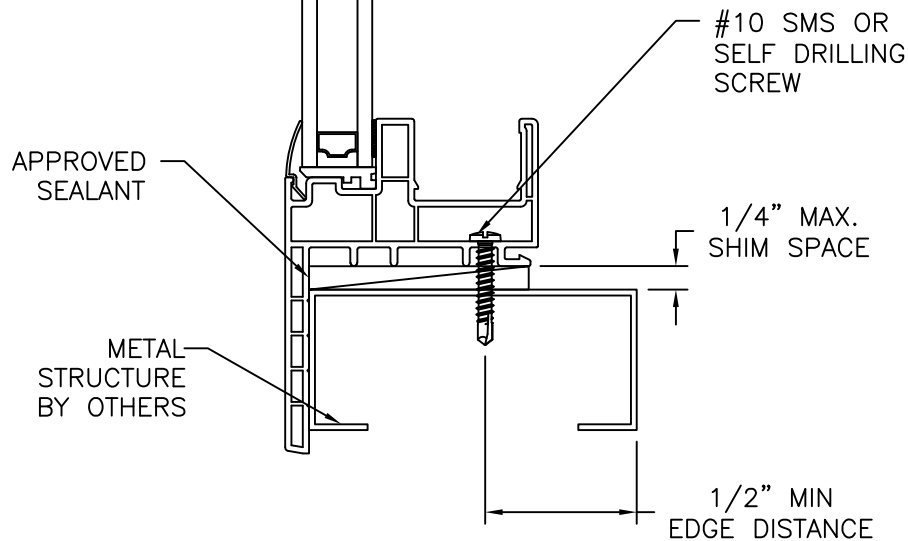

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

ALL AMERICAN WINDOW COMPANY, LLC


1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

**1970 FIXED WINDOW
NON-IMPACT
FLANGE INSTALLATION DETAILS**

DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 10 OF 23



L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/02/2026

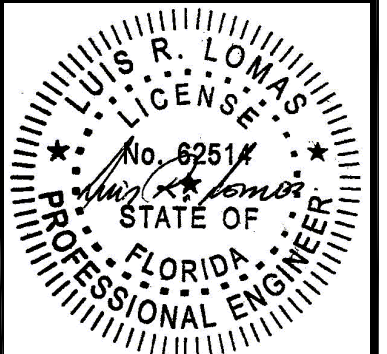


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

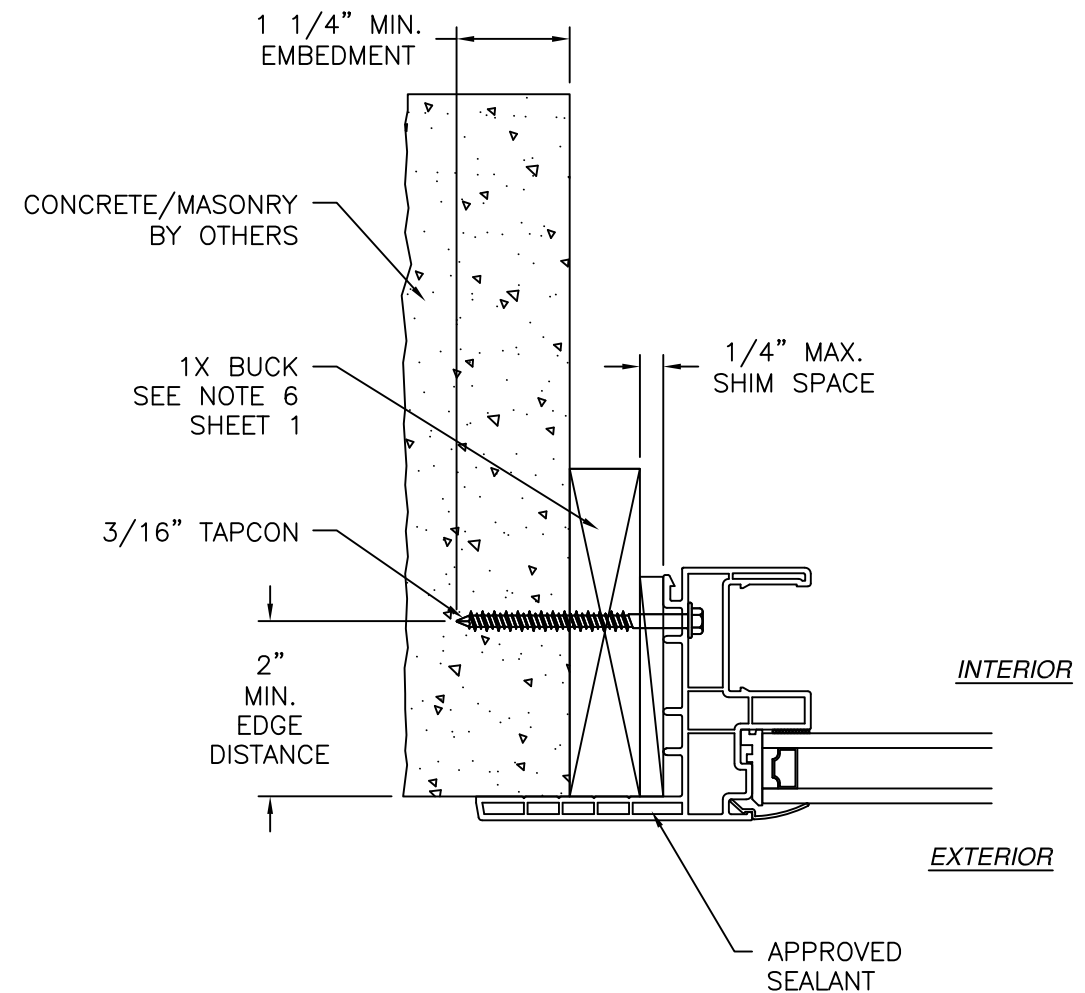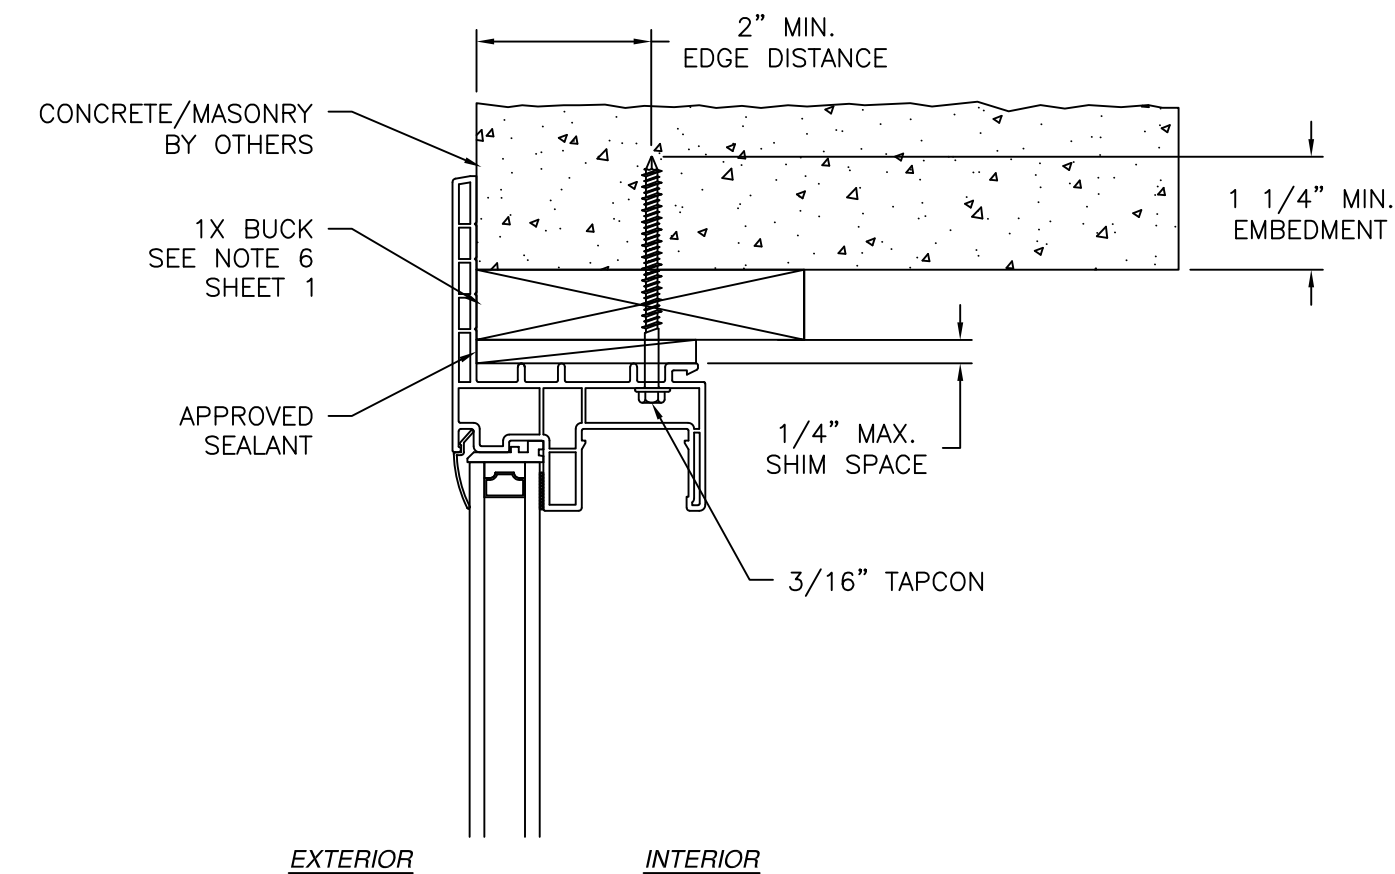

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY W/1X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

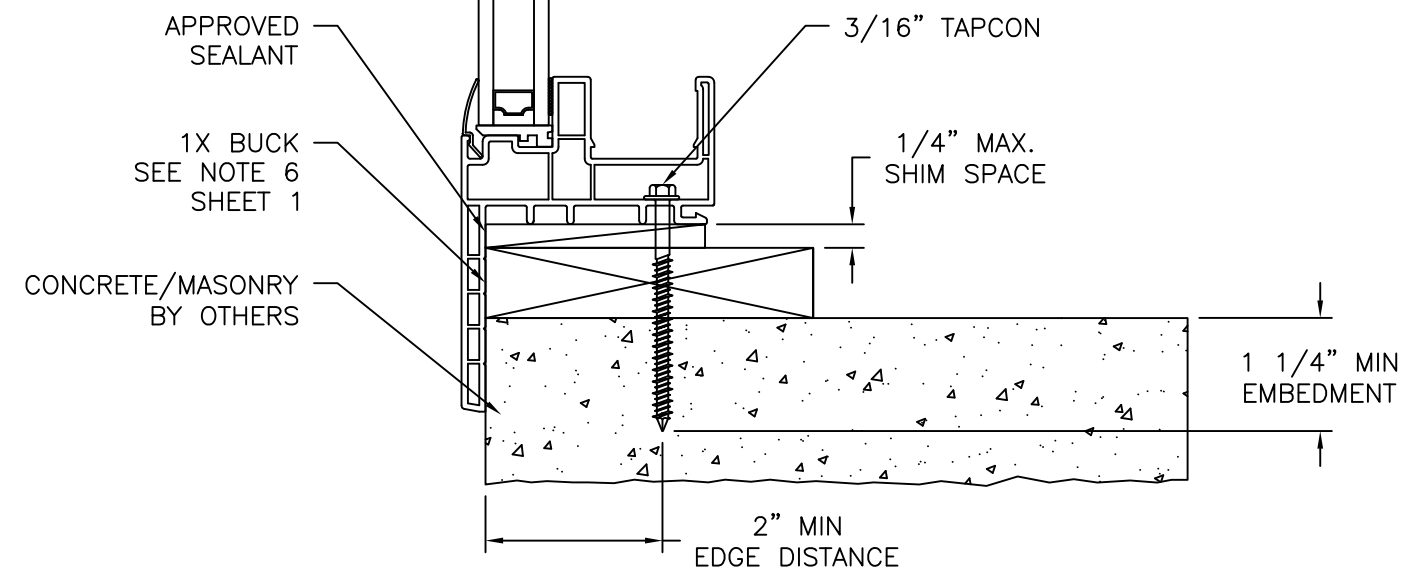

VERTICAL CROSS SECTION
CONCRETE/MASONRY W/1X BUCK INSTALLATION


ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
FLANGE INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 11 OF 23




L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/02/2026

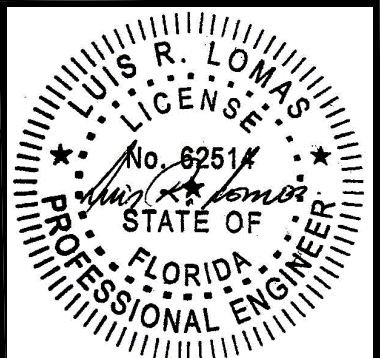

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

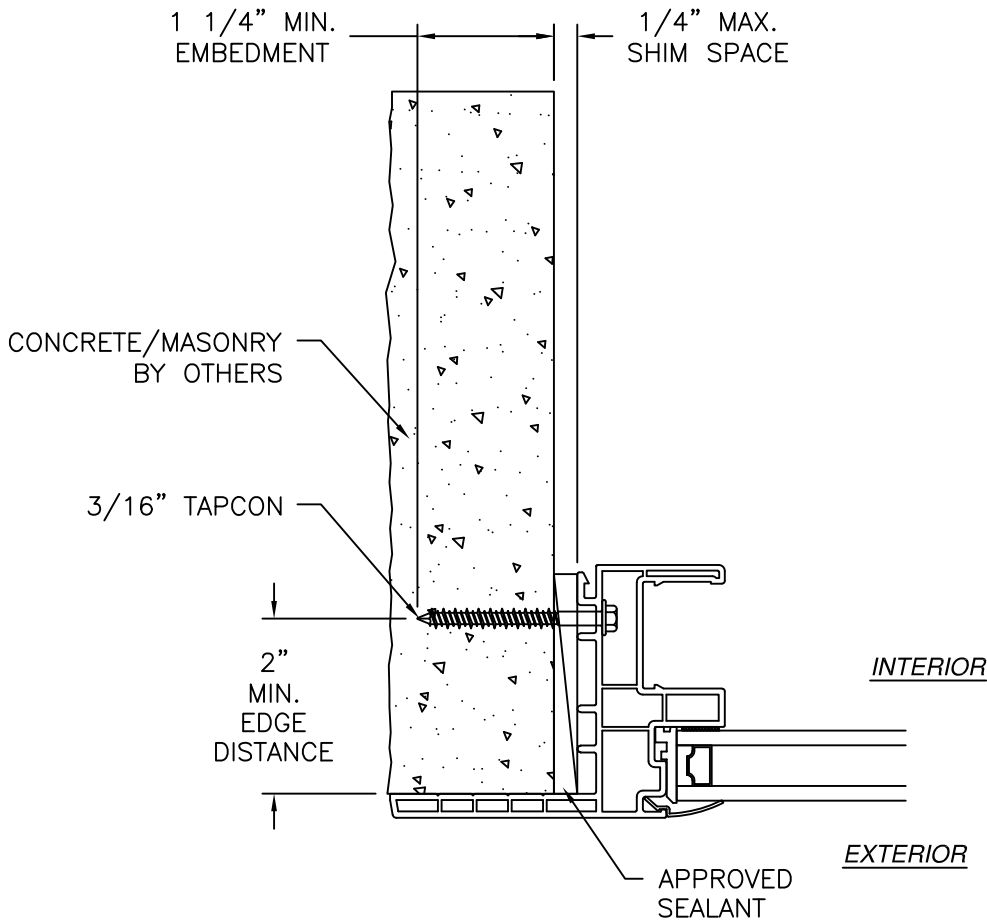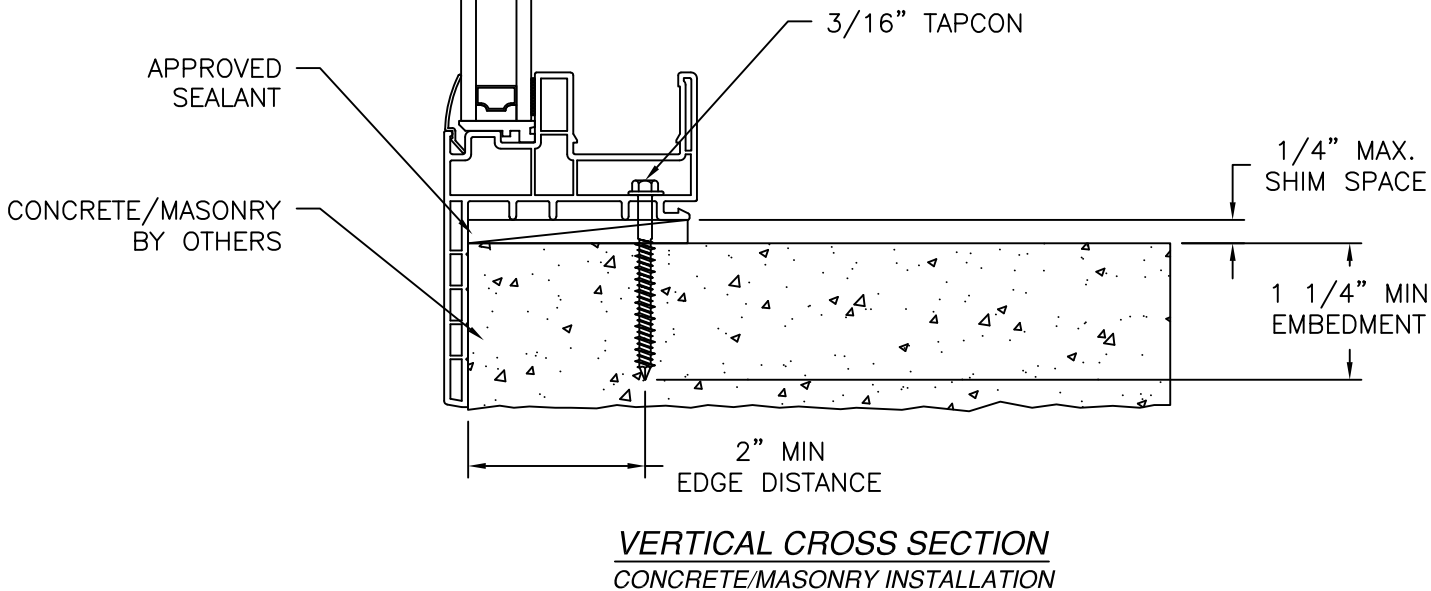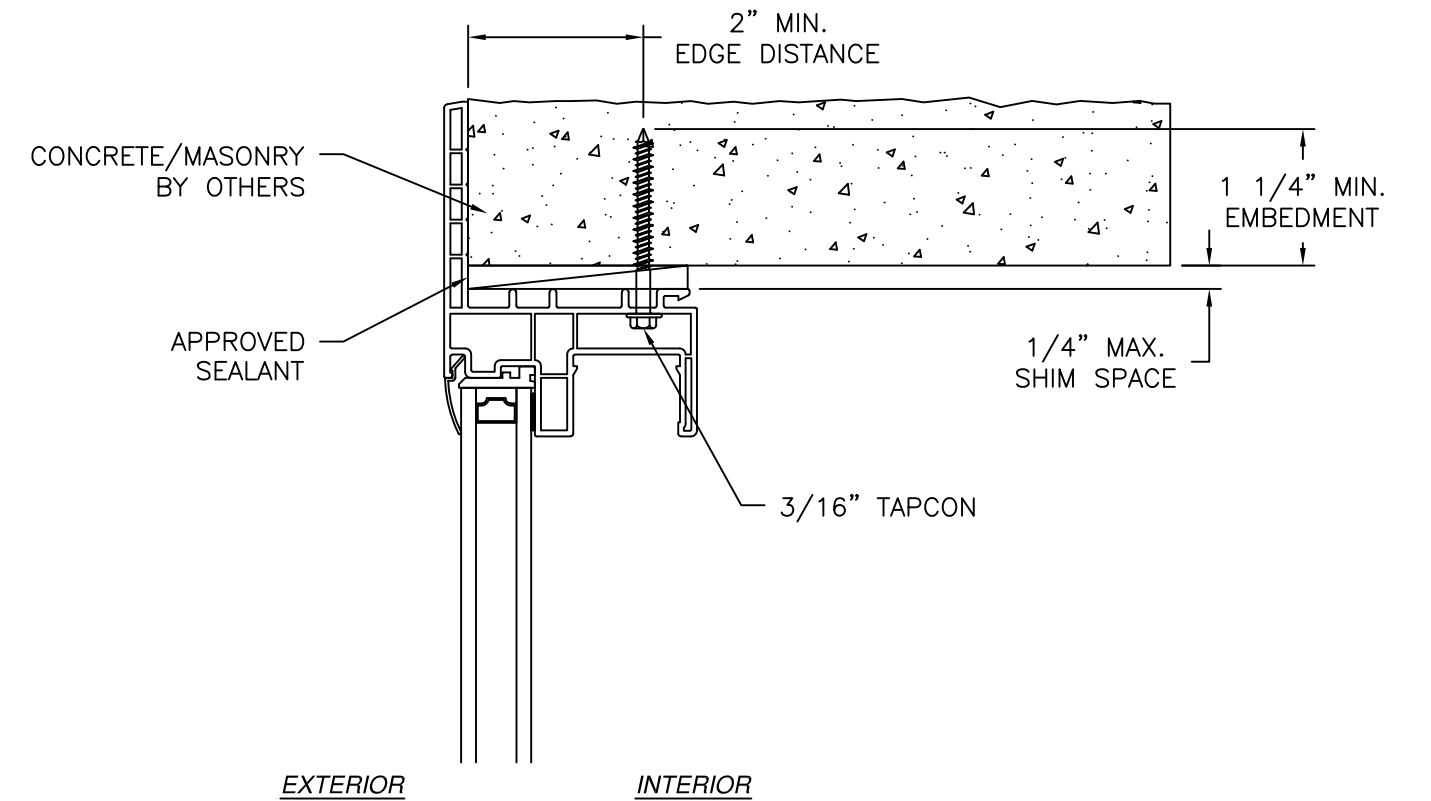

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY INSTALLATION

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/02/2026

ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
FLANGE INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-03179B


REV
B

SCALE NTS



DATE 10/04/2017

SHEET 12 OF 23


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

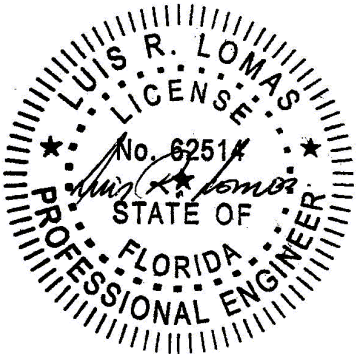

Luis R. Lomas P.E.
FL No.: 62514

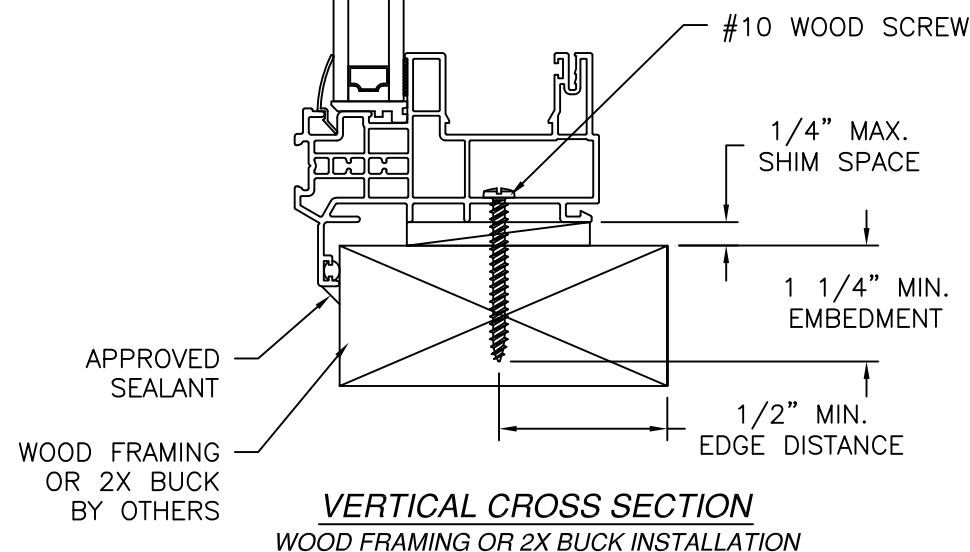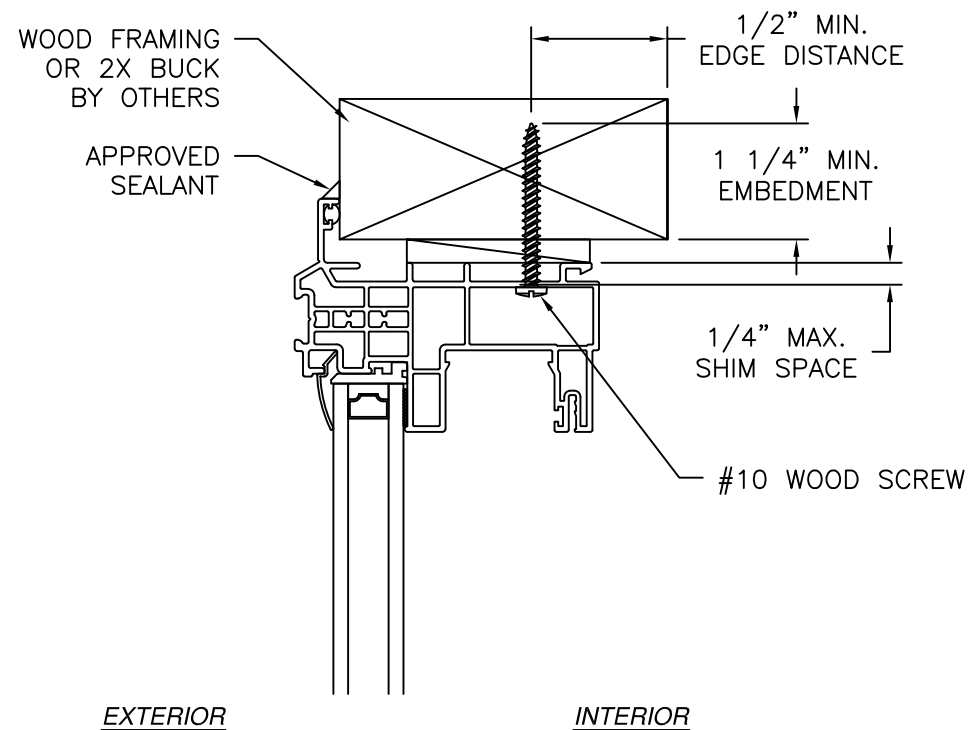

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

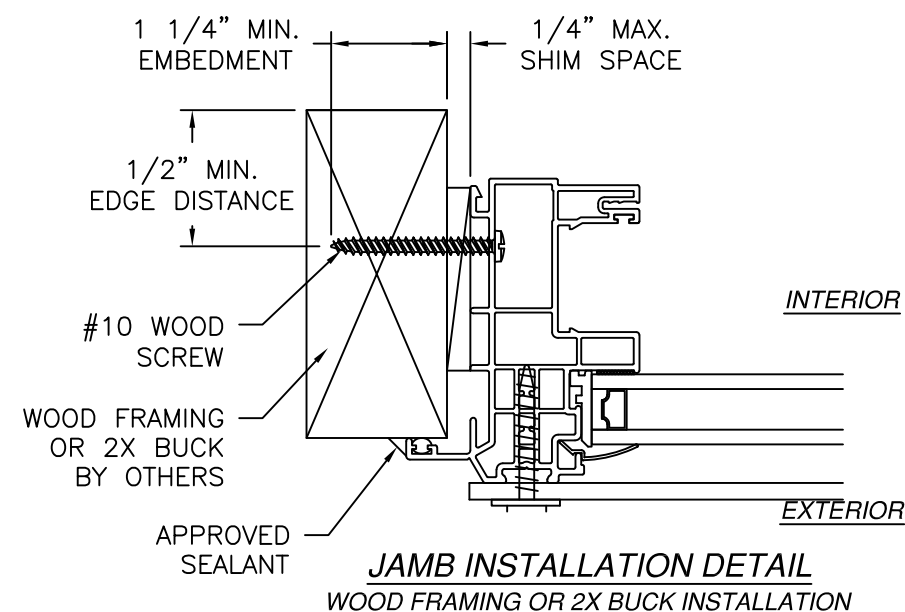

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.


SIGNED: 09/02/2026

ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406




1970 FIXED WINDOW
NON-IMPACT
INSTALLATION DETAILS W/STORM JAMB

DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 13 OF 23

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

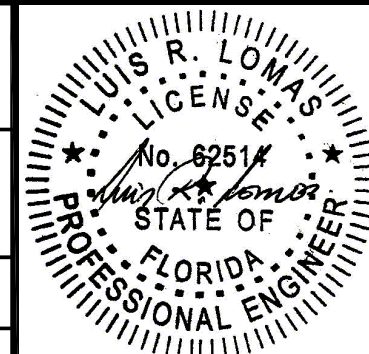

Luis R. Lomas P.E.
FL No.: 62514

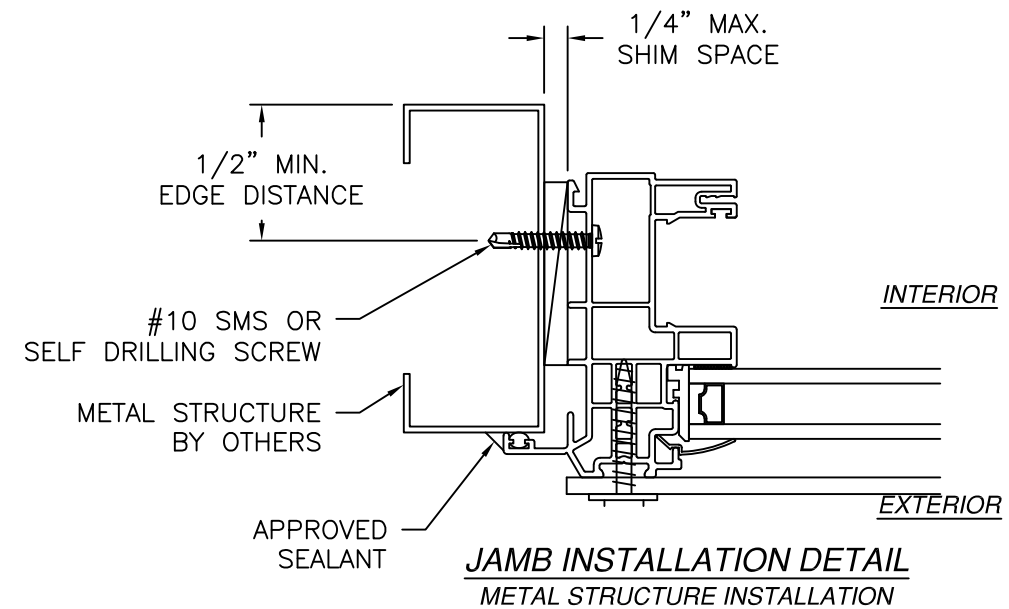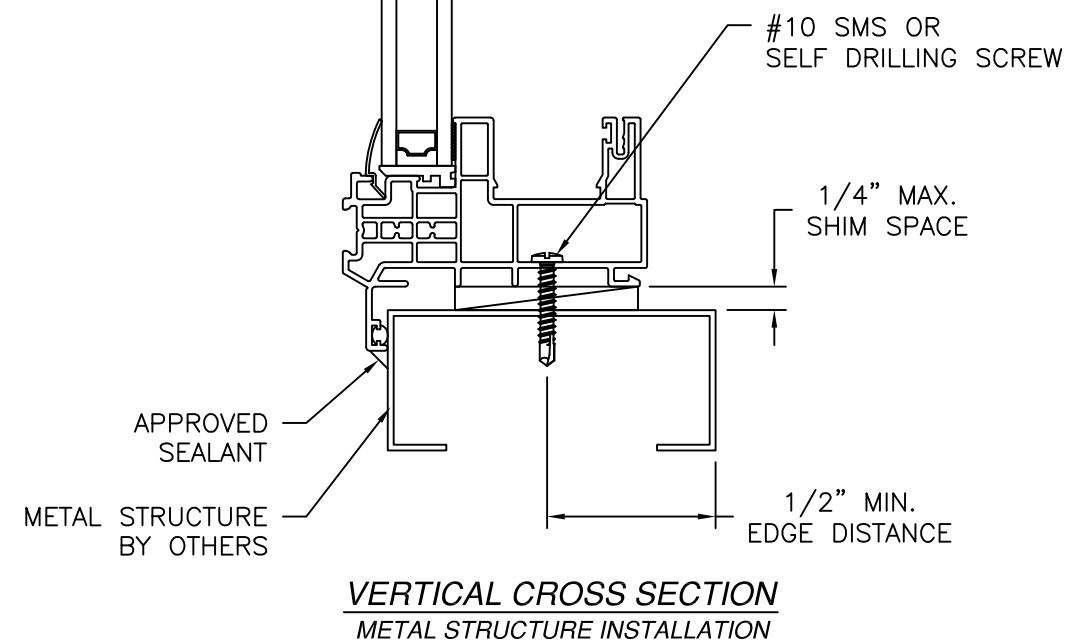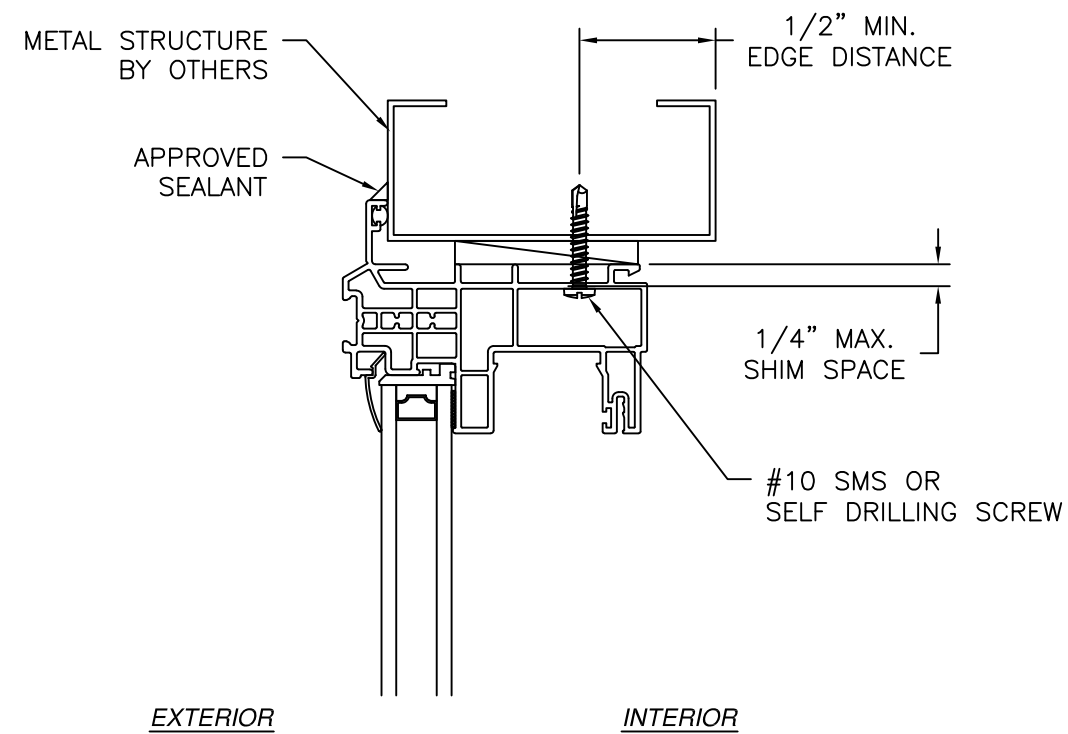

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.


ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
INSTALLATION DETAILS W/STORM JAMB

DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 14 OF 23




L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/02/2026

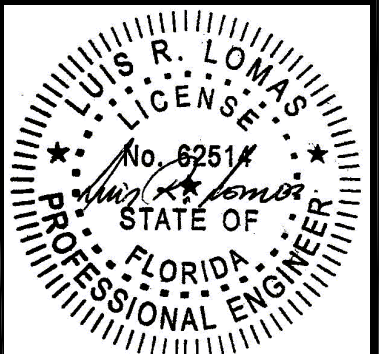

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

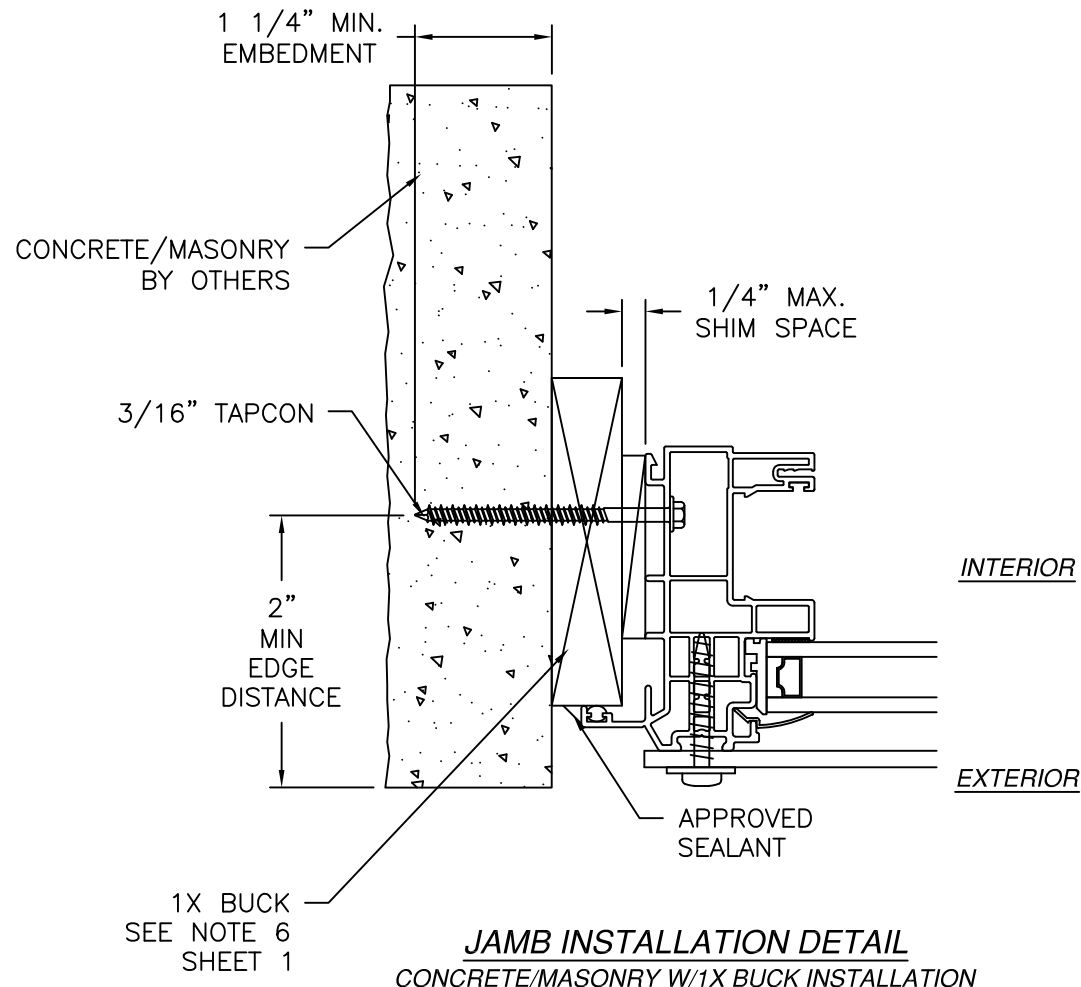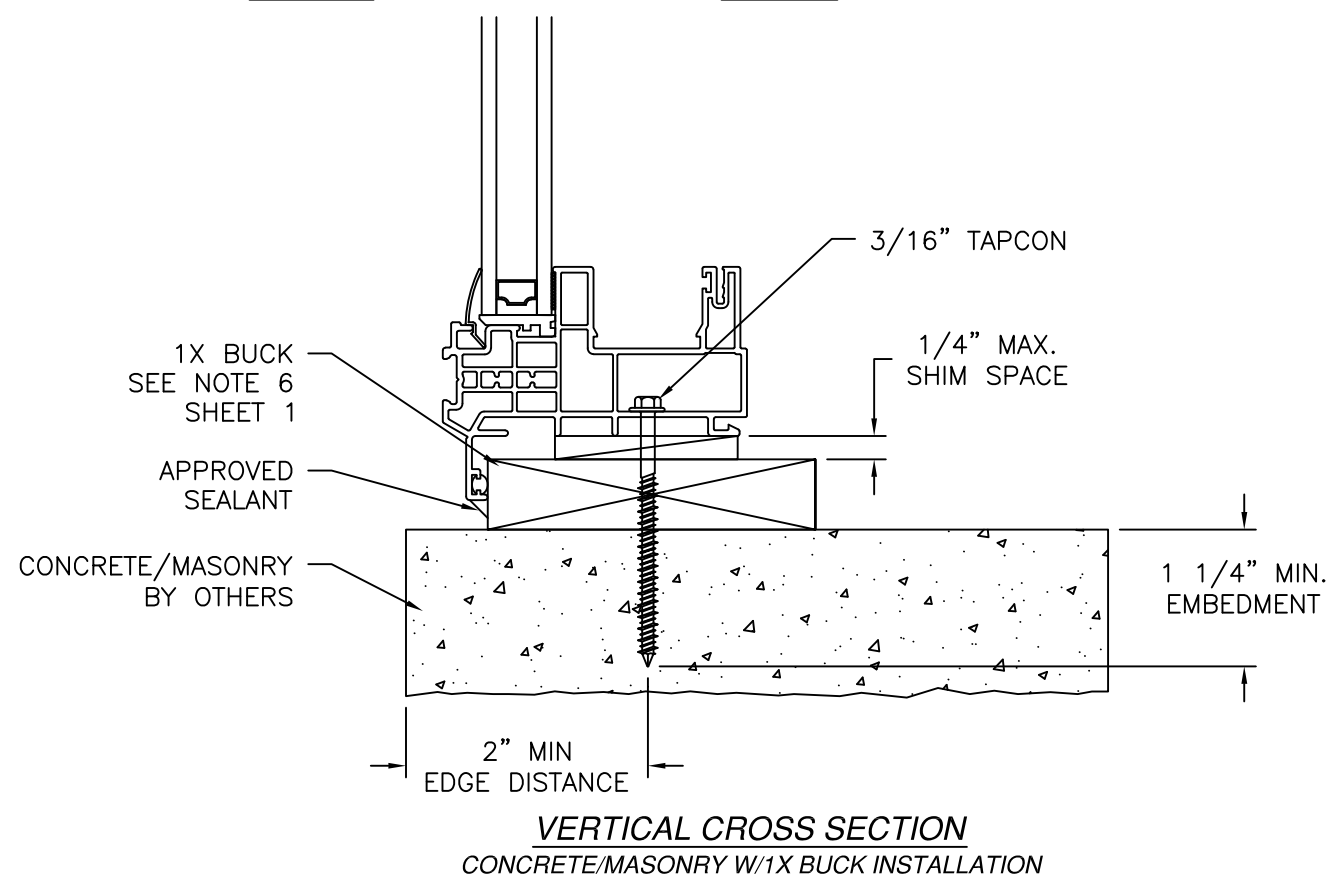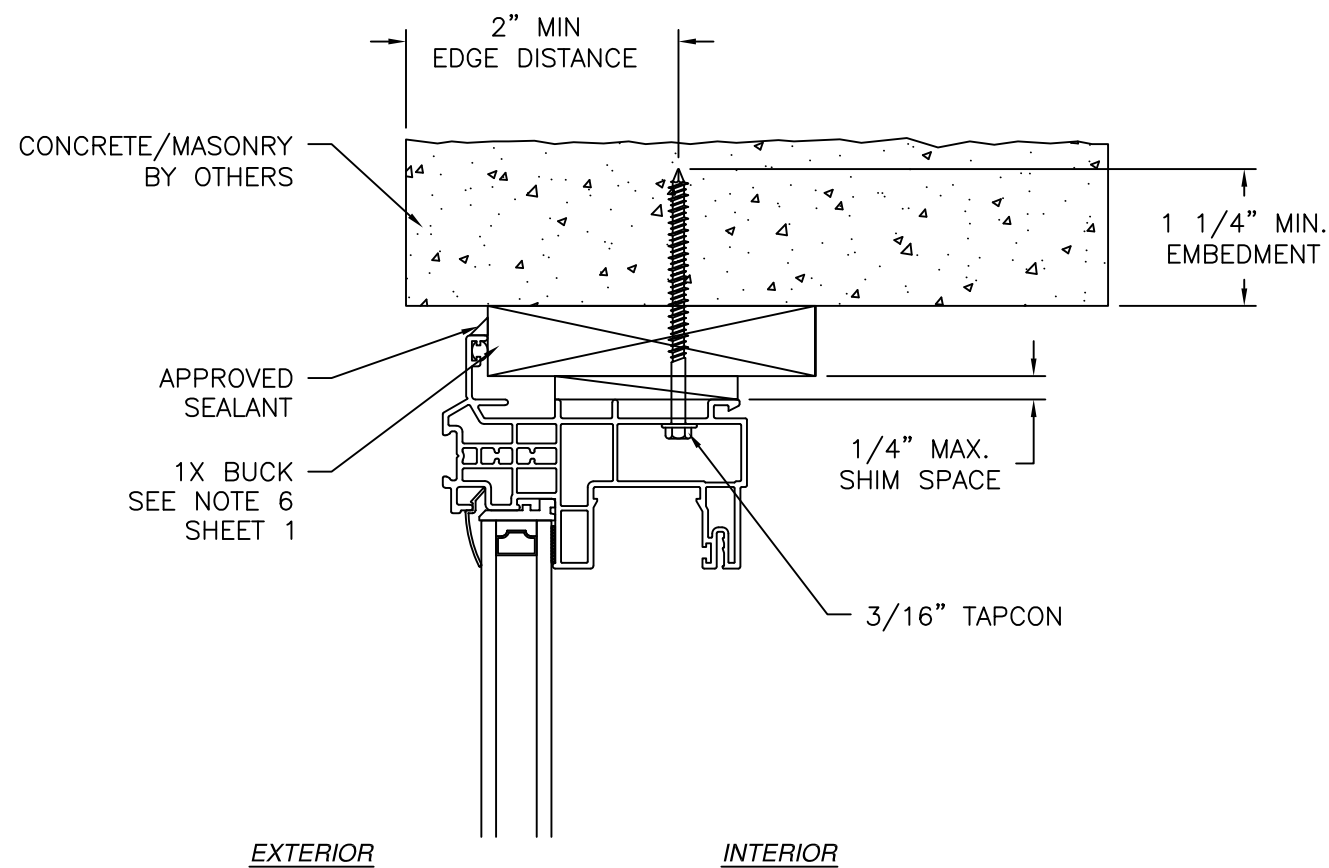

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
INSTALLATION DETAILS W/STORM JAMB

DRAWN:
A.R.

DWG NO.
08-03179B

REV
B

SCALE
NTS

DATE
10/04/2017

SHEET
15 OF 23


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609
rlomas@lrlomaspe.com

SIGNED: 09/02/2026


L. ROBERTO LOMAS
P.E.
No. 62514
STATE OF FLORIDA
PROFESSIONAL ENGINEER

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

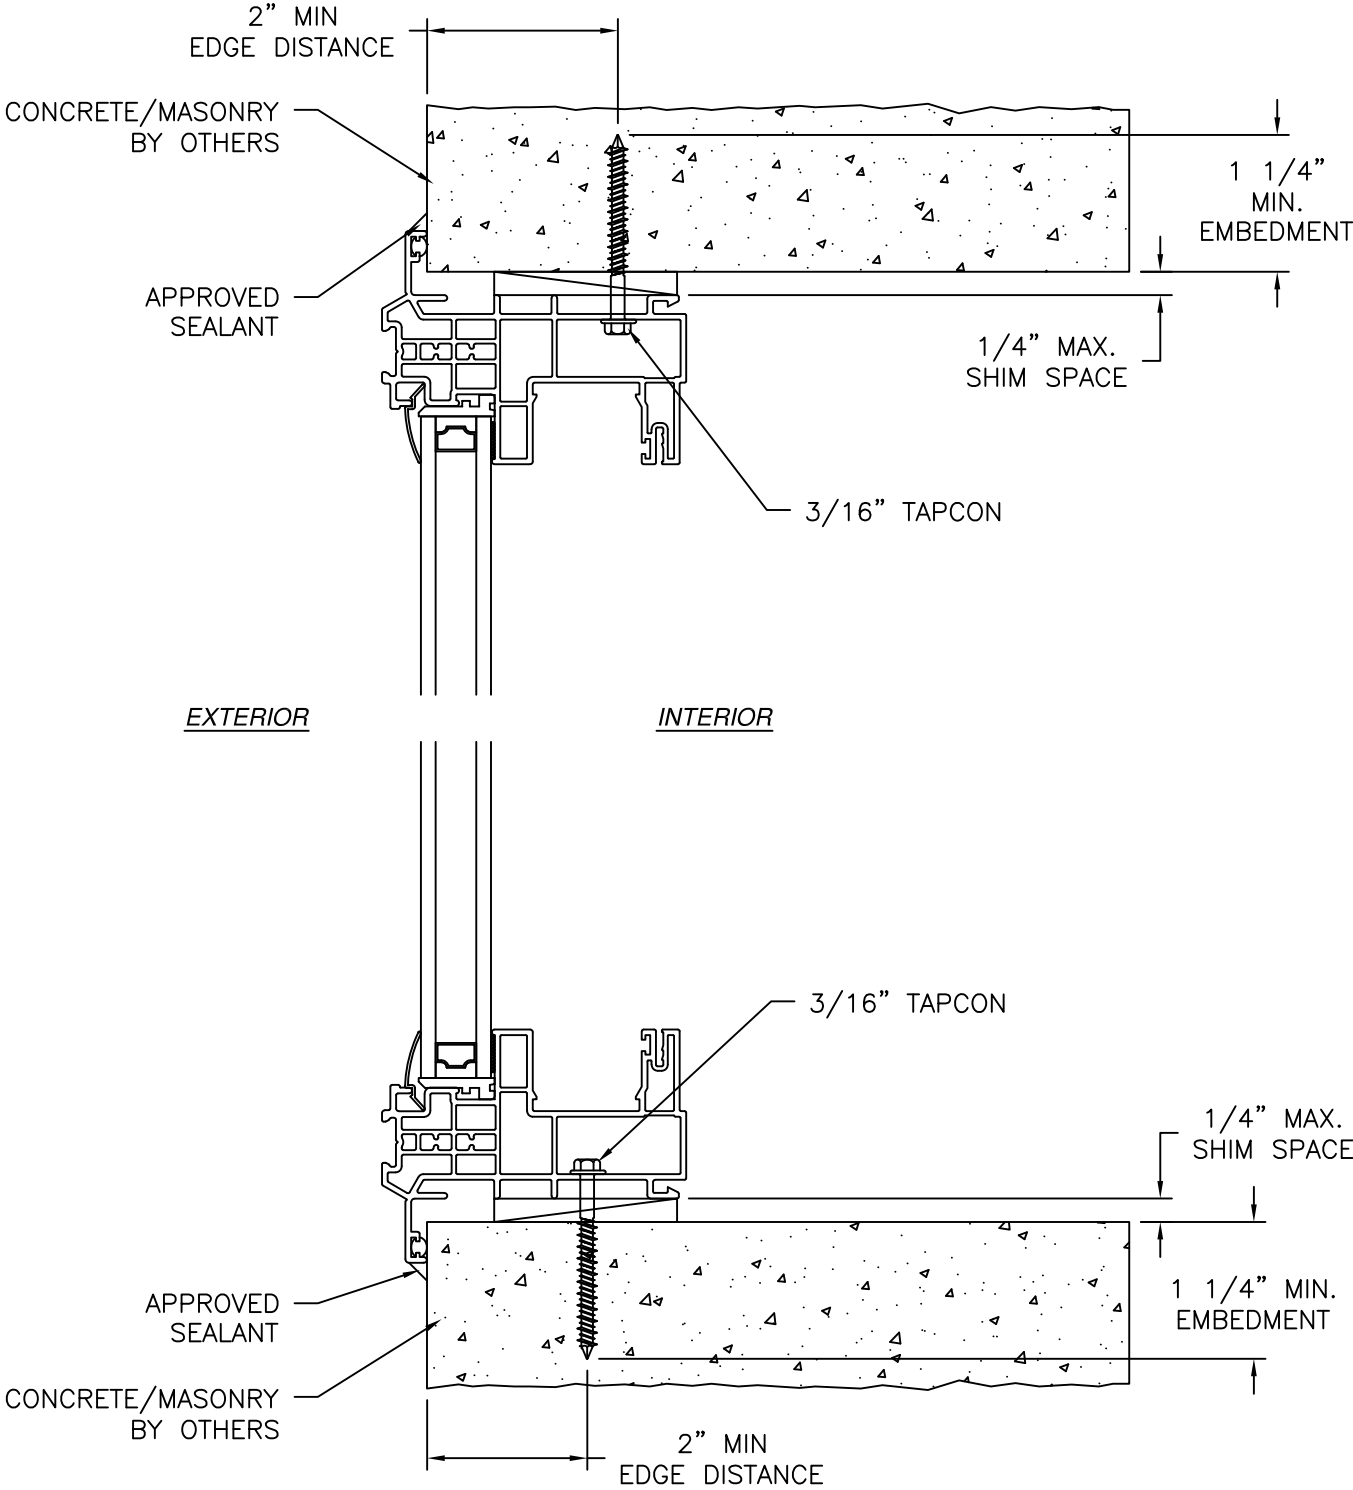

VERTICAL CROSS SECTION
CONCRETE/MASONRY INSTALLATION

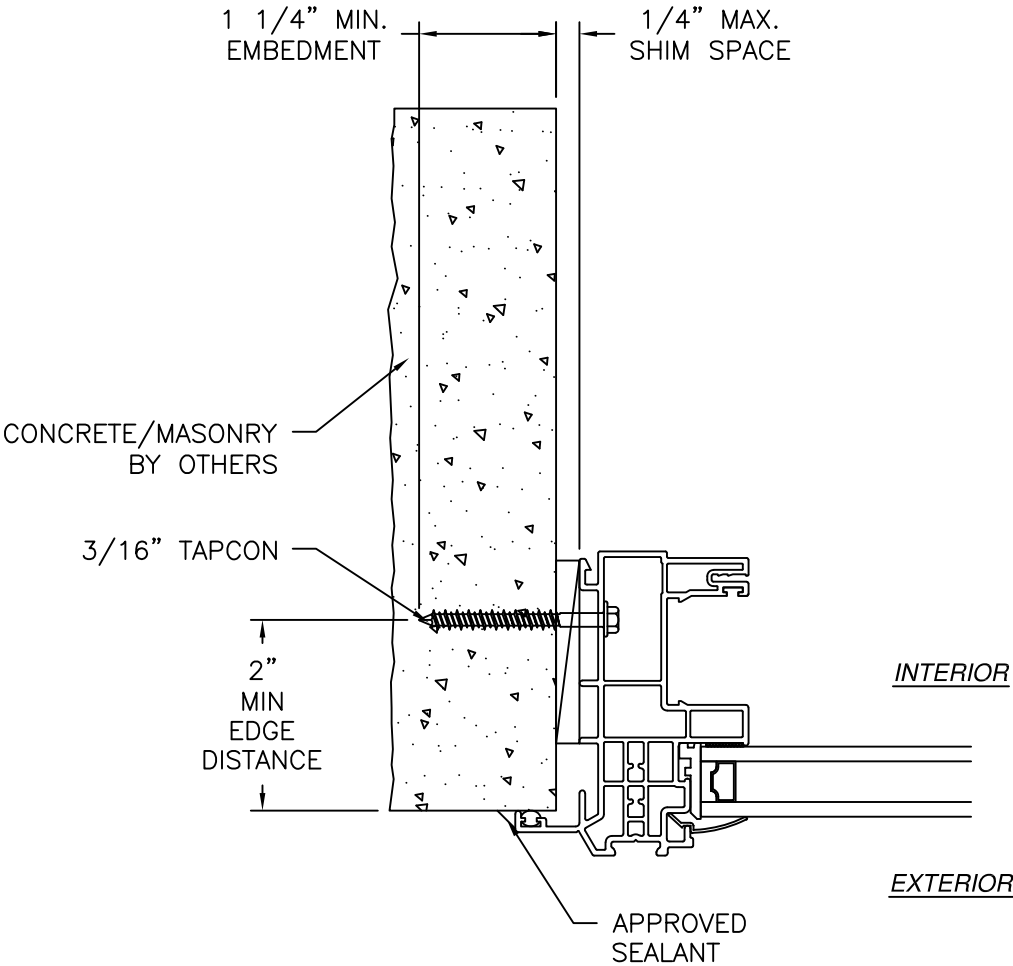

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY INSTALLATION

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/02/2026


ALL AMERICAN WINDOW COMPANY, LLC

1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406




1970 FIXED WINDOW
NON-IMPACT
INSTALLATION DETAILS W/STORM JAMB

DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 16 OF 23

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

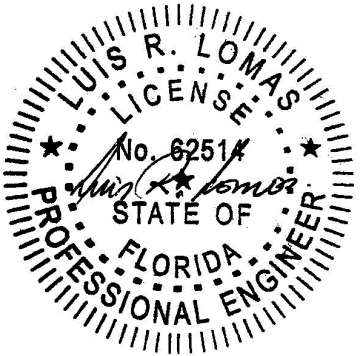

Luis R. Lomas P.E.
FL No.: 62514

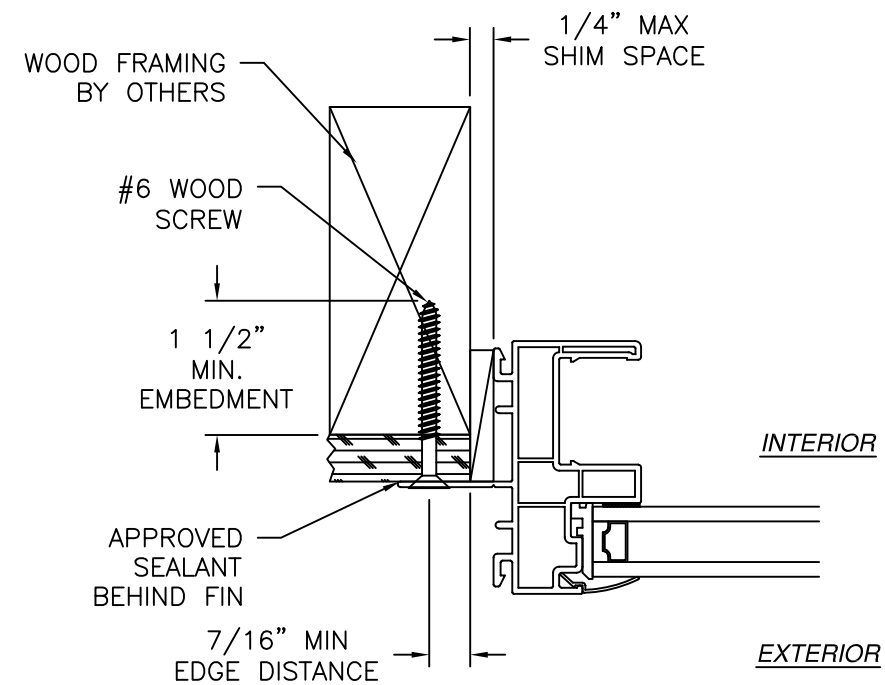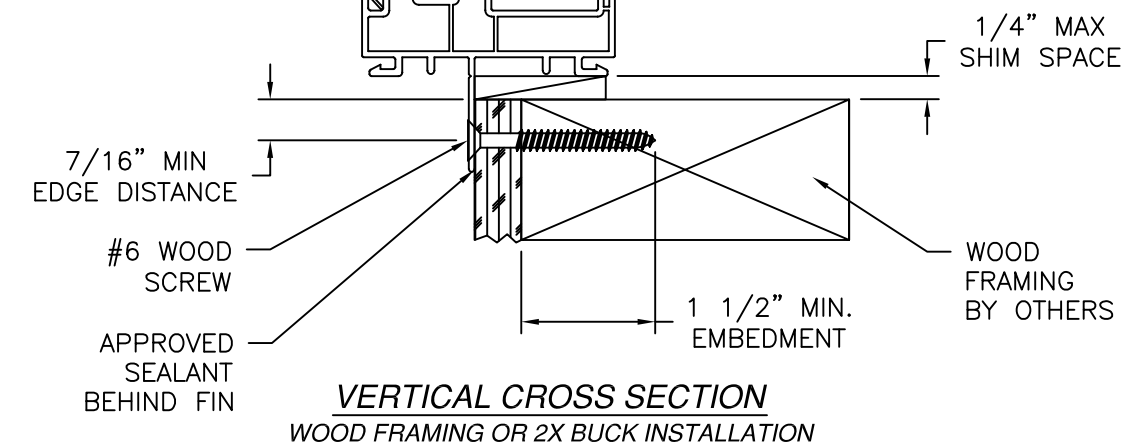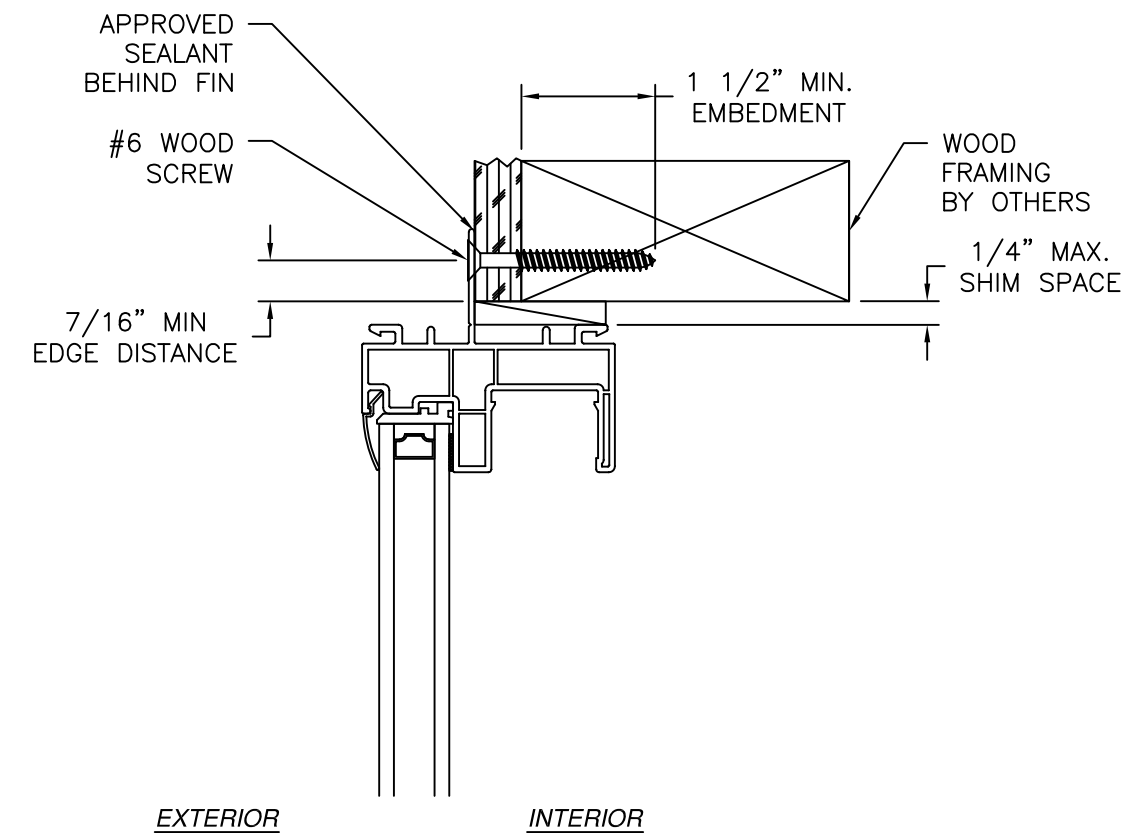

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

ALL AMERICAN WINDOW COMPANY, LLC


1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

**1970 FIXED WINDOW
NON-IMPACT
FIN INSTALLATION DETAILS**

DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 17 OF 23



L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/02/2026

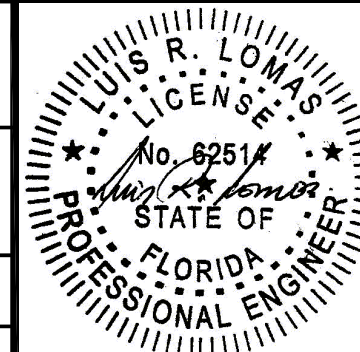


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

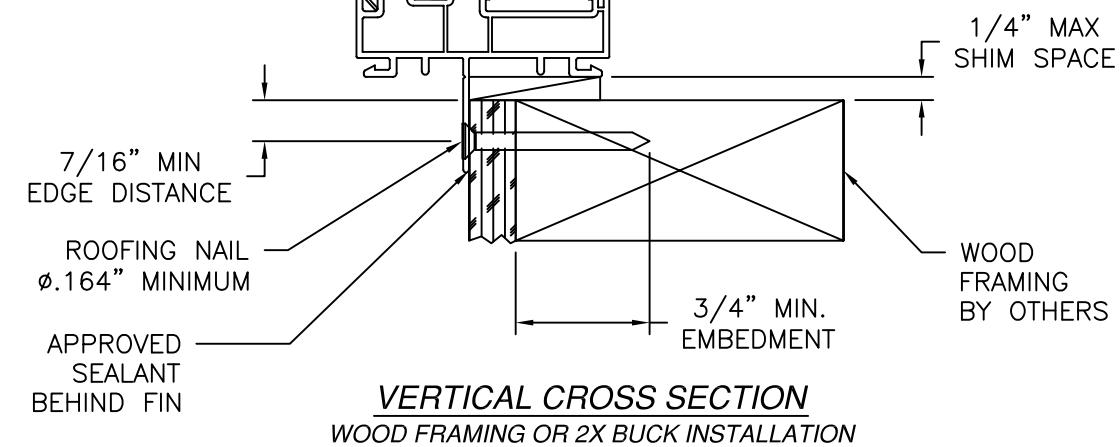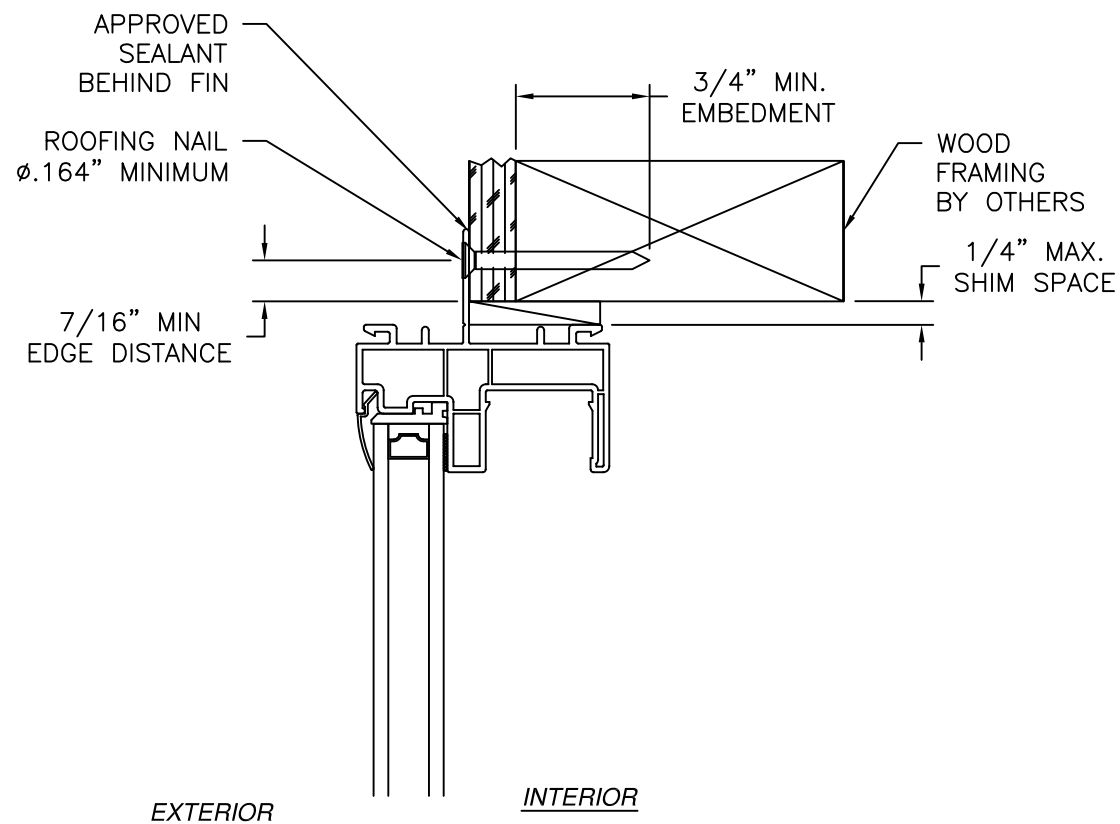

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

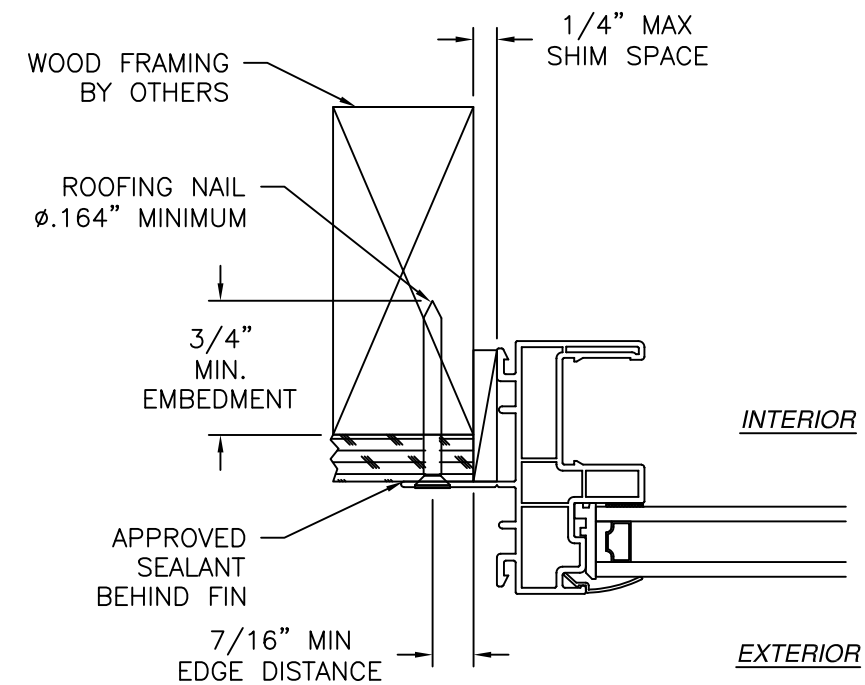

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/02/2026


ALL AMERICAN WINDOW COMPANY, LLC

1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

**1970 FIXED WINDOW
NON-IMPACT
FIN INSTALLATION DETAILS**




DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 18 OF 23

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

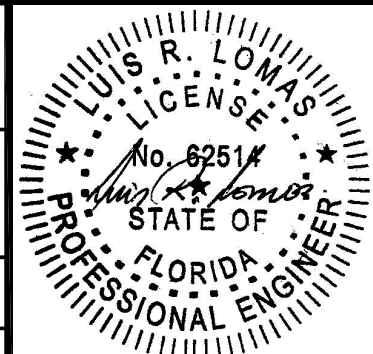

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

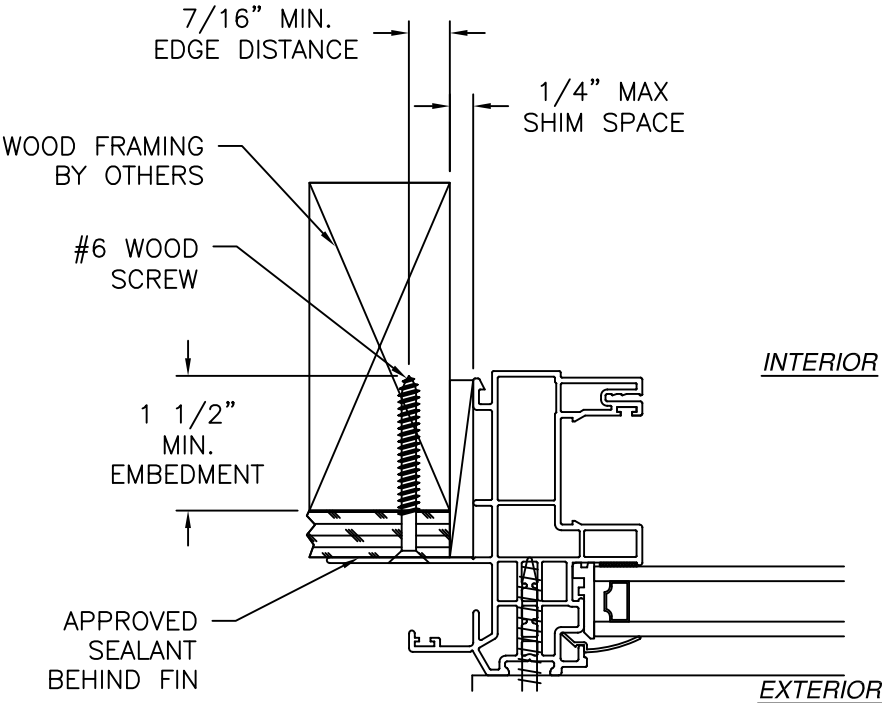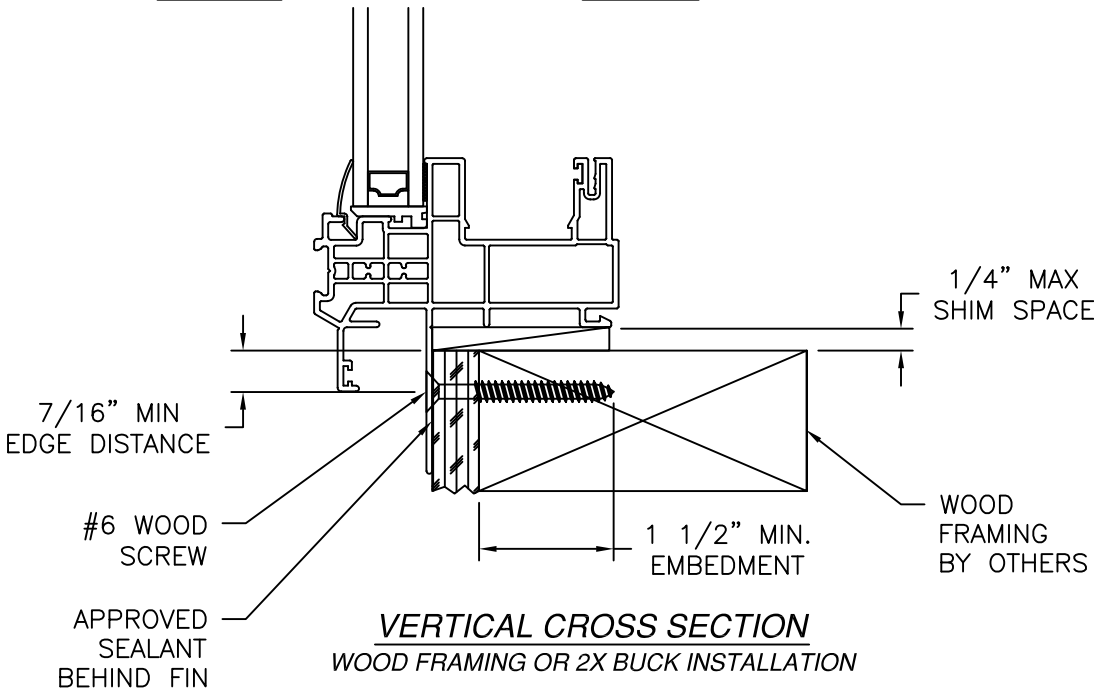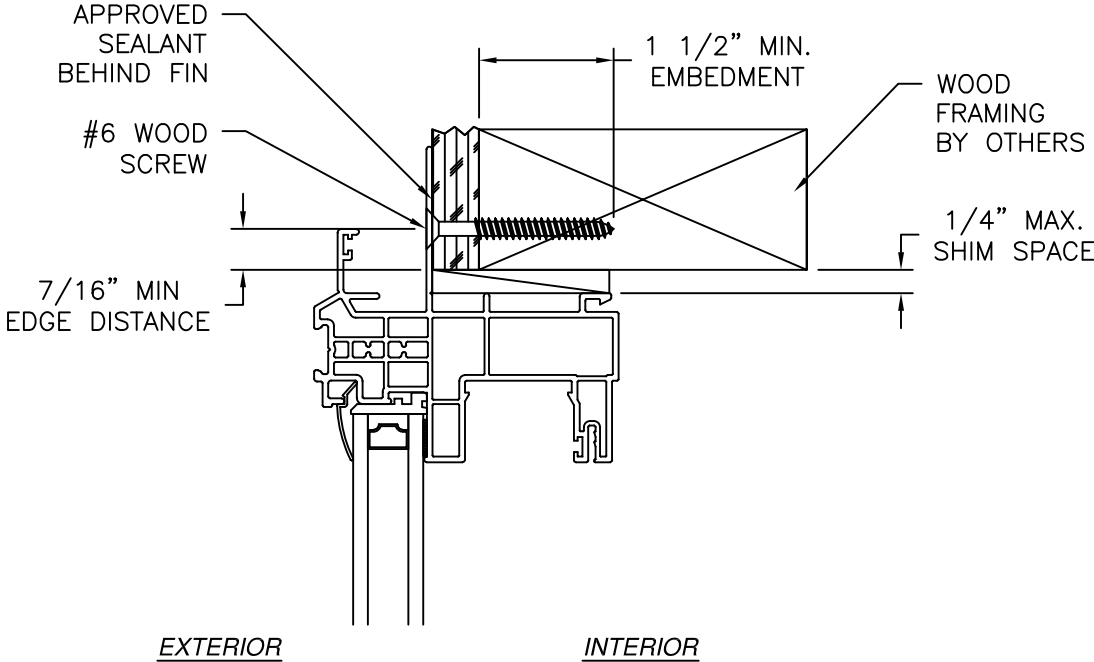

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/02/2026

ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
FIN INSTALLATION DETAILS W/STORM JAMB


DRAWN:
A.R.

DWG NO.
08-03179B

REV
B




SCALE NTS
DATE 10/04/2017
SHEET 19 OF 23

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

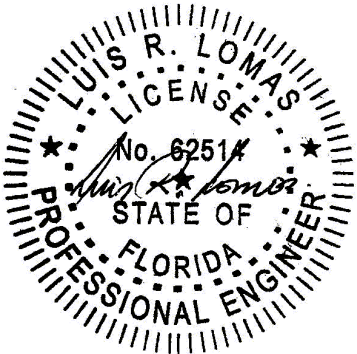

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

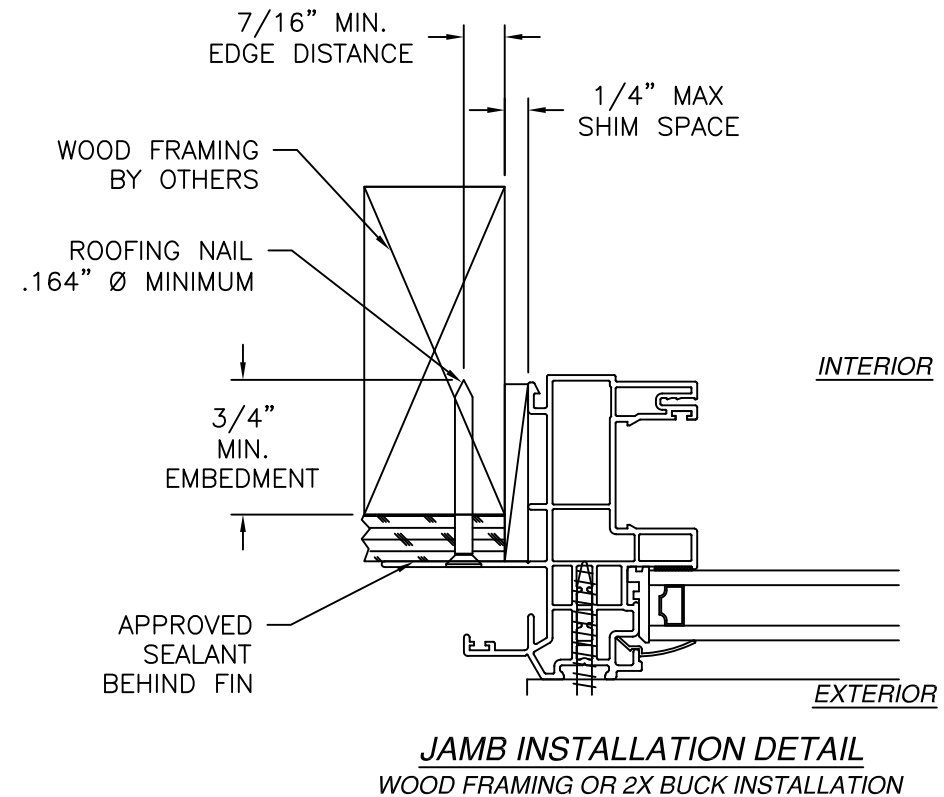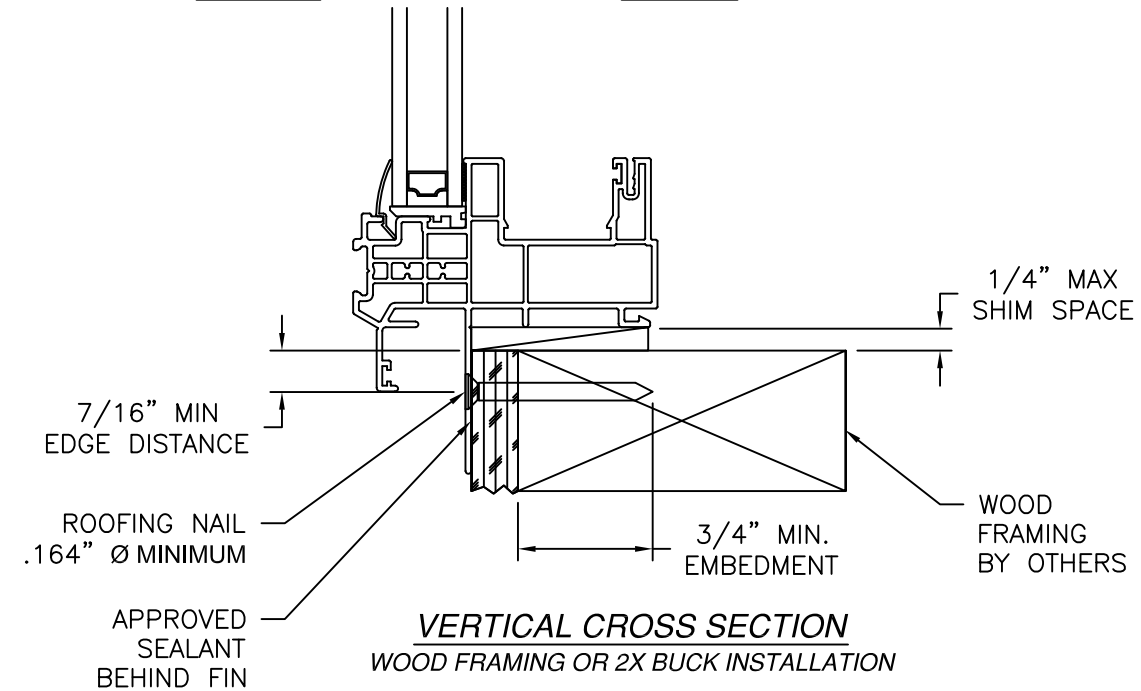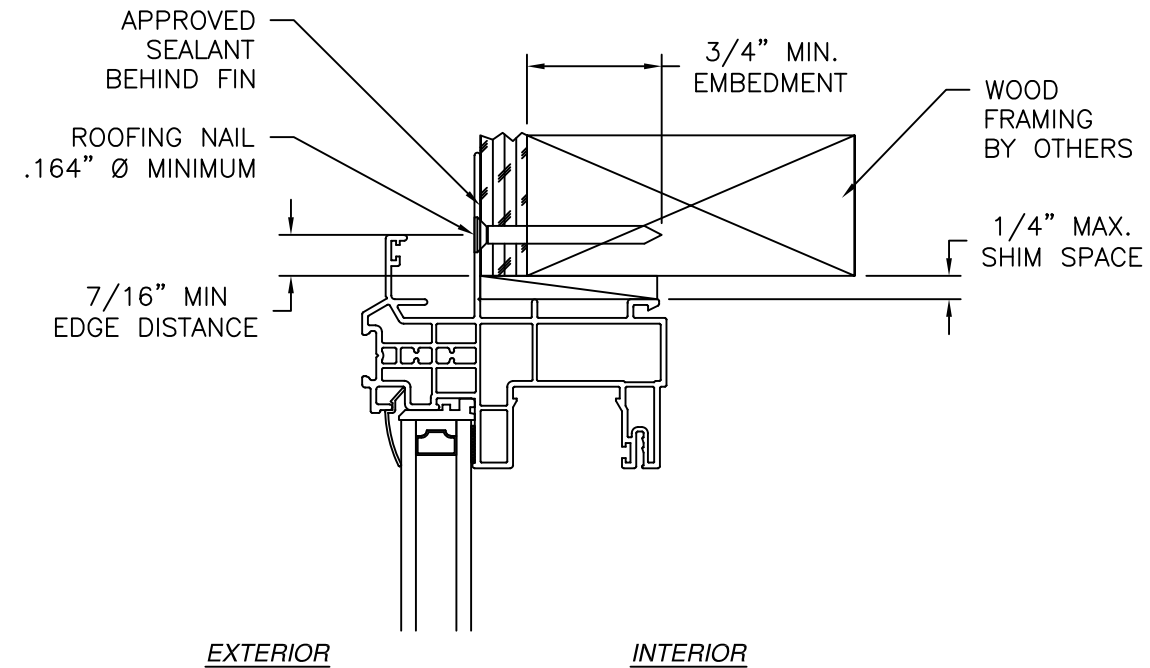

NOTES:

- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/02/2026


ALL AMERICAN WINDOW COMPANY, LLC

1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
FIN INSTALLATION DETAILS W/STORM JAMB




DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 20 OF 23

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

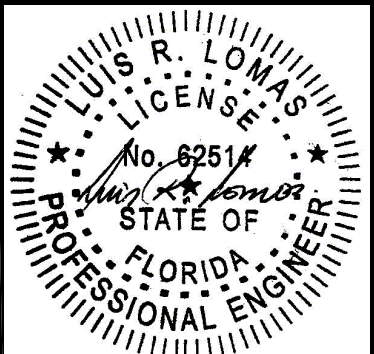

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

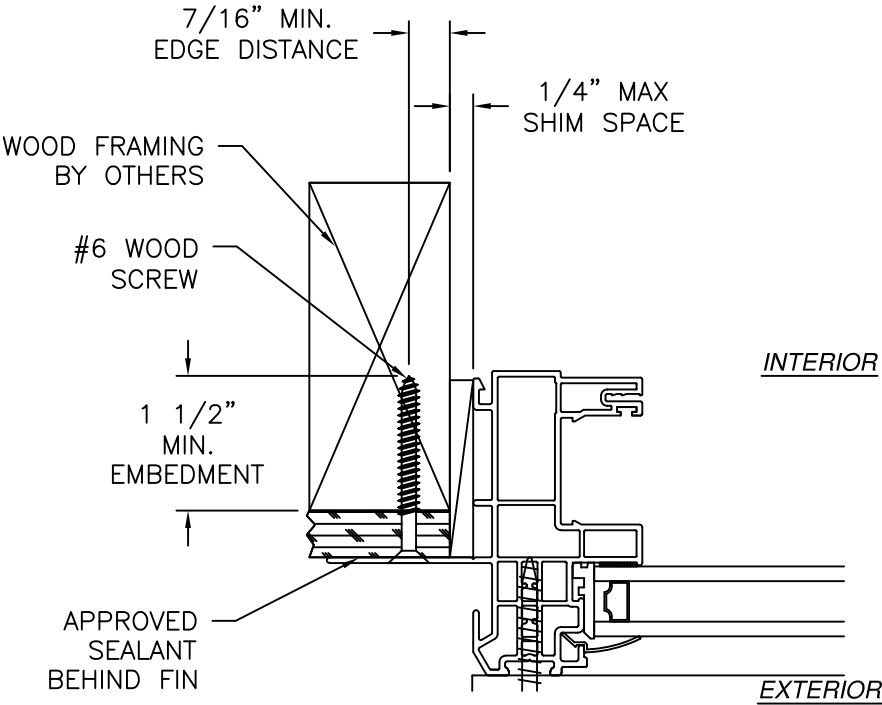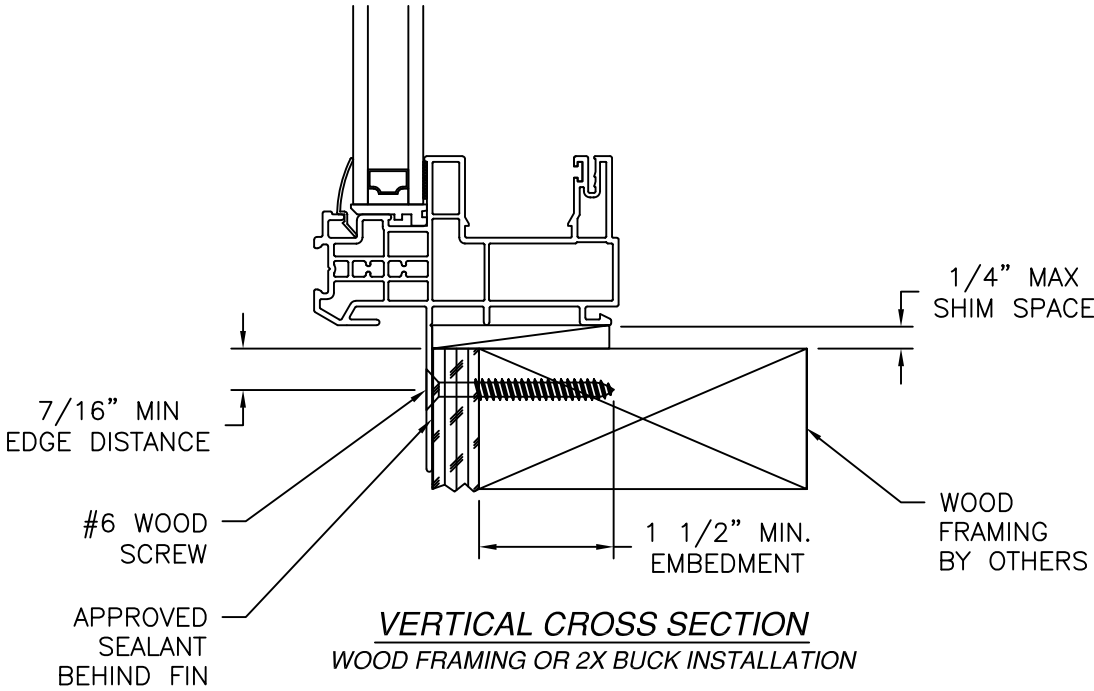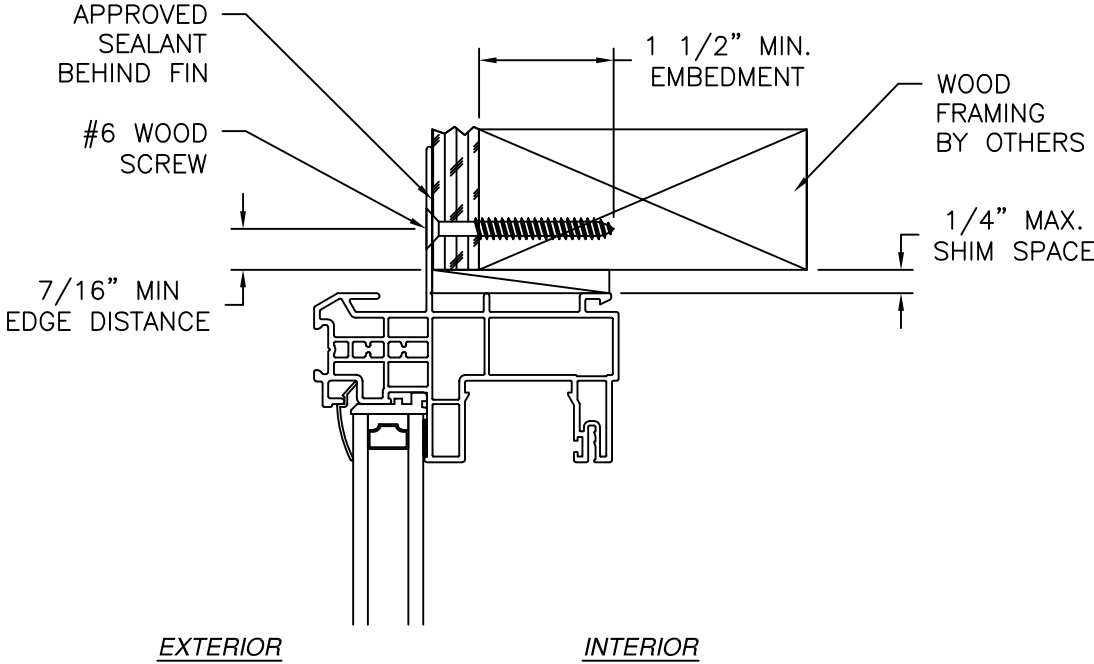

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/02/2026

ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
FIN INSTALLATION DETAILS W/STORM JAMB

DRAWN:
A.R.

DWG NO.
08-03179B


REV
B

SCALE NTS

DATE 10/04/2017




SHEET 21 OF 23

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

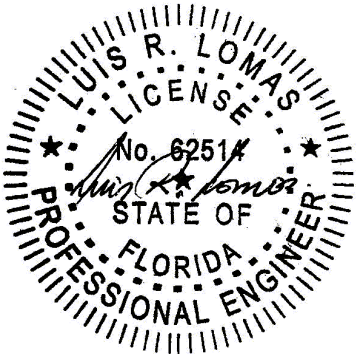

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

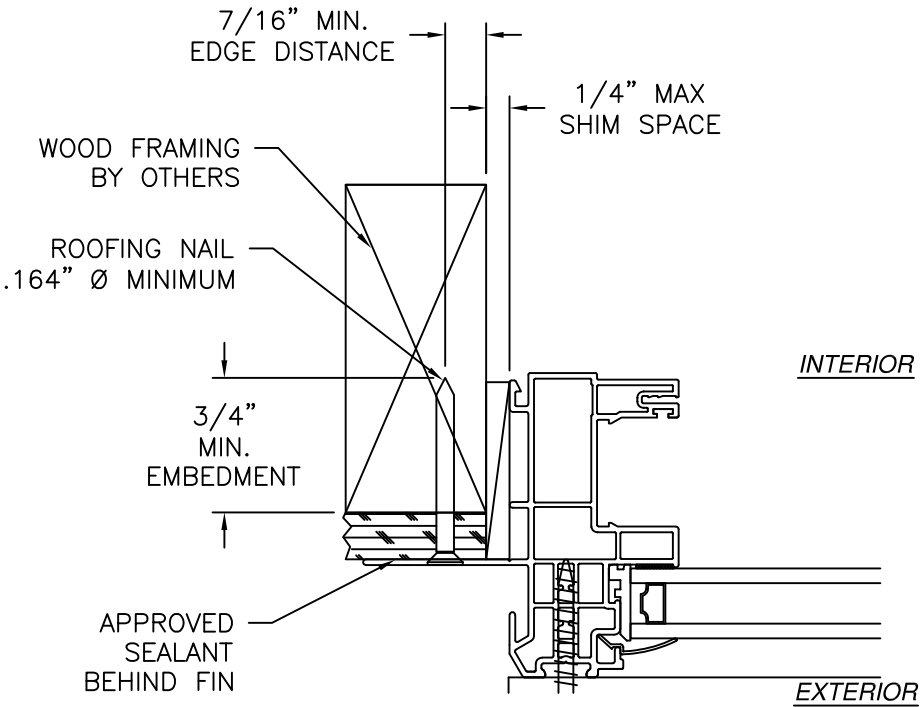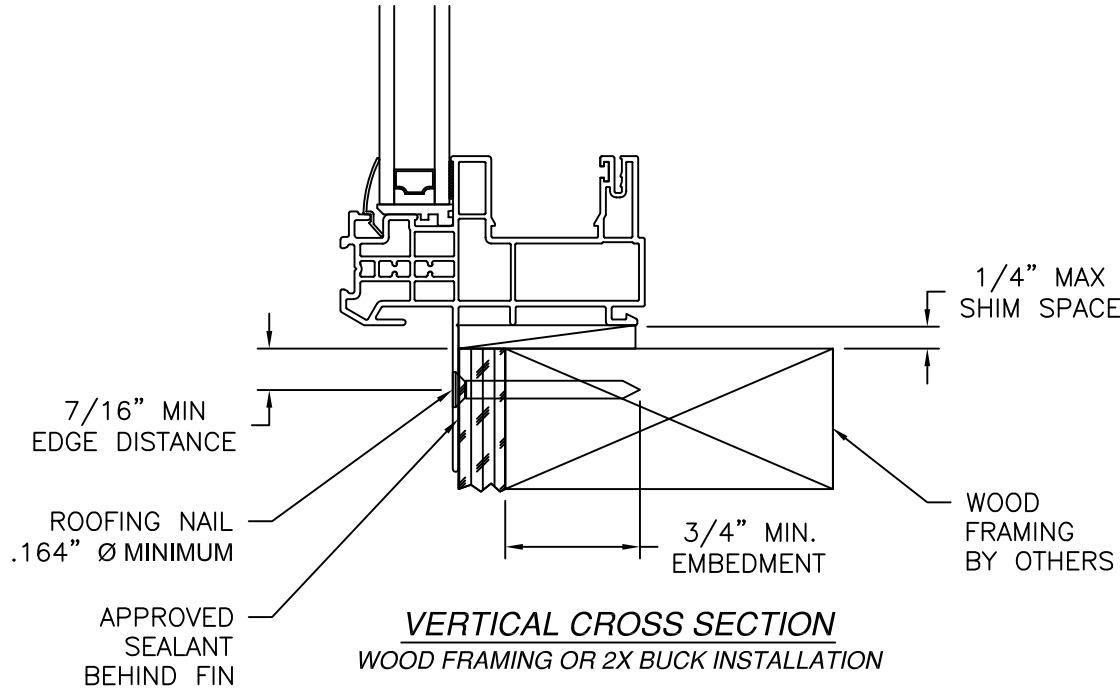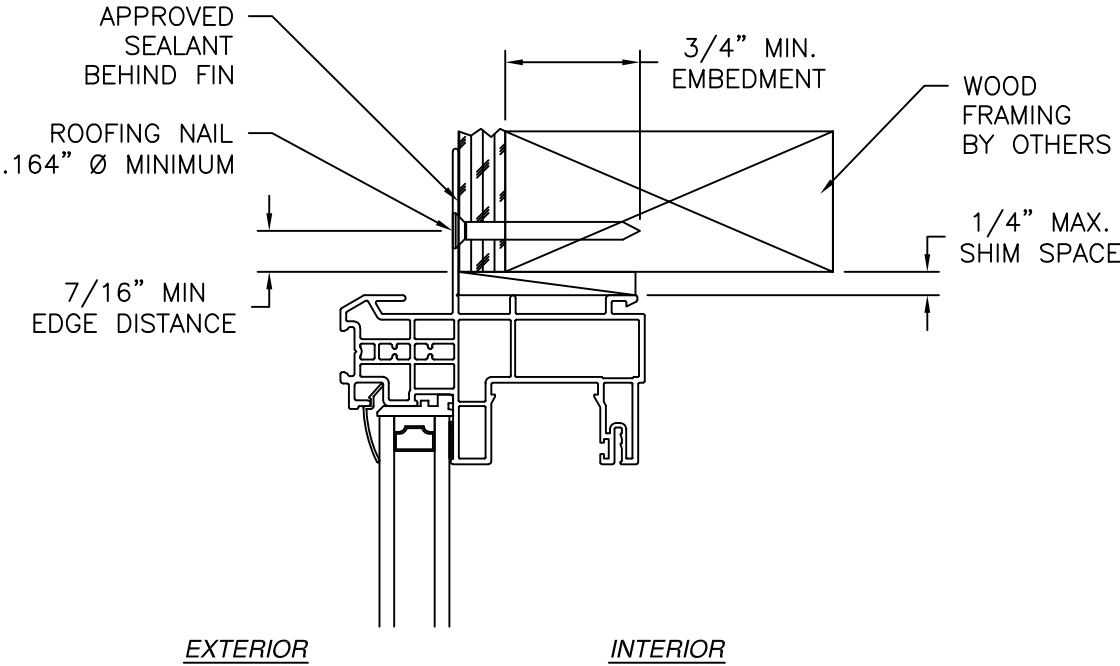


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 09/02/2026

ALL AMERICAN WINDOW COMPANY, LLC		
1930 HANAHAN RD. SUITE 1400A NORTH CHARLESTON, SC 29406		
1970 FIXED WINDOW NON-IMPACT FIN INSTALLATION DETAILS W/STORM JAMB		
DRAWN: A.R.	DWG NO. 08-03179B	REV B
SCALE NTS	DATE 10/04/2017	SHEET 22 OF 23
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

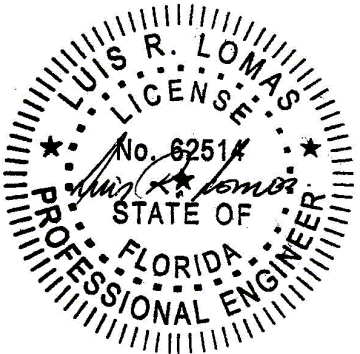


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED TO ADD STORM JAMB	03/03/22	R.L.
B	REVISED MANUFACTURER ADDRESS	09/02/26	R.L.

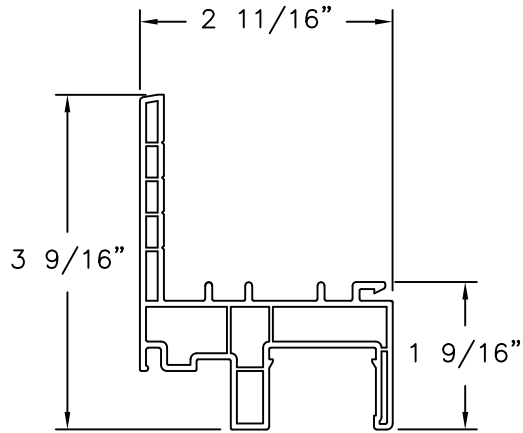


MAIN FRAME WITH FLANGE

PVC (610114)

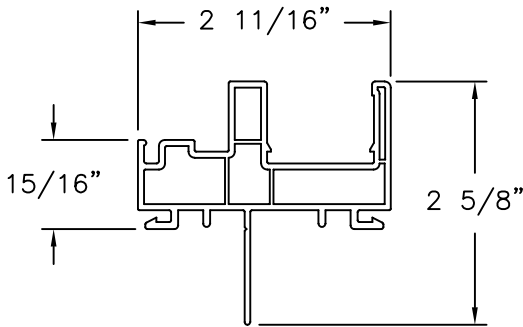


**MAIN FRAME
FIN INSTALLATION**

PVC (606004)

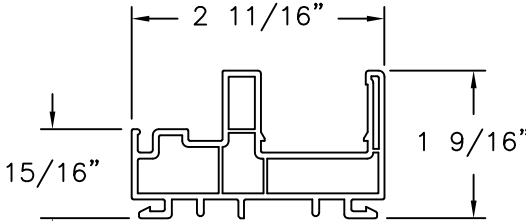


MAIN FRAME

PVC (610114)

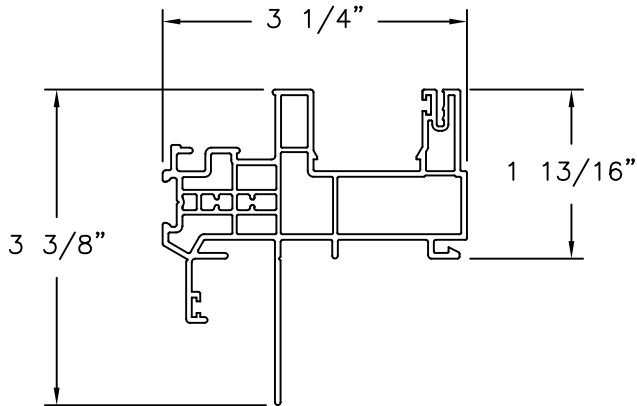


**STORM JAMB
FIN INSTALLATION**

PVC (CL-2930)

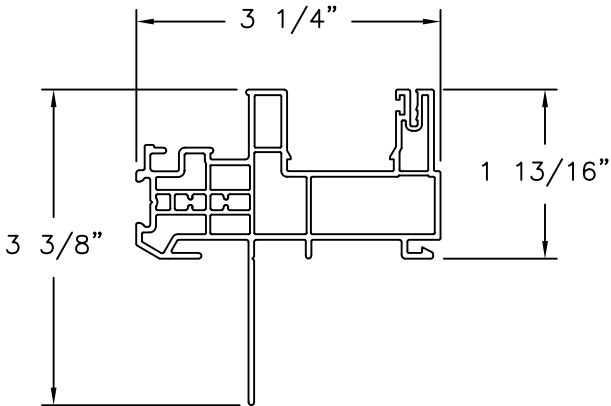


**STORM JAMB WITHOUT J-CHANNEL
FIN INSTALLATION**

PVC (CL-2930)

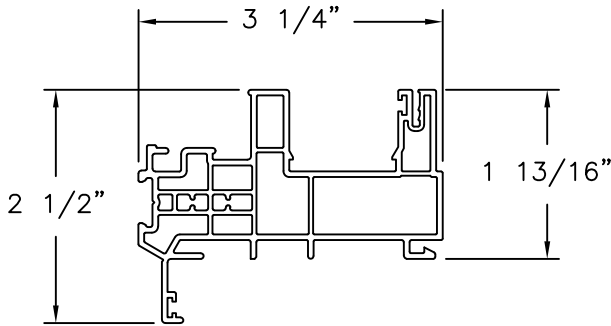

STORM JAMB

PVC (CL-2930)

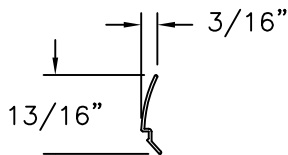

GLAZING BEAD

PVC (245504)

ALL AMERICAN WINDOW COMPANY, LLC
1930 HANAHAN RD. SUITE 1400A
NORTH CHARLESTON, SC 29406

1970 FIXED WINDOW
NON-IMPACT
COMPONENTS

DRAWN:
A.R.

DWG NO.
08-03179B

REV
B


SCALE
NTS

DATE
10/04/2017

SHEET
23 OF 23

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/02/2026

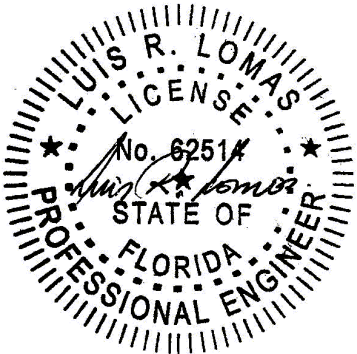

Luis R. Lomas P.E.
FL No.: 62514