



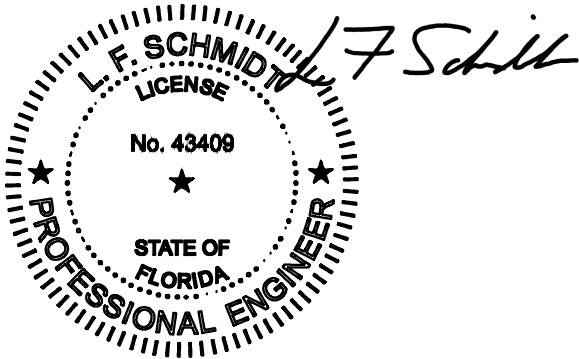

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

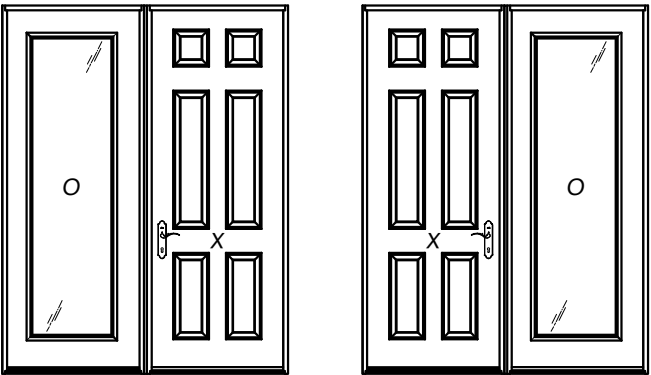

OPAQUE FIBERGLASS SINGLE DOOR

w/ SIDELITE(S)

INSWING/OUTSWING


"IMPACT"

GENERAL NOTES

1. This product evaluation drawing has been developed in compliance with the 8th Edition (2023) Florida Building Code (FBC) including the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in the "HVHZ" this product complies with Section 1626 of the FBC and does not require an impact resistant covering.
4. When used in areas outside of the "HVHZ" requiring wind borne debris protection this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
5. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
6. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
7. Outswing configurations using coastal sill item #21 under active doors, and all sills used under sidelites meet water infiltration requirements for the "HVHZ".
8. Inswing configurations and outswing configurations (other than sill item #21) under active doors do not meet the water infiltration requirements for the "HVHZ" and shall be installed only in non-habitable areas or at habitable locations protected by an overhang or canopy such that the angle between the edge of canopy or overhang to sill is less than 45 degrees.

TABLE OF CONTENTS

SHEET #	DESCRIPTION	SHEET #	
1	Typical Elevations, Design Pressures & General Notes	8	Vertical Cross Sections (Thresholds)
2	Door Panel Details	9	Buck Anchoring
3	Sidelite Panel Details	10	Frame Anchoring
4	Elevations	11	Components
5	Horizontal & Vertical Cross Sections (2X Buck)	12	Bill of Materials
6	Horizontal & Vertical Cross Sections (1X Buck)		
7	Horizontal & Vertical Cross Sections (Direct to Masonry)		

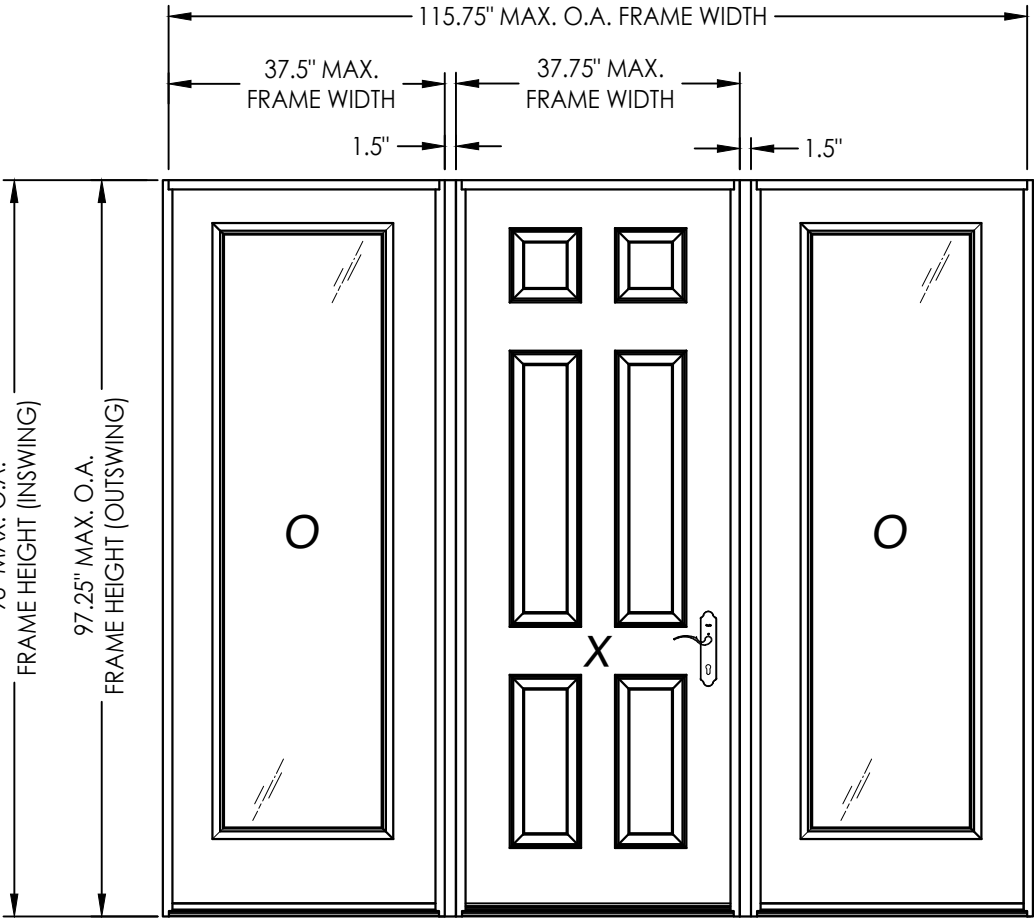

CONFIGURATION	DESIGN PRESSURE (PSF) INSWING		DESIGN PRESSURE (PSF) OUTSWING	
	POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
OX, XO, OXO	+50.0	-55.0	+55.0	-55.0

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

NO.	DATE	REVISIONS	
2	7/24/23	UPDATE TO 8TH ED. (2023)	FBC
1	7/23/20	UPDATE TO 7TH ED (2020)	FBC


DATE: 4/21/20
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.:
FL-23957.8
SHEET 1 OF 12

Z:\2023 FBC Drawings\Therma-Tru\FL-23957 R3\FL-23957.7-9.dwg


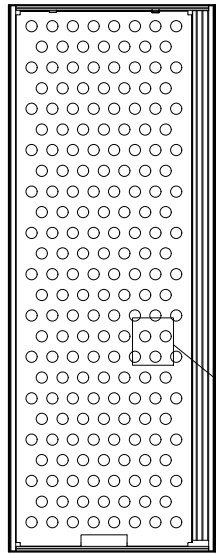


DOOR PANEL SECTION
PANEL REINFORCEMENT
(0.023" Thick Steel)


STEEL REINFORCEMENT
28.86% OPEN
AREA MAX.

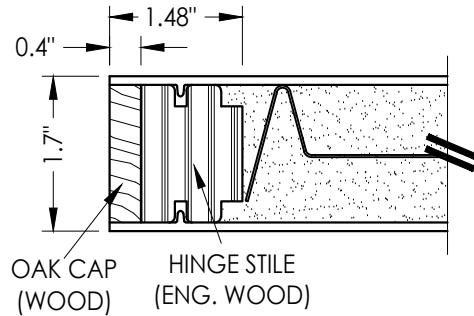


1
2 **HORIZONTAL CROSS SECTION**

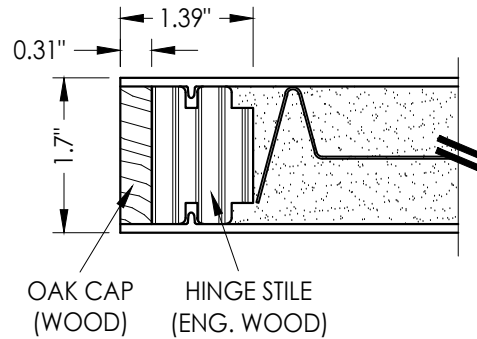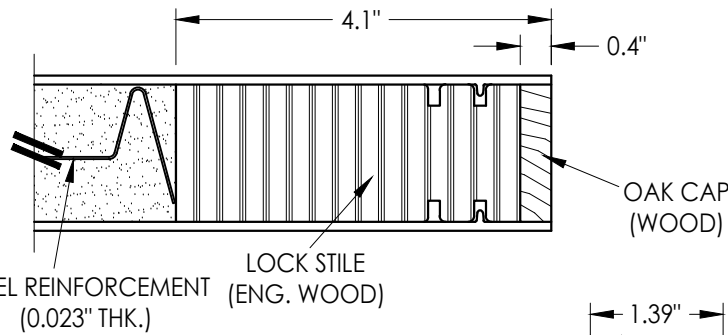


2
2 **HORIZONTAL CROSS SECTION**

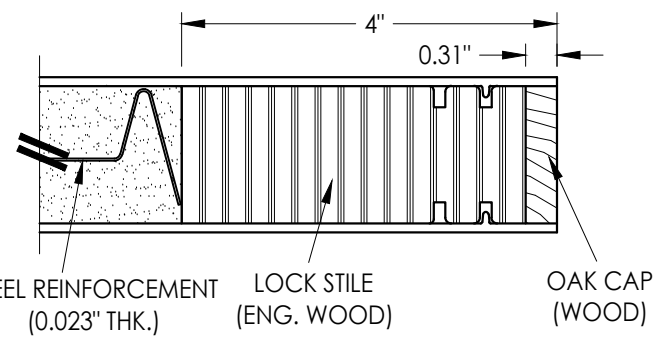


* #8 X 2.5" PFH WS (TYP. @ EACH DOOR CORNER)

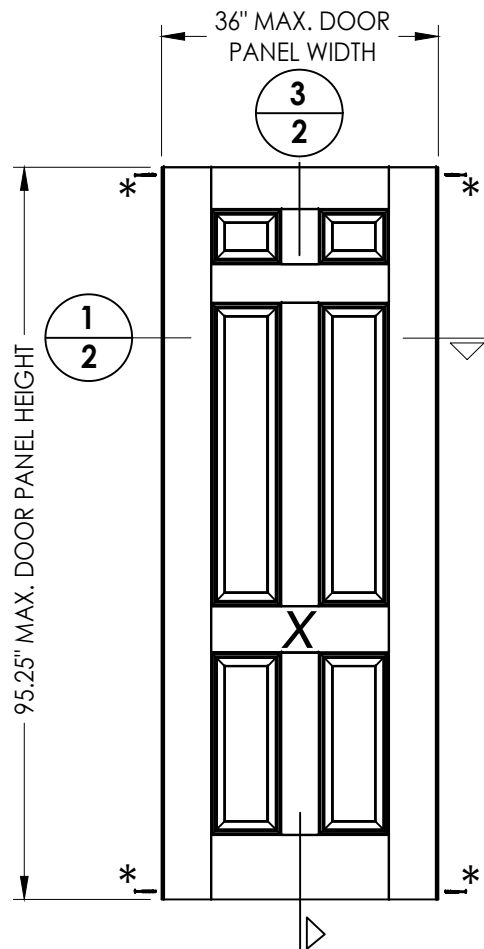


40 **DOOR PANEL**
BOOK

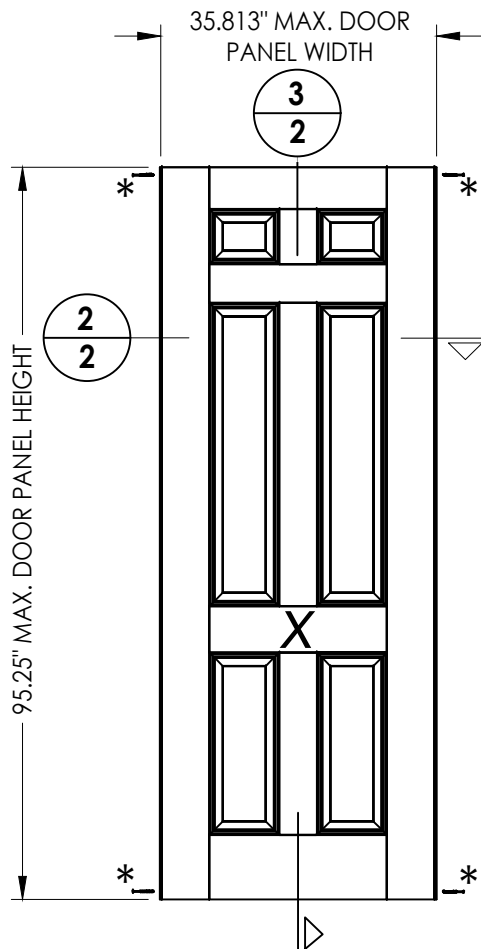


41 **DOOR PANEL**
Hybrid Door

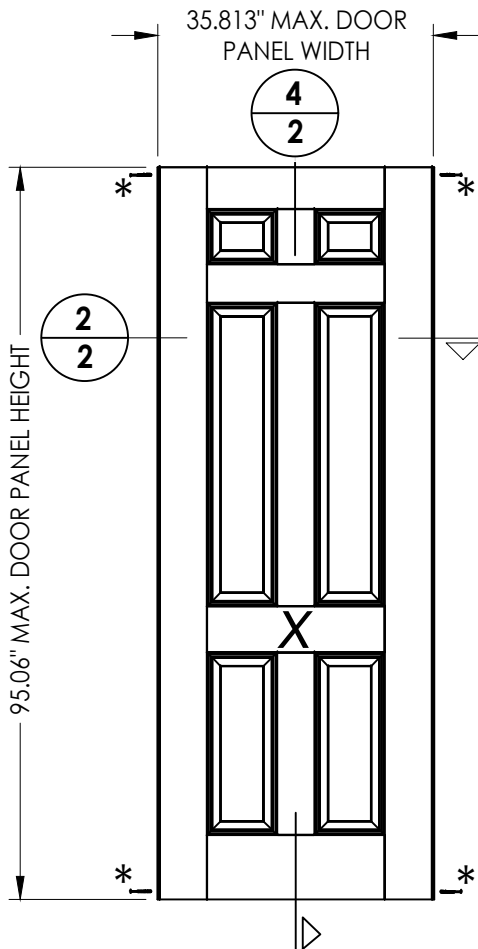

42 **DOOR PANEL**
U1 Door

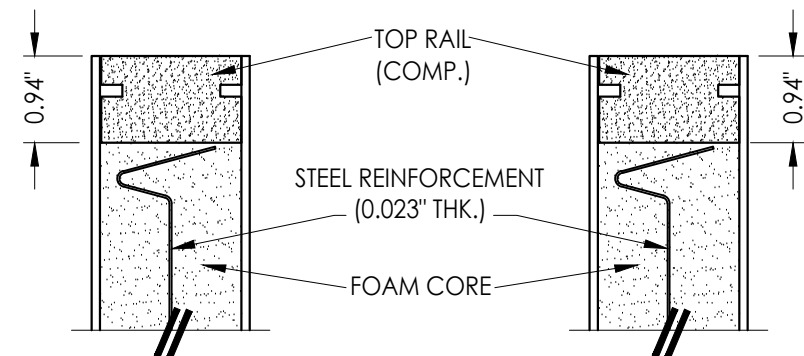

3
2 **VERTICAL CROSS SECTION**

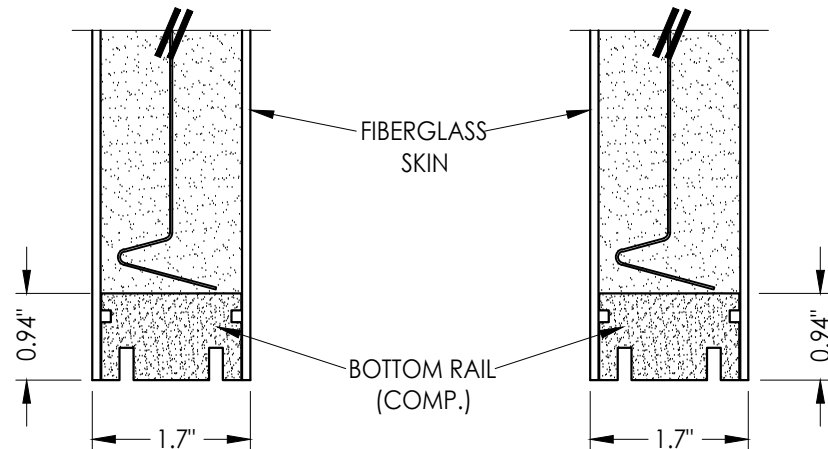

4
2 **VERTICAL CROSS SECTION**

"Classic-Craft" SERIES DOOR PANEL

FIBERGLASS DOOR SKIN: 0.125" MIN. THK.

FOAM CORE: POLYURETHANE FOAM (1.9 PCF MIN.)

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.

P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
DOOR PANEL DETAILS

NO.	DATE	REVISIONS		
		BY	LFS	FBC
2	7/24/23	UPDATE TO 8TH ED. (2023)	FBC	LFS
1	7/23/20	UPDATE TO 7TH ED (2020)	FBC	LFS

DATE: 4/21/20

SCALE: N.T.S.












DWG. BY: RW

CHK. BY: LFS

DRAWING NO.:

FL-23957.8

SHEET 2 OF 12

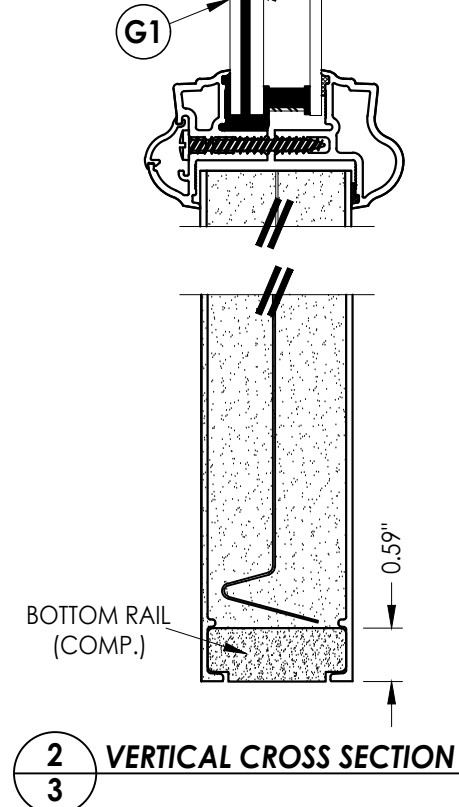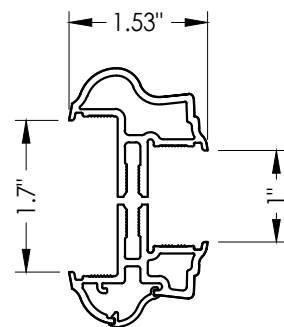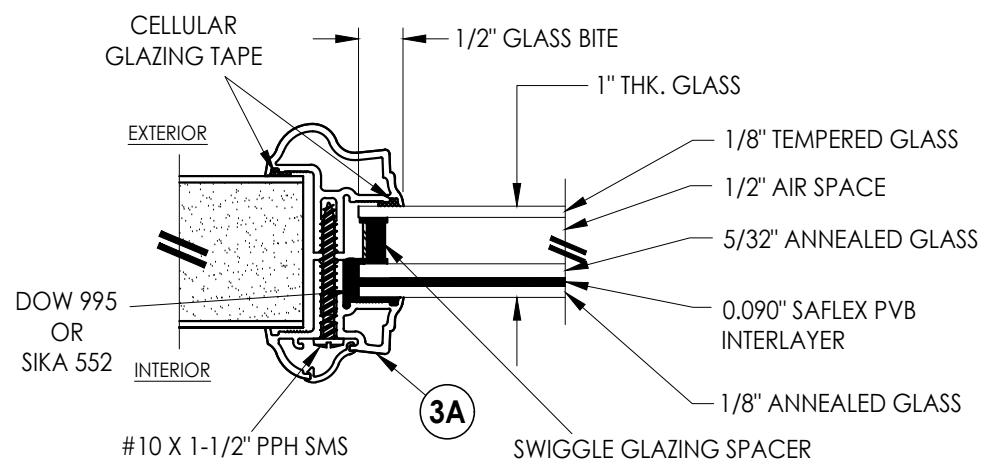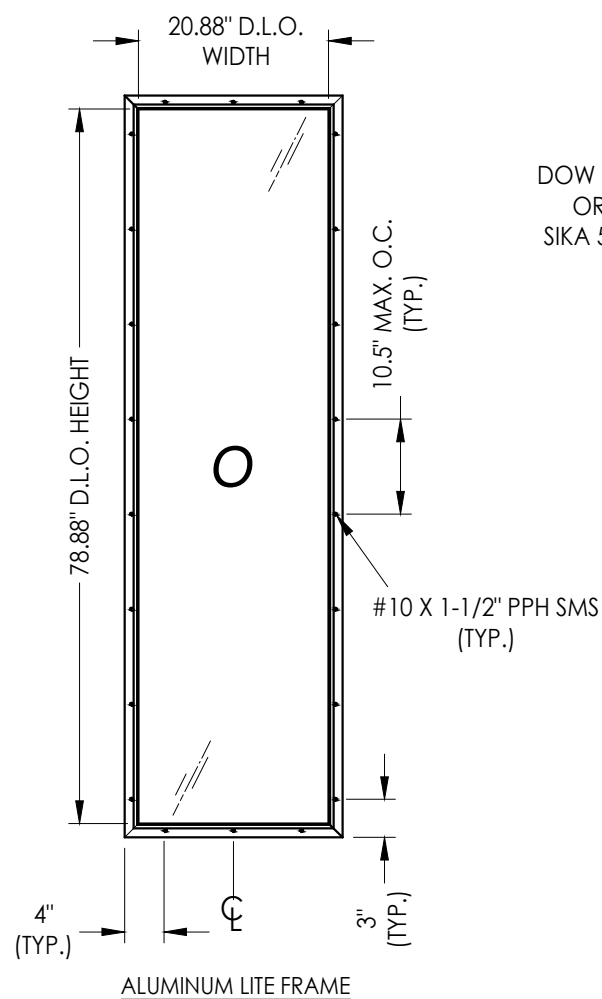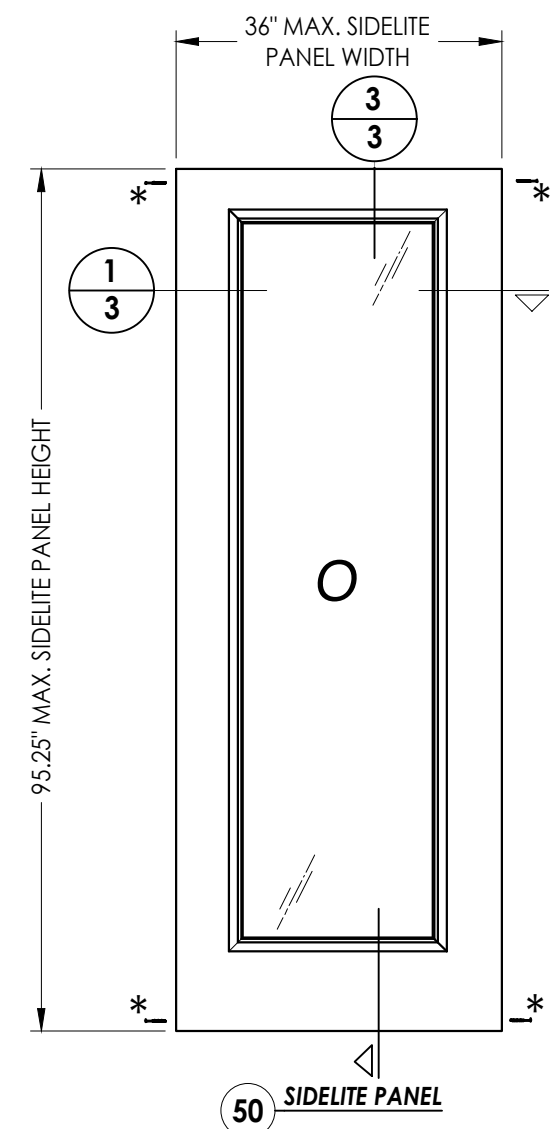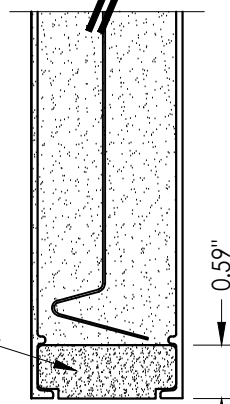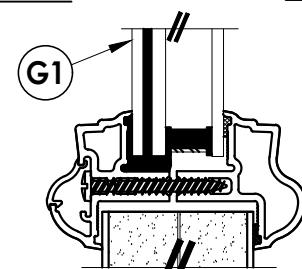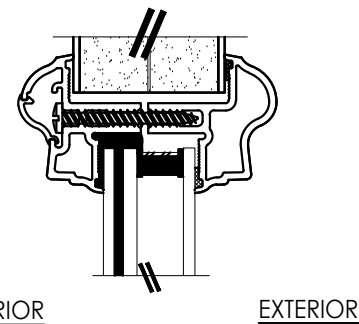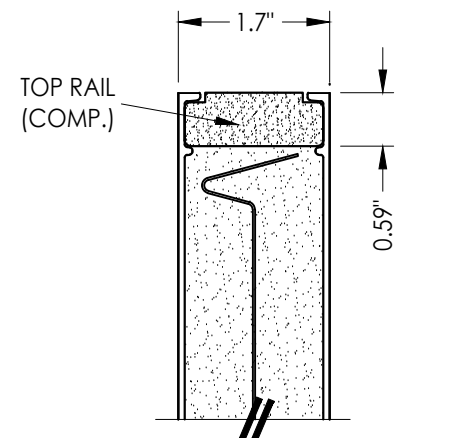
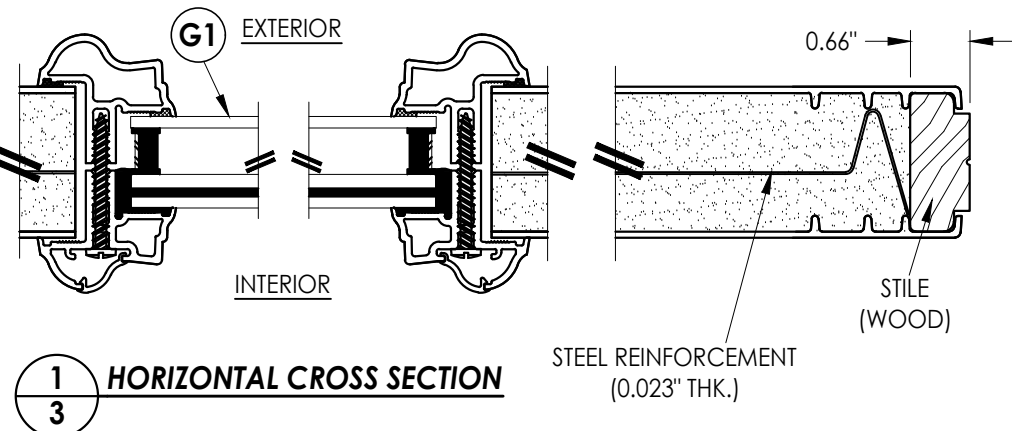
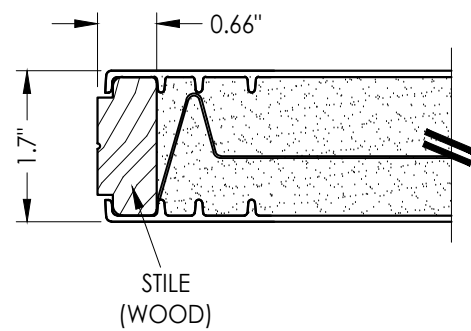


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

[illegible]

Z:\2023 FBC Drawings\Therma-Tru\FL-23957 R3\FL-23957.7-9.dwg

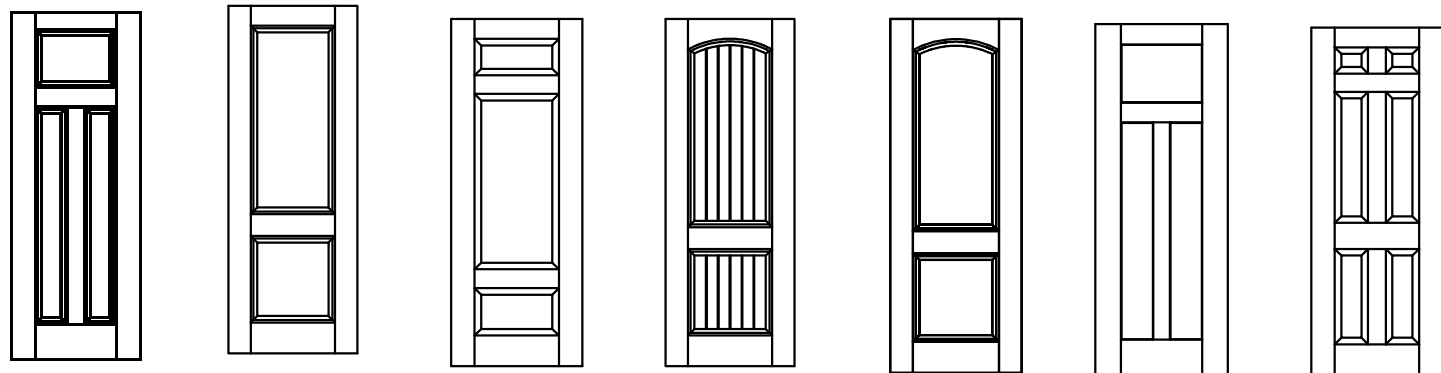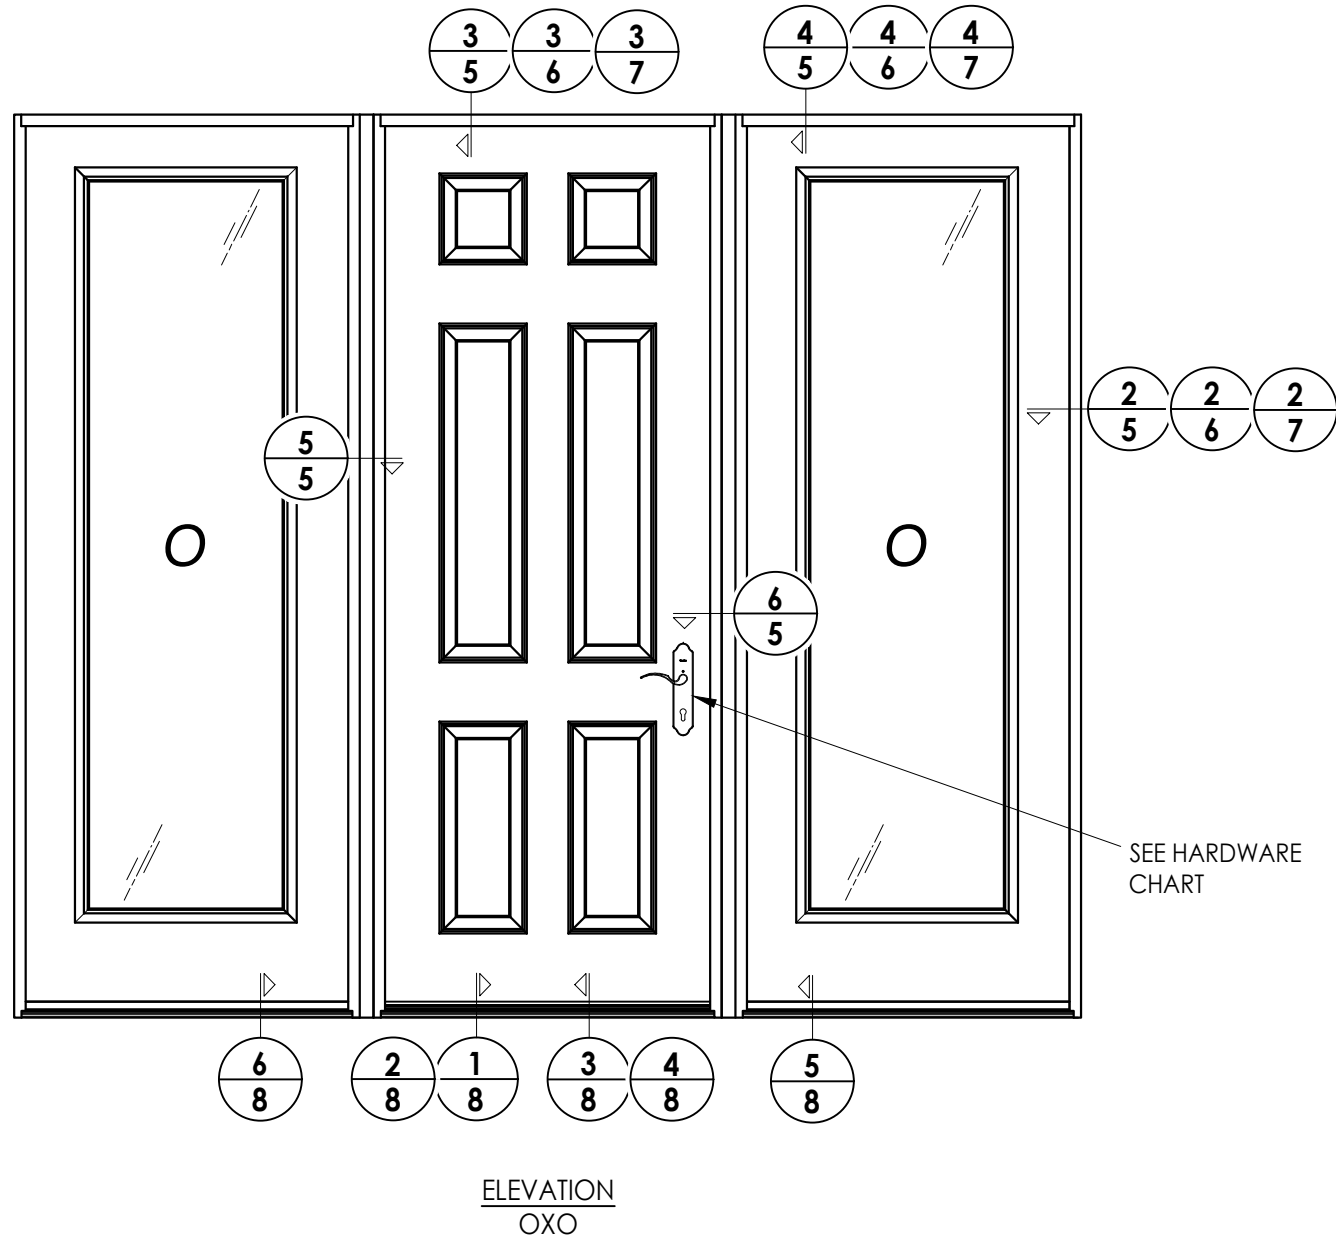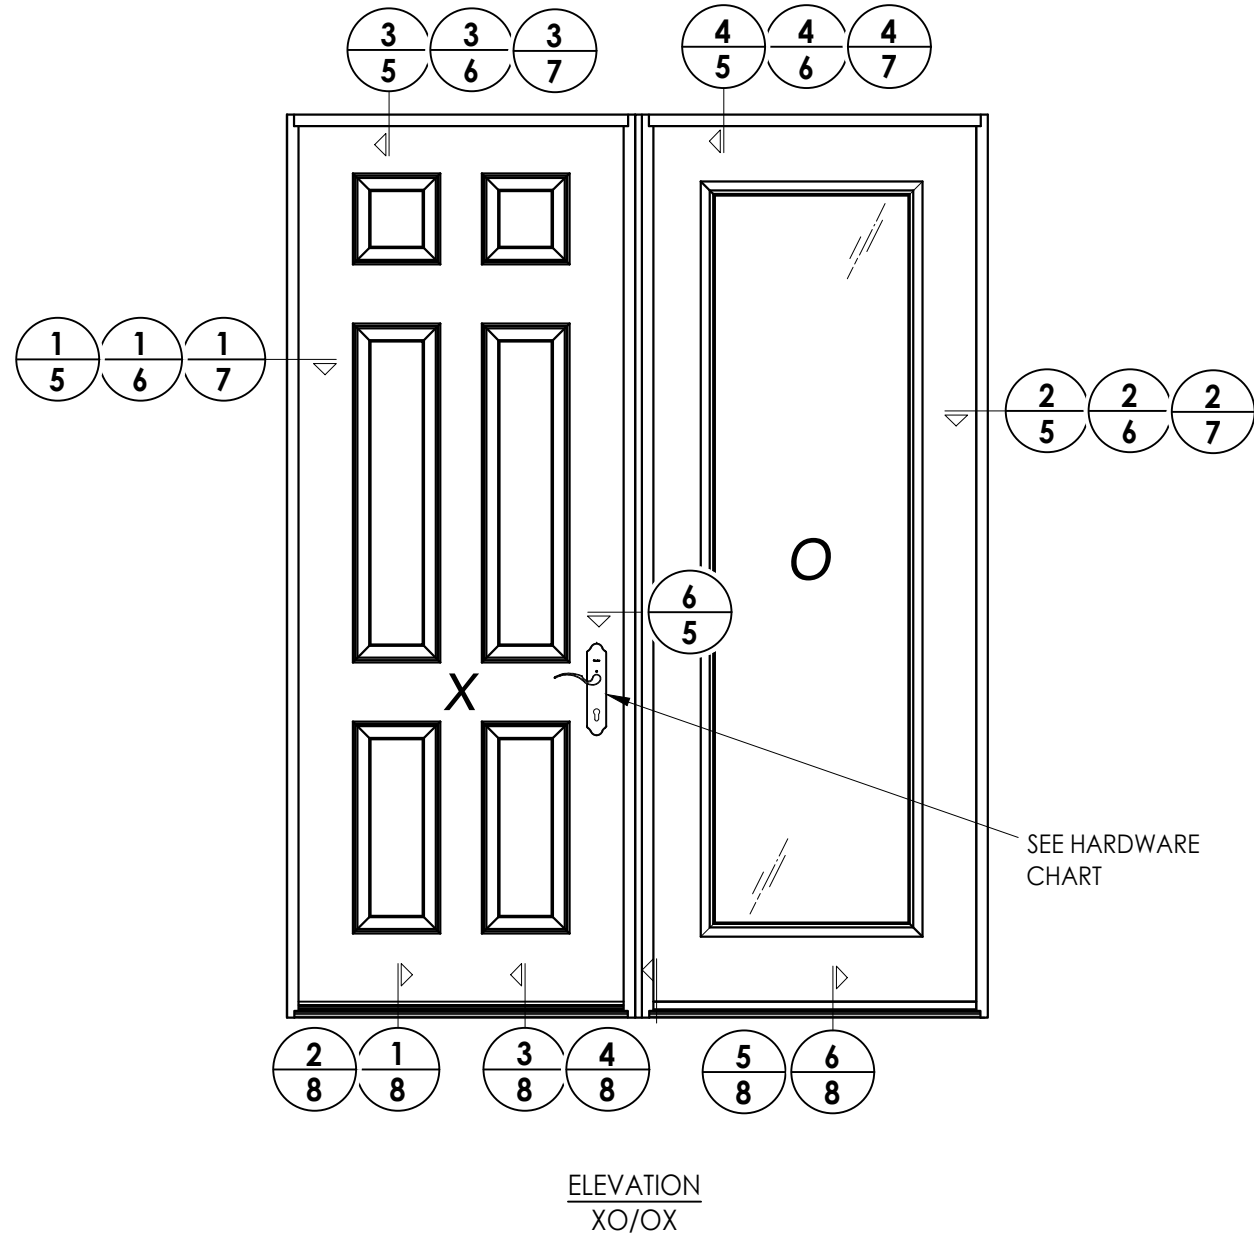

Classic-Craft Door Panel Options
Panel options shown are for illustration and are representative only
(similar opaque panel configurations are allowed)

HARDWARE TABLE	
MANUFACTURER	MODEL
HOPPE (THERMA-TRU)	MULTIPOINT : MPDGART (3 pt. Manual Tongue)


REVISIONS	
NO.	DATE
2	7/24/23
1	7/23/20

DATE: 4/21/20
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-23957.8
SHEET 4 OF 12


PRODUCT: THERMA-TRU
FIBERGLASS DOOR
PART OR ASSEMBLY:
ELEVATIONS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409
RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\Therma-Tru\FL-23957 R3\FL-23957.7-9.dwg

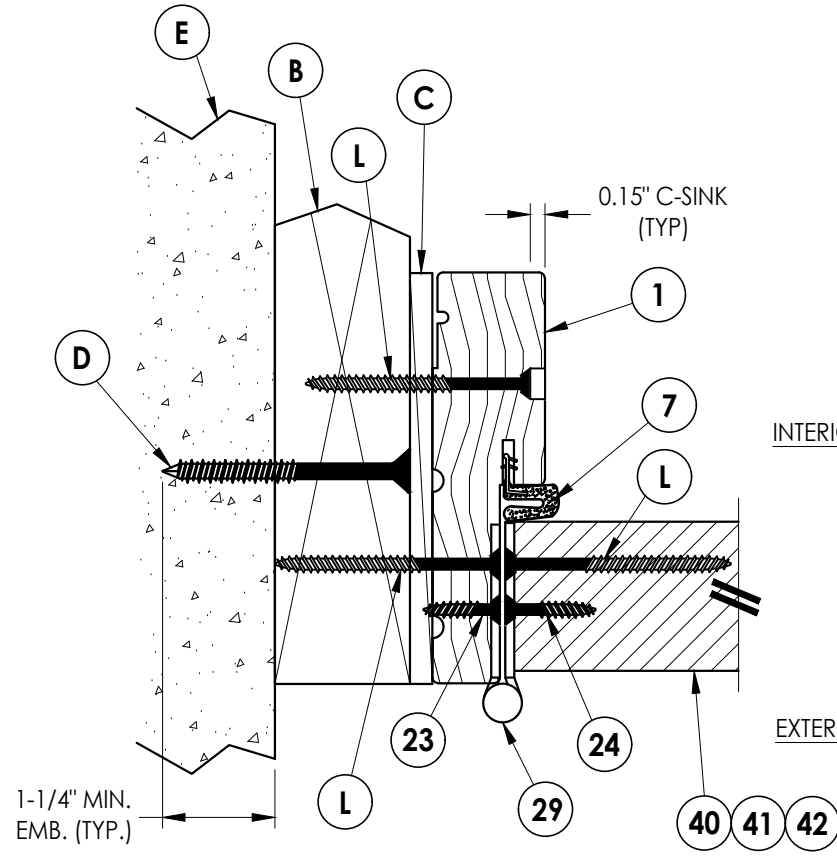


1 **HORIZONTAL CROSS SECTION**
5 Outswing shown (Inswing similar)

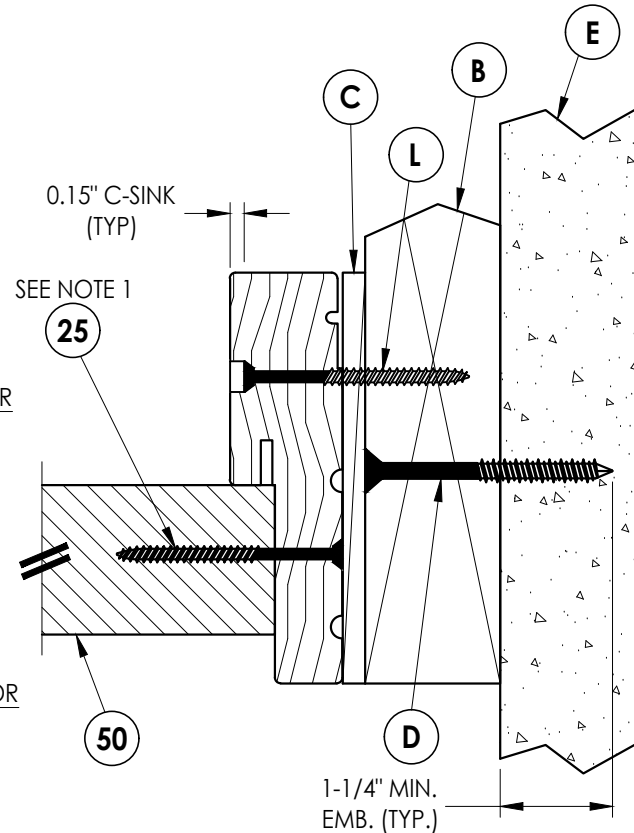


2 **HORIZONTAL CROSS SECTION**
5 Outswing shown (Inswing similar)

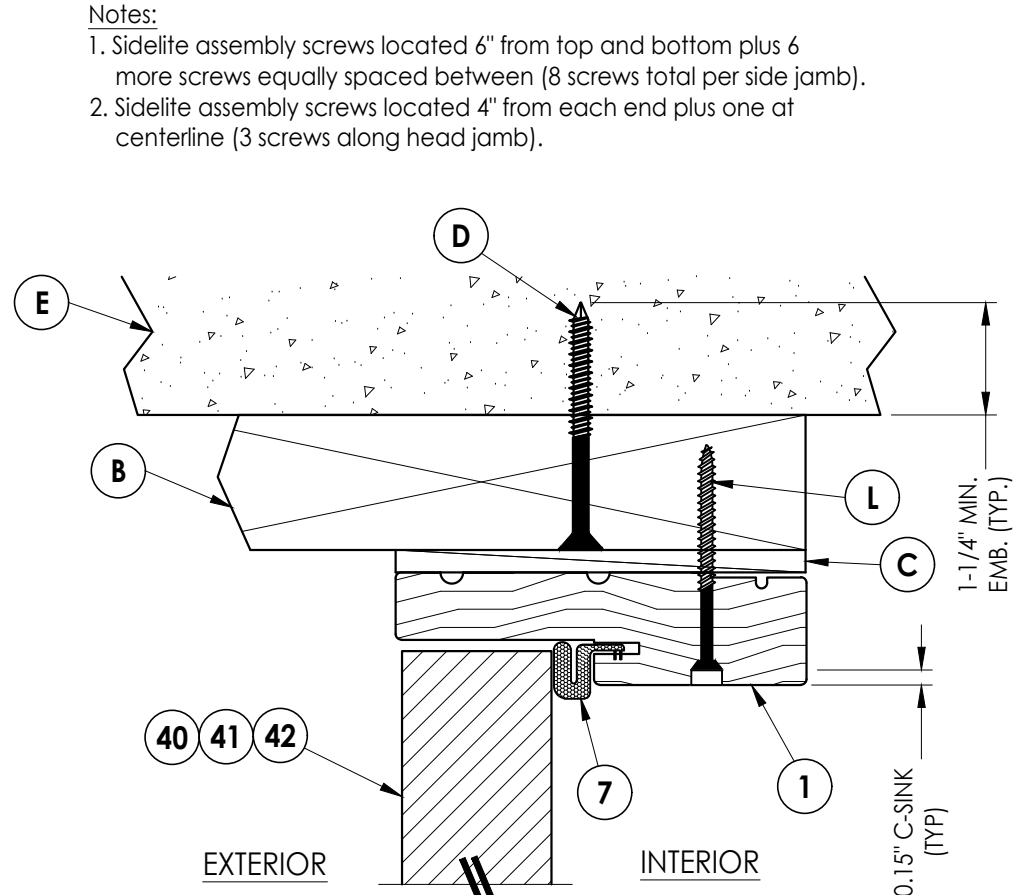


3 **VERTICAL CROSS SECTION**
5 Outswing shown (Inswing similar)

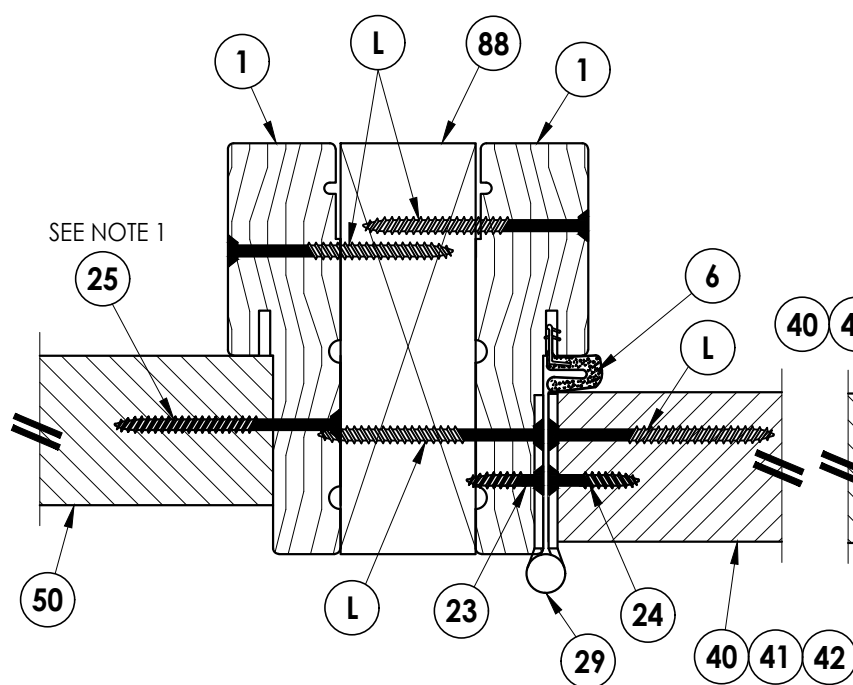

5 **HORIZONTAL CROSS SECTION**
5 Outswing shown (Inswing similar)

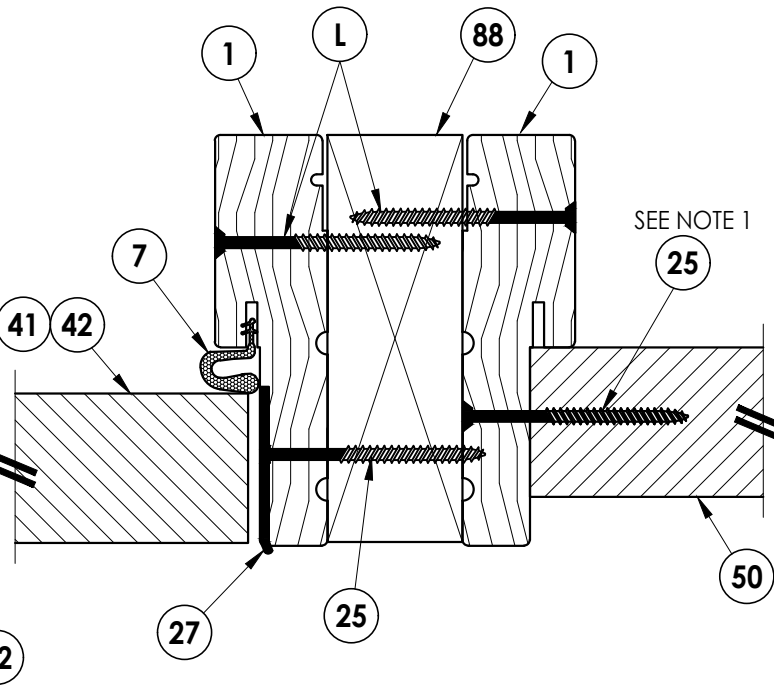

6 **HORIZONTAL CROSS SECTION**
5 Outswing shown (Inswing similar)

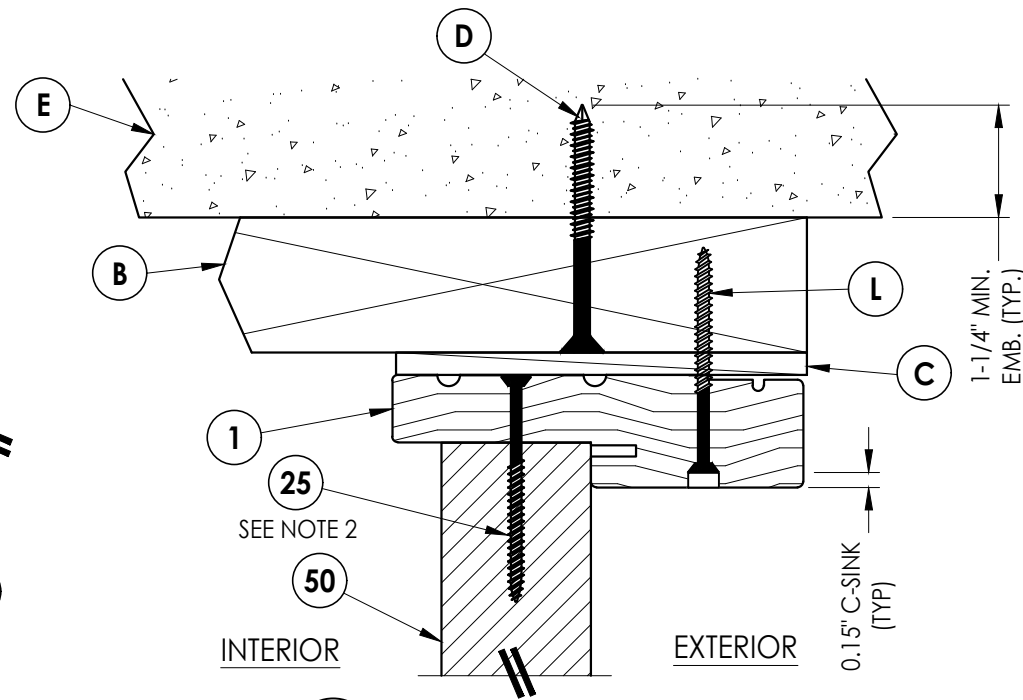

4 **VERTICAL CROSS SECTION**
5 Outswing shown (Inswing similar)

- Notes:
1. Sidelite assembly screws located 6" from top and bottom plus 6 more screws equally spaced between (8 screws total per side jamb).
 2. Sidelite assembly screws located 4" from each end plus one at centerline (3 screws along head jamb).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (2X BUCK)

NO.	DATE	REVISIONS
2	7/24/23	UPDATE TO 8TH ED. (2023) FBC
1	7/23/20	UPDATE TO 7TH ED (2020) FBC

DATE: 4/21/20

SCALE: N.T.S.





DWG. BY: RW

CHK. BY: LFS

DRAWING NO.: FL-23957.8

SHEET 5 OF 12

1. Sidelite assembly screws located 6" from top and bottom plus 6 more screws equally spaced between (8 screws total per side jamb).
2. Sidelite assembly screws located 4" from each end plus one at centerline (3 screws along head jamb).

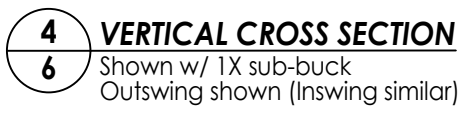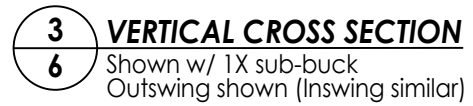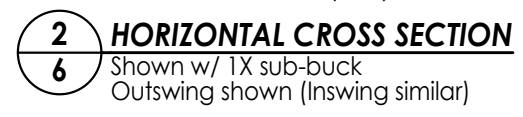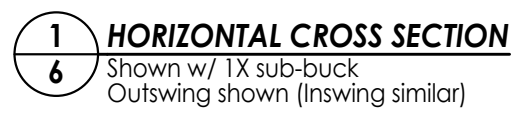

2	7/24/23	UPDATE TO 8TH ED. (2023)	FBC	LFS
1	7/23/20	UPDATE TO 7TH ED (2020)	FBC	LFS
NO.	DATE		BY	
				REVISIONS


DATE:	4/21/20
SCALE:	N.T.S.
DWG. BY:	RW
CHK. BY:	LFS
DRAWING NO.:	FL-23957.8
SHEET	6 OF 12

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2020 R.W. BUILDING CONSULTANTS INC.


Z:\2023 FBC Drawings\Therma-Tru\FL-23957 R3\FL-23957.7-9.dwg

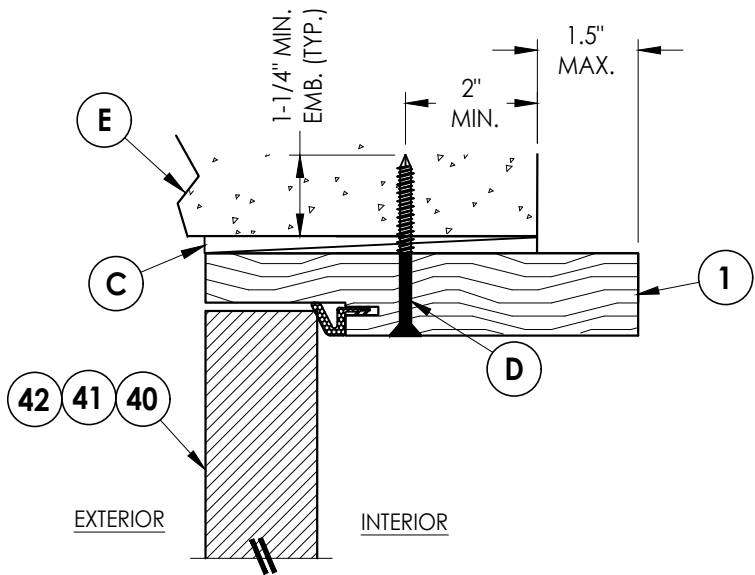


2 **HORIZONTAL CROSS SECTION**
7 Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

Notes:


1. Sidelite assembly screws located 6" from top and bottom plus 6 more screws equally spaced between (8 screws total per side jamb).
2. Sidelite assembly screws located 4" from each end plus one at centerline (3 screws along head jamb).

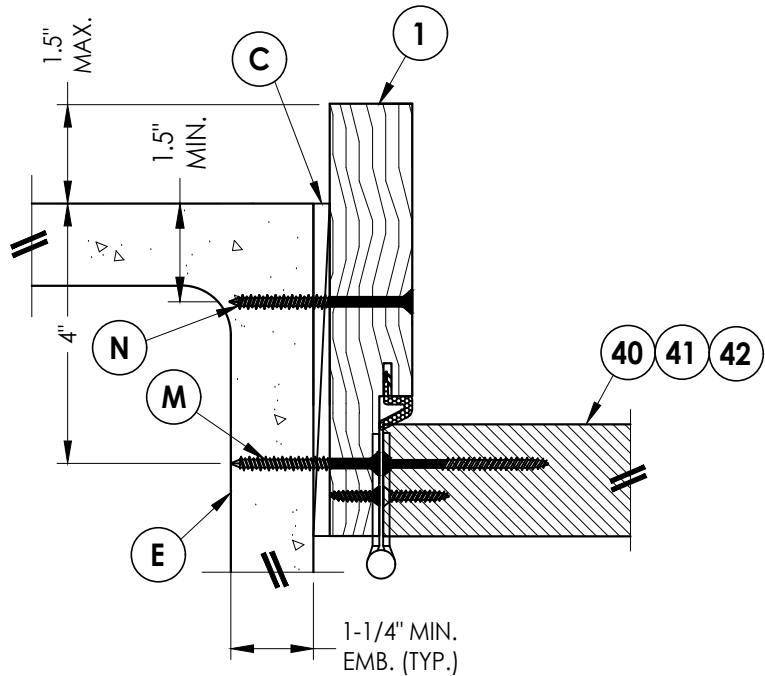

1 **HORIZONTAL CROSS SECTION**
7 Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

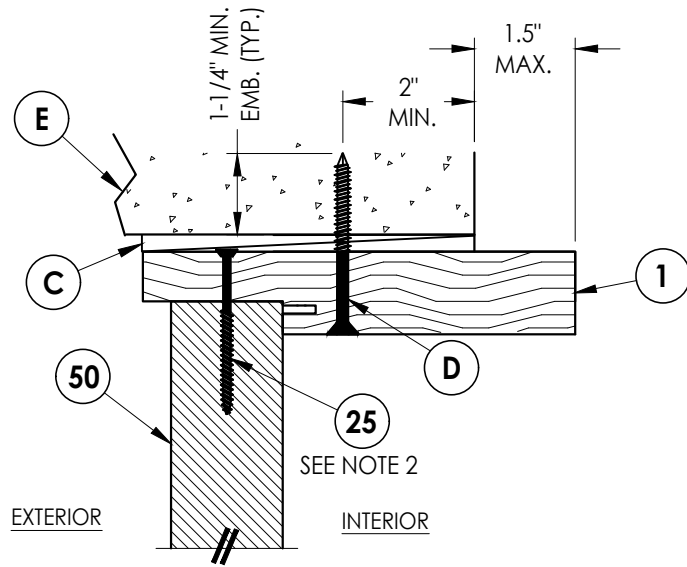

3 **VERTICAL CROSS SECTION**
7 Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

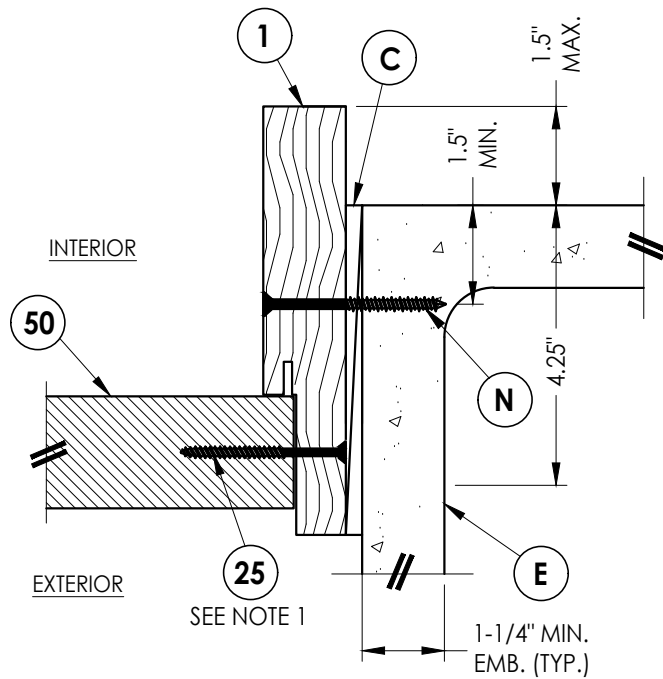

4 **VERTICAL CROSS SECTION**
7 Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: THERMA-TRU
FIBERGLASS DOOR
PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
SECTIONS (DIRECT TO MASONRY)

NO.	DATE	REVISIONS
2	7/24/23	UPDATE TO 8TH ED. (2023) FBC
1	7/23/20	UPDATE TO 7TH ED (2020) FBC

DATE: 3/24/20

SCALE: N.T.S.

DWG. BY: RW







CHK. BY: LFS

DRAWING NO.:
FL-23957.8

SHEET 7 OF 12

Z:\2023 FBC Drawings\Therma-Tru\FL-23957 R3\FL-23957.7-9.dwg

- Notes:
- 1. Sill Item #'s 13, 16, 17, 19 & 20 are attached to jambs w/ (3) #8 X 2-1/2" pfh screws at each end.
Sill Item #'s 14, 15 & 21 are attached to jambs w/ (2) #8 X 2-1/2" pfh screws at each end.
Sill Item #18 is attached to jambs utilizing (2) #10 X 1-1/2" pph screws at each end.
 - 2. Sidelite assembly screws located 4" from each end plus one at centerline (3 screws total along sill).

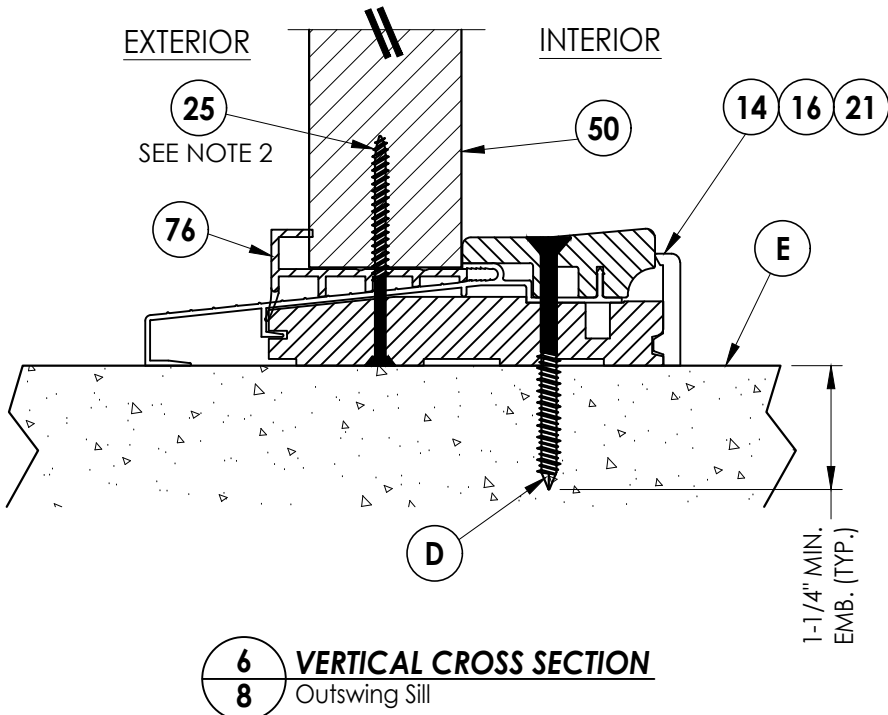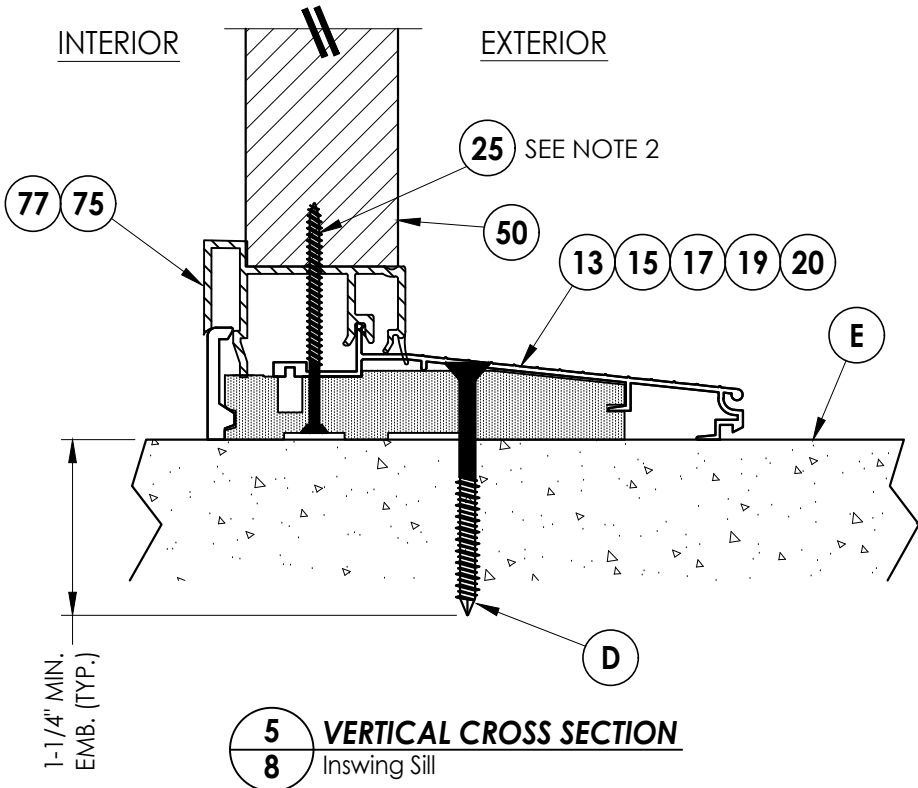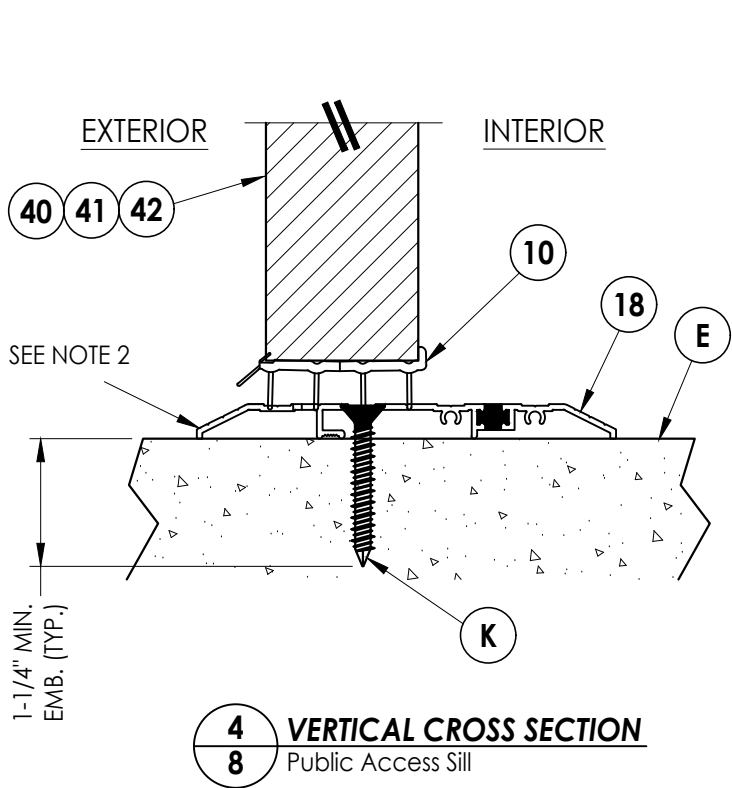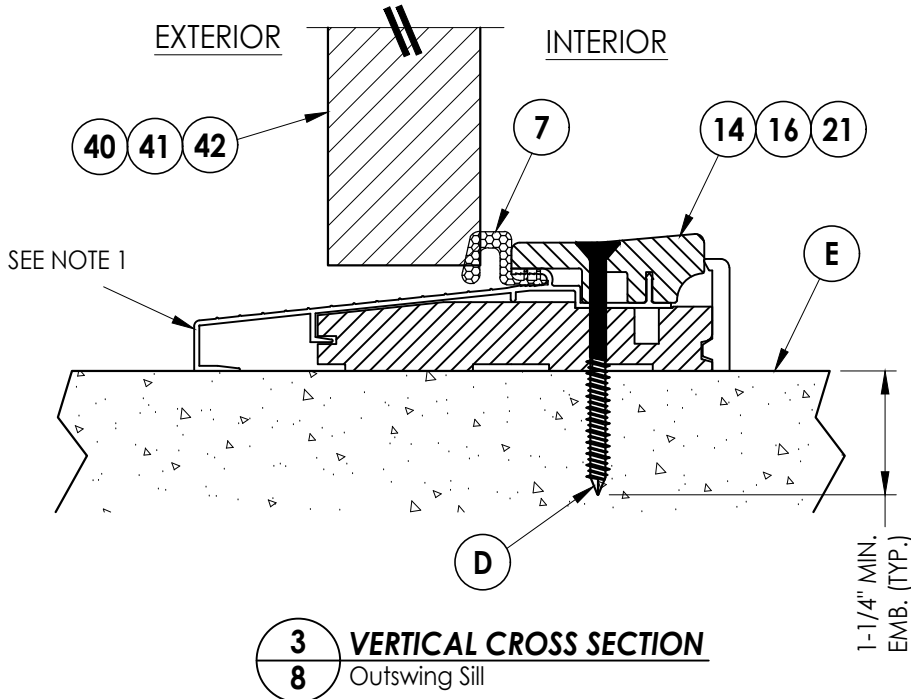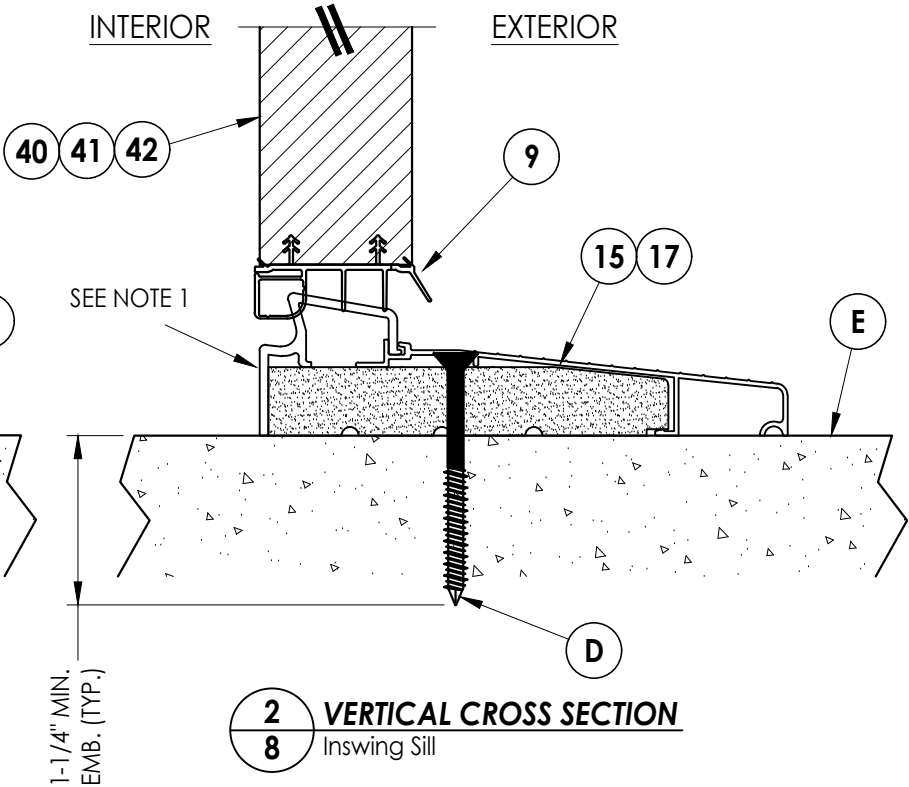
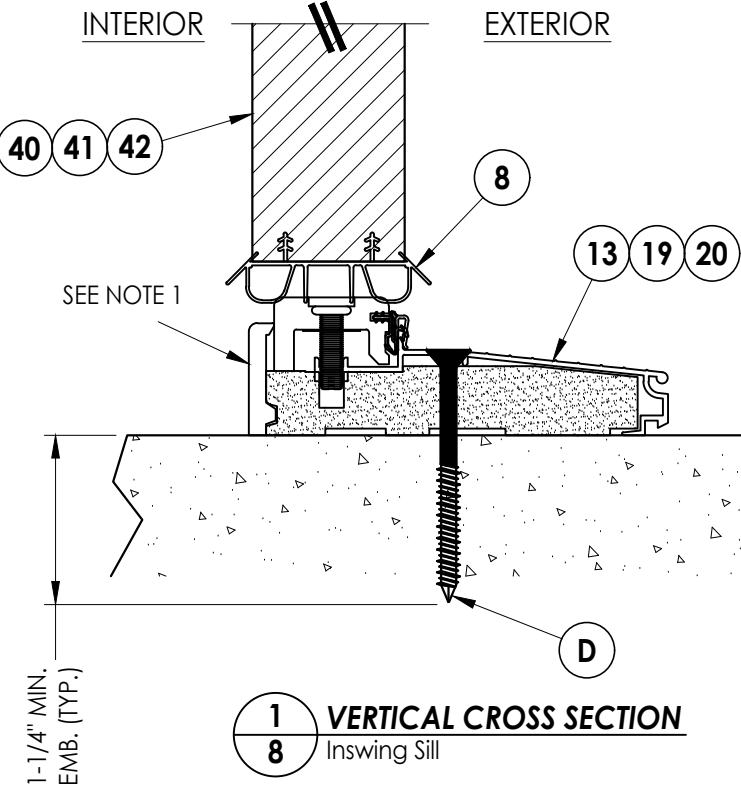


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:		PART OR ASSEMBLY:	
THERMA-TRU FIBERGLASS DOOR		VERTICAL CROSS SECTIONS (THRESHOLDS)	
		LFS	BY
		FBC	
2	7/24/23	UPDATE TO 8TH ED. (2023)	FBC
1	7/23/20	UPDATE TO 7TH ED (2020)	FBC
NO.	DATE		
REVISIONS			
DATE: 4/21/20			
SCALE: N.T.S.			
DWG. BY: RW			
CHK. BY: LFS			
DRAWING NO.: FL-23957.8			
SHEET 8 OF 12			

Z:\2023 FBC Drawings\Therma-Tru\FL-23957 R3\FL-23957.7-9.dwg

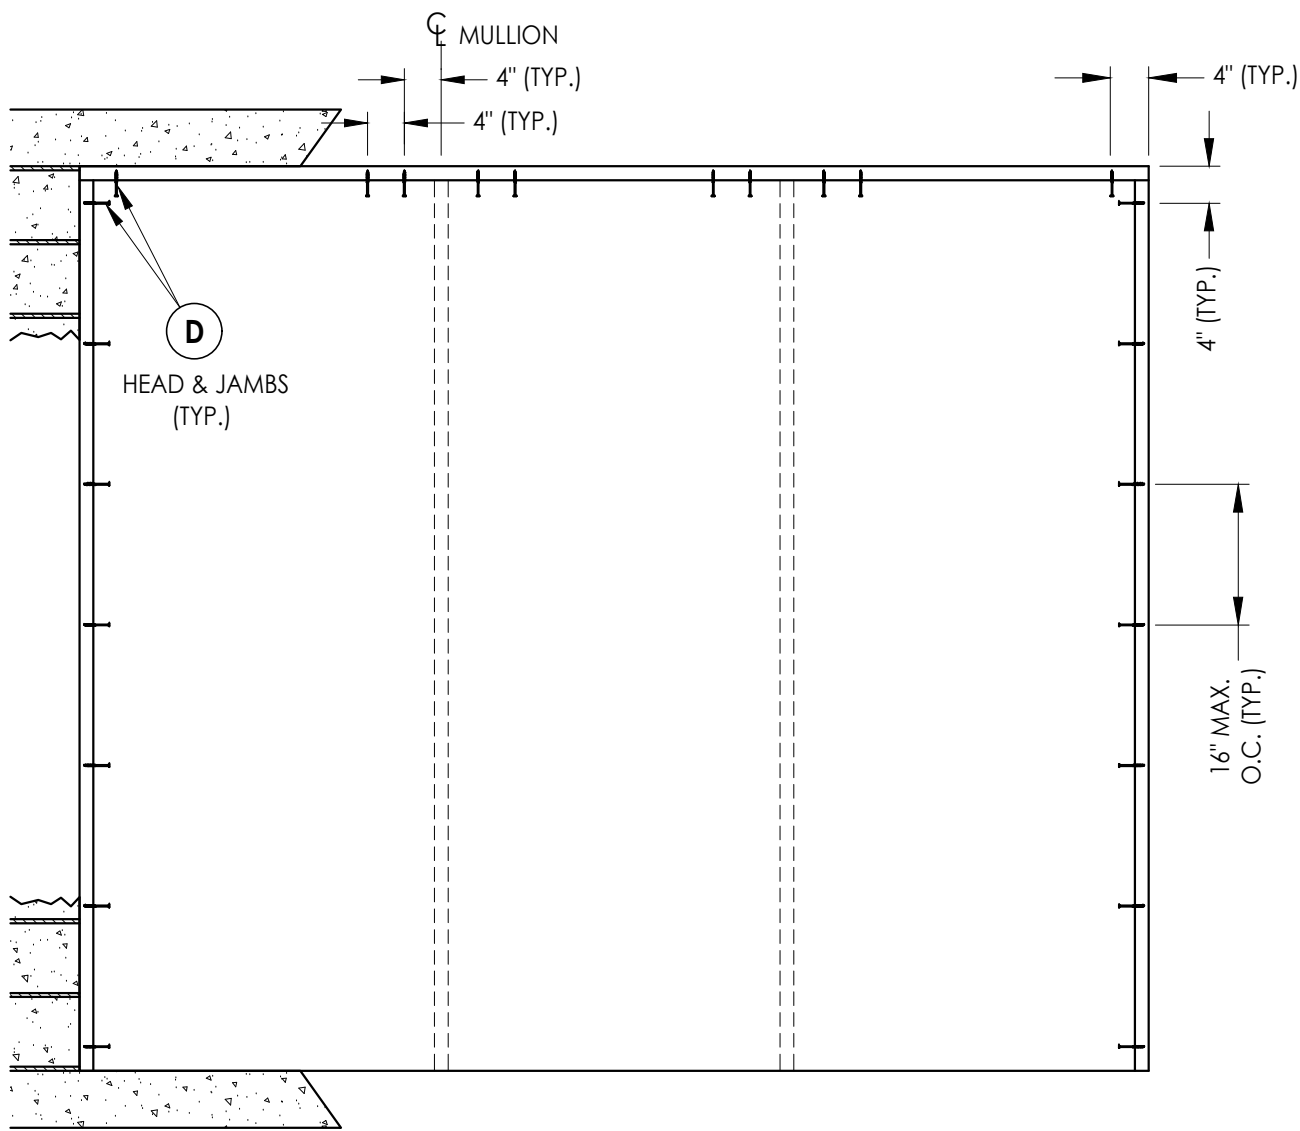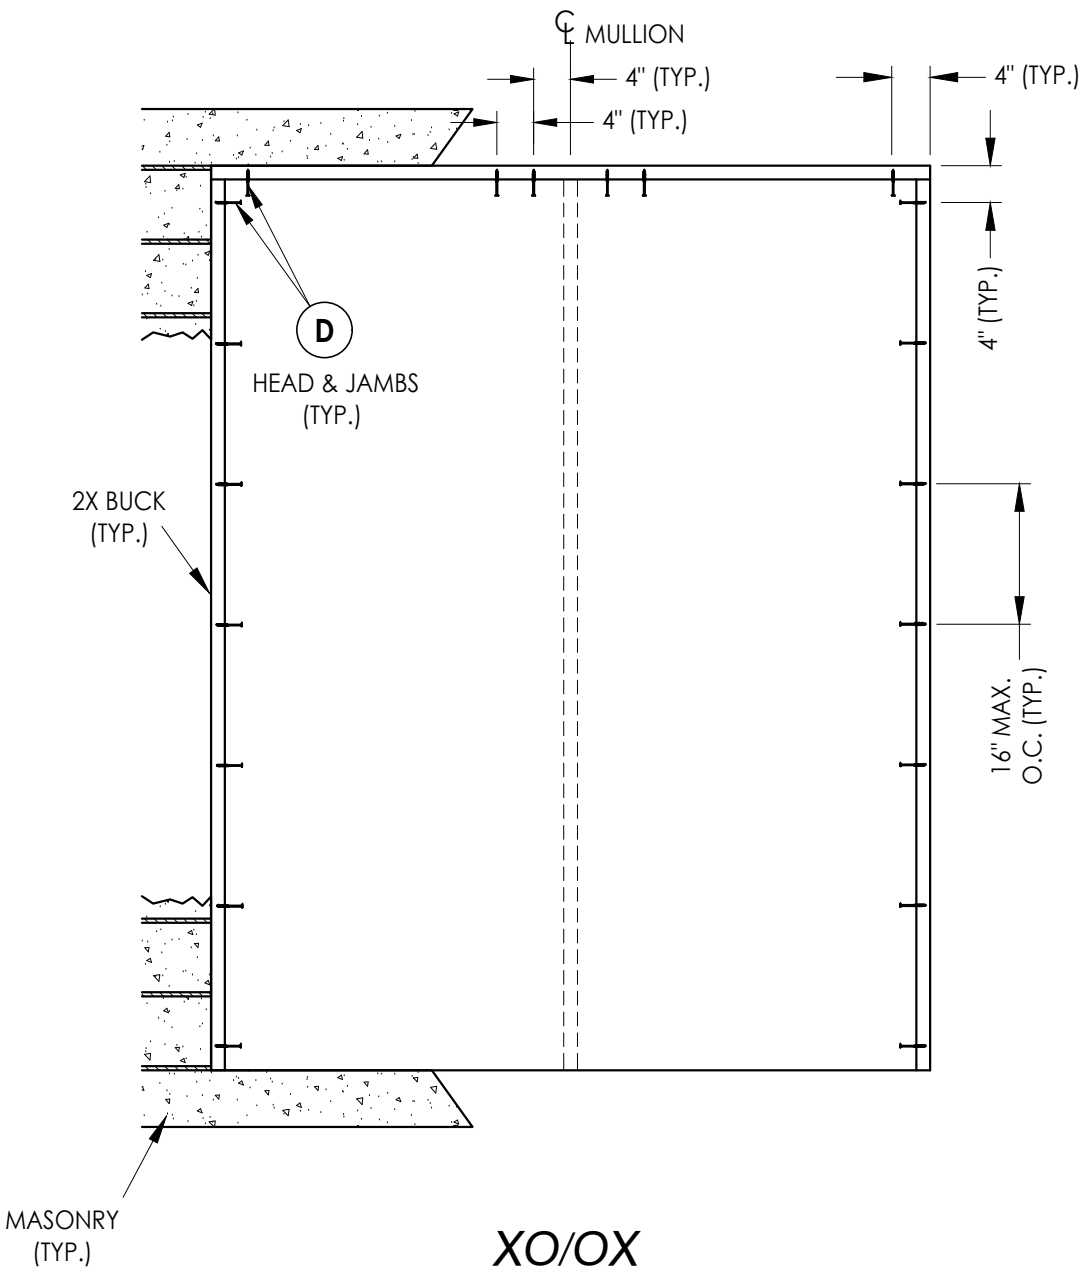


2X BUCK ANCHORING

DATE: 4/21/20				DOCUMENTS PREPARED BY: Lyndon F. Schmidt P.E. No. 43409			
SCALE: N.T.S.				PRODUCT: THERMA-TRU FIBERGLASS DOOR			
DWG. BY: RW							
CHK. BY: LFS				PART OR ASSEMBLY: BUCK ANCHORING			
DRAWING NO.: FL-23957.8							
SHEET 9 OF 12				REVISIONS			
				RW BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813			


Z:\2023 FBC Drawings\Therma-Tru\FL-23957 R3\FL-23957.7-9.dwg

NOTES:


1. 3/16" X 3-1/4" ITW CONCRETE SCREW TOE-NAILED THROUGH MULLION INTO MASONRY (EACH FACE).
2. #10 X 3" WOOD SCREW TOE-NAILED THROUGH MULLION INTO 2X BUCK (EACH FACE) AT HEAD.

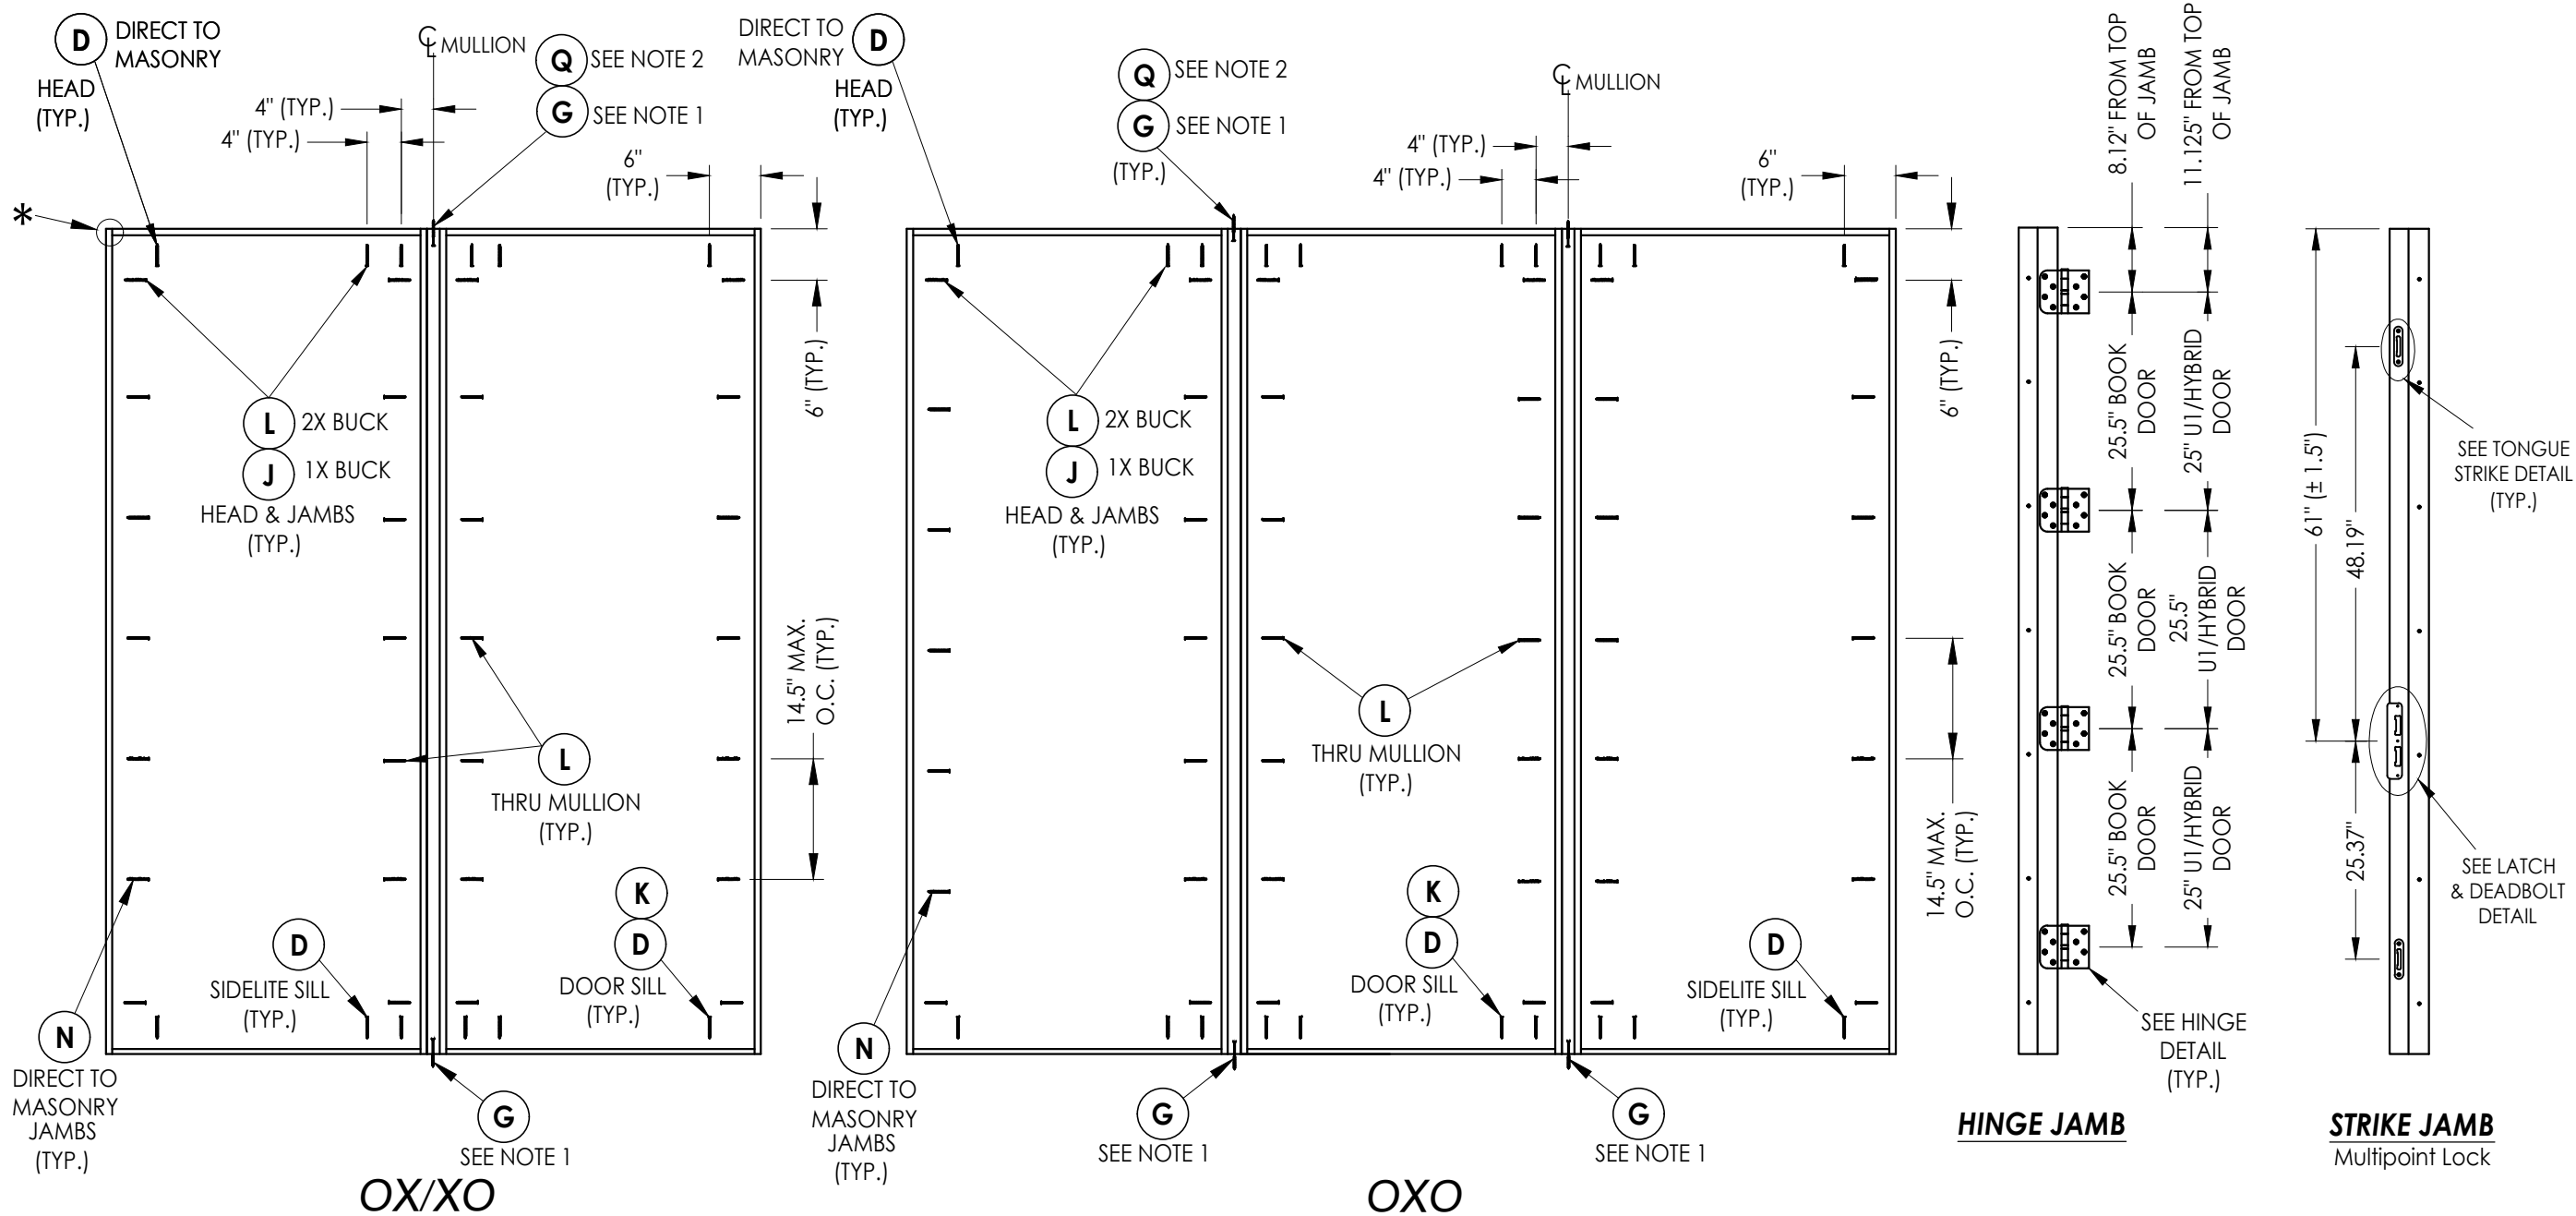


FRAME ANCHORING

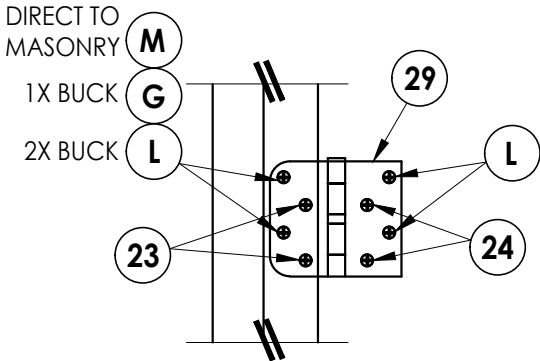

HINGE DETAIL

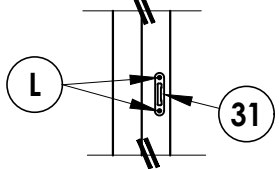

TONGUE STRIKE DETAIL
Multipoint Lock

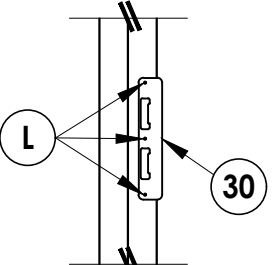

LATCH & DEADBOLT DETAIL
Multipoint Lock

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.

P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
FRAME ANCHORING


NO.	DATE	REVISIONS
2	7/24/23	UPDATE TO 8TH ED. (2023) FBC
1	7/23/20	UPDATE TO 7TH ED (2020) FBC

DATE: 4/21/20
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-23957.8
SHEET 10 OF 12


Z:\2023 FBC Drawings\Therma-Tru\FL-23957 R3\FL-23957.7-9.dwg

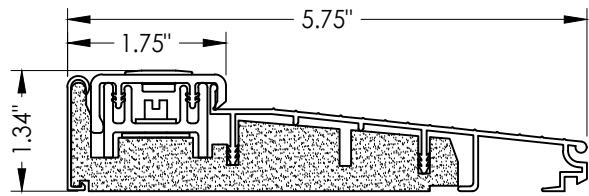


13 **INSWING THRESHOLD**
Adjustable

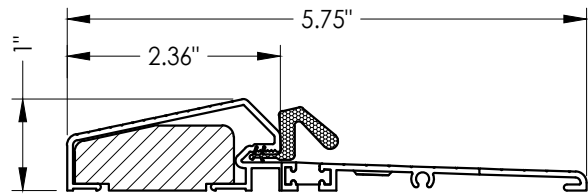


14 **OUTSWING THRESHOLD**

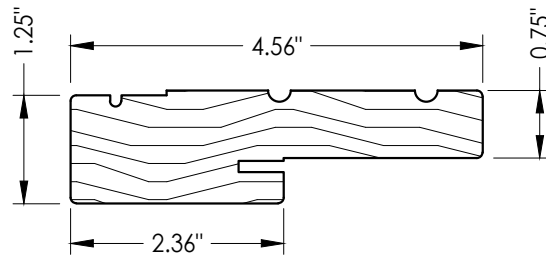


1 **WOOD JAMB**

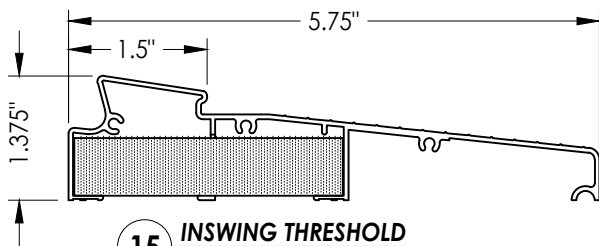


15 **INSWING THRESHOLD**
Moderate Climate

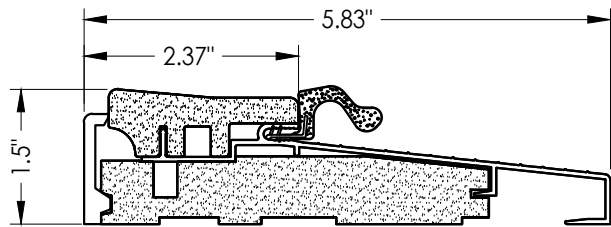


16 **OUTSWING THRESHOLD**

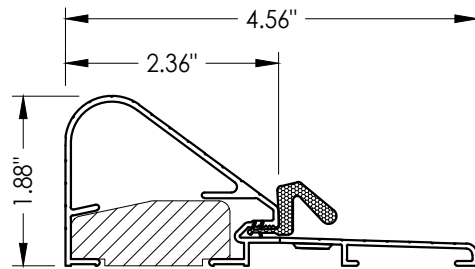


21 **OUTSWING THRESHOLD**
Coastal

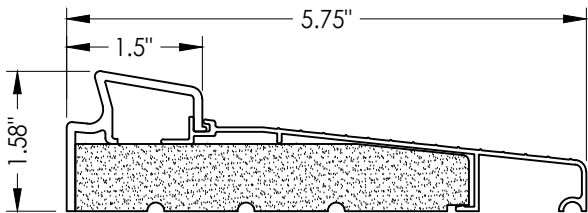


17 **INSWING THRESHOLD**
Basic Fixed

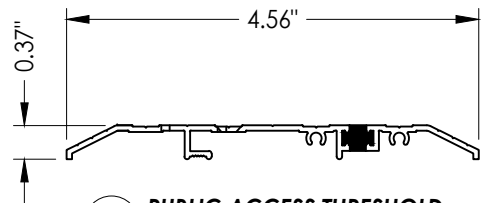


18 **PUBLIC ACCESS THRESHOLD**




8 **SWEEP**




9 **SWEEP**

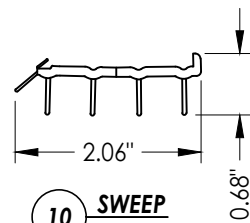


10 **SWEEP**

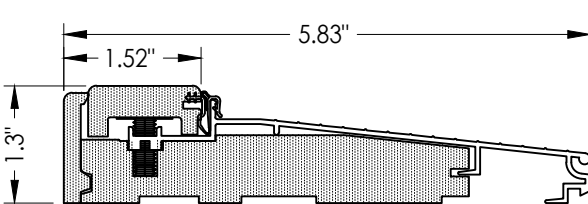


19 **INSWING THRESHOLD**
Adjustable

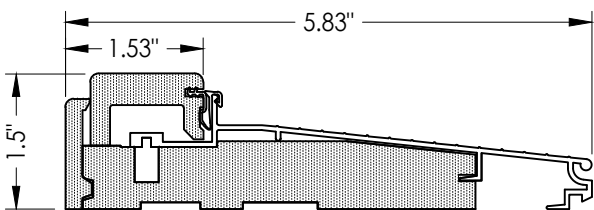


20 **INSWING THRESHOLD**
Adjustable

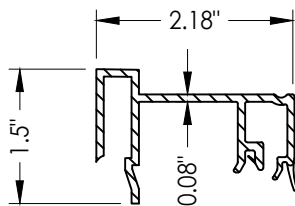

75 **SIDELITE SPACER**
Inswing

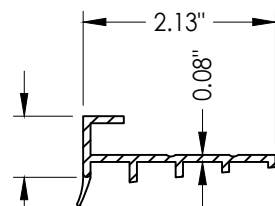

76 **SIDELITE SPACER**
Outswing

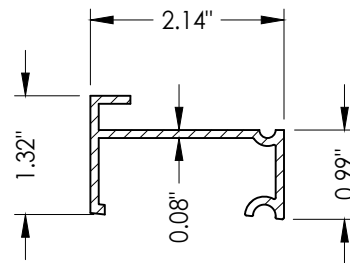

77 **INSWING SIDELITE**
Adapter
Moderate Climate Sill

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
COMPONENTS

NO.	DATE	REVISIONS
2	7/24/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	7/23/20	UPDATE TO 7TH ED (2020) FBC LFS

DATE: 4/21/20

SCALE: N.T.S.

DWG. BY: RW

CHK. BY: LFS

DRAWING NO.:

FL-23957.8

SHEET 11 OF 12

Z:\2023 FBC Drawings\Therma-Tru\FL-23957 R3\FL-23957.7-9.dwg

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (SG >= 0.42)	WOOD
B	2X BUCK (SG >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	#10 X 2" PFH WOOD SCREW	STEEL
G	3/16" X 3-1/4" PFH ITW CONCRETE SCREW	STEEL
J	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
K	1/4" X 1-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL
M	3/16" X 2-1/4" PFH ITW CONCRETE SCREW	STEEL
Q	#10 X 3" PFH WOOD SCREW	STEEL
1	JAMB (FINGER JOINT PINE)	WOOD
7	WEATHERSTRIP	FOAM
8	SWEEP	VINYL
9	SWEEP (USE w/ MODERATE CLIMATE THRESHOLD)	VINYL
10	SWEEP (USE w/ PUBLIC ACCESS THRESHOLD)	VINYL
13	INSWING THRESHOLD	ALUM/COMP
14	OUTSWING THRESHOLD	ALUM/COMP
15	INSWING THRESHOLD	ALUM/COMP
16	OUTSWING THRESHOLD	ALUM/COMP
17	INSWING THRESHOLD	ALUM/COMP
18	PUBLIC ACCESS THRESHOLD	ALUM
19	INSWING THRESHOLD	ALUM/COMP
20	INSWING THRESHOLD	ALUM/COMP
21	OUTSWING COASTAL THRESHOLD	ALUM/WOOD
23	#10 X 3/4" PFH WOOD SCREW	STEEL
24	#10 X 1" PFH WOOD SCREW	STEEL
25	#8 X 2-1/2" PFH WOOD SCREW	STEEL
29	4" X 4" HINGE	STEEL
30	MULTI-POINT LOCK STRIKE PLATE	STEEL
31	TONGUE STRIKE PLATE	STEEL
40	DOOR PANEL (BOOK DOOR)	-
41	DOOR PANEL (HYBRID DOOR)	-
42	DOOR PANEL (U1 DOOR)	-
50	14" SIDELITE PANEL	-
75	SIDELITE SPACER (INSWING)	PVC
76	SIDELITE SPACER (OUTSWING)	PVC
77	SIDELITE SPACER (INSWING) - Moderate Climate Sill	PVC
88	2X REINFORCEMENT (SG >= 0.55)	WOOD

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON+®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	AS SHOWN	1-1/2"

CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:

WOOD SCREW INSTALLATION NOTES:

1. Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: THERMA-TRU FIBERGLASS DOOR		PART OR ASSEMBLY: BILL OF MATERIALS	
		LFS	BY
		FBC	
		FBC	
		REVISIONS	
		2	7/24/23
		1	7/23/20
		NO.	DATE
DATE: 4/21/20			
SCALE: N.T.S.			
DWG. BY: RW			
CHK. BY: LFS			
DRAWING NO.: FL-23957.8			
SHEET 12 OF 12			