

p:\caoba doors\loc-47-1005 - fbc submittal - aluminum clad revisions (windows and doors)\dwgs\116750\cab041-narrow frame double hung window.dwg 12/21/2017 5:51 PM

INSTALLATION NOTES:

- ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN.
- THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION.
- INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/2 INCH OF THE DEPICTED LOCATION IN THE ANCHOR LAYOUT DETAIL (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
- SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
- FOR INSTALLATION INTO WOOD FRAMING USE #10 WOOD SCREWS OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.
- FOR INSTALLATION THROUGH 1X BUCK TO CONCRETE/MASONRY, OR DIRECTLY INTO CONCRETE/MASONRY, USE) 3/16 INCH DIAMETER ITW TAPCONS OF SUFFICIENT LENGTH TO ACHIEVE 1 1/4 INCH MINIMUM EMBEDMENT.
- FOR INSTALLATION THROUGH STEEL STUD USE #10 SELF-TAPPING SCREWS OF SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM PENETRATION BEYOND STEEL STRUCTURE.
- MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
- FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
- INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.
- INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE FOLLOWING PROPERTIES:
 - WOOD - MINIMUM SPECIFIC GRAVITY OF 0.55.
 - CONCRETE -MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI.
 - MASONRY - STRENGTH CONFORMANCE TO ASTM C-90, 2000 PSI MIN. COMPRESSIVE STRENGTH.
 - STEEL - MINIMUM YIELD STRENGTH OF 33 KSI. MINIMUM WALL THICKNESS OF 49 MILS. (18 GAUGE)

GENERAL NOTES:

- THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE (FBC), INCLUDING HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
 - TAS 201-94
 - TAS 202-94
 - TAS 203-94
- ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY AND 2X FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.
- APPROVED IMPACT PROTECTIVE SYSTEM **IS NOT REQUIRED** ON THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
- WINDOW FRAME MATERIAL: MAHOGANY
- THE MINIMUM SPECIFIC GRAVITY OF TRUE MAHOGANY SHALL BE SG=0.42 OR THE SPECIFIC GRAVITY OF ANY NATURALLY DURABLE WOOD SG>0.42.
- ALL WOOD PRODUCTS SHALL NOT BE IN DIRECT CONTACT WITH THE SUBSTRATES, I.E. CONCRETE, MASONRY, REINFORCED CMU, ETC., USING "WOLMAN EHT" WATER REPELLANT PRESERVATIVE AS MANUFACTURED BY ZINSSER CO. INC OR EQUIVALENT COMPLYING WITH THE CURRENT FLORIDA BUILDING CODE.
- GLASS MEETS THE REQUIREMENTS OF ASTM E 1300 GLASS CHARTS. SEE SHEET 4 FOR GLAZING DETAIL.

TABLE OF CONTENTS		
SHEET	REVISION	SHEET DESCRIPTION
1	A	INSTALLATION & GENERAL NOTES
2	-	ELEVATION & ANCHOR LAYOUT
3	-	VERTICAL SECTIONS
4	-	HORIZONTAL SECTIONS & GLAZING DETAIL
5	-	COMPONENTS
6	-	COMPONENTS & BILL OF MATERIAL

DESIGN PRESSURE RATING		
GLAZE TYPE	DESIGN PRESSURE - ALL SIZES	MISSILE IMPACT RATING
1	+70/-70 PSF	SMALL AND LARGE MISSILE IMPACT RATED



4918 CEDAR AVENUE
PHILADELPHIA, PA 19143

PH: (215) 525-5048 FX: (215) 747-8908

TITLE:
ALUMINUM CLAD NARROW
FRAME DOUBLE HUNG WINDOW

INSTALLATION & GENERAL NOTES

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE

THIS DOCUMENT IS THE PROPERTY OF BUILDING DROPS, INC. AND SHALL NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN CONSENT OF BUILDING DROPS, INC. ALTERATIONS, ADDITIONS, HIGHLIGHTING, OR OTHER MARKINGS TO THIS DOCUMENT ARE NOT PERMITTED AND INVALIDATE OUR CERTIFICATION.

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2017.12.22 07:24:24 -0500

HERMES F. NORERO, P.E.
FLORIDA P.E. No. 73778
BUILDING DROPS, INC
398 E. DANIA BEACH BLVD. # 338
DANIA BEACH, FL 33004
FBPE CERT. OF AUTHORIZATION No. 29578

FL #:
FL16750


DATE: **10.25.17**

DWG. BY: **RV** CHK. BY: **HFN**


SCALE: **NTS**

DWG. #: **CAB041**

SHEET:
1
OF 6

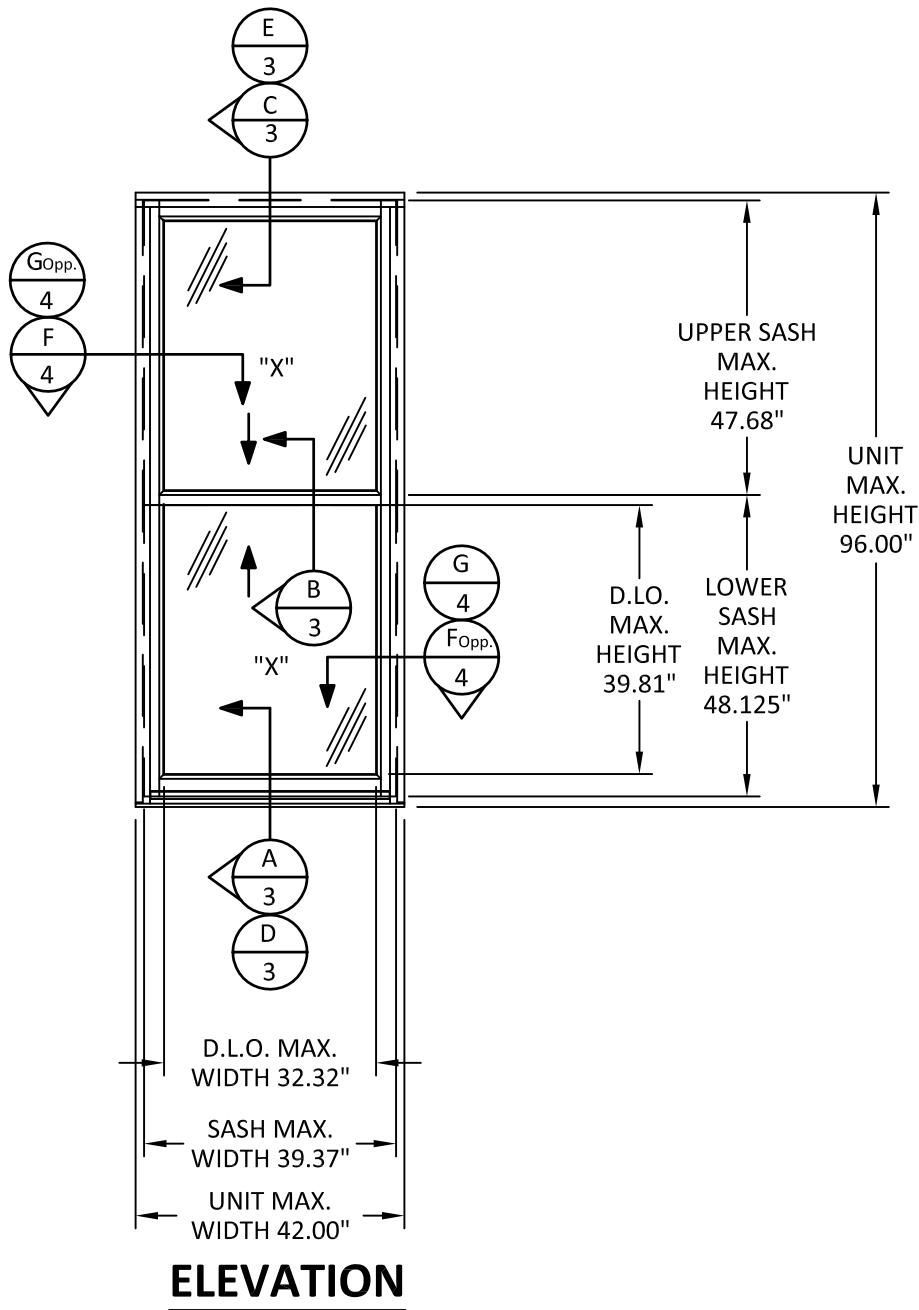

ELEVATION

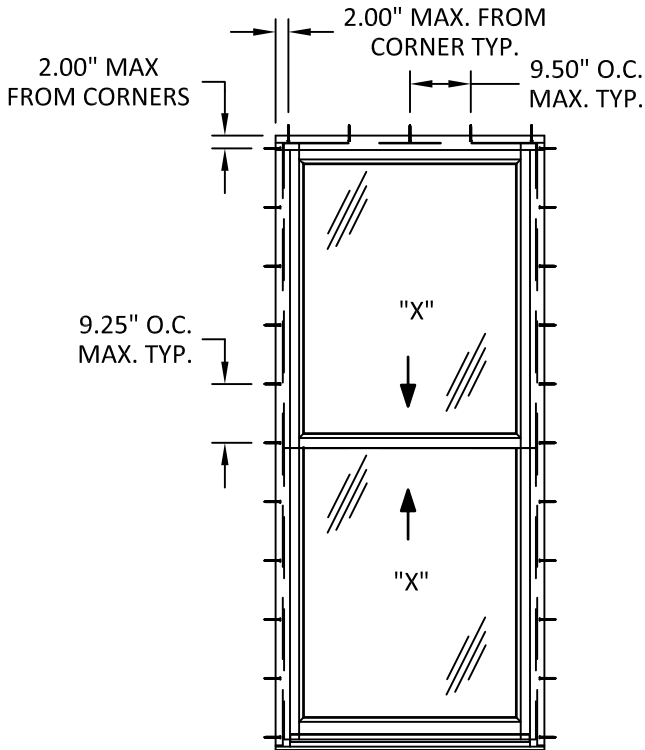

ANCHOR LAYOUT



4918 CEDAR AVENUE
PHILADELPHIA, PA 19143

PH: (215) 525-5048 FX: (215) 747-8908

TITLE: ALUMINUM CLAD NARROW FRAME DOUBLE HUNG WINDOW
ELEVATION & ANCHOR LAYOUT

PREPARED BY: BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE

THIS DOCUMENT IS THE PROPERTY OF BUILDING DROPS, INC. AND SHALL NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN CONSENT OF BUILDING DROPS, INC. ALTERATIONS, ADDITIONS, HIGHLIGHTING, OR OTHER MARKINGS TO THIS DOCUMENT ARE NOT PERMITTED AND INVALIDATE OUR CERTIFICATION.

HERMES F. NORERO
LICENSED PROFESSIONAL ENGINEER
No. 73778
STATE OF FLORIDA

HERMES F. NORERO, P.E.
FLORIDA P.E. No. 73778
BUILDING DROPS, INC
398 E. DANIA BEACH BLVD. # 338
DANIA BEACH, FL 33004
FBPE CERT. OF AUTHORIZATION No. 29578

FL #:
FL16750

DATE: **10.25.17**

DWG. BY: **RV** CHK. BY: **HFN**


SCALE: **NTS**

DWG. #: **CAB041**


SHEET:
2
OF 6

12/21/2017 5:51 PM


p:\caoba doors\lbc-17-1005 - lbc submittal - aluminum clad revisions (windows and doors)\dwgs\l16750\cab041-narrow frame double hung window.dwg

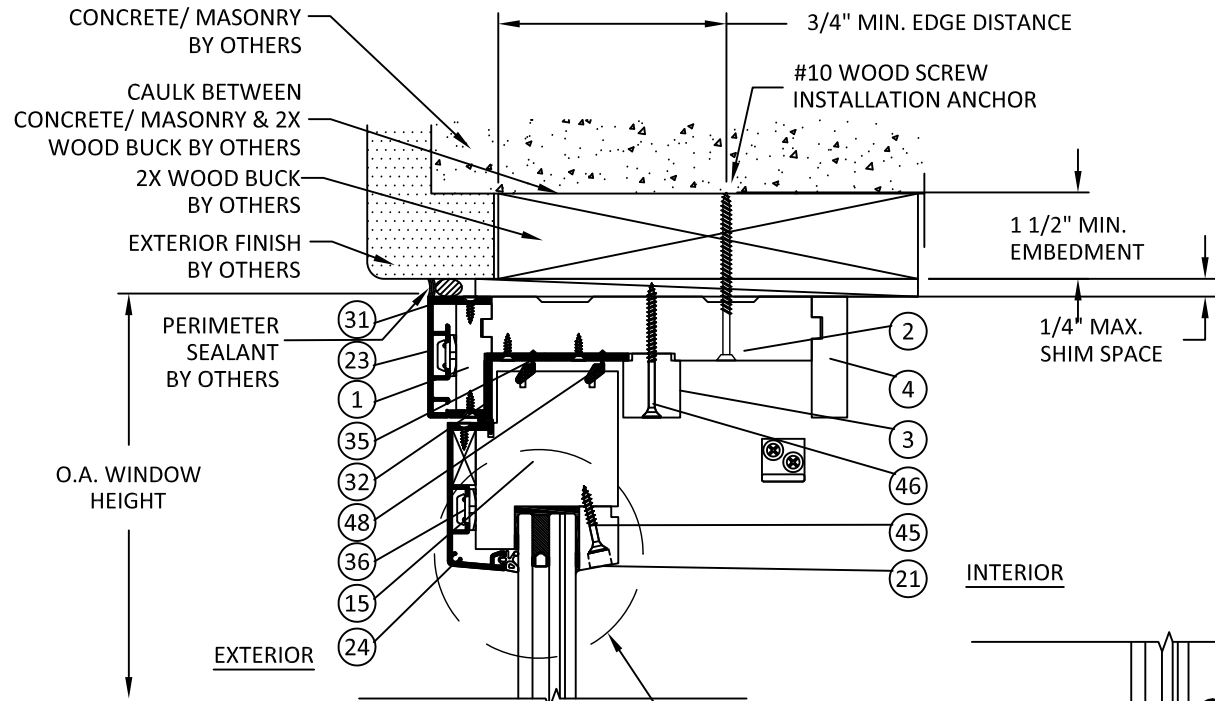


C
3 VERTICAL SECTION
HEAD - 2X WOOD BUCK

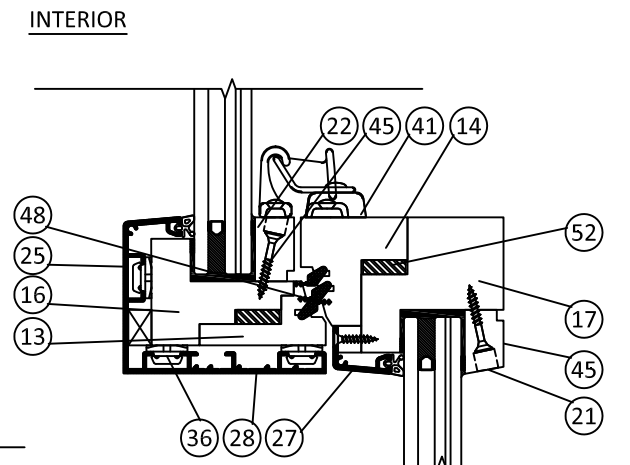


B
3 VERTICAL SECTION
MEETING RAIL

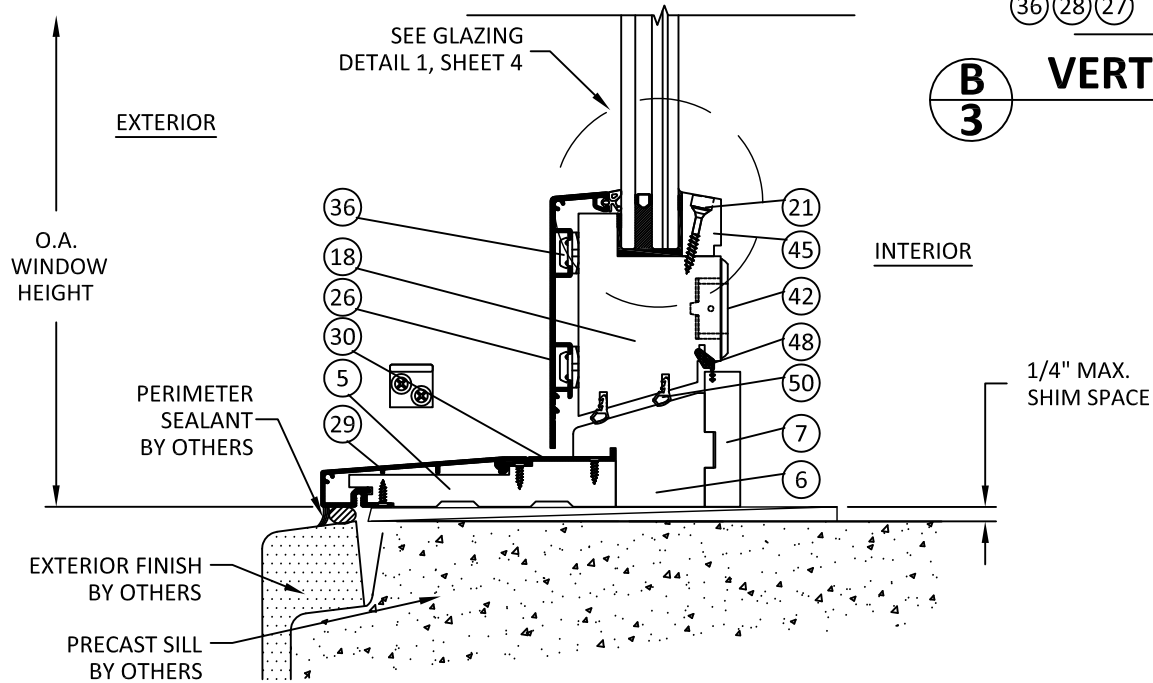

A
3 VERTICAL SECTION
SILL - CONCRETE/MASONRY
PRE-CAST SILL

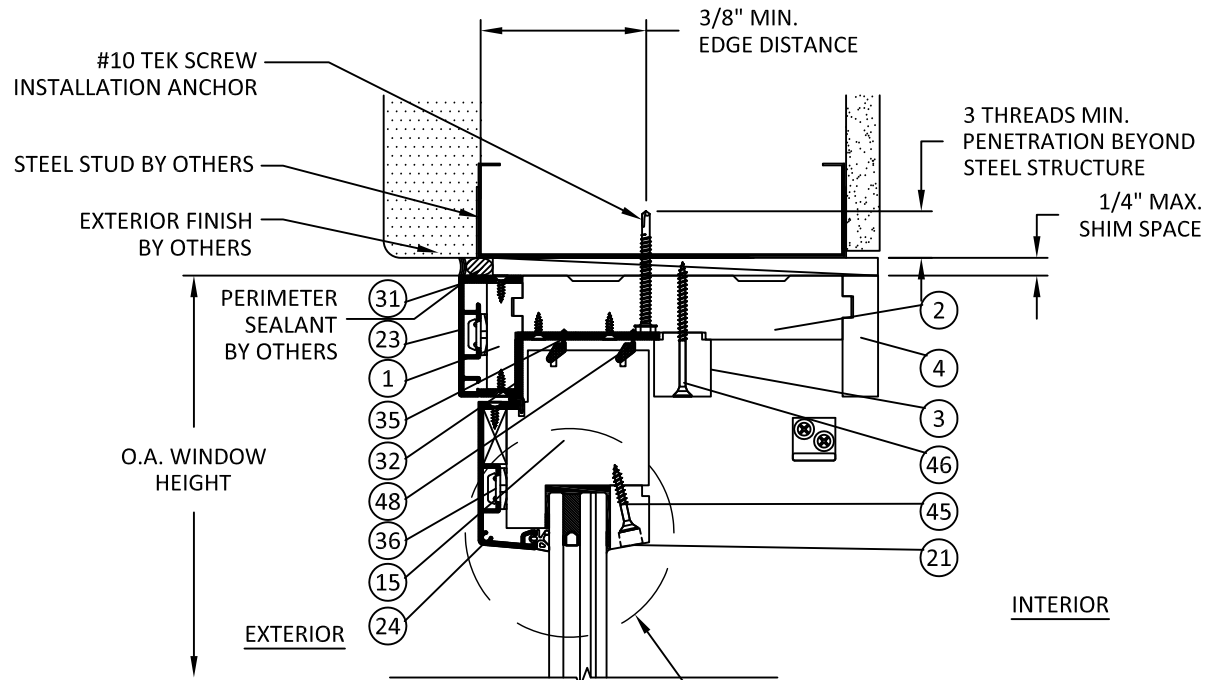

E
3 VERTICAL SECTION
HEAD - CONCRETE/MASONRY

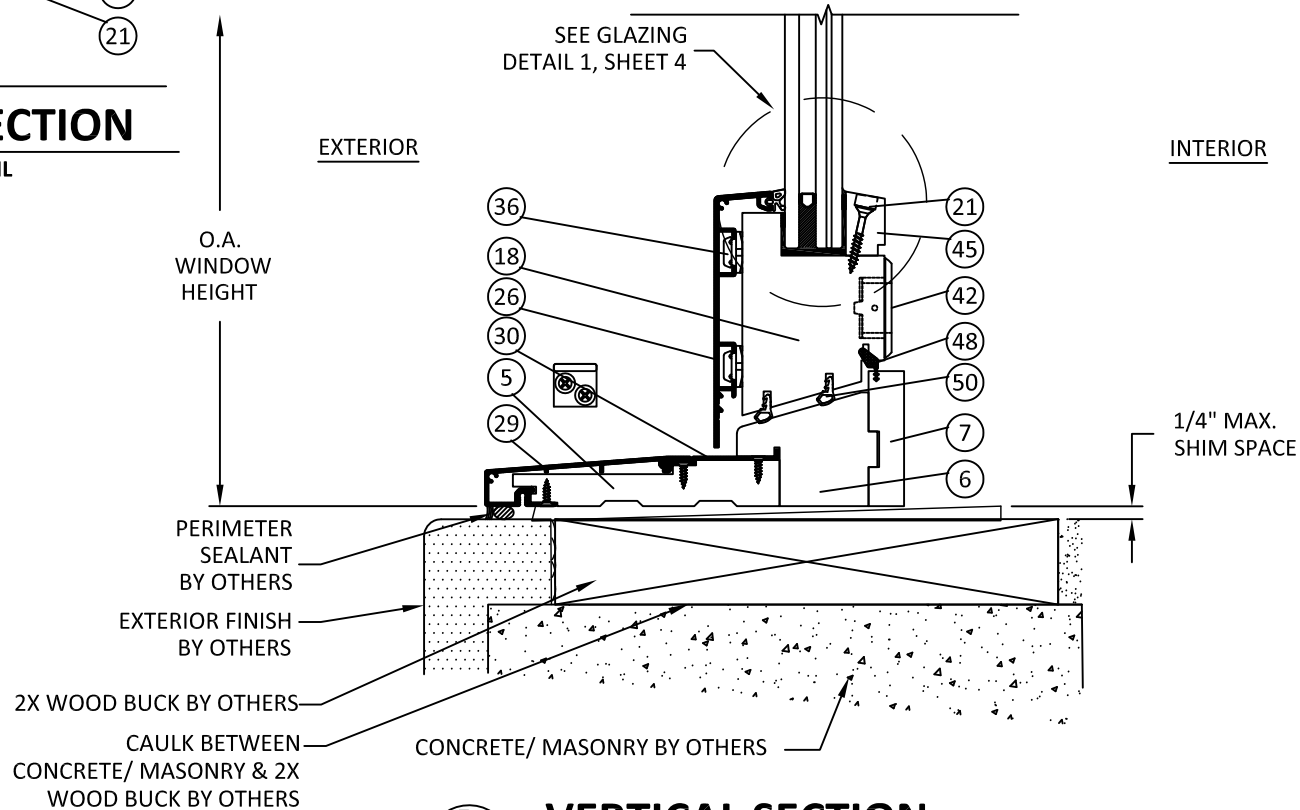

D
3 VERTICAL SECTION
SILL - 2X WOOD STUD



4918 CEDAR AVENUE
PHILADELPHIA, PA 19143
PH: (215) 525-5048 FX: (215) 747-8908

TITLE:
ALUMINUM CLAD NARROW
FRAME DOUBLE HUNG WINDOW

VERTICAL SECTIONS


PREPARED BY:
BUILDING DROPS, INC.

398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE

THIS DOCUMENT IS THE PROPERTY OF BUILDING DROPS, INC. AND SHALL NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN CONSENT OF BUILDING DROPS, INC. ALTERATIONS, ADDITIONS, HIGHLIGHTING, OR OTHER MARKINGS TO THIS DOCUMENT ARE NOT PERMITTED AND INVALIDATE OUR CERTIFICATION.

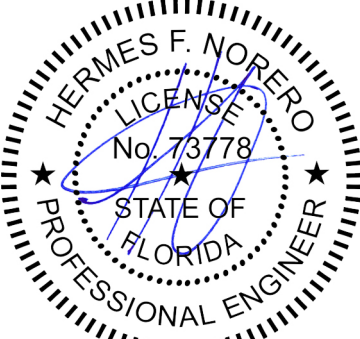




HERMES F. NORERO, P.E.
FLORIDA P.E. No. 73778
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD. # 338
DANIA BEACH, FL 33004
FBPE CERT. OF AUTHORIZATION No. 29578

FL #:	FL16750
DATE:	10.25.17
DWG. BY:	RV
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	CAB041
SHEET:	3

3

12/21/2017 5:51 PM

p:\caoba doors\fbcc-1005 - fbc submittal - aluminum clad revisions (windows and doors)\dwgs\cab041-narrow frame double hung window.dwg

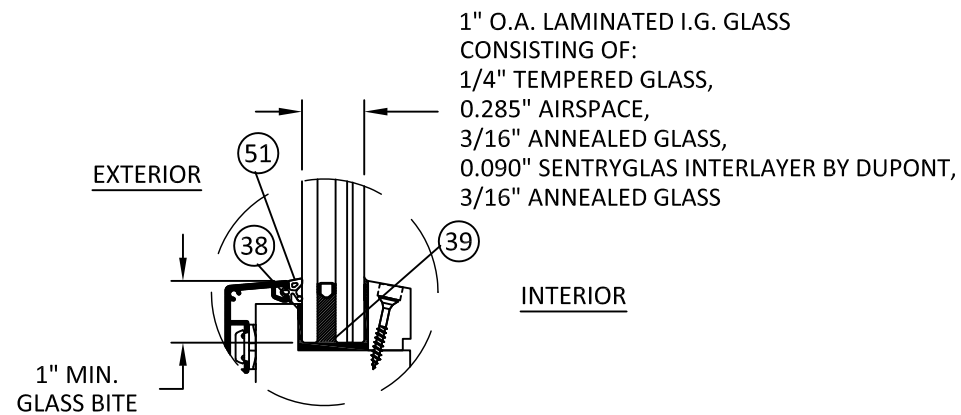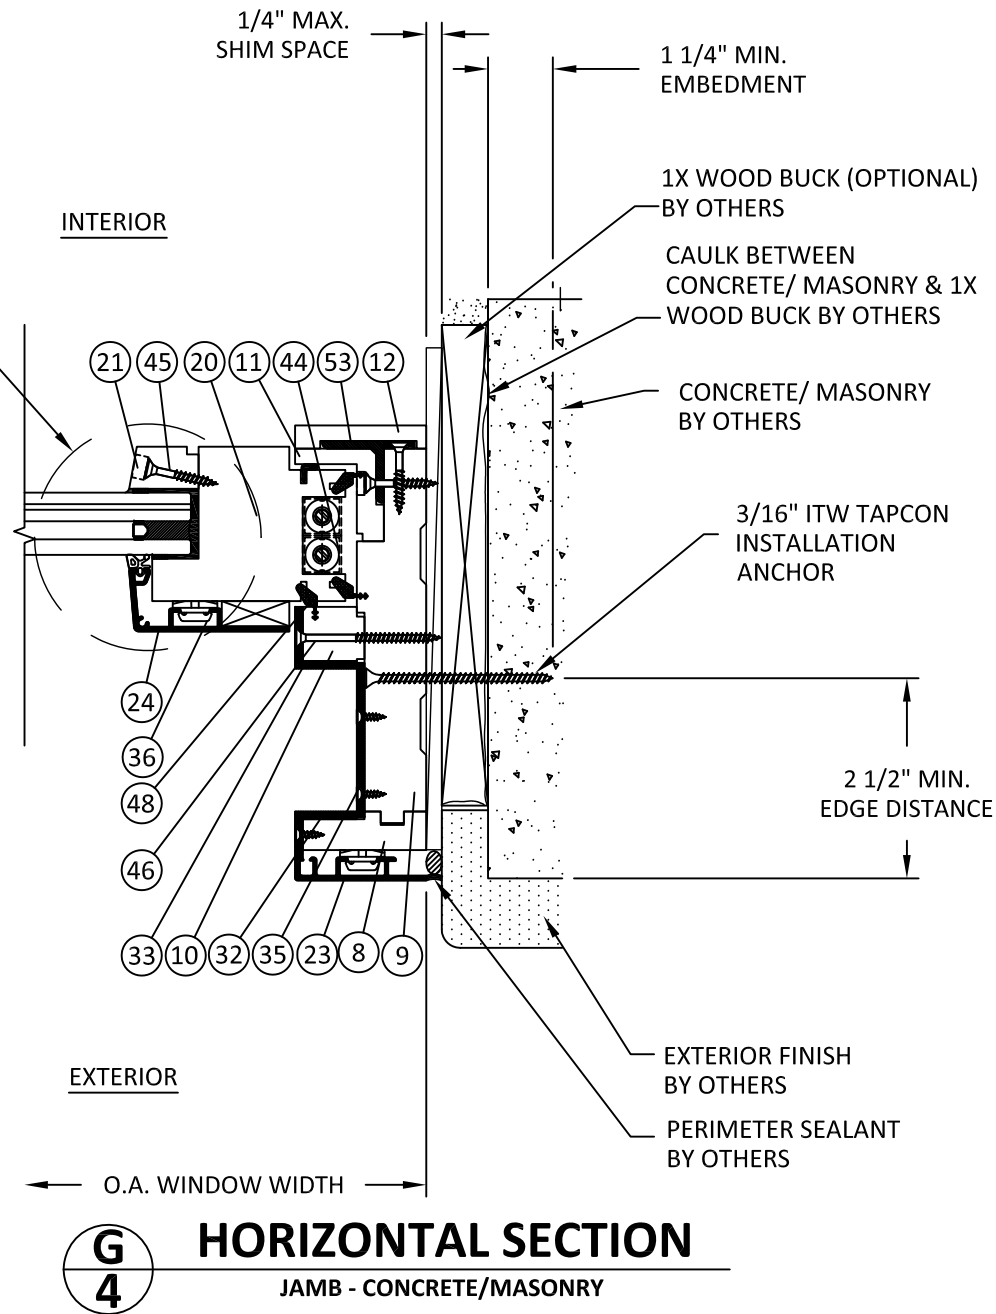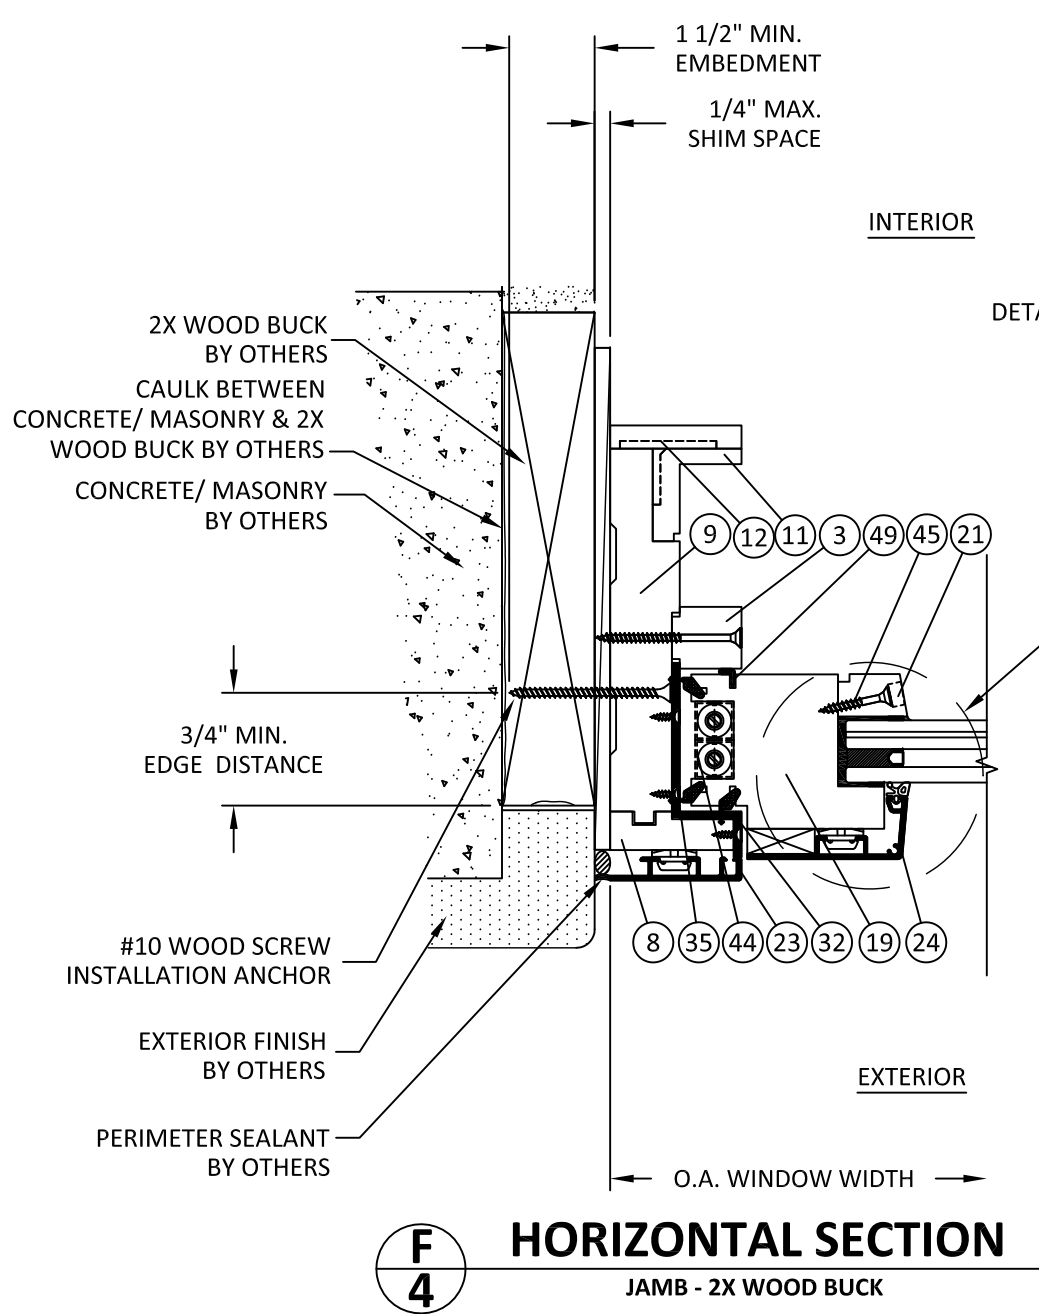

GLAZING DETAIL 1

NOTE:
GLASS THICKNESS AND TYPE SHALL COMPLY WITH ASTM E 1300 GLASS CHART REQUIREMENTS

- NOTE:**
- GLASS CAPACITIES ON THIS SHEET ARE BASED ON ASTM E1300-04 (3 SEC. GUSTS) AND CHAPTER 17 OF THE CURRENT FBC FOR SIZES OTHER THAN TESTED.
 - SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN CHAPTER 24.
 - SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER CHAPTER 24.
 - D.L.O. MAY NOT EXCEED MAX DIMENSIONS IN GLASS CHARTS FOR GLASS TYPE.



4918 CEDAR AVENUE
PHILADELPHIA, PA 19143

PH: (215) 525-5048 FX: (215) 747-8908

TITLE:
ALUMINUM CLAD NARROW
FRAME DOUBLE HUNG WINDOW

HORIZONTAL SECTIONS & GLAZING DETAIL

PREPARED BY:

BUILDING DROPS, INC.

398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004


PH: (954) 399-8478
FAX: (954) 744-4738

WEB: www.buildingdrops.com



REMARKS	BY	DATE

THIS DOCUMENT IS THE PROPERTY OF BUILDING DROPS, INC. AND SHALL NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN CONSENT OF BUILDING DROPS, INC. ALTERATIONS, ADDITIONS, HIGHLIGHTING, OR OTHER MARKINGS TO THIS DOCUMENT ARE NOT PERMITTED AND INVALIDATE OUR CERTIFICATION.

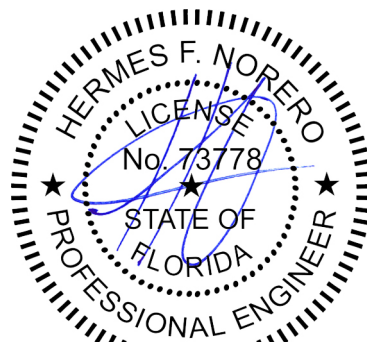

HERMES F. NORERO, P.E.
FLORIDA P.E. No. 73778
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD. # 338
DANIA BEACH, FL 33004
FBPE CERT. OF AUTHORIZATION No. 29578

FL #:
FL16750

DATE: **10.25.17**

DWG. BY:
RV

CHK. BY:
HFN

SCALE: **NTS**

DWG. #: **CAB041**


SHEET:

4


OF 6

p:\caoba doors\lbc-17-1005 - lbc submittal - aluminum clad revisions (windows and doors)\dwgs\16750\cab041-narrow frame double hung window.dwg 12/21/2017 5:51 PM


1 HEAD EXT. SASH STOP




2 JAMB HEAD

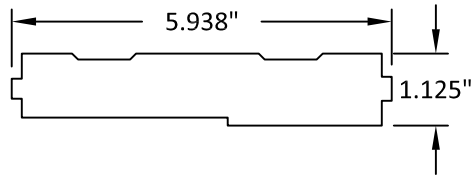


3 TOP LEG & HEAD PARTING BEAD




4 HEAD INT. SASH STOP




5 SILL

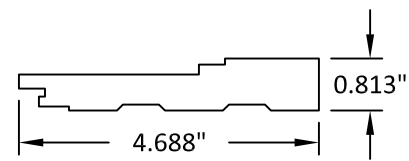


6 SUB SILL




7 BOTTOM INTERIOR SASH STOP




8 LEG EXT. SASH STOP




9 JAMB LEG

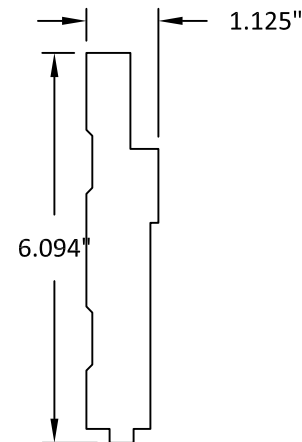


10 BOTTOM LEG PARTING BEAD




11 COVER LEG




12 INT. SASH STOP LEG




13 TOP SASH INTERLOCK




14 BOTTOM SASH INTERLOCK




15 TOP SASH TOP RAIL




16 TOP SASH BOTTOM RAIL




17 BOTTOM SASH TOP RAIL




18 BOTTOM SASH BOTTOM RAIL



19 TOP SASH RAILS

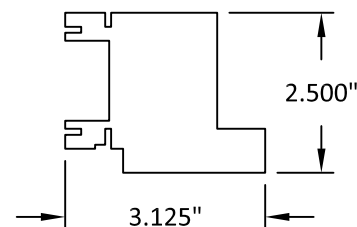

20 BOTTOM SASH RAILS

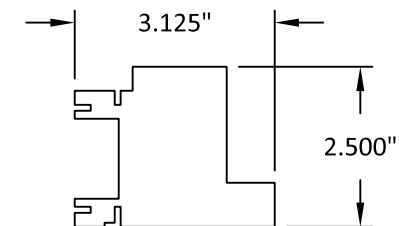

4918 CEDAR AVENUE
PHILADELPHIA, PA 19143

PH: (215) 525-5048 FX: (215) 747-8908


TITLE:
ALUMINUM CLAD NARROW
FRAME DOUBLE HUNG WINDOW
COMPONENTS

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE

THIS DOCUMENT IS THE PROPERTY OF BUILDING DROPS, INC. AND SHALL NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN CONSENT OF BUILDING DROPS, INC. ALTERATIONS, ADDITIONS, HIGHLIGHTING, OR OTHER MARKINGS TO THIS DOCUMENT ARE NOT PERMITTED AND INVALIDATE OUR CERTIFICATION.

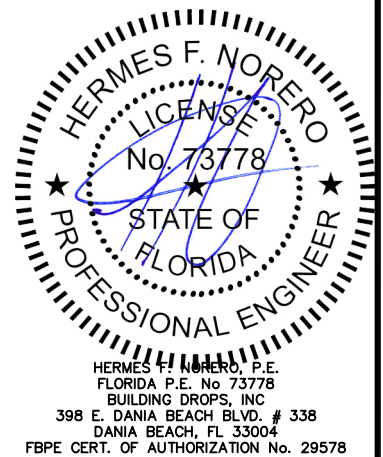

HERMES F. NORERO, P.E.
FLORIDA P.E. No. 73778
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD. # 338
DANIA BEACH, FL 33004
FBPE CERT. OF AUTHORIZATION No. 29578

FL #:
FL16750

DATE: **10.25.17**

DWG. BY: **RV** CHK. BY: **HFN**

SCALE: **NTS**

DWG. #: **CAB041**


SHEET:
5

OF 6

BILL OF MATERIALS				
ITEM #	PART #	ITEM DESCRIPTION	MANUFACTURER	MATERIAL
1	---	HEAD EXTERIOR SASH STOP	CAOBA DOORS	WOOD
2	---	JAMB HEAD	CAOBA DOORS	WOOD
3	---	TOP LEG AND & PARTING BEAD	CAOBA DOORS	WOOD
4	---	HEAD INTERIOR SASH STOP	CAOBA DOORS	WOOD
5	---	SILL	CAOBA DOORS	WOOD
6	---	SUB SILL	CAOBA DOORS	WOOD
7	---	BOTTOM INTERIOR SASH STOP	CAOBA DOORS	WOOD
8	---	LEG EXTERIOR SASH STOP	CAOBA DOORS	WOOD
9	---	JAMB LEG	CAOBA DOORS	WOOD
10	---	BOTTOM PARTING BEAD	CAOBA DOORS	WOOD
11	---	COVER LEG	CAOBA DOORS	WOOD
12	---	INTERIOR SASH STOP LEG	CAOBA DOORS	WOOD
13	---	TOP SASH INTERLOCK	CAOBA DOORS	WOOD
14	---	BOTTOM SASH INTERLOCK	CAOBA DOORS	WOOD
15	---	TOP SASH TOP RAIL	CAOBA DOORS	WOOD
16	---	TOP SASH BOTTOM RAIL	CAOBA DOORS	WOOD
17	---	BOTTOM SASH TOP RAIL	CAOBA DOORS	WOOD
18	---	BOTTOM SASH BOTTOM RAIL	CAOBA DOORS	WOOD
19	---	TOP SASH RAILS	CAOBA DOORS	WOOD
20	---	BOTTOM SASH RAILS	CAOBA DOORS	WOOD
21	---	GLASS STOP	CAOBA DOORS	WOOD
22	---	INFERIOR SASH GLASS STOP	CAOBA DOORS	WOOD
23	SW1000	EXTERIOR SASH STOP FRAME CLADDING	EXTRALUM	ALUMINUM
24	SIM001	TOP SASH TOP RAIL & STILES SASH CLADDING	EXTRALUM	ALUMINUM
25	SIM001	TOP SASH BOTTOM RAIL SASH CLADDING	EXTRALUM	ALUMINUM
26	SIM001	INFERIOR SASH BOTTOM RAIL SASH CLADDING	EXTRALUM	ALUMINUM
27	SIM001	INFERIOR SASH TOP RAIL SASH CLADDING	EXTRALUM	ALUMINUM
28	SIM001	TOP SASH BOTTOM RAIL COVER SASH CLADDING	EXTRALUM	ALUMINUM
29	JWS001	SILL CLADDING	EXTRALUM	ALUMINUM
30	JWC001	SILL EXTENSION CLADDING	EXTRALUM	ALUMINUM
31	F4181	TOP FRAME COVER CLADDING	METALS DEPOT	ALUMINUM
32	A313418	EXTERIOR SASH STOP COVER CLADDING	METALS DEPOT	ALUMINUM
33	A31118-6063	PARTING BEAD COVER CLADDING	METALS DEPOT	ALUMINUM
34	F418212	FRAME COVER CLADDING	METALS DEPOT	ALUMINUM
35	F41858	TOP SASH COVER CLADDING	METALS DEPOT	ALUMINUM
36	---	CLAD CLIP	PLASTIKA S.A.	PLASTIC
38	AWT3	1/4" X 1 1/16" GLAZING TAPE	ARLON	TAPE
39	SG-20	SILICON SEALANT	SIKAFLEX	SILICONE
40	WS-305	SILICON SEALANT	SIKAFLEX	SILICONE
41	LKF14	SASH LOCK	PHELPS	BRASS
42	LFM26	SASH LIFT	PHELPS	BRASS
43	---	SASH LIMITER	CAOBA DOORS	BRONZE
44	84 Series	CONCEALED BALANCE	STRYBUC	---
45	10mm X 1 3/16"	MOULDING SCREW	SPAX	SST
46	W LSBOLT1000-15	PARTING BEAD SCREW	FFI	SST
47	#12 x 2 1/2"	FRAME SCREW	SPAX	SST
48	QEZD-320	WEATHERSEAL	SCHLEGEL	URETHANE FOAM
49	QEZD-100	WEATHERSEAL	SCHLEGEL	URETHANE FOAM
50	HH0134-02	WEATHERSEAL	SIEGENIA	RUBBER
51	K 2030	CLAD WEATHERSEAL	TRELLEBORG	TSP-FOAM
52	1/4" x 3/4"	INTERLOCK REINFORCEMENT	METALS DEPOT	STEEL
53	1" x 1"	INTERIOR SASH STOP REINFORCEMENT	METALS DEPOT	STEEL


21

GLASS STOP




22

INFERIOR SASH GLASS STOP




23

EXT. SASH STOP FRAME CLADDING




24

TOP SASH TOP RAIL AND STILE SASH CLADDING




25

TOP SASH BOTTOM RAIL SASH CLADDING

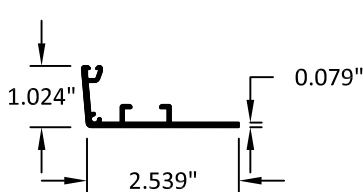


26

INF. SASH BOTTOM RAIL SASH CLADDING

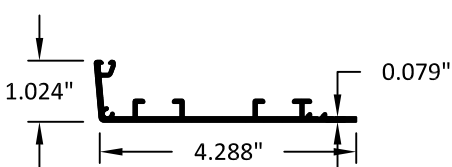


27

INF. SASH TOP RAIL SASH CLADDING




28

TOP SASH BOTTOM RAIL COVER SASH CL.

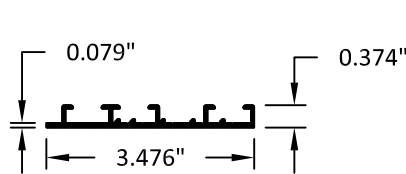


29

SILL CLADDING

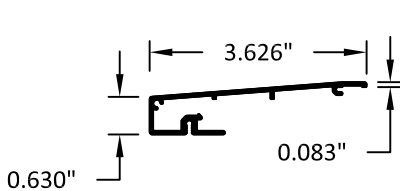


30

SILL EXTENTION CLADDING




31

TOP FRAME COVER CLADDING




32

EXT. SASH STOP COVER CLADDING




33

PARTING BEAD COVER CLADDING




34

FRAME COVER CLADDING

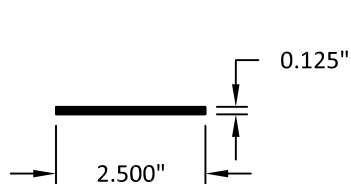

35

TOP SASH COVER CLADDING



4918 CEDAR AVENUE
PHILADELPHIA, PA 19143

PH: (215) 525-5048 FX: (215) 747-8908

TITLE:

ALUMINUM CLAD NARROW
FRAME DOUBLE HUNG WINDOW
COMPONENTS & BILL OF MATERIAL

PREPARED BY:

BUILDING DROPS, INC.

398 E. DANIA BEACH BLVD., STE. 338

DANIA BEACH, FL 33004

PH: (954)399-8478

FAX: (954)744-4738

WEB: www.buildingdrops.com




REMARKS

BY

DATE

THIS DOCUMENT IS THE PROPERTY OF BUILDING DROPS, INC. AND SHALL NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN CONSENT OF BUILDING DROPS, INC. ALTERATIONS, ADDITIONS, HIGHLIGHTING, OR OTHER MARKINGS TO THIS DOCUMENT ARE NOT PERMITTED AND INVALIDATE OUR CERTIFICATION.

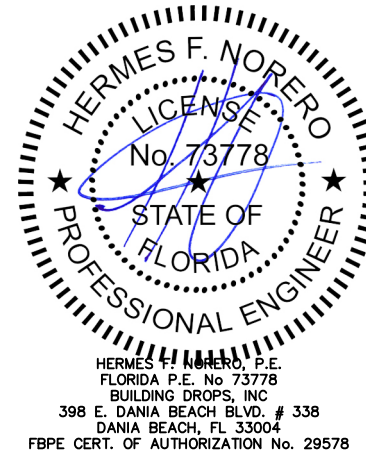

FL #:

FL16750

DATE: 10.25.17

DWG. BY:

RV

CHK. BY:

HFN

SCALE: NTS

DWG. #: CAB041

SHEET:

6

OF 6