


M600 FIXED WINDOW (Non-Impact)

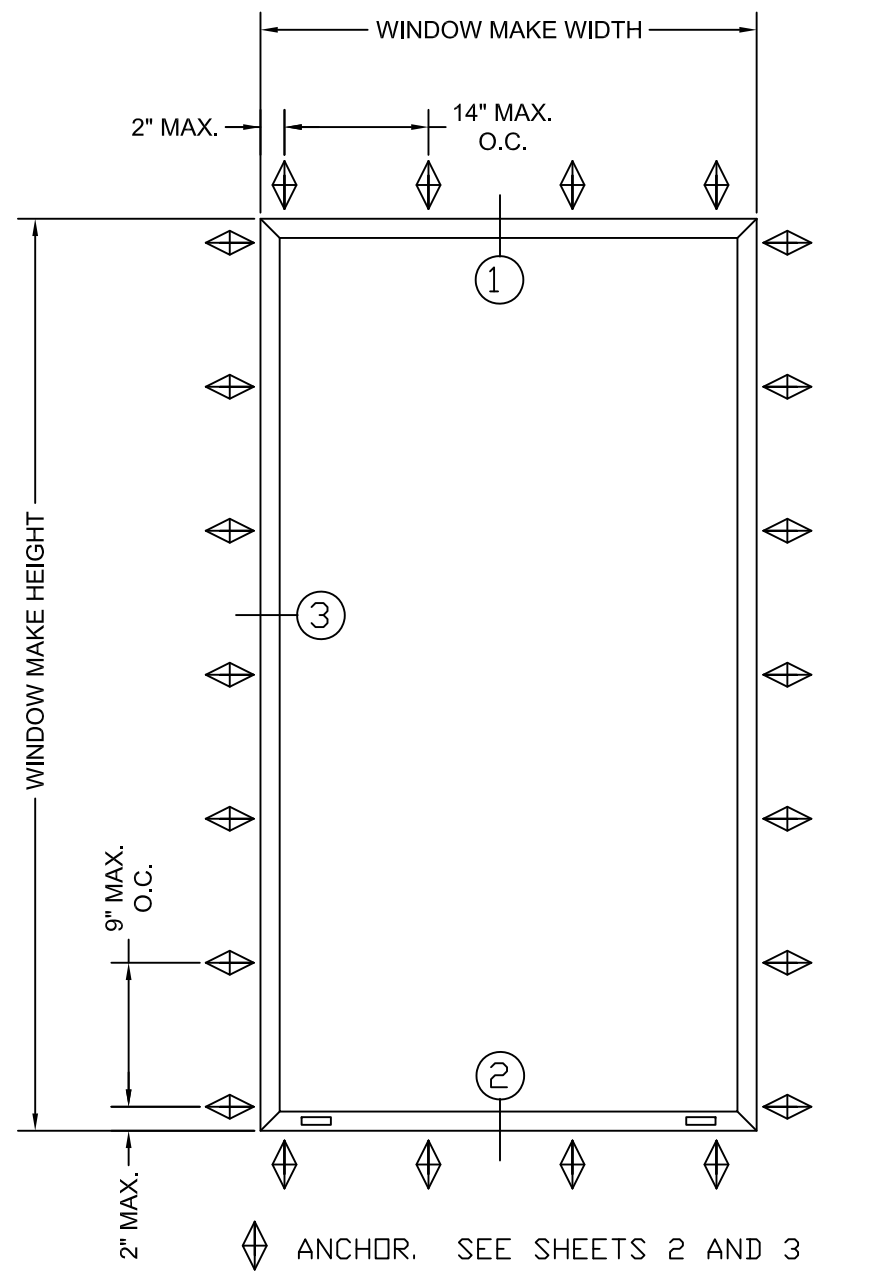


Maximum				
FW	FH	DLO-W	DLO-H	Pressure
72"	120"	69 1/8"	117 1/8"	± 70 PSF


Minimum Glazing
1" Insulating Glass
EXT - 5/16" Tempered Glass
INT - 5/16" Tempered Glass

NOTES:

1. Installations depicted satisfy the requirements of the Florida Building Code, Building 8th; Edition (2023) for design wind pressures and overall sizes noted.
2. Wood framing, steel stud framing, concrete and concrete masonry are by others and shall be designed by the architect or engineer of record to resist the loads imparted to them.
3. Wood bucks and wood framing are assumed to be Southern Pine (G=0.55) or denser.
4. Wood screws shall meet requirements of ANSI/ASME B18.6.1.
5. Maximum shim thickness 1/4".
6. Products are not impact resistant and require an approved protection device if used in windborne debris regions.
7. Not for use in High Velocity Hurricane Zone (HVHZ).
8. Glazing Conforms to ASTM E1300-16 (See Engineering)

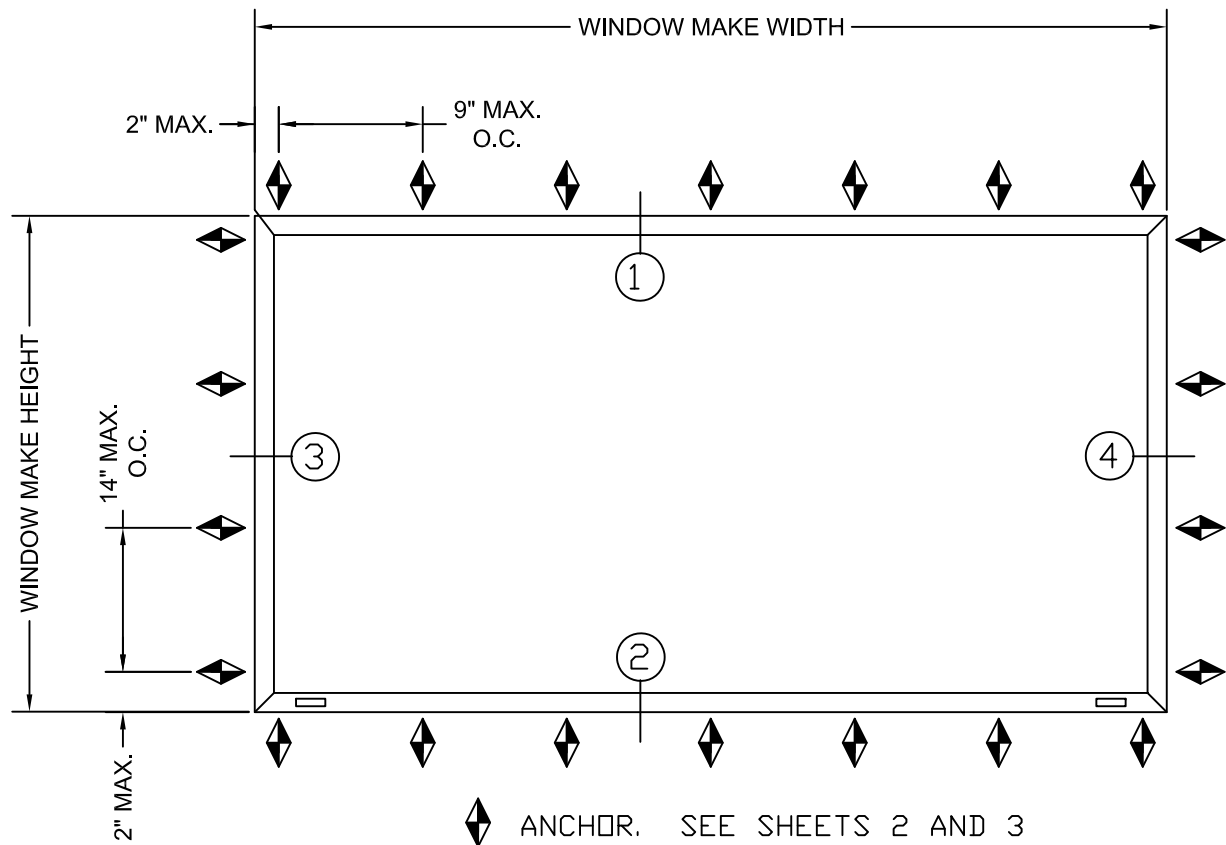

Maximum				
FW	FH	DLO-W	DLO-H	Pressure
120"	72"	117 1/8"	69 1/8"	± 70 PSF

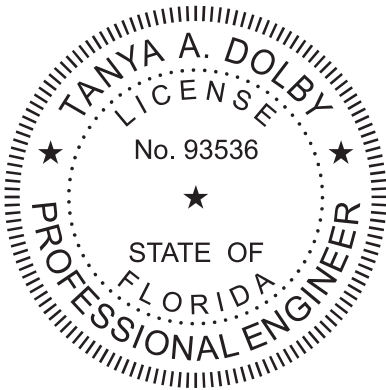

Digitally Signed by: Tanya Dolby

2024.04.05 13:39:01 -04'00'
Tanya A. Dolby, P.E.
FL P.E. No. 93536
Intertek – ATI
130 Derry Ct. York, PA 17406
(717) 764-7700
Project: Q9365.01

CONTENTS

Sheet 1/3	Elevation and Notes
Sheet 2/3	Fin Installations
Sheet 3/3	Aternate Substrates

Project Name:

M600 FIXED

Drawn By:

BUD

Date:

02-19-2024

Revision #:

Date:

By:

DESCRIPTION:

ELEVATIONS AND NOTES

QUAKER WINDOW PRODUCTS WILL NOT BE RESPONSIBLE FOR FIELD MEASUREMENT, QUANTITIES, & INSTALLATION DESIGN. CONTRACTOR MUST VERIFY ALL DIMENSIONS.

PHONE (573)-744-5211

FAX (573)-744-5586

COMMERCIAL

FAX (573)-744-5822

www.quakerwindows.com

504 Highway 63 South

Freeburg, MO 65035

drafting@quakerwindows.com

Scale:


NONE

Sheet #:

1 of 3


QUAKER

Commercial Windows and Doors

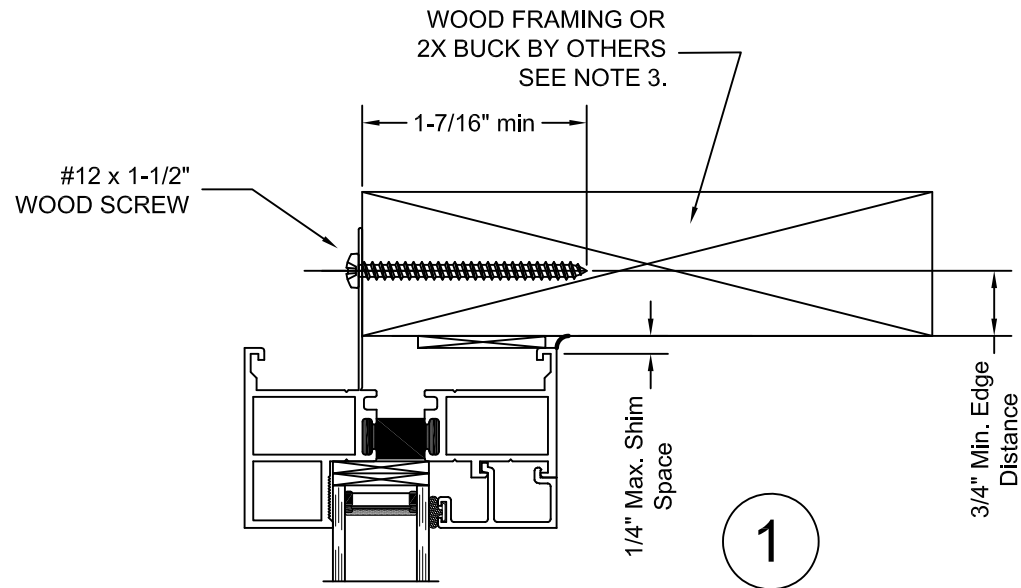


EXTERIOR

INTERIOR

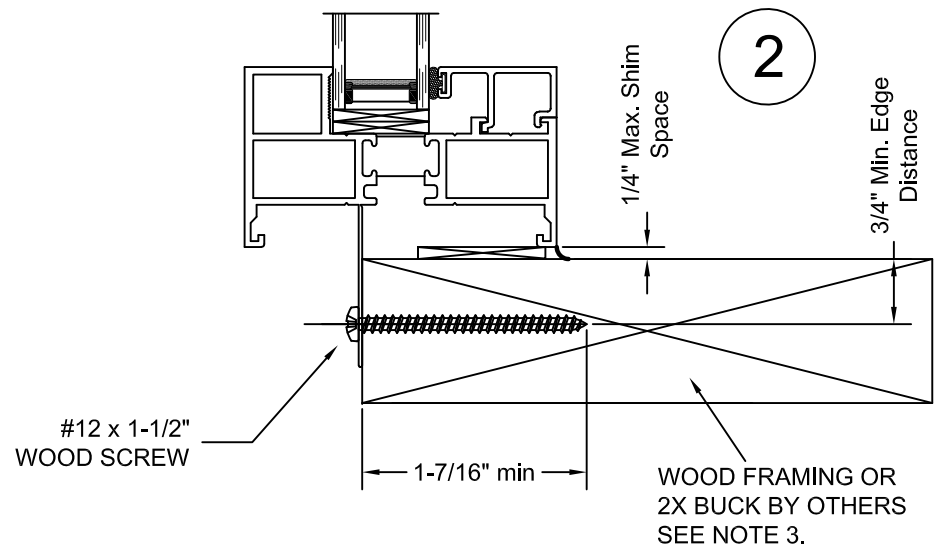



VERTICAL SECTION DETAIL
WOOD FRAMING INSTALLATION

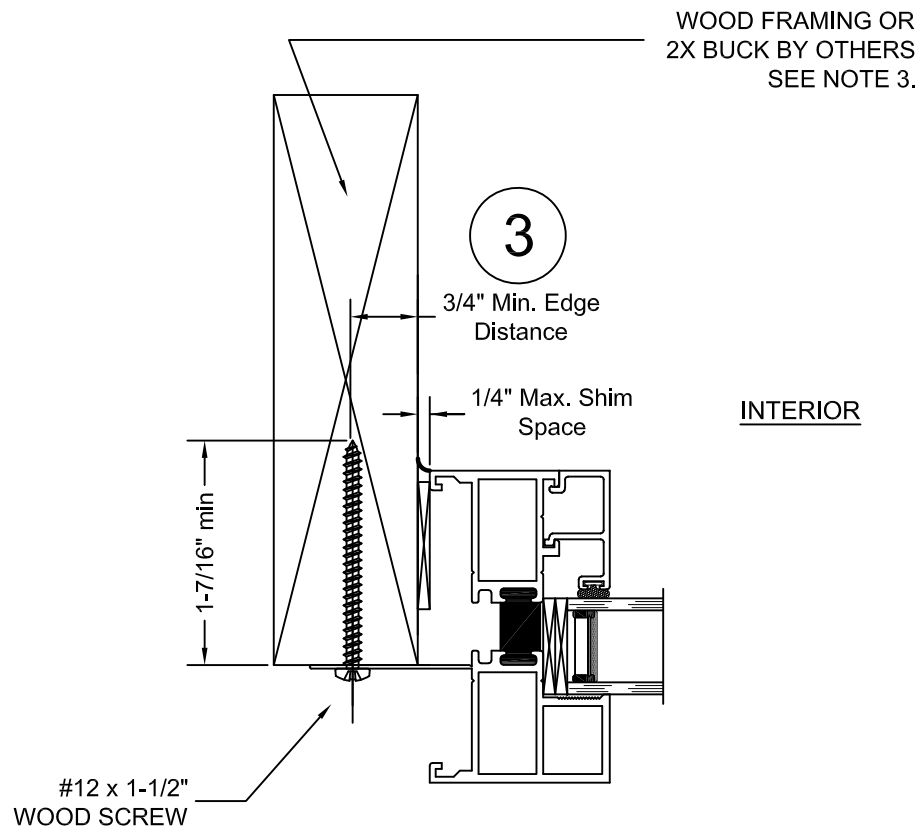

INTERIOR

EXTERIOR

HORIZONTAL SECTION DETAIL
WOOD FRAMING INSTALLATION

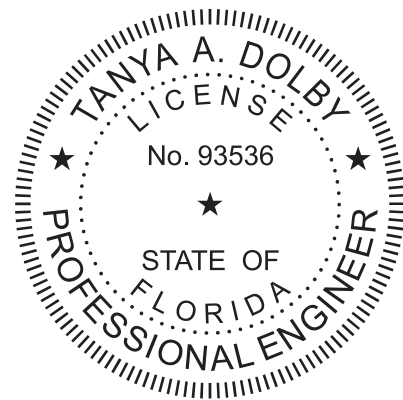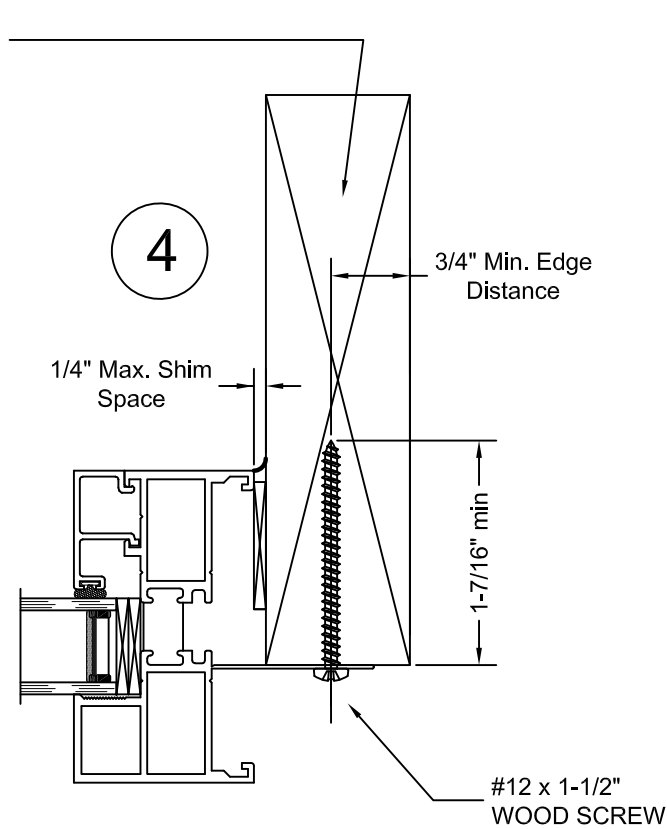

Tanya A. Dolby


Digitally Signed by: Tanya Dolby

2024.04.05 13:39:25 -04'00'


Tanya A. Dolby, P.E.
FL P.E. No. 93536
Intertek – ATI
130 Derry Ct. York, PA 17406
(717) 764-7700
Project: Q9365.01

Project Name:		M600 FIXED NAIL FIN INSTALLATION INSTRUCTIONS	
Description:		FIN INSTALLATIONS	
QUAKER WINDOW PRODUCTS WILL NOT BE RESPONSIBLE FOR FIELD MEASUREMENT, QUANTITIES, & INSTALLATION DESIGN. CONTRACTOR MUST VERIFY ALL DIMENSIONS.		Revision #:	
By:		Date:	
Scale:		NONE	
Sheet #:		2 of 3	
Drawn By:		BUD	
Date:		02-19-2024	
QUAKER COMMERCIAL WINDOW AND DOOR		504 Highway 63 South Freeburg, MO 65035 drafting@quakerwindows.com	
PHONE (573)-744-5211 FAX (573)-744-5586 COMMERCIAL FAX (573)-744-5822 www.quakerwindows.com			


- Notes:
- 1. See detail 4 on sheet 2 for attachment of window to wood buck.
 - 2. Shimming and anchorage to shown substraights - BY OTHERS

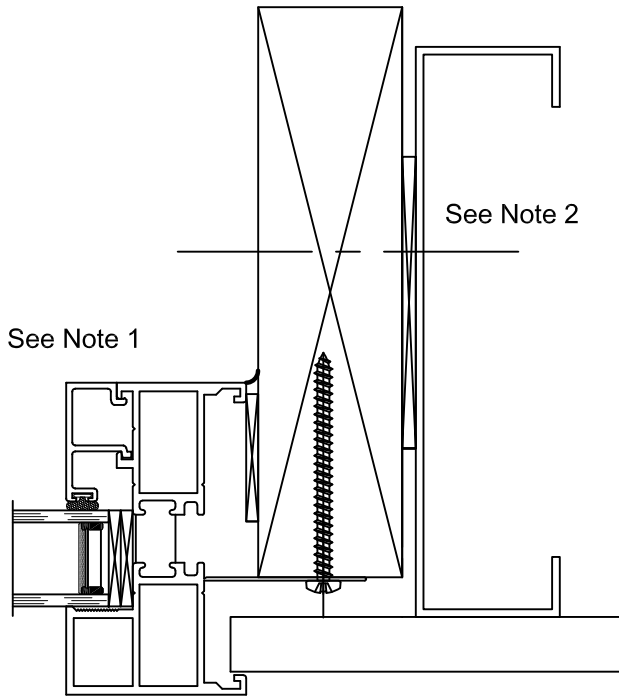


STEEL FRAMING INSTALLATION

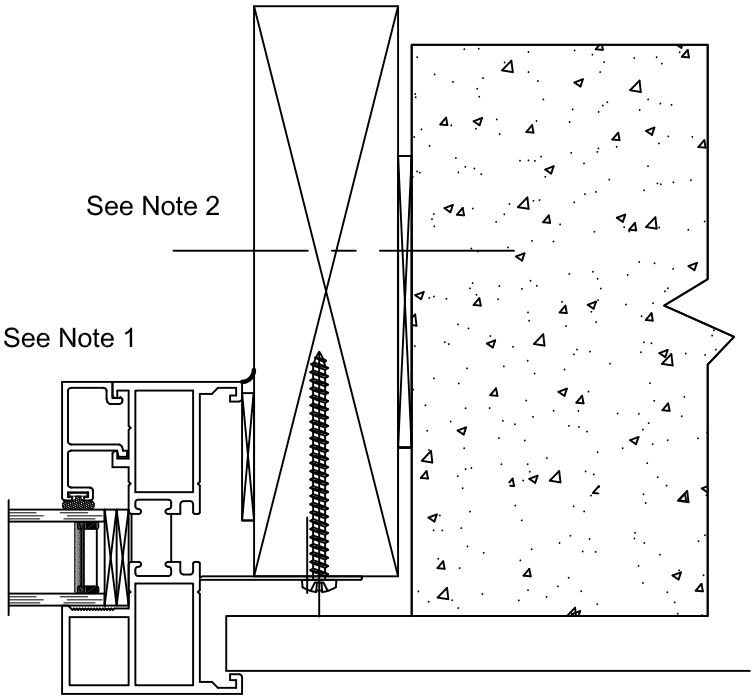

CONCRETE INSTALLATION

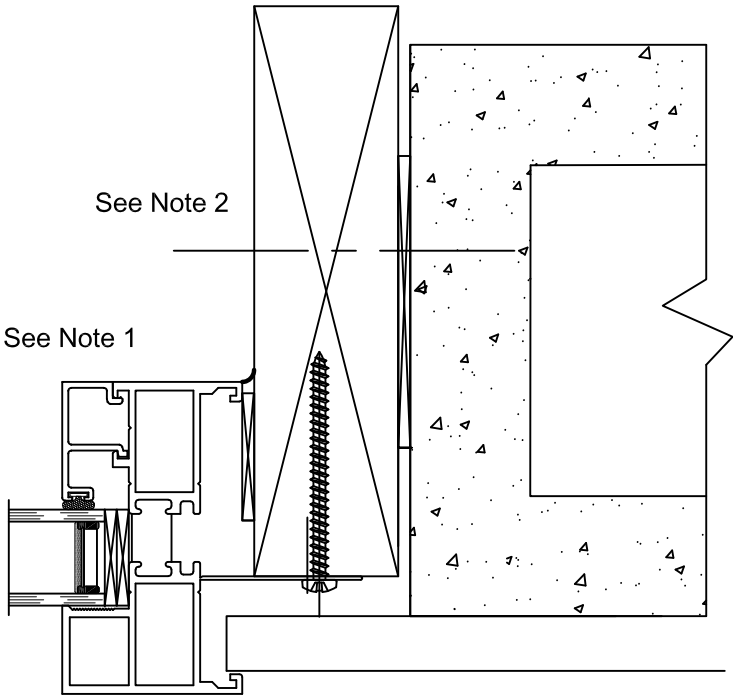

CMU INSTALLATION

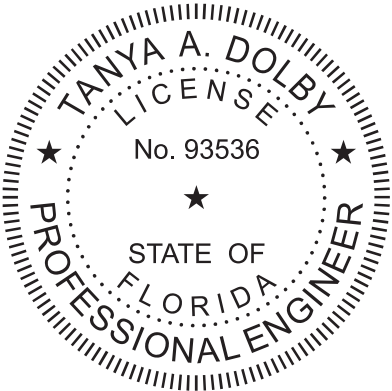

Digitally Signed by: Tanya Dolby
2024.04.05 13:39:42 -04'00'
Tanya A. Dolby, P.E.
FL P.E. No. 93536
Intertek – ATI
130 Derry Ct. York, PA 17406
(717) 764-7700
Project: Q9365.01



QUAKER
COMMERCIAL WINDOW AND DOOR

Drawn By: BUD
Date: 02-19-2024

504 Highway 63 South
Freeburg, MO 65035
drafting@quakerwindows.com

Scale: NONE
Sheet #: 3 of 3

PHONE (573)-744-5211
FAX (573)-744-5586
COMMERCIAL
FAX (573)-744-5822
www.quakerwindows.com

QUAKER WINDOW PRODUCTS
WILL NOT BE RESPONSIBLE
FOR FIELD MEASUREMENT,
QUANTITIES, & INSTALLATION
DESIGN. CONTRACTOR MUST
VERIFY ALL DIMENSIONS.

FIN INSTALLATIONS

Project Name: M600 FIXED NAIL FIN
INSTALLATION INSTRUCTIONS

By: _____
Date: _____
Revision #: _____