



8000 Vinyl Casement Window 2-Wide (Composite)
With 2-Wide Transom Stacked (Composite)
70 1/4" x 95 1/2" Overall Unit Frame Size
Nail Fin Installation / Non-Impact

TEST REPORT SUMMARY:

- MAXIMUM OVERALL COMBINATION FRAME SIZE:
70 1/4" (1784mm) x 95 1/2" (2426mm)
- OVERALL DESIGN PRESSURE: ± 35.09 psf
- STRUCTURAL TEST PRESSURE: ± 52.63 psf
- RATING: **LC-PG35**


CCL Listing #448-H-004.18	ELEMENT TEST REPORT #: ESP025014P-2128		
8000 Vinyl Series Casement 2-Wide Operating/2-Wide Transom Stacked Nail Fin Installation / WDMA Instructions / Non-Impact			
SHEET: 1 OF 3		UPDATED: 5/09/2017	DRAWN BY: B.K.

FRAME ANCHOR INSTALLATION NOTES:

1. Use 2" x _ wood buck.
2. Place wood shims every 6-10" **AND** behind each screw.
3. 1/4" Maximum shim space at head, sill and each jamb.
4. Apply a continuous bead of sealant between the nail fin and the buck at the head, sill and side jambs to secure nailing flange to framing material.
5. Install #8 X 1-1/4" PPH Zinc coated screws spaced maximum 2-4" from each corner and maximum 4-5" on center thereafter, through the integral nail fin into the wood buck framing material, at head, sill and side jambs.
 - Minimum fastener embedment of 1" into framing material.
 - 3/8" minimum edge distance.
 - Silicone seal over screw heads.

GENERAL INSTALLATION NOTES:

- Check rough opening for proper size, plumb, level and square.
- Make all necessary adjustments to ensure rough opening is plumb, level & square.
- Sill must be flat, level and capable of supporting the weight of the unit.
- Opening must allow a maximum of 1/4" shim space at head, sill and jambs.
- Wood buck, framing, fasteners, sealant and all wall system materials are provided by others

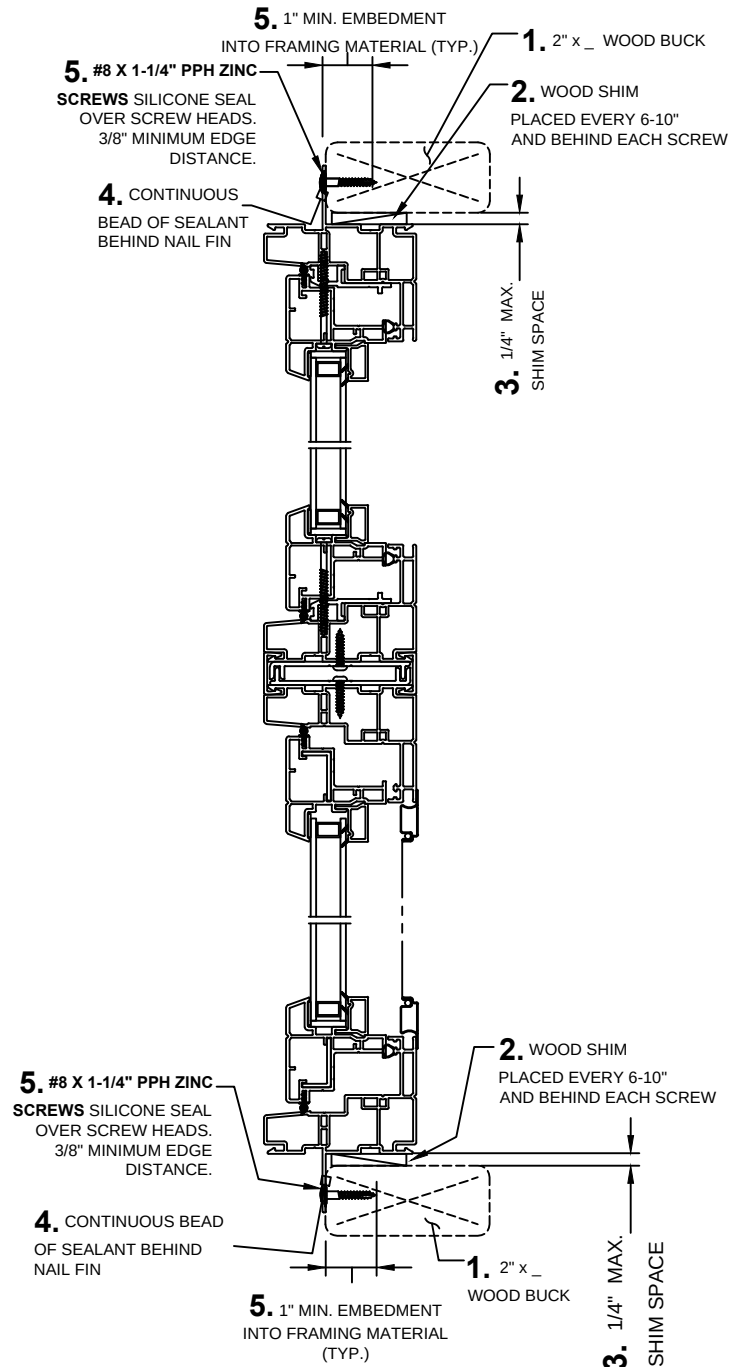



8000 Vinyl Casement Window 2-Wide (Composite)
With 2-Wide Transom Stacked (Composite)
70 1/4" x 95 1/2" Overall Unit Frame Size
Nail Fin Installation / Non-Impact

TEST REPORT SUMMARY:

- MAXIMUM OVERALL COMBINATION FRAME SIZE:
70 1/4" (1784mm) x 95 1/2" (2426mm)
- OVERALL DESIGN PRESSURE: ± 35.09 psf
- STRUCTURAL TEST PRESSURE: ± 52.63 psf
- RATING: LC-PG35

CCL Listing #448-H-004.18



ELEMENT TEST REPORT #: **ESP025014P-2128**

8000 Vinyl Series Casement 2-Wide Operating/2-Wide Transom Stacked
Nail Fin Installation / WDMA Instructions / Non-Impact

SHEET: 2 OF 3

UPDATED: 5/09/2017

DRAWN BY: B.K.

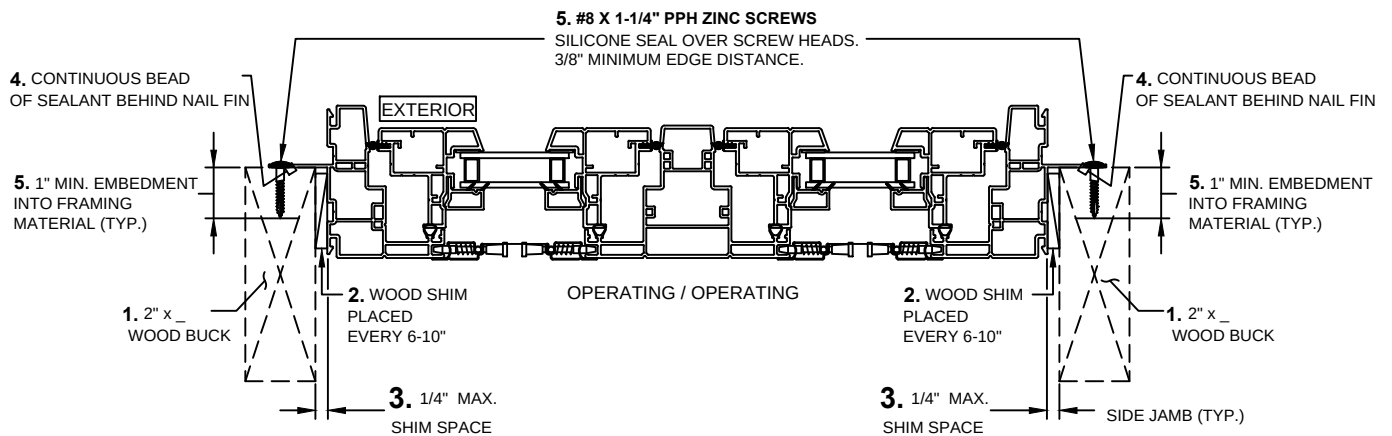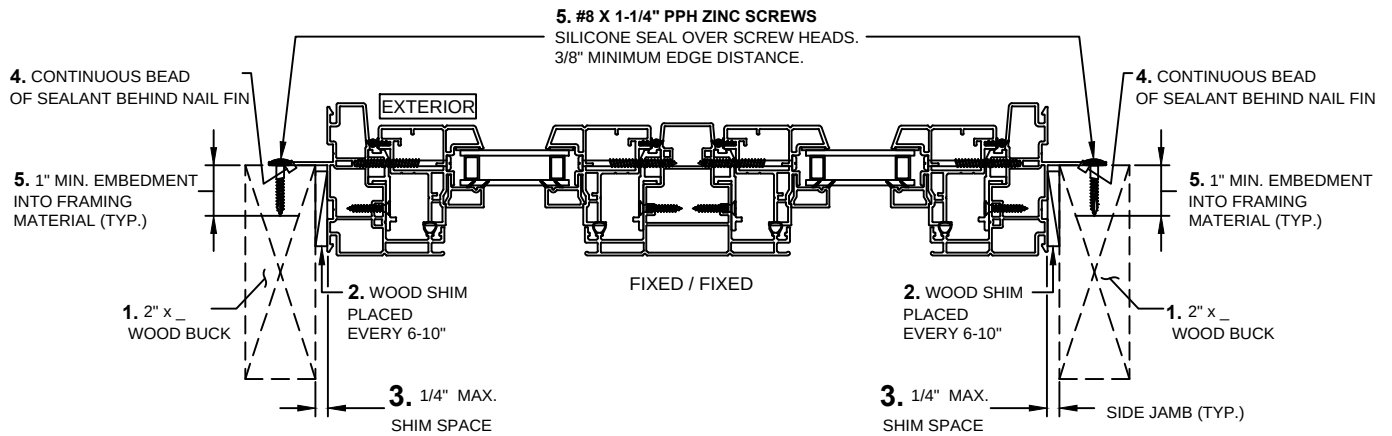

Installation requirements may vary in particular locations and in other types of construction. Proper installation is essential, and Sierra Pacific Windows, recommends consultation with an AAMA Certified Installer, or other qualified, registered building professional before installation of any Sierra Pacific product. Proper installation of Sierra Pacific products is the responsibility of the installer. Sierra Pacific is not responsible for proper installation. Sierra Pacific is not responsible for the design of, conditions in, or performance of building construction beyond the perimeters of the Sierra Pacific units. Sierra Pacific is not responsible for proper integration of the Sierra Pacific units with the weather-repellent systems of the building.



8000 Vinyl Casement Window 2-Wide (Composite)
With 2-Wide Transom Stacked (Composite)
70 1/4" x 95 1/2" Overall Unit Frame Size
Nail Fin Installation / Non-Impact

TEST REPORT SUMMARY:

- MAXIMUM OVERALL COMBINATION FRAME SIZE:
70 1/4" (1784mm) x 95 1/2" (2426mm)
- OVERALL DESIGN PRESSURE: ± 35.09 psf
- STRUCTURAL TEST PRESSURE: ± 52.63 psf
- RATING: LC-PG35

CCL Listing #448-H-004.18


ELEMENT TEST REPORT #: **ESP025014P-2128**

8000 Vinyl Series Casement 2-Wide Operating/2-Wide Transom Stacked
Nail Fin Installation / WDMA Instructions / Non-Impact

SHEET: 3 OF 3

UPDATED: 5/09/2017

DRAWN BY: B.K.

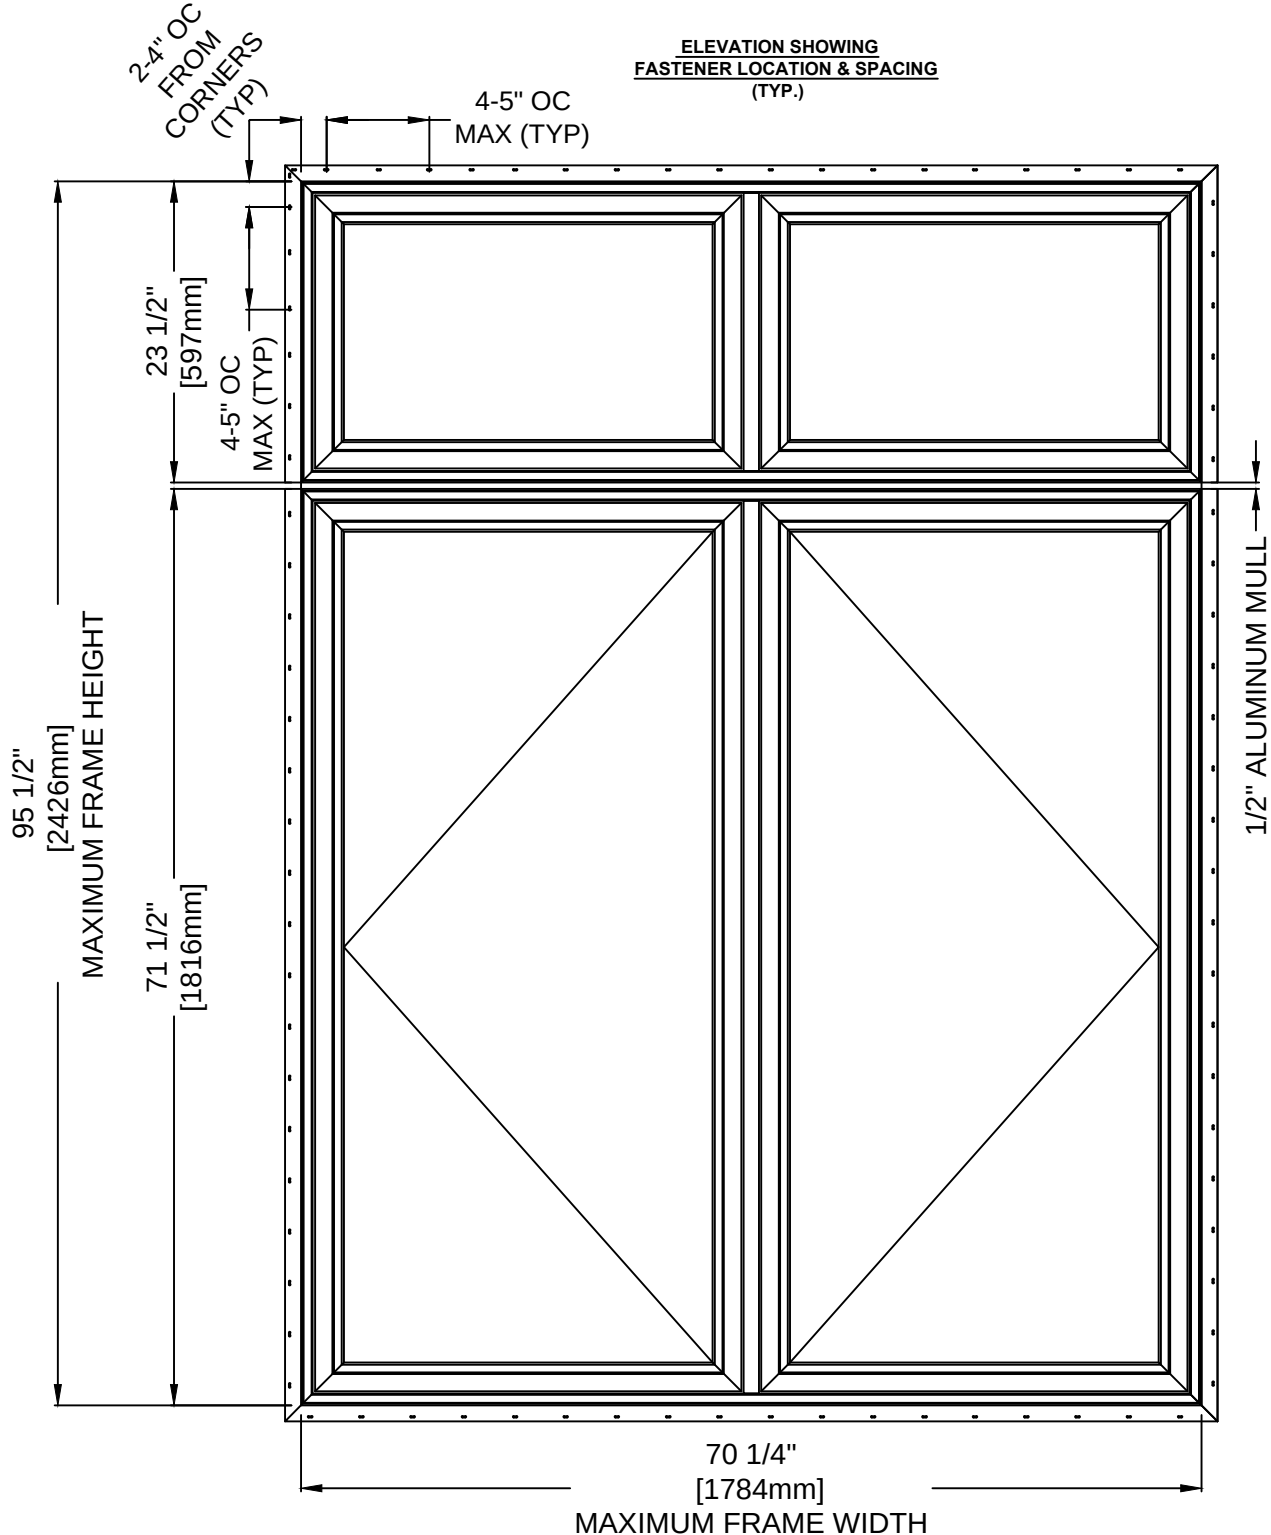

Installation requirements may vary in particular locations and in other types of construction. Proper installation is essential, and Sierra Pacific Windows, recommends consultation with an AAMA Certified Installer, or other qualified, registered building professional before installation of any Sierra Pacific product. Proper installation of Sierra Pacific products is the responsibility of the installer. Sierra Pacific is not responsible for proper installation. Sierra Pacific is not responsible for the design of, conditions in, or performance of building construction beyond the perimeters of the Sierra Pacific units. Sierra Pacific is not responsible for proper integration of the Sierra Pacific units with the weather-repellent systems of the building.