
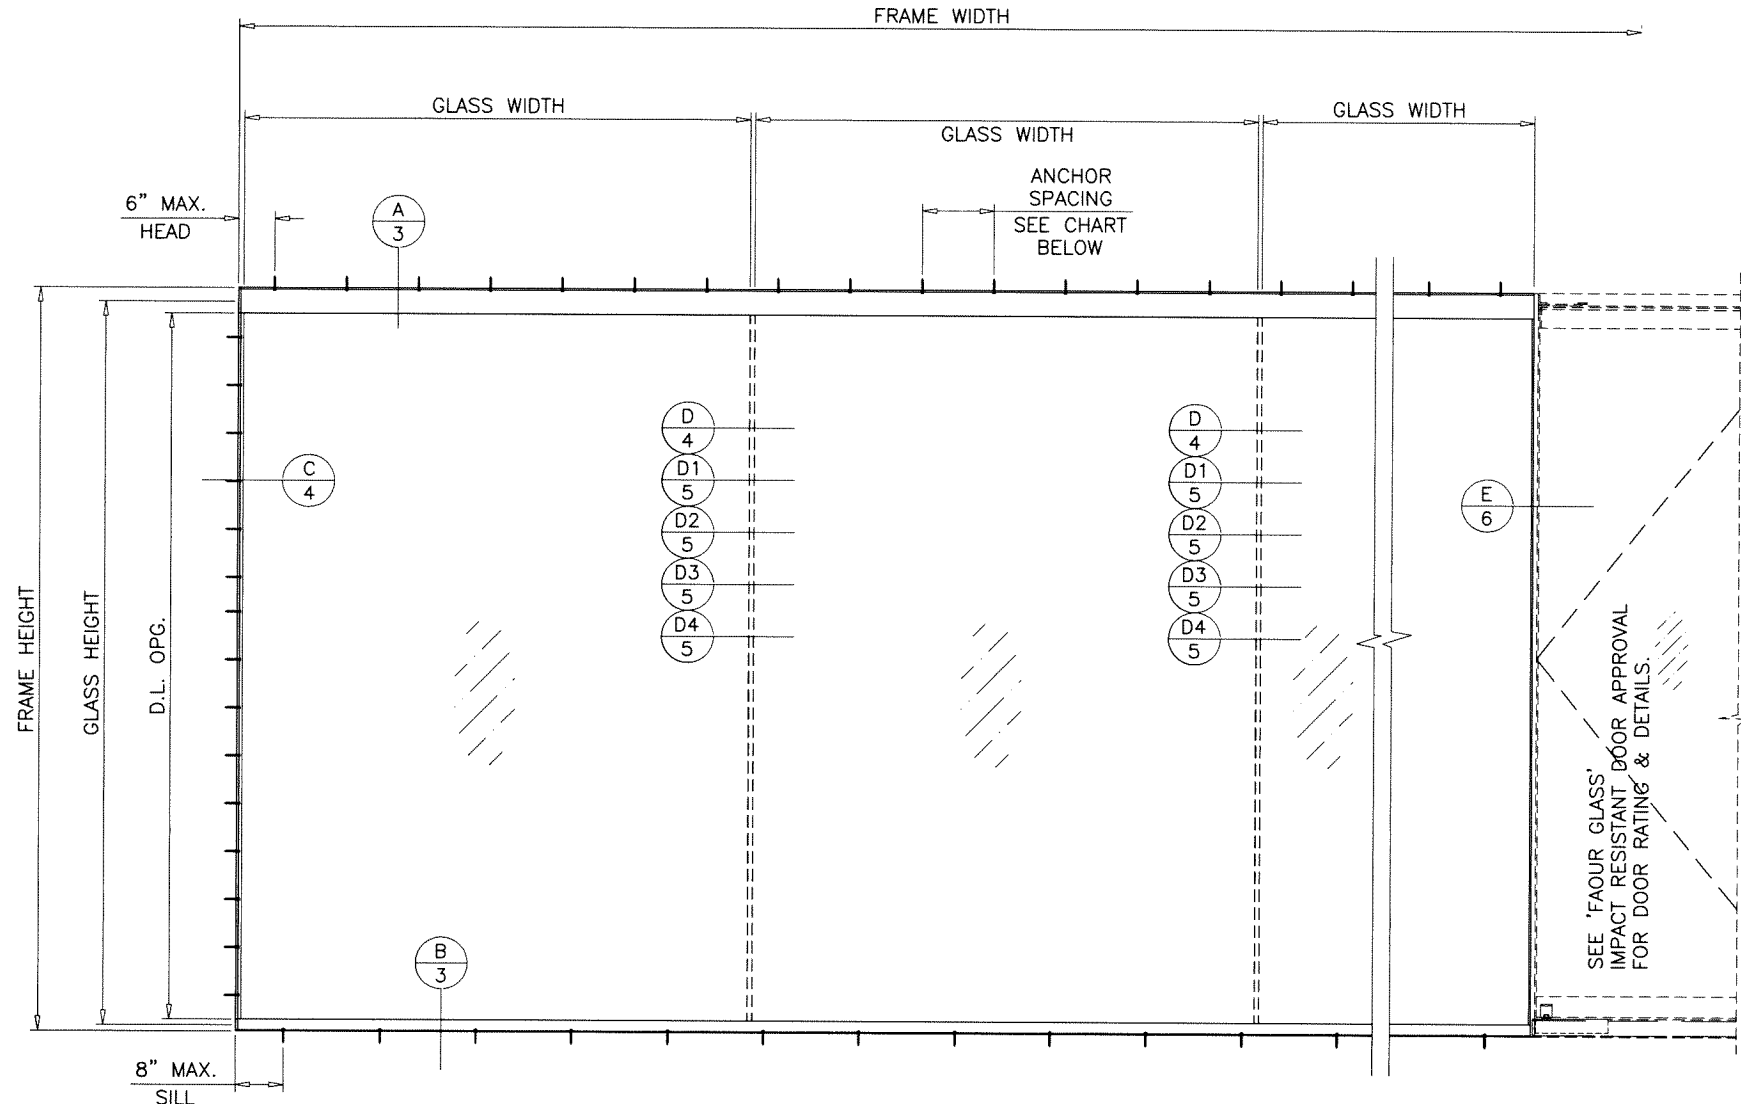


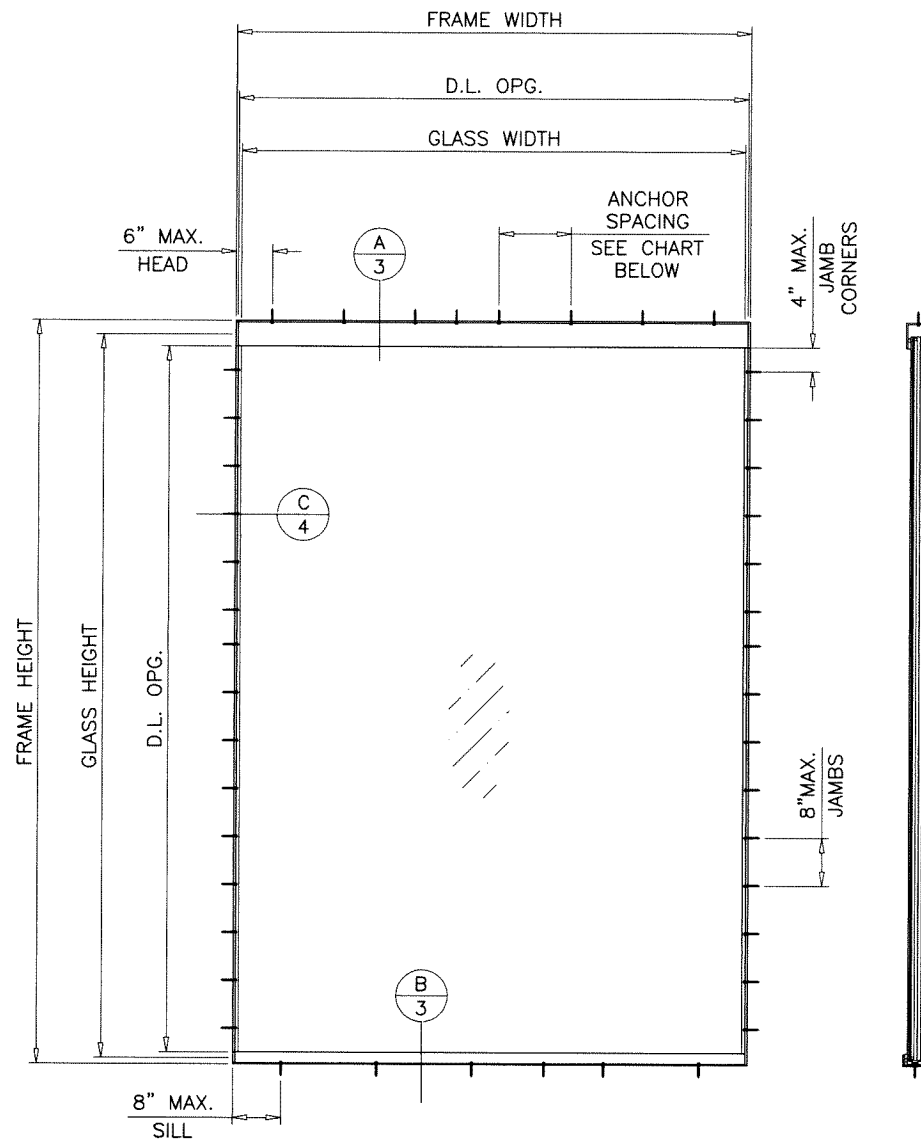

TYPICAL ELEVATIONS

ANCHOR TYPE	ANCHOR SPACING INCHES	
	HEAD	SILL
A	12	14
B	12	16
C	12	16

NOTE:
GLASS CAPACITIES ARE BASED ON
ASTM E1300-09 (3 SEC. GUSTS).


THIS SYSTEM IS RATED FOR LARGE & SMALL MISSILE IMPACT.
SHUTTERS ARE NOT REQUIRED.

APPROVAL APPLIES TO SINGLE LITE UNITS OR MULTIPLE LITES UNIT INSTALLATIONS
SEE SHEET 2 FOR DESIGN LOAD CAPACITY

Sealed: 8/21/2023

FL #25673

A- CONTRACTOR TO BE RESPONSIBLE FOR THE SELECTION, PURCHASE AND INSTALLATION OF THIS PRODUCT BASED ON THIS PRODUCT EVALUATION PROVIDED HE/SHE DOES NOT DEVIATE FROM THE CONDITIONS DETAILED ON THIS DOCUMENT.
B- THIS PRODUCT EVALUATION DOCUMENT WILL BE CONSIDERED INVALID IF ALTERED BY ANY MEANS.
C- SITE SPECIFIC PROJECTS SHALL BE PREPARED BY A FLORIDA REGISTERED ENGINEER OR ARCHITECT WHICH WILL BECOME THE ENGINEER OF RECORD (E.O.R.) FOR THE PROJECT AND WHO WILL BE RESPONSIBLE FOR THE PROPER USE OF THE P.E.D. ENGINEER OF RECORD, ACTING AS A DELEGATED ENGINEER TO THE P.E.D. ENGINEER SHALL SUBMIT TO THIS LATTER THE SITE SPECIFIC DRAWINGS FOR REVIEW.
D- THIS P.E.D. SHALL BEAR THE DATE AND ORIGINAL SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER OF RECORD THAT PREPARED IT.

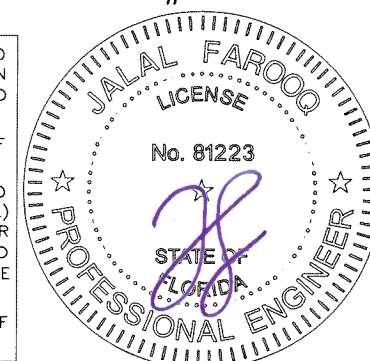

SERIES 'SLIMPACT XLIG' GLASS WALL SYSTEM

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE 2020 (7TH EDITION)/2023 (8TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

1BY OR 2BY WOOD BUCKS & BUCK FASTENERS BY OTHERS, MUST BE DESIGNED AND INSTALLED ADEQUATELY TO TRANSFER APPLIED PRODUCT LOADS TO THE BUILDING STRUCTURE.

ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.

ALL SHIMS TO BE HIGH IMPACT, NON-METALLIC AND NON-COMPRESSIBLE.

MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE 2020/2023 FLORIDA BLDG. CODE & ADOPTED STANDARDS.

THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR WATER INFILTRATION RESISTANCE ETC. CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY, AND TO BE REVIEWED BY BUILDING OFFICIAL.

DESIGN LOADS SHOWN ARE BASED ON 'ALLOWABLE STRESS DESIGN (ASD)'.



MANUFACTURER'S LABEL SHALL BE LOCATED ON A READILY VISIBLE LOCATION IN ACCORDANCE WITH SECTION 1709.9.3 OF FLORIDA BUILDING CODE. LABELING TO COMPLY WITH SECTION 1709.9.2.

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173 (C.A.N. 3538)
TEL. (305) 264-8100 FAX. (305) 262-6978
COMP-ANL\21-04F-FGT

SERIES 'SLIMPACT XLIG' GLASS WALL SYSTEM (L.M.I.)
Faour Glass Technologies
5119 West Knox Street
Tampa, FL 33634
Tel. (813) 884-3297 Fax. (-)

revisions:	no	date	by	description
	A	10.05.21		CORNER DETAIL ADDED
	B	08.16.23		UPDATED TO 2023 FBC
date:	01-14-21			
scale:	3/8"=1'-0"			
dr. by:	TARIQ			
chk. by:				
drawing no.	21-04F			
sheet	1 of 6			

DESIGN LOAD CAPACITY - PSF			
D.L.O. DIMS.		LAM. INSUL. GLASS	
WIDTH	HEIGHT	EXT.(+)	INT.(-)
96"	144"	70.0	70.0
102-7/8"	134-7/16"	75.0	75.0
109-3/4"	126"	80.0	80.0
116-1/2"	118-1/2"	80.0	85.0
123-7/16"	112"	80.0	90.0

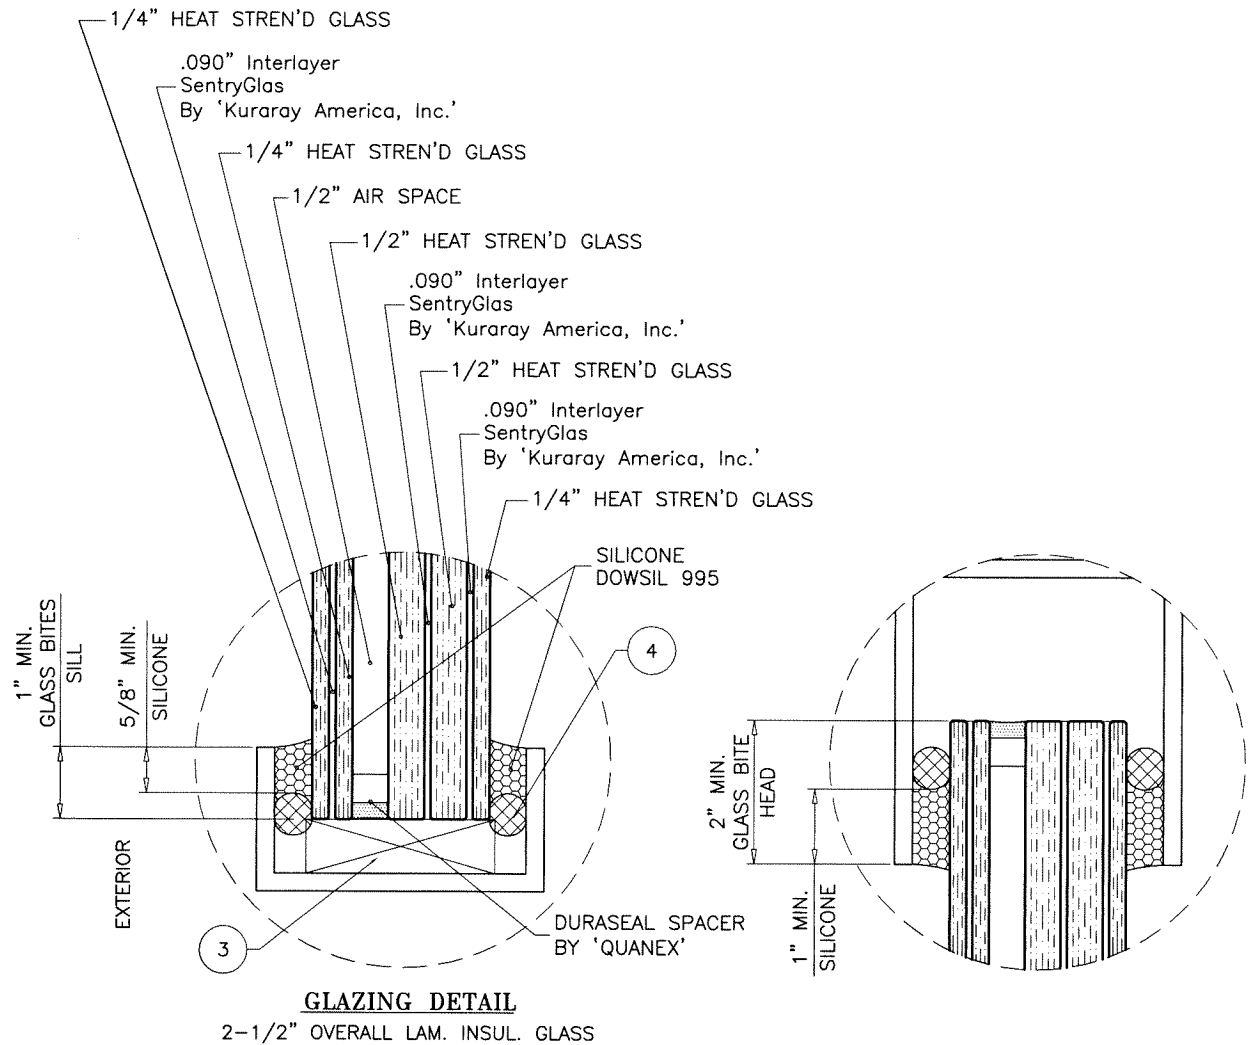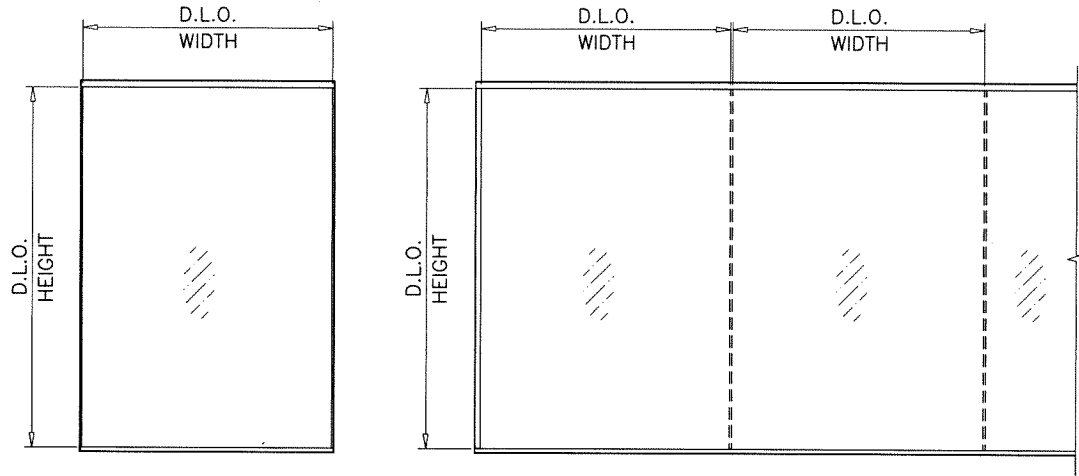

Sealed: 8/21/2023



FL #25673



AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173 (C.A.N. 3538)
TEL. (305) 264-8100 FAX. (305) 262-6978
COMP-ANL\21-04F-FGT

SERIES 'SLIMPACT XLIG' GLASS WALL SYSTEM (L.M.I.)





Faour Glass Technologies
5119 West Knox Street
Tampa, FL. 33634
Tel. (813) 884-3297 Fax. (-)

revisions:

no	date	by	description

date: 01-14-21
scale: 3/8" = 1"
dr. by: TARIQ
chk. by:

drawing no.
21-04F
sheet 2 of 6

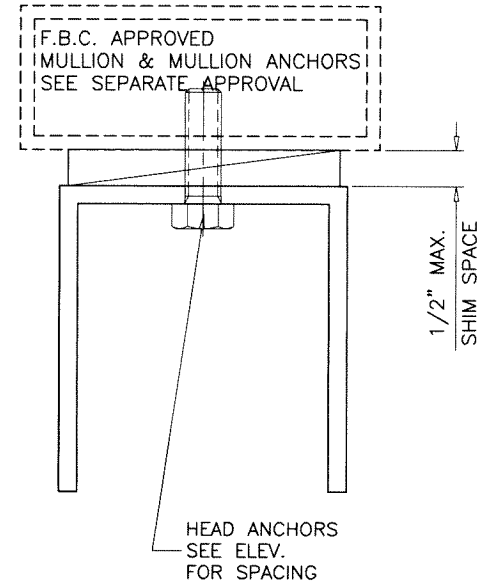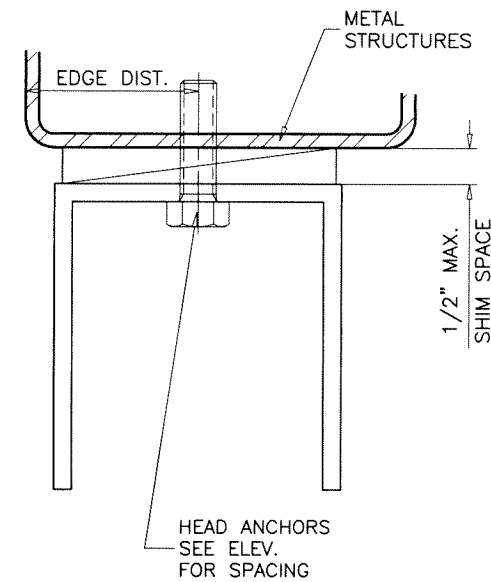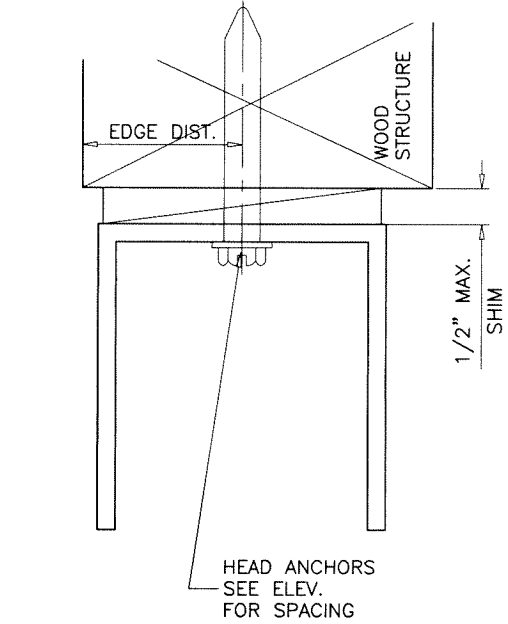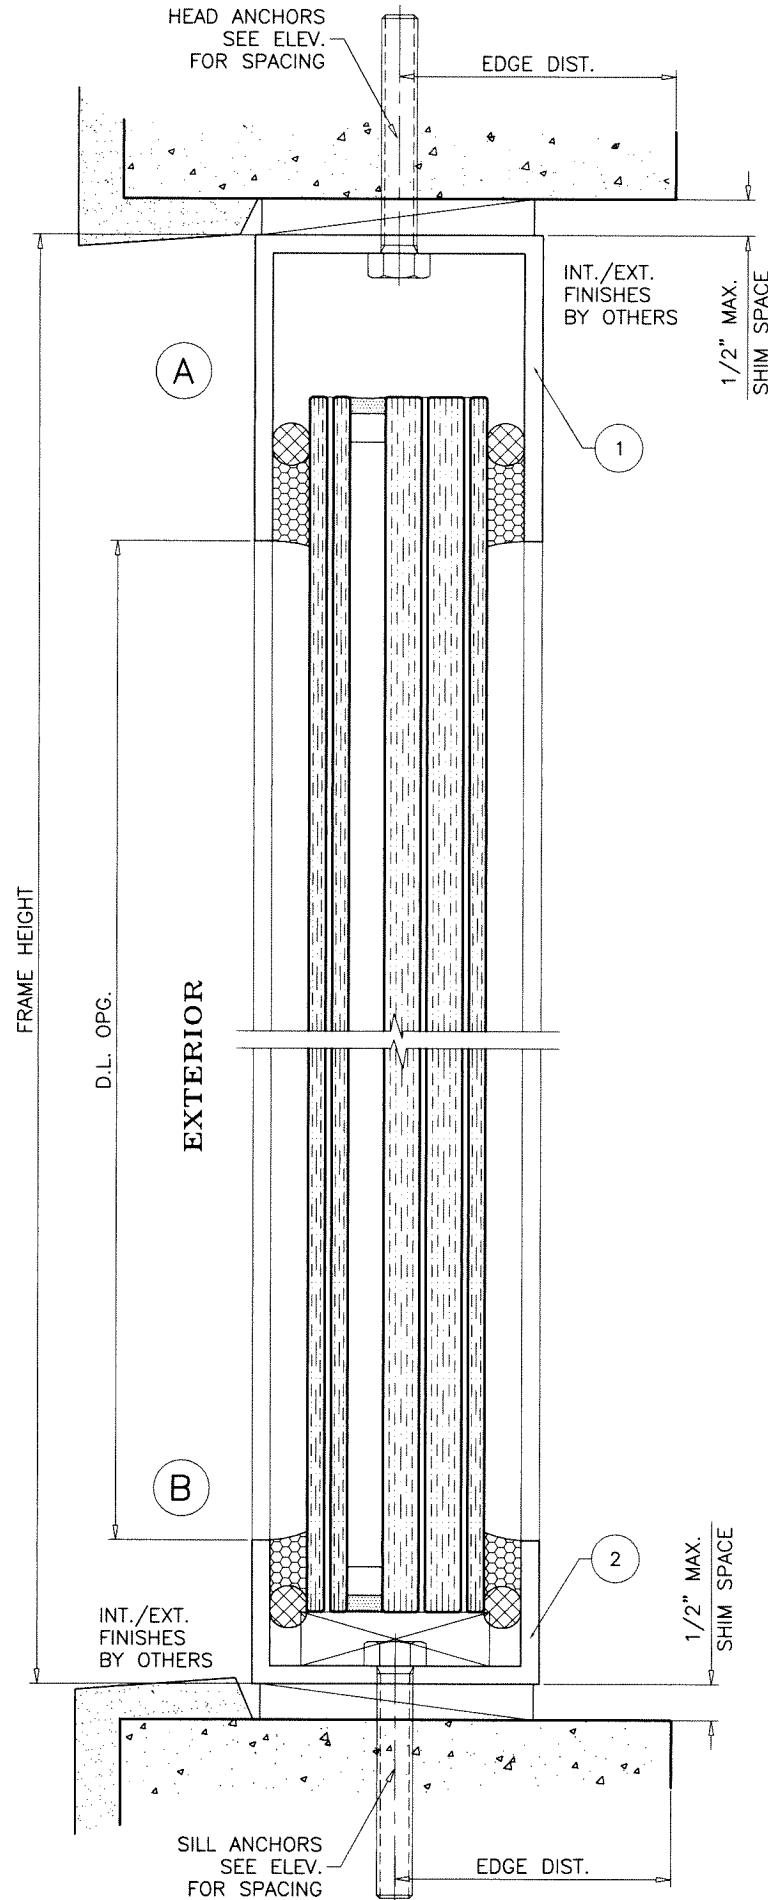


HEAD/SILL ANCHORS: SEE ELEV. FOR SPACING

- ANCHOR 'A'— 1/2" DIA. LAG SCREWS**
 INTO WOOD STRUCTURES
 3" MIN. PENETRATION INTO WOOD
- ANCHOR 'B'— 1/2" DIA. SCREW-BOLT+ BY 'DEWALT'**
 THRU 1BY OR 2BY WOOD BUCKS INTO CONC.
 2-1/2" MIN. EMBED INTO CONCRETE
 DIRECTLY INTO CONCRETE
 2-1/2" MIN. EMBED INTO CONCRETE
- ANCHOR 'C'— 1/2" DIA. Tap-Flex BY 'DEWALT'**
1/2" DIA. ST. STEEL MACHINE SCREW (Fu=120 KSI MIN., Fy=92 KSI MIN.)
 INTO METAL STRUCTURES
 (3) THREADS MIN. PENETRATION BEYOND SUBSTRATE (FOR Tap-Flex)
 1/4" EMBEDMENT INTO SUBSTRATE (FOR MACHINE SCREWS)
 ALUMINUM: 1/4" THK. (6063-T5)
 STEEL: 1/4" THK. MIN. (Fy = 36 KSI MIN.)
 (STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

TYPICAL EDGE DISTANCE

INTO CONCRETE = 2-1/2" MIN.
 INTO WOOD STRUCTURE = 2" MIN.
 INTO METAL STRUCTURE = 3/4" MIN.
 WOOD AT HEAD OR SILL SG = 0.55 MIN.
 CONCRETE AT HEAD OR SILL f'c = 3000 PSI MIN.

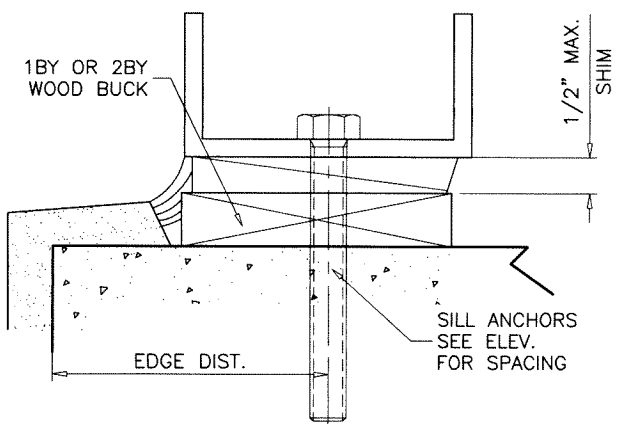

JAMB ANCHORS: SEE ELEV. FOR SPACING


- 5/16" DIA. ULTRACON BY 'DEWALT'** (Fu=177 KSI, Fy=155 KSI)
 INTO 2BY WOOD BUCKS OR WOOD STRUCTURES
 1-1/2" MIN. PENETRATION INTO WOOD
 THRU 1BY BUCKS INTO CONC. OR BLOCKS
 1-1/4" MIN. EMBED INTO CONCRETE
 1-1/4" MIN. EMBED INTO BLOCKS
 DIRECTLY INTO CONCRETE OR BLOCKS
 1-1/4" MIN. EMBED INTO CONCRETE
 1-3/4" MIN. EMBED INTO GROUT-FILLED BLOCKS
- 5/16" DIA. TEKS OR SELF DRILLING SCREWS** (GRADE 5 CRS)
5/16" DIA. ST. STEEL MACHINE SCREW (Fu=120 KSI MIN., Fy=92 KSI MIN.)
 INTO METAL STRUCTURES
 (3) THREADS MIN. PENETRATION BEYOND SUBSTRATE (FOR TEKS)
 1/4" EMBEDMENT INTO SUBSTRATE (FOR MACHINE SCREWS)
 ALUMINUM: 1/4" THK. (6063-T5)
 STEEL: 1/4" THK. MIN. (Fy = 36 KSI MIN.)
 (STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

TYPICAL EDGE DISTANCE

INTO CONCRETE AND BLOCKS = 2-1/2" MIN.
 INTO WOOD STRUCTURE = 1" MIN.
 INTO METAL STRUCTURE = 3/4" MIN.
 WOOD AT HEAD, SILL OR JAMBS SG = 0.55 MIN.
 CONCRETE AT HEAD, SILL OR JAMBS f'c = 3000 PSI MIN.
 C-90 HOLLOW/FILLED BLOCK AT JAMBS f'm = 2000 PSI MIN.

WOOD BUCKS AND METAL STRUCTURE NOT BY 'FAOUR GLASS'
 MUST SUSTAIN LOADS IMPOSED BY GLAZING SYSTEM
 AND TRANSFER THEM TO THE BUILDING STRUCTURE.

Sealed: 8/21/2023

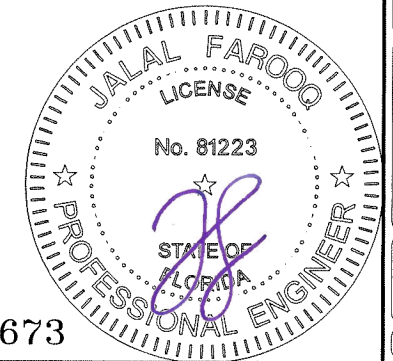

FL #25673

AL-FAROOQ CORPORATION
 ENGINEERS & PRODUCT DEVELOPMENT
 9360 SUNSET DRIVE, SUITE 220
 MIAMI, FLORIDA 33173
 TEL. (305) 264-8100 FAX. (305) 262-6978

COMP-ANL\21-04F-FGT

SERIES 'SLIMPACT XLIG' GLASS WALL SYSTEM (L.M.I.)






Faour Glass Technologies
 5119 West Knox Street
 Tampa, FL. 33634
 Tel. (813) 884-3297 Fax. (-)

revisions:

no	date	by	description

date: 01-14-21
 scale: 3/8" = 1"
 dr. by: TARIO
 ch. by:

drawing no.
21-04F
 sheet 3 of 6

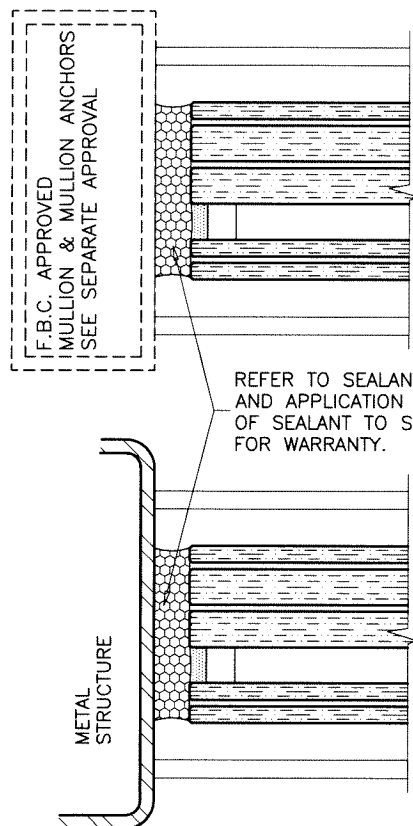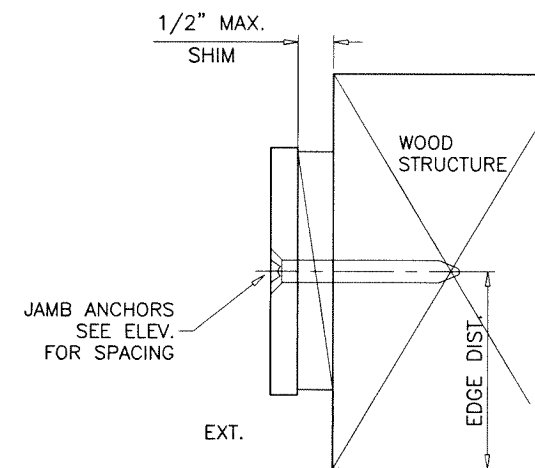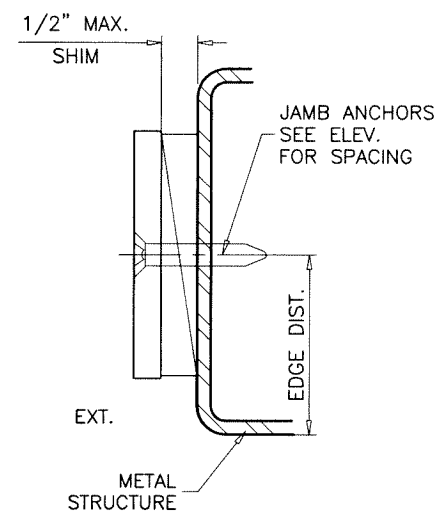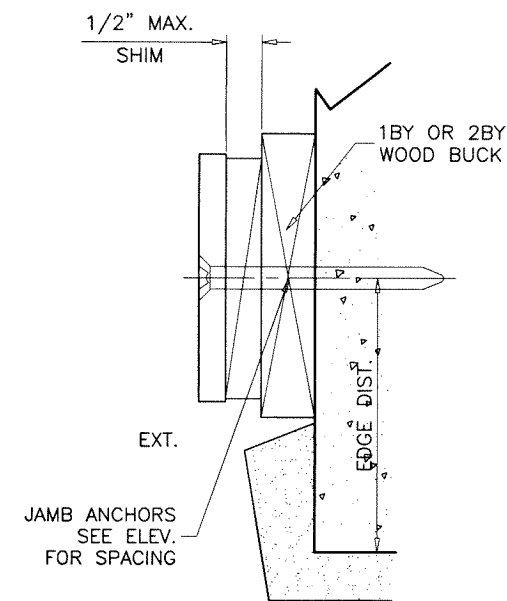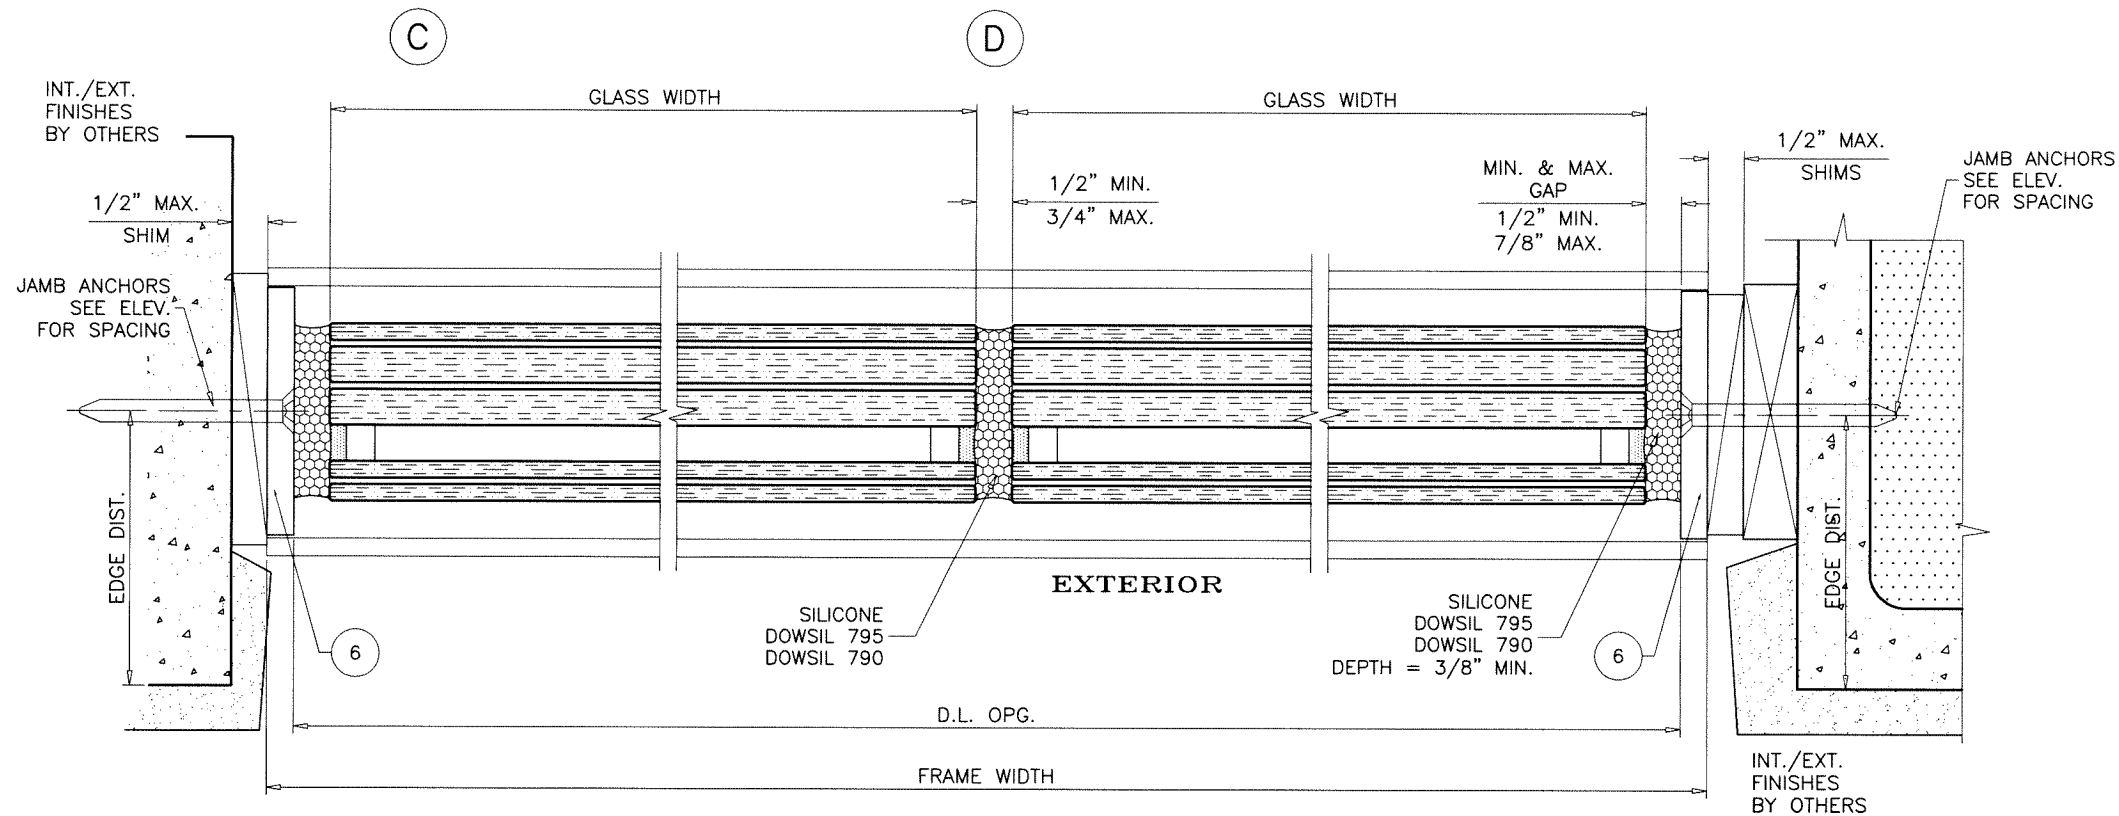

REFER TO SEALANT MANUFACTURER'S DATA AND APPLICATION MANUAL FOR COMPATABILITY OF SEALANT TO SUBSTRATE AND COMPLIANCE FOR WARRANTY.

NOTE:
 MAX. MOVEMENT CONSIDERED=50% STRETCH FOR DOWSIL 795.
 MAX. MOVEMENT CONSIDERED=100% STRETCH FOR DOWSIL 790.
 PLEASE REFER TO SEALANT MANUFACTURER'S DATA AND APPLICATION MANUAL FOR COMPATABILITY OF SEALANT TO SUBSTRATE & WINDOWALL MATERIAL/FINISH AND COMPLIANCE FOR WARRANTY.
 REFER TO ACI-117-10 FOR CONSTRUCTION TOLERANCES.

ALTERNATE SEALANTS AT JAMB GAPS CAN BE DESIGNED BY ENGINEER OF RECORD BASED ON MANUFACTURER GUIDE LINES.

Sealed: 8/21/2023



FL #25673

afc

AL-FAROOQ CORPORATION
 ENGINEERS & PRODUCT DEVELOPMENT
 9360 SUNSET DRIVE, SUITE 220
 MIAMI, FLORIDA 33173 (C.A.N. 3538)
 TEL. (305) 264-8100 FAX. (305) 262-6978
 COMP-ANL 21-04F-FGT

SERIES 'SLIMPACT XLIG' GLASS WALL SYSTEM (L.M.I.)

Faour Glass Technologies

5119 West Knox Street
 Tampa, FL. 33634

Tel. (813) 884-3297 Fax. (-)

revisions:
 no date by description

date: 01-14-21

scale: 3/8" = 1"





dr. by: TARIQ

chk. by:

drawing no.


21-04F

sheet 4 of 6

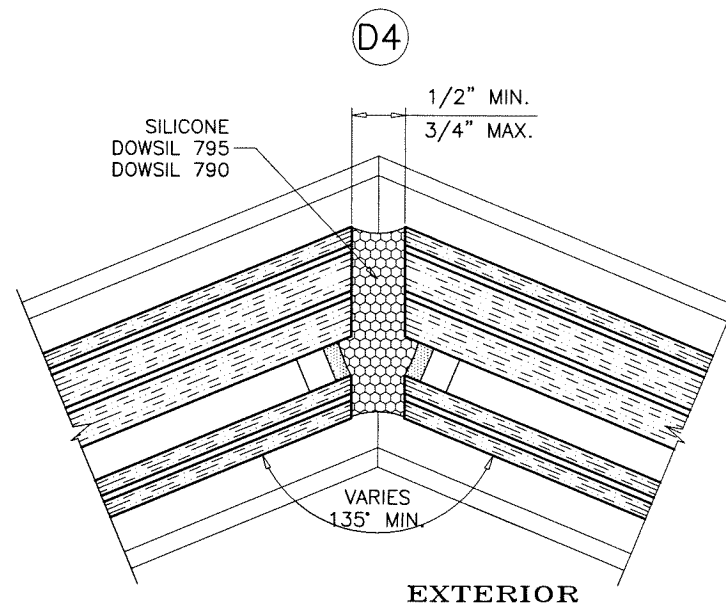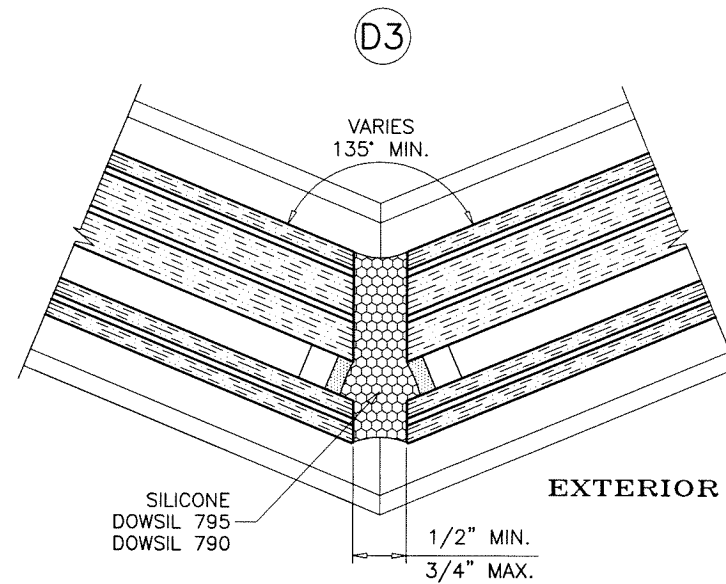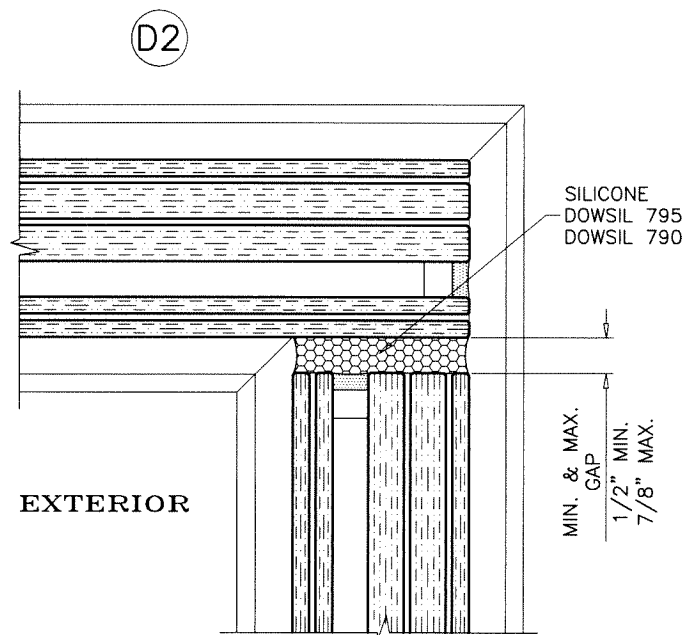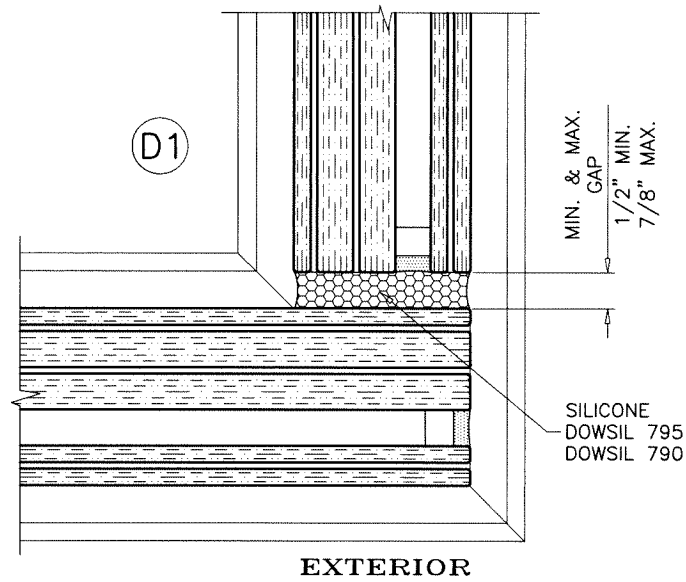

Sealed: 8/21/2023

FL #25673

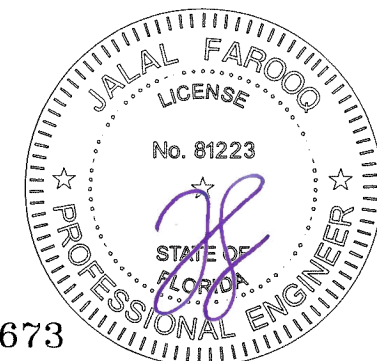

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173
TEL. (305) 264-8100 FAX. (305) 262-6978

af c

COMP-ANL\21-04F-FGT

SERIES 'SLIMPACT XLIC' GLASS WALL SYSTEM (L.M.I.)

Faour Glass Technologies
5119 West Knox Street
Tampa, FL. 33634
Tel. (813) 884-3297 Fax. (-)

revisions:	
no	description

date: 01-14-21	scale: 3/8" = 1"	dr. by: TARIQ	chk. by:
----------------	------------------	---------------	----------

drawing no.	21-04F
sheet	5 of 6

