

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED PER NEW CODE	10/30/2023	R.L.

NOTES:


1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" WINDOW UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. WINDOW UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND WINDOW INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. SHIM AS NEEDED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: EXTRUDED RIGID PVC.
11. UNITS MUST BE GLAZED PER ASTM E1300, WITH SAFETY GLAZING.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.

13. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #12 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/8" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 1/4" ELCO ULTRACON TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 1" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #12 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH CLIP INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH CLIP INTO MASONRY/CONCRETE USE 1/4" ELCO ULTRACON TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 1" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. FOR ANCHORING THROUGH CLIP INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
19. ALL FASTENERS TO BE CORROSION RESISTANT.
20. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - 20.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - 20.2. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - 20.3. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
 - 20.4. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR ALUMINUM 6063-T5 FU=30KSI 1/8" THICK MINIMUM
21. APPROVED CONFIGURATIONS: XO, OX.

SIGNED: 10/30/2023

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATION
3 - 6	INSTALLATION DETAILS
7	COMPONENTS

MI WINDOWS & DOORS, LLC. 650 WEST MARKET STREET GRATZ, PA 17030		
SERIES 1615/1617 PVC SLIDING GLASS DOOR NON - IMPACT NOTES		
DRAWN: A.R.	DWG NO. 08-03129	REV B
SCALE NTS	DATE 06/28/17	SHEET 1 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

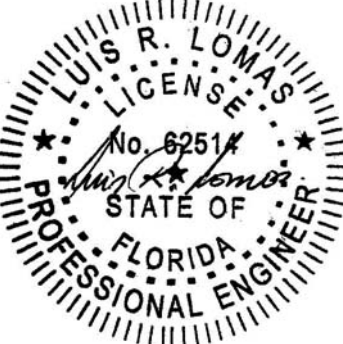


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED PER NEW CODE	10/30/2023	R.L.

- NOTES:
- PANEL SIZE: 35 5/8" x 77 9/16"
 - D.L.O.: 29 3/16" x 71 7/16"

CHART #1

Number of anchor locations required								
Frame Height (in)	Frame Width (in)							
	36.00		48.00		60.00		70.88	
	H & S	Jamb	H & S	Jamb	H & S	Jamb	H & S	Jamb
81.88	4	8	5	8	7	8	8	8

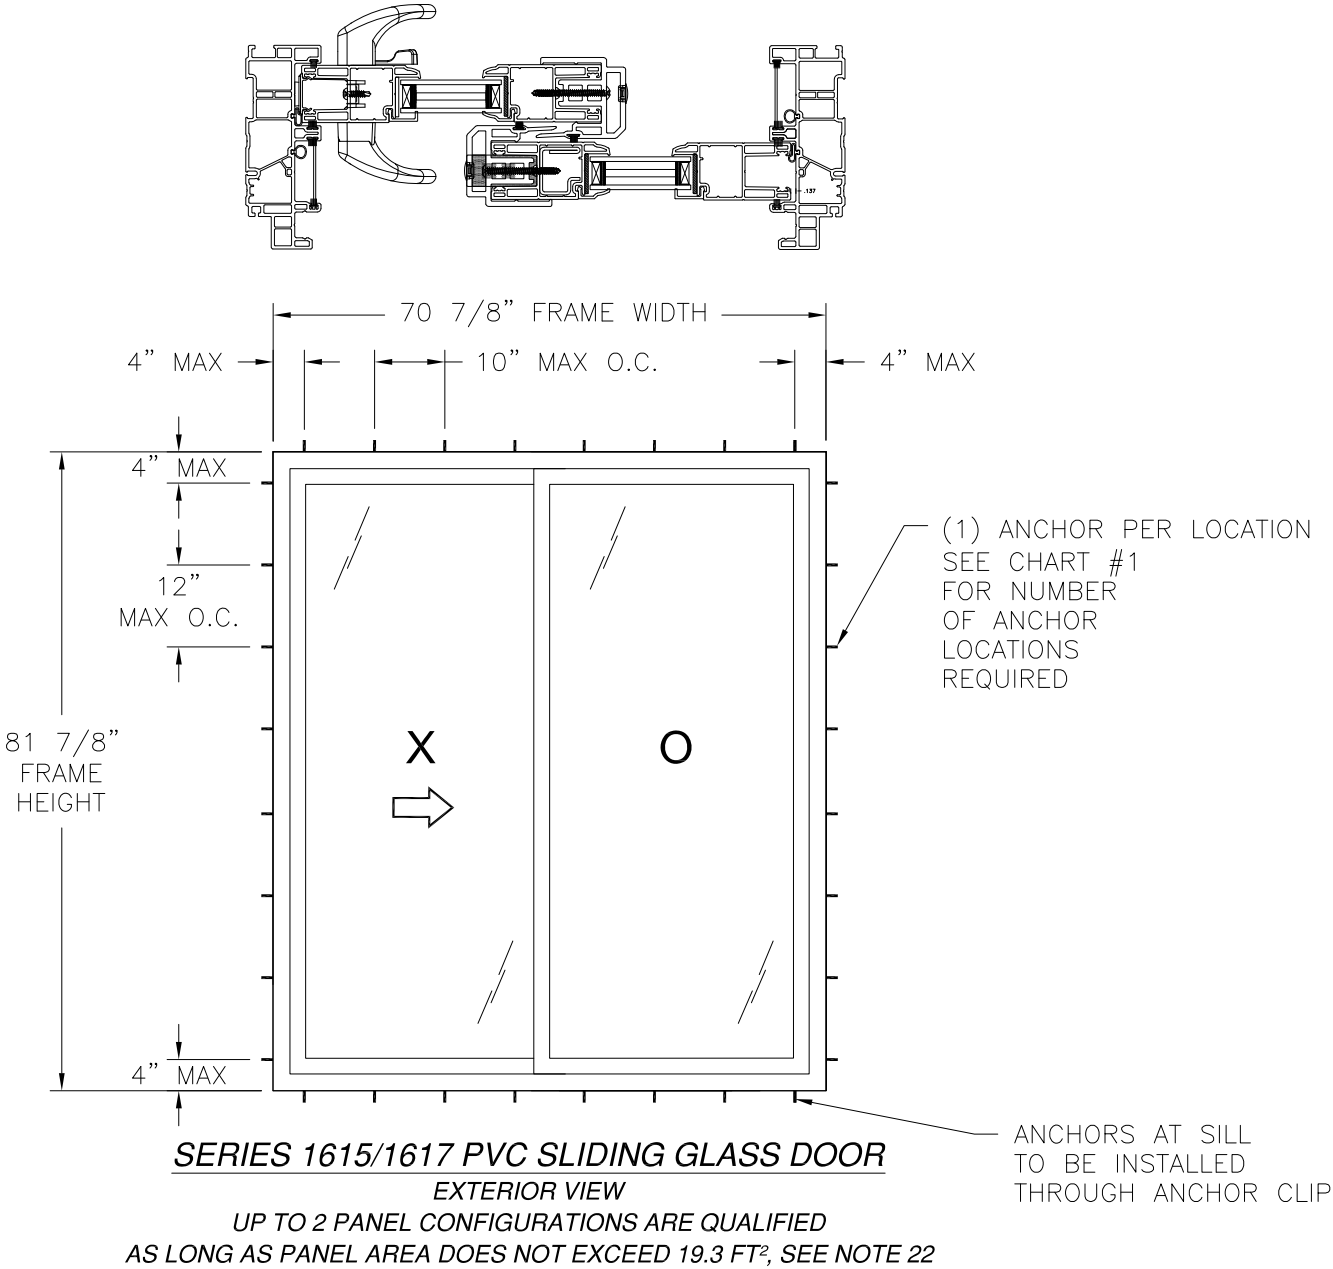

DESIGN PRESSURE RATING	IMPACT RATING
±60.0PSF	NONE

HARDWARE SCHEDULE	
A.	(1) HANDLE (9748)
B.	(1) 1 POINT MORTISE LOCK WITH KEEPER (9149)
C.	(1) 2 POINT MORTISE LOCK WITH KEEPERS (9249)
D.	(2) ROLLERS (9732)
E.	STEEL REINFORCEMENT (9599) AT MEETING STILES
F.	STEEL REINFORCEMENT (9598) AT LOCKING STILES

MI WINDOWS & DOORS, LLC.
650 WEST MARKET STREET
GRATZ, PA 17030

SERIES 1615/1617 PVC SLIDING GLASS DOOR
NON – IMPACT
ELEVATION

DRAWN:
A.R.

DWG NO.
08-03129

REV
B

SCALE
NTS

DATE
06/28/17



SHEET
2 OF 7

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 10/30/2023

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED PER NEW CODE	10/30/2023	R.L.

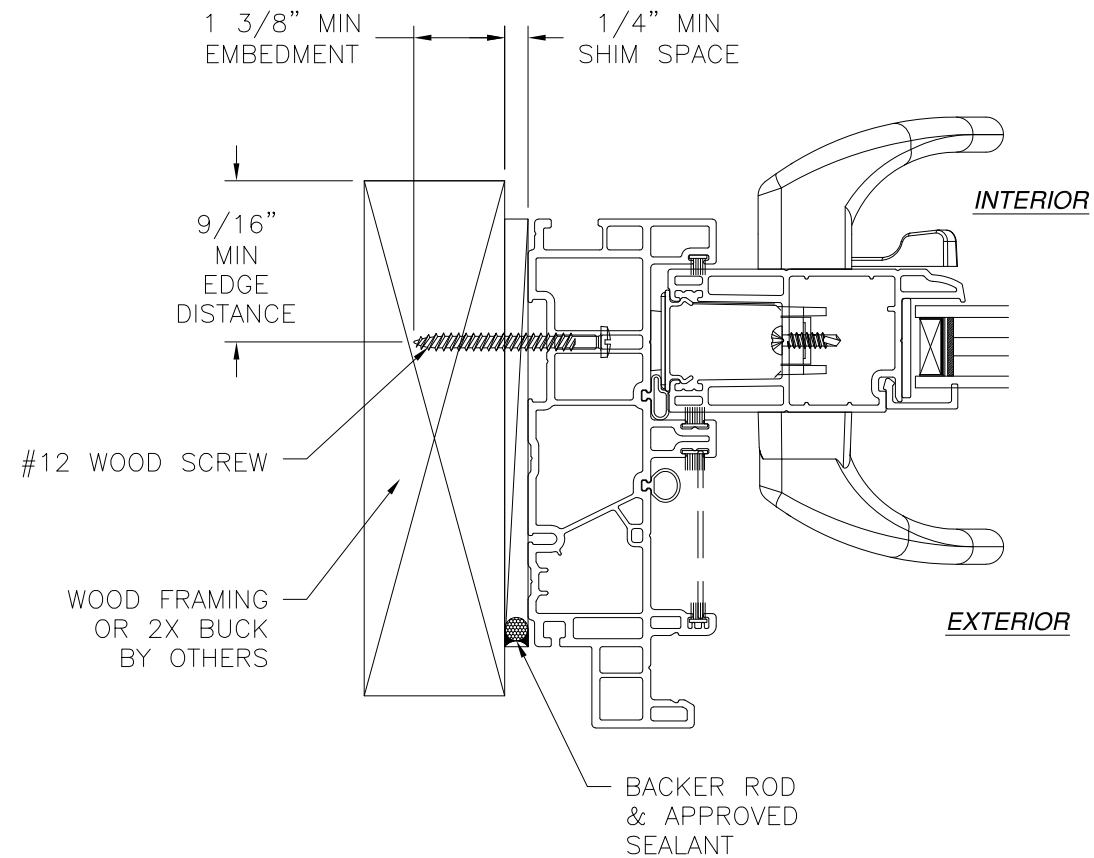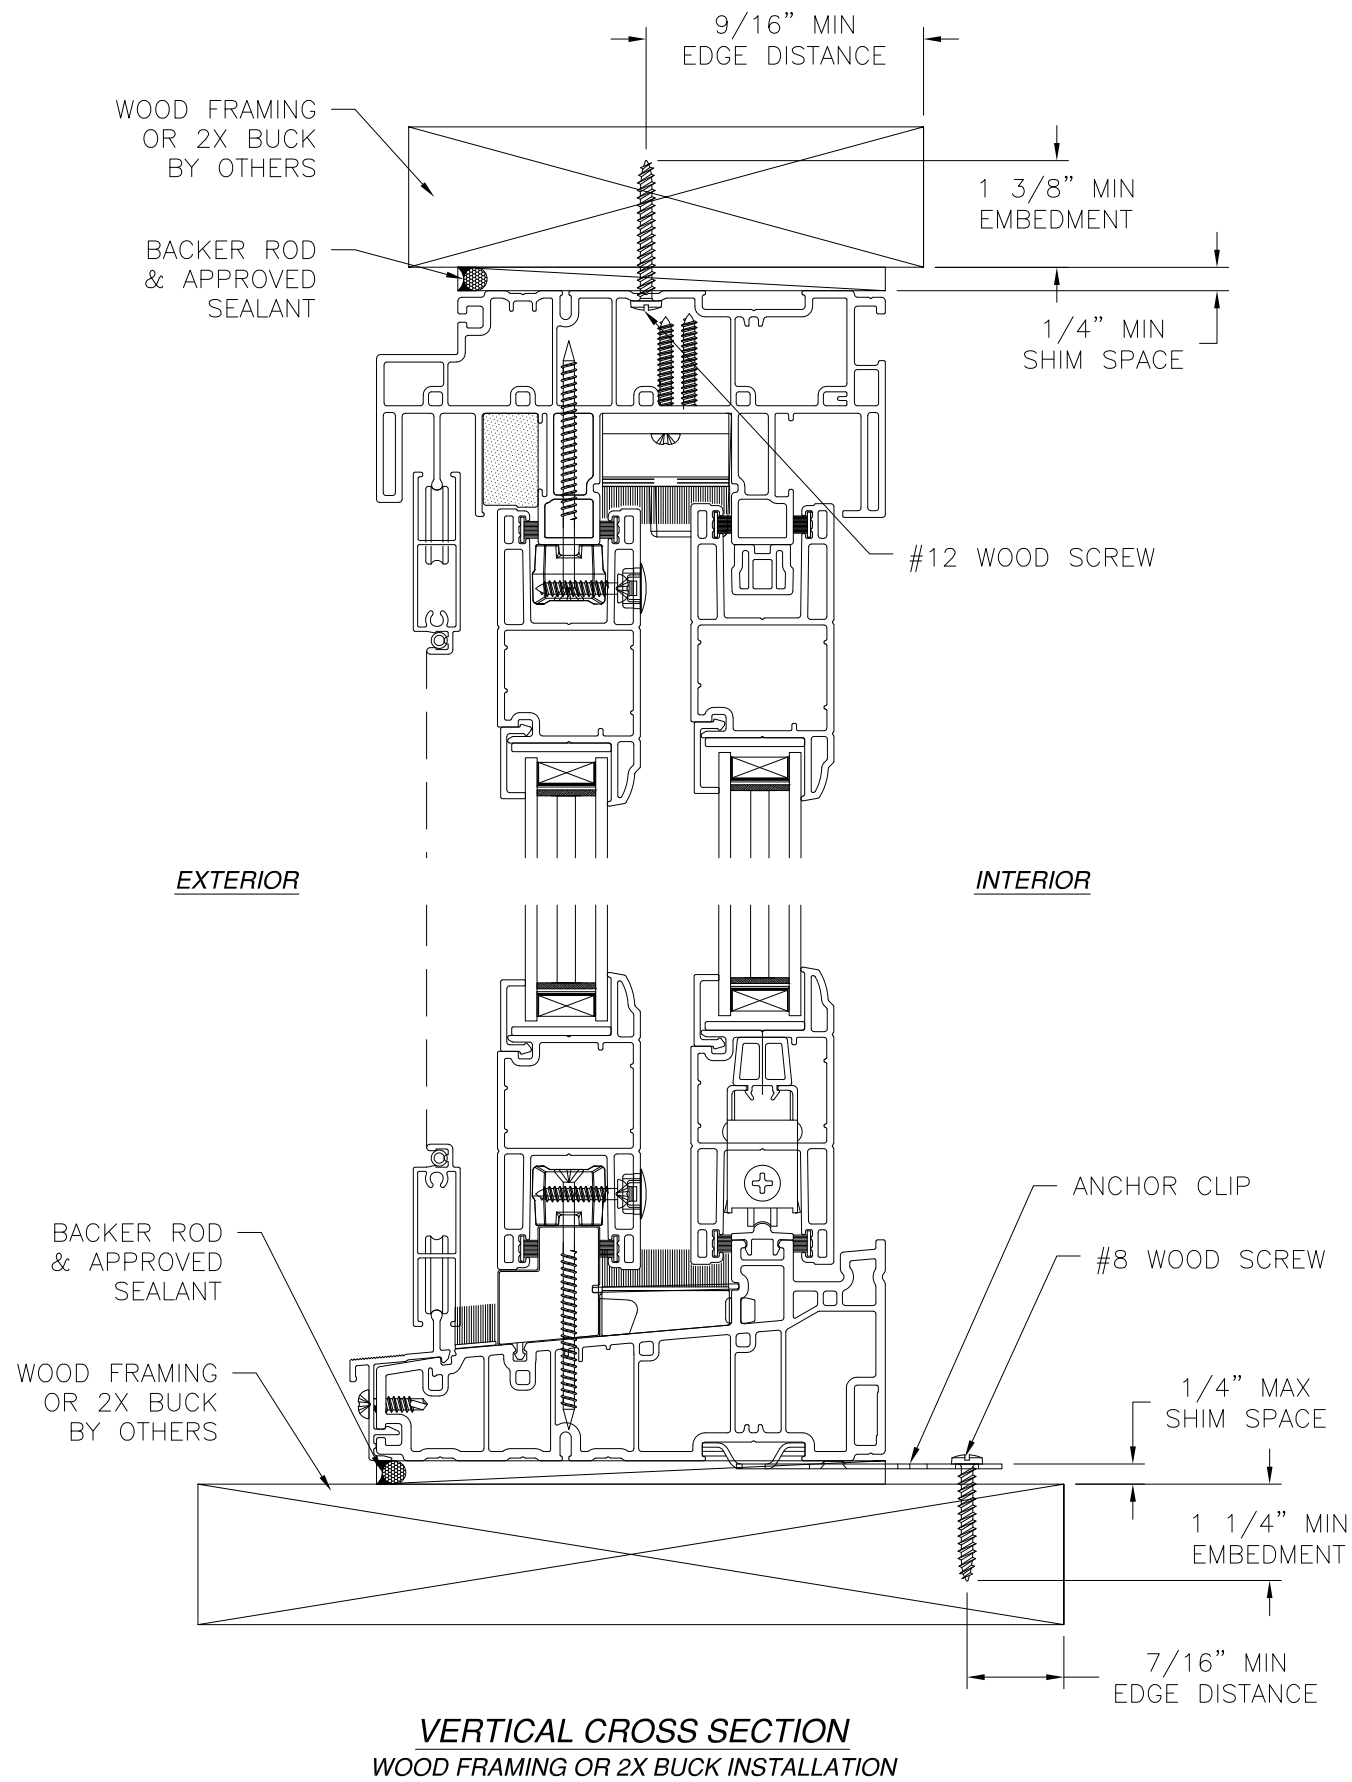


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 10/30/2023

MI WINDOWS & DOORS, LLC. 650 WEST MARKET STREET GRATZ, PA 17030		
SERIES 1615/1617 PVC SLIDING GLASS DOOR NON - IMPACT INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03129	REV B
SCALE NTS	DATE 06/28/17	SHEET 3 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

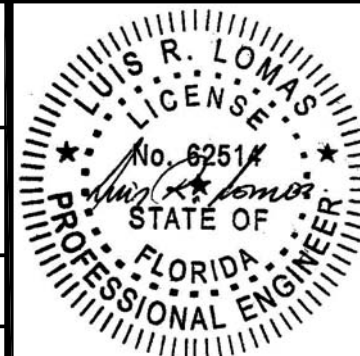


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED PER NEW CODE	10/30/2023	R.L.

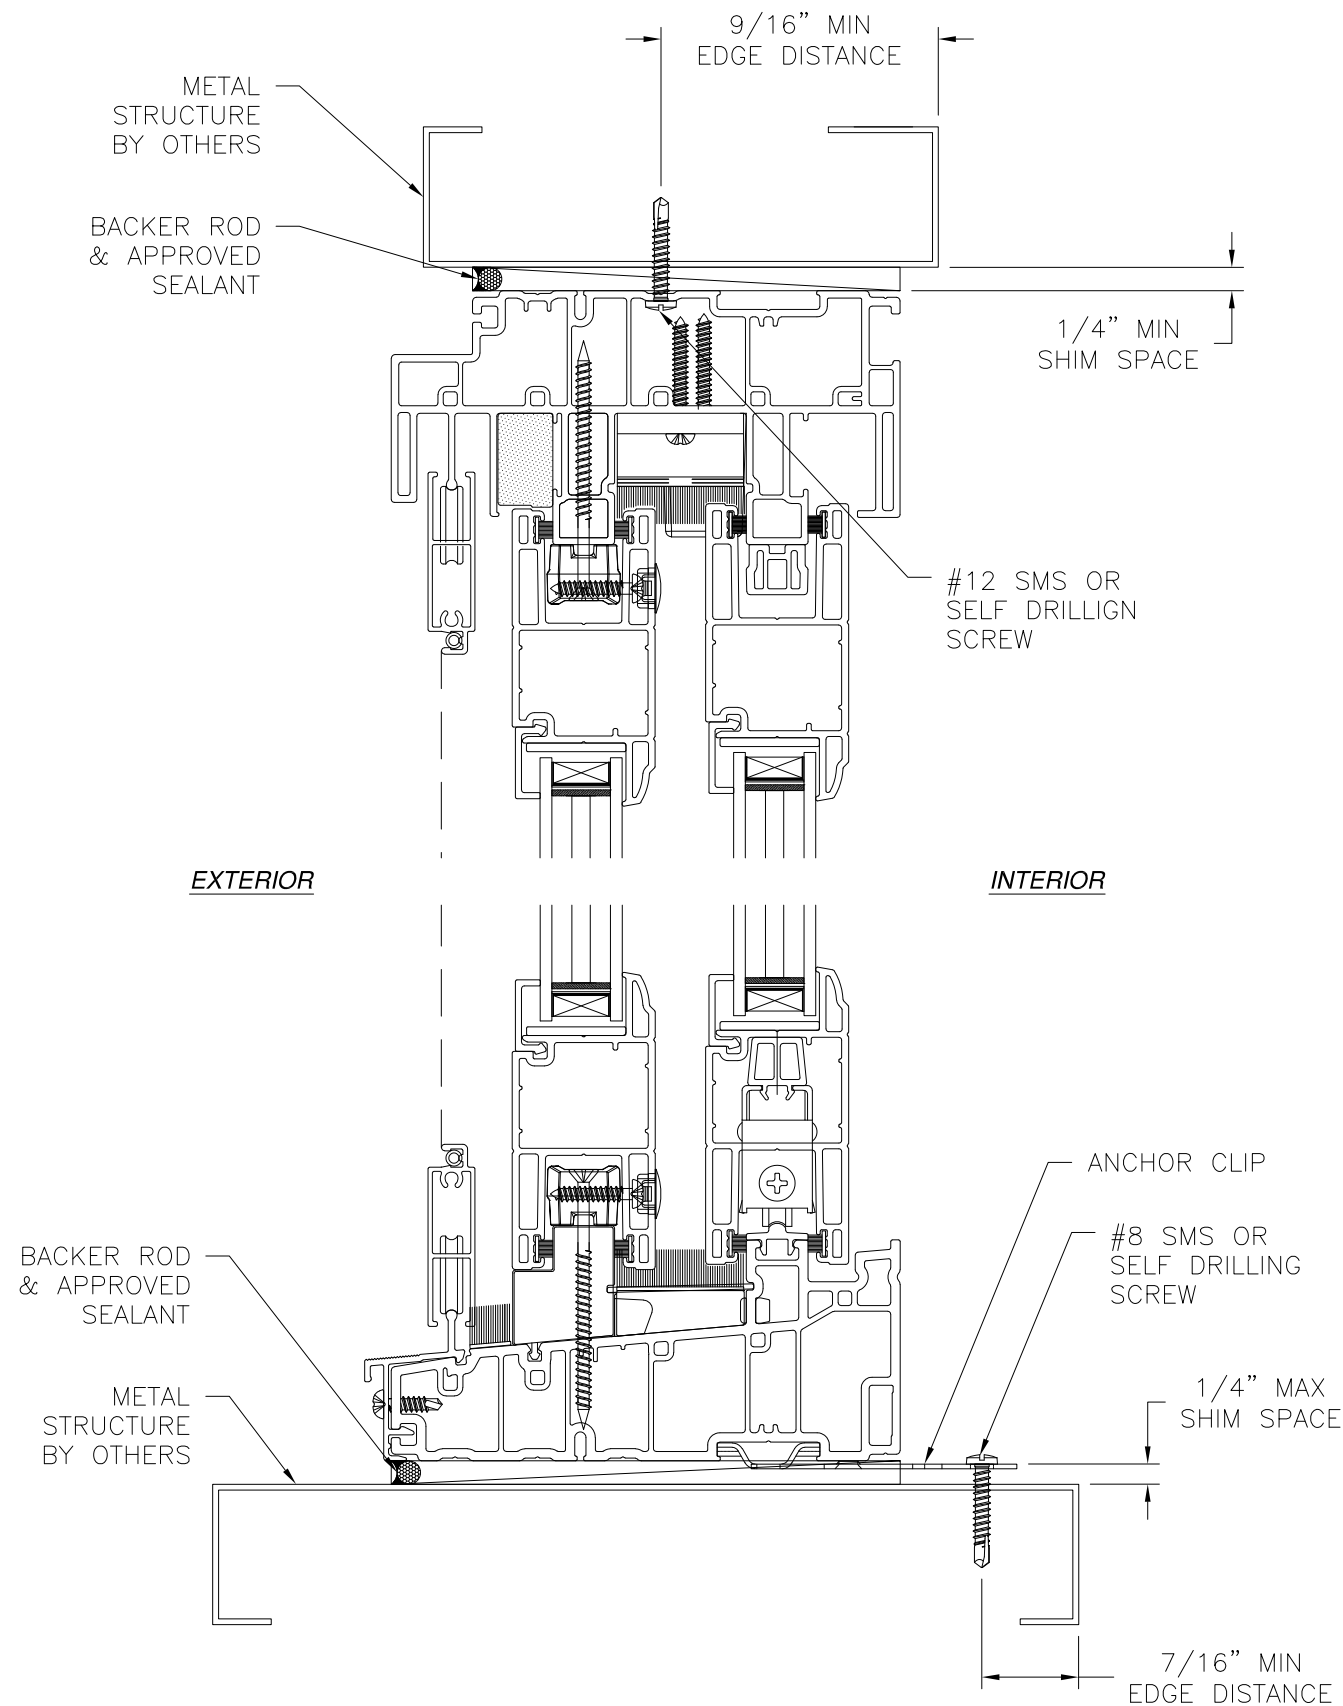

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

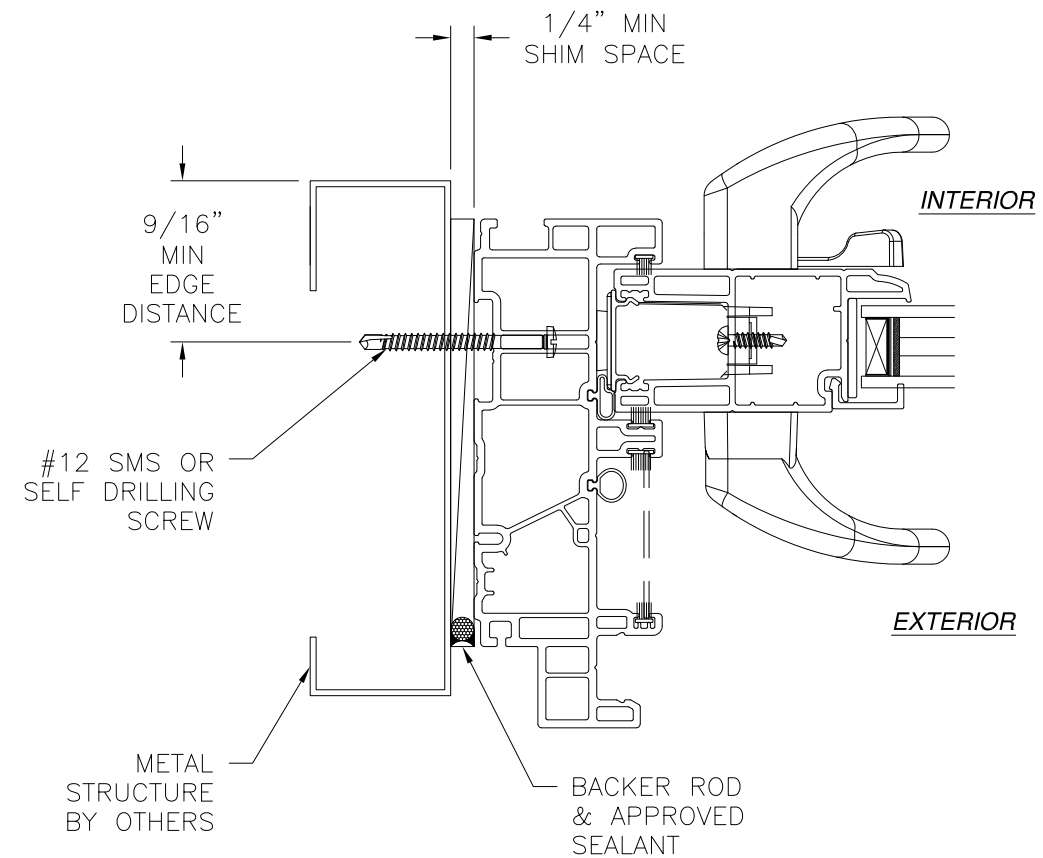


JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112



SIGNED: 10/30/2023

MI WINDOWS & DOORS, LLC. 650 WEST MARKET STREET GRATZ, PA 17030		
SERIES 1615/1617 PVC SLIDING GLASS DOOR NON - IMPACT INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03129	REV B
SCALE NTS	DATE 06/28/17	SHEET 4 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

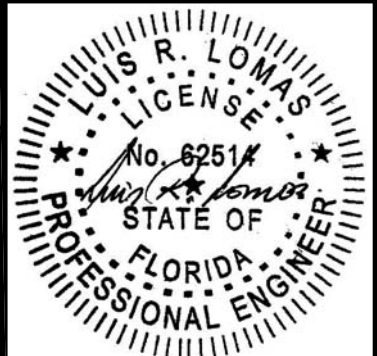

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED PER NEW CODE	10/30/2023	R.L.

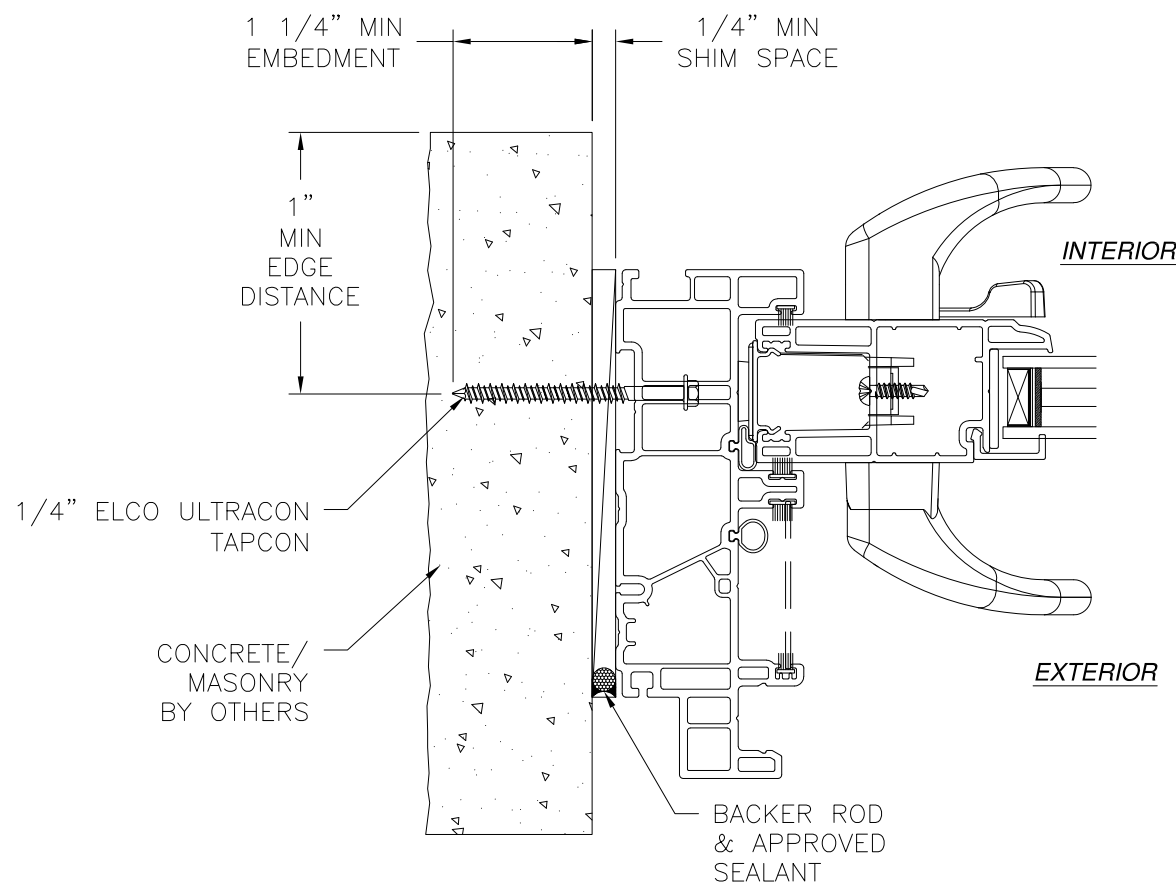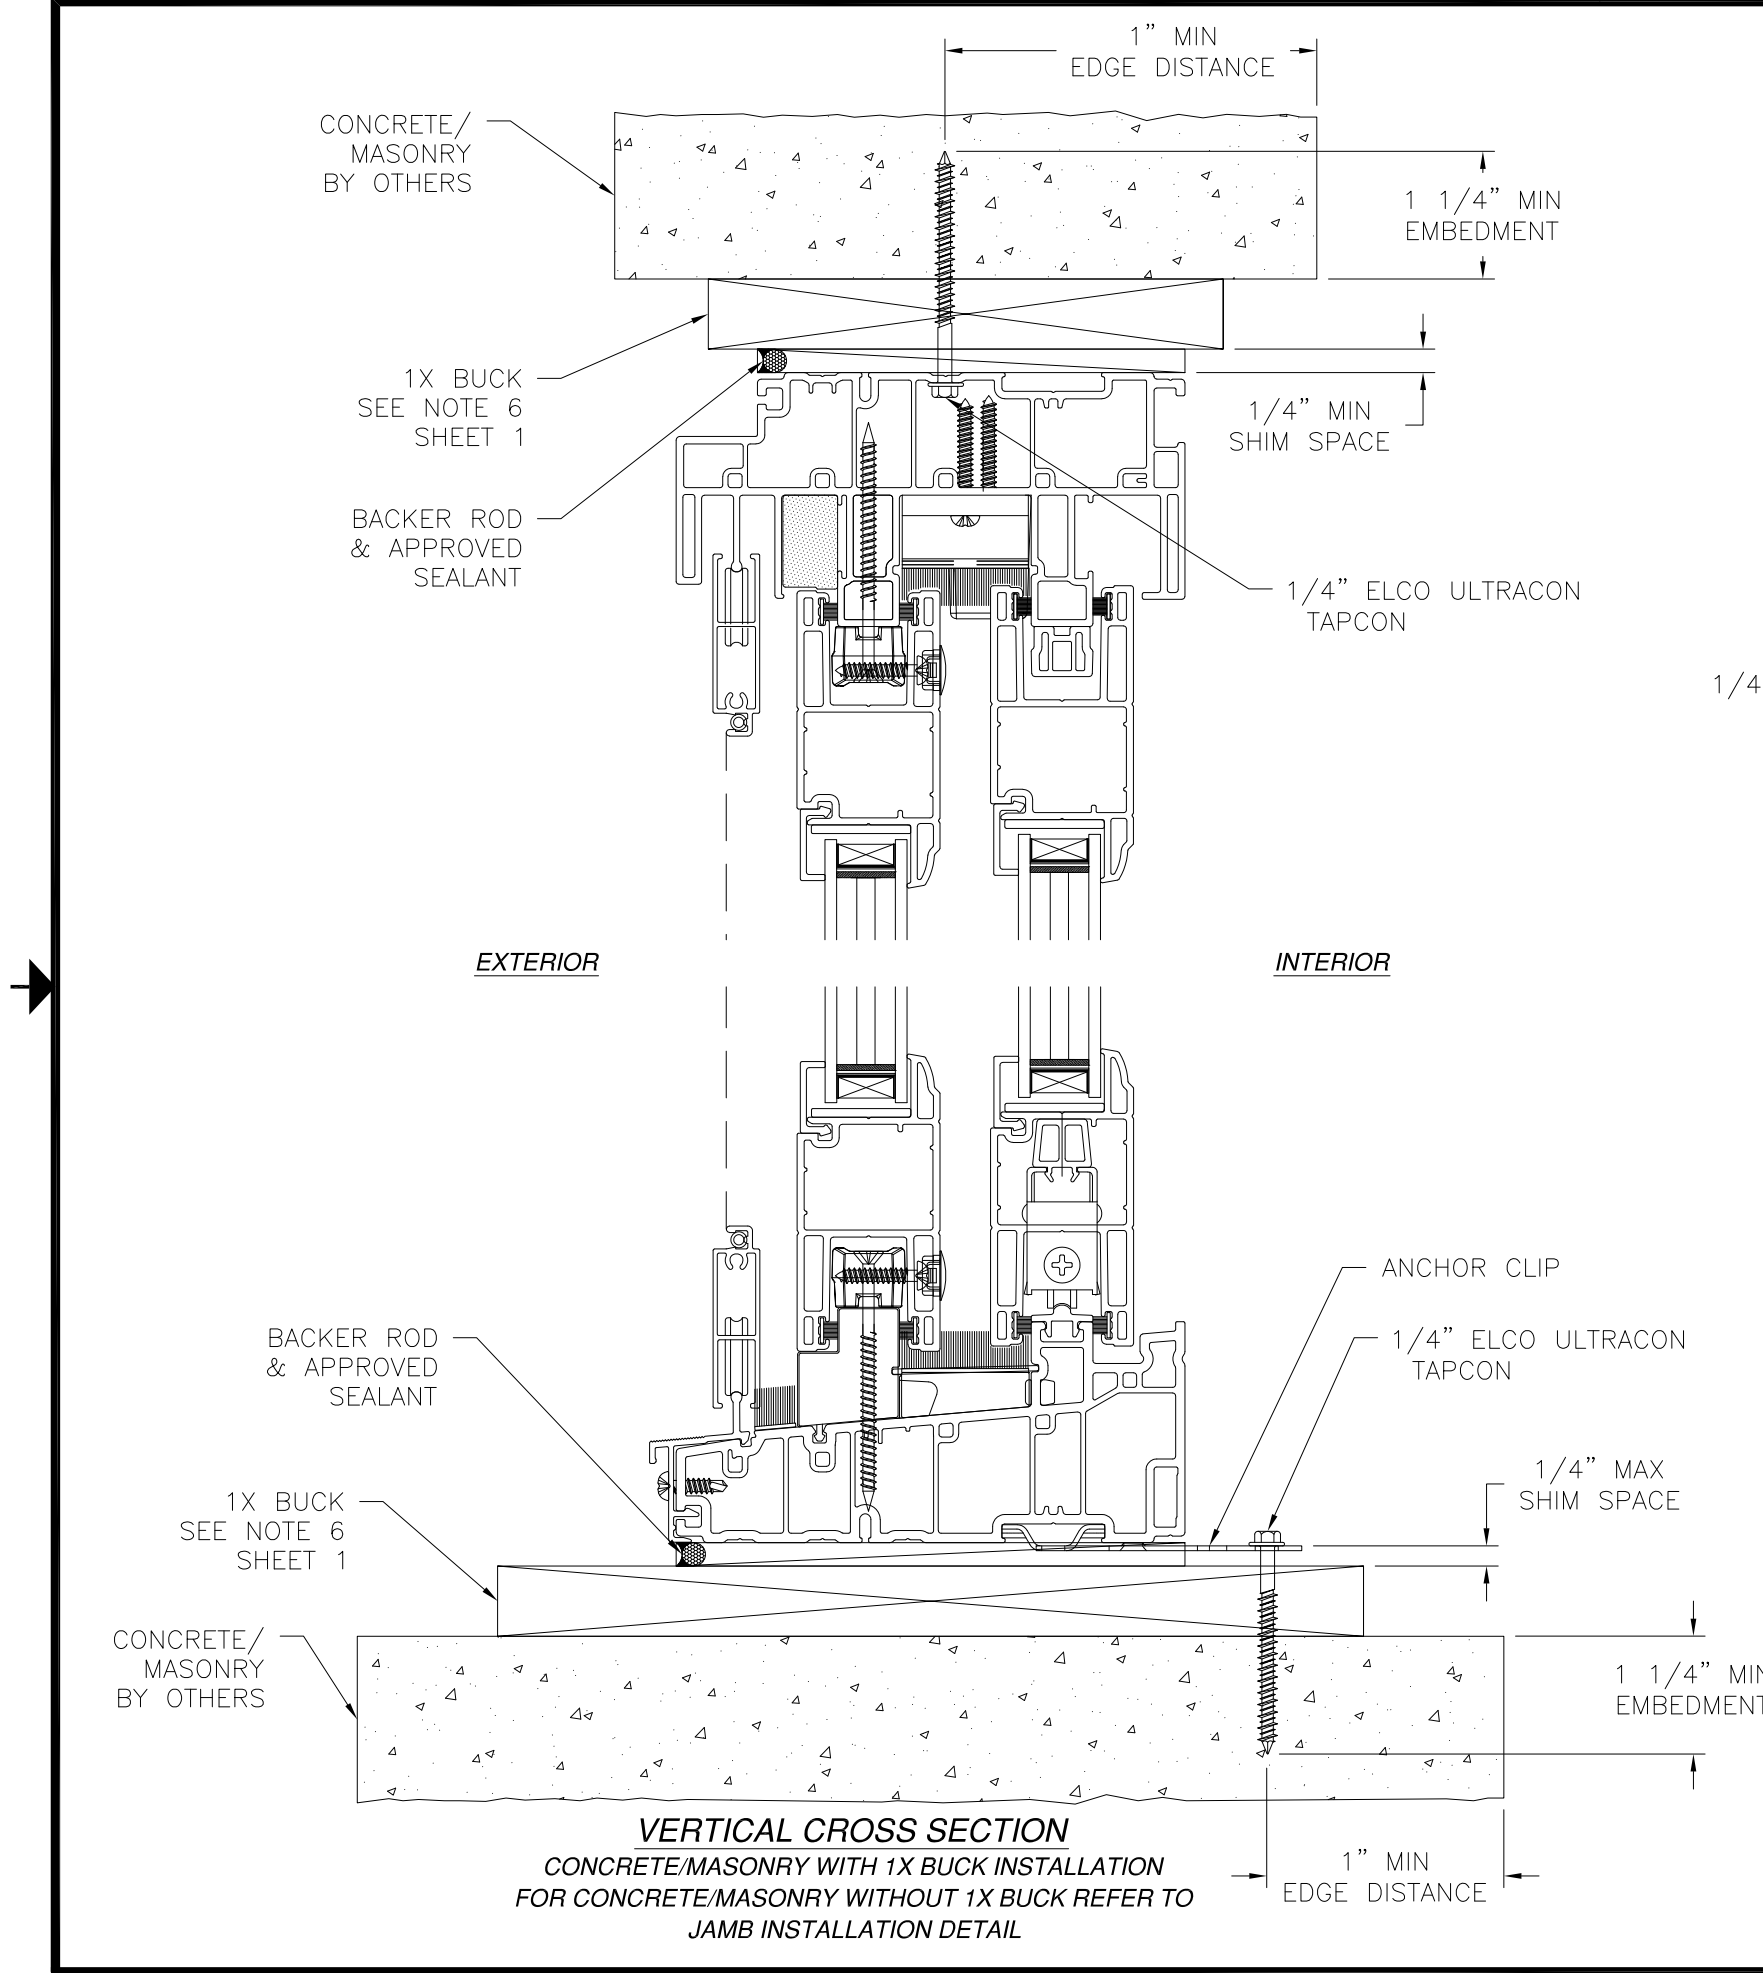

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 10/30/2023

MI WINDOWS & DOORS, LLC.
650 WEST MARKET STREET
GRATZ, PA 17030

SERIES 1615/1617 PVC SLIDING GLASS DOOR
NON – IMPACT
INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-03129

REV
B

SCALE
NTS

DATE
06/28/17

SHEET
5 OF 7


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

L. ROBERTO LOMAS
P.E.
No. 62514
STATE OF
FLORIDA
PROFESSIONAL ENGINEER


Luis R. Lomas P.E.
FL No.: 62514

OPTIONAL SILL INSTALLATIONS


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED PER NEW CODE	10/30/2023	R.L.

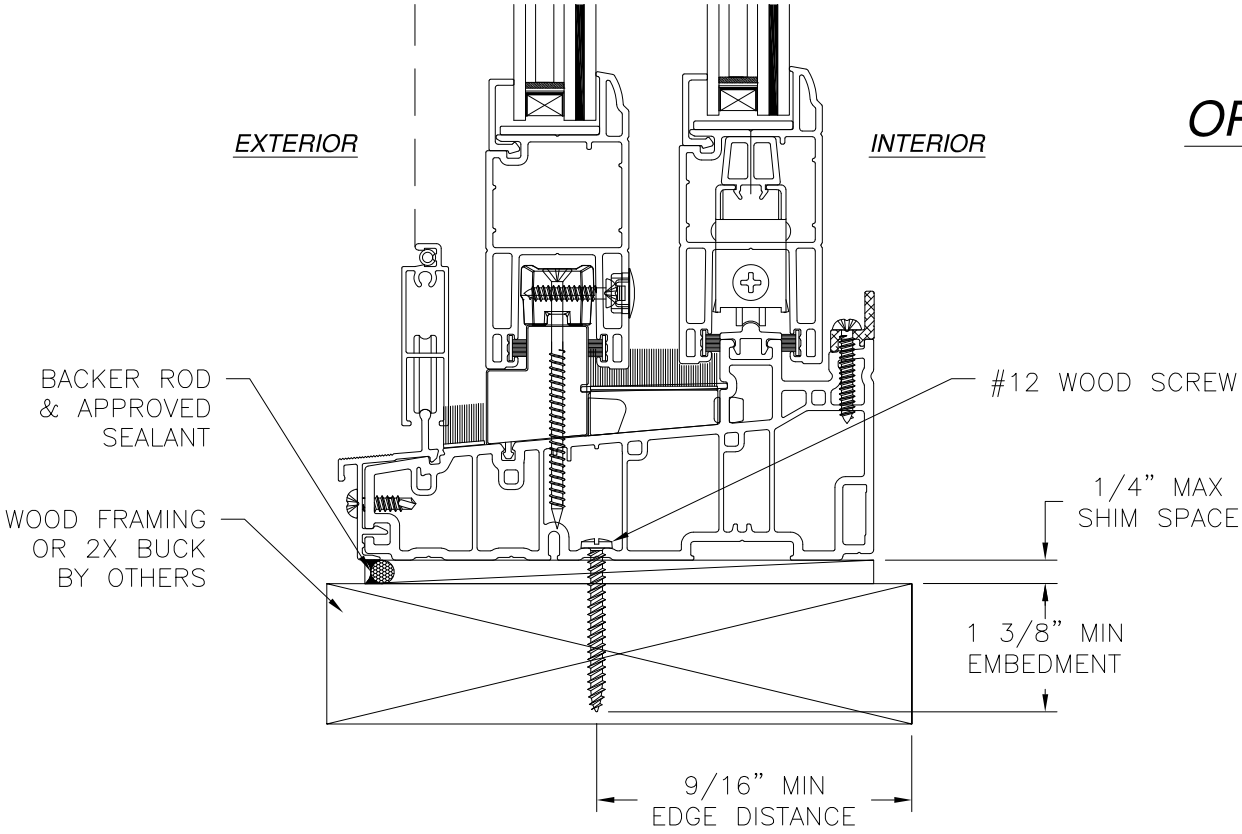

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

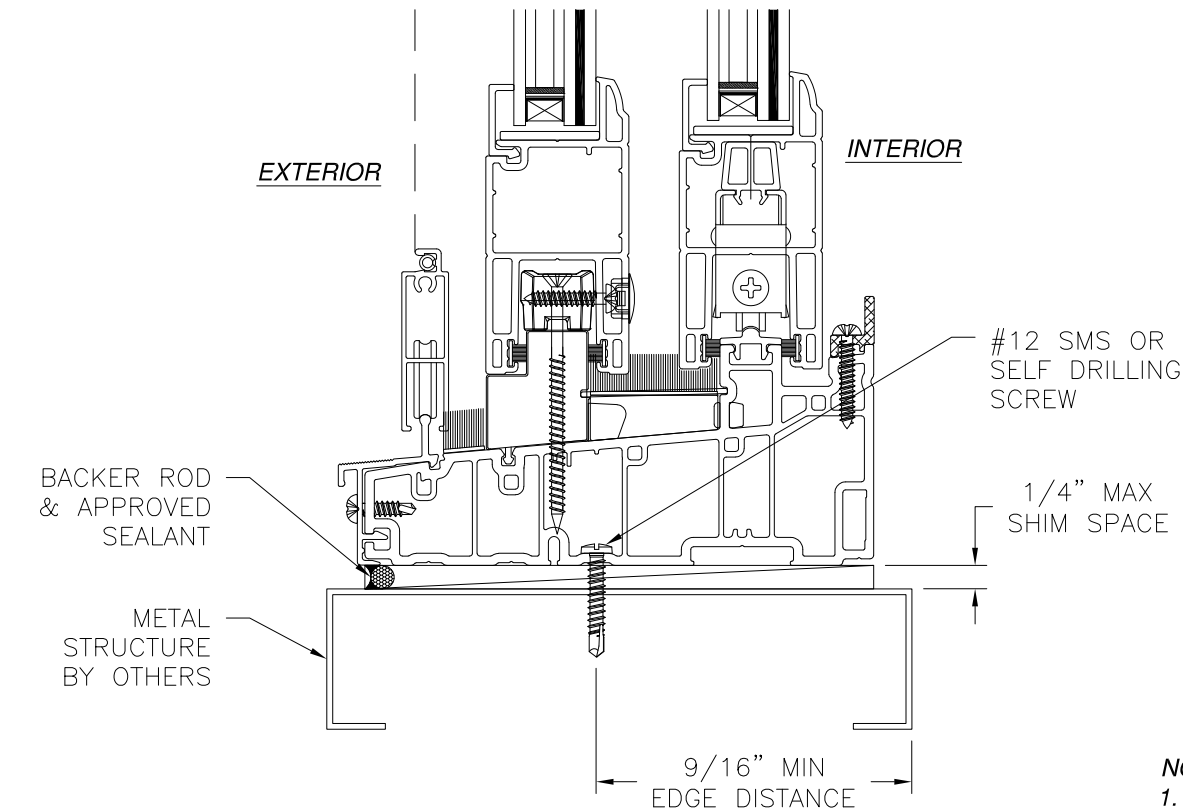

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

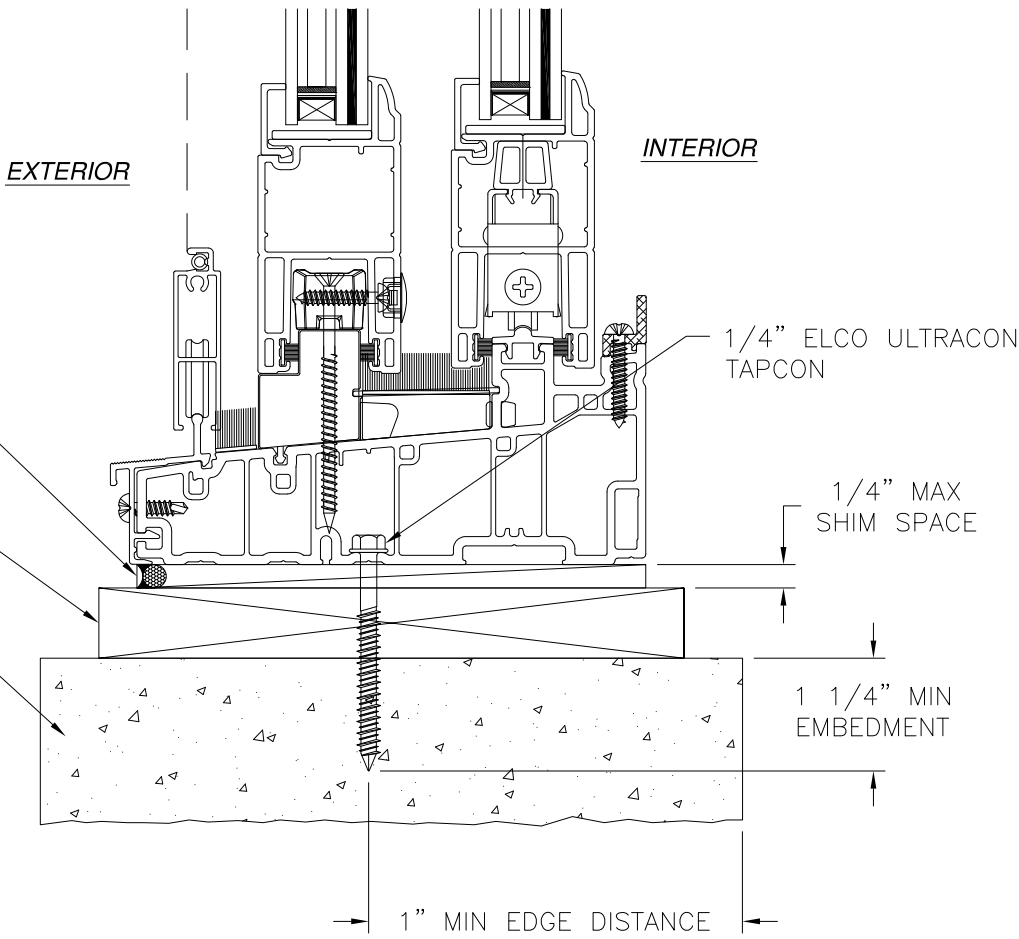

VERTICAL CROSS SECTION
CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
JAMB INSTALLATION DETAIL

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


MI WINDOWS & DOORS, LLC.
650 WEST MARKET STREET
GRATZ, PA 17030

SERIES 1615/1617 PVC SLIDING GLASS DOOR
NON - IMPACT
INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-03129	REV B
SCALE NTS	DATE 06/28/17	SHEET 6 OF 7


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 10/30/2023

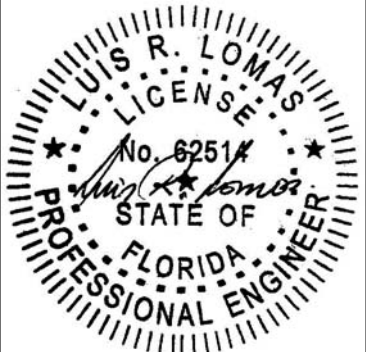


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED PER NEW CODE	10/30/2023	R.L.

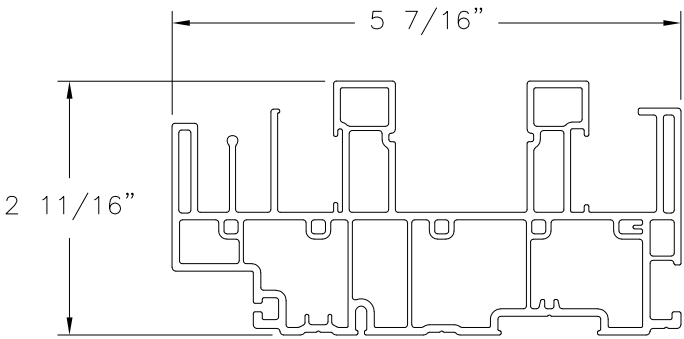


HEAD (7002)
RIGID PVC

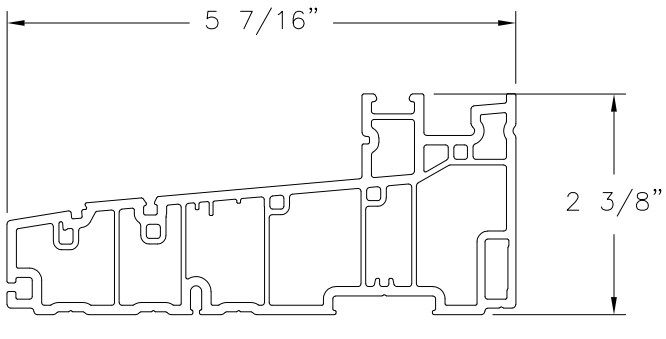


SILL (7000)
RIGID PVC

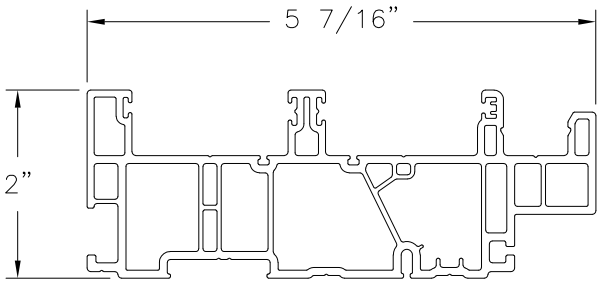


JAMB (7004)
RIGID PVC

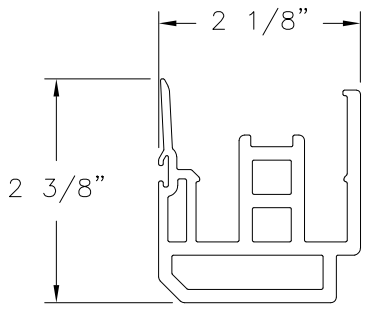


INTERLOCK (7026)
RIGID PVC

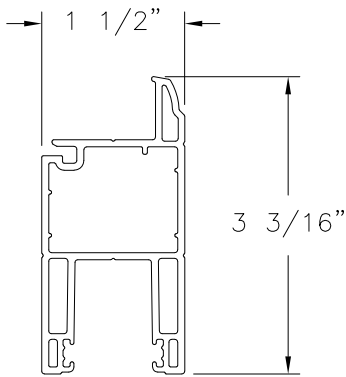


RAIL / STILE (7500)
RIGID PVC

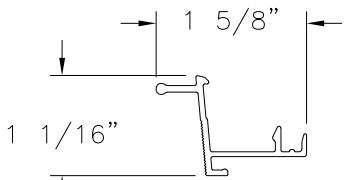


SILL CLADDING (9991)
ALUMINUM

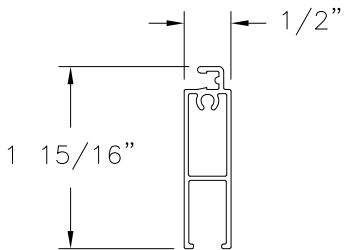


SCREEN
ALUMINUM

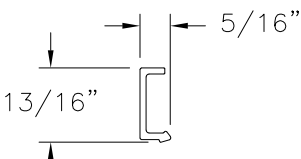


GLAZING BEAD
(5775, -70, -71, 72)
RIGID PVC

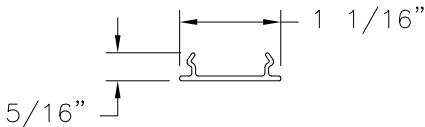


SASH COVERING CAP
(7523)
RIGID PVC

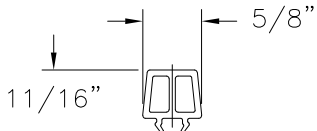



OUT. BEAD WELDED SASH
TANDEM WHEEL SHIM (7541)
RIGID PVC

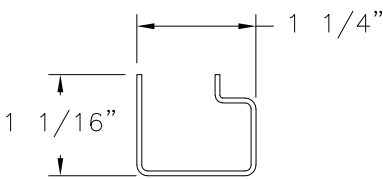

STILE REINFORCEMENT
(9598)
STEEL

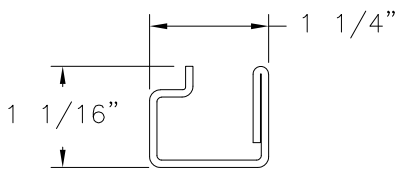

STILE REINFORCEMENT
(9599)
STEEL

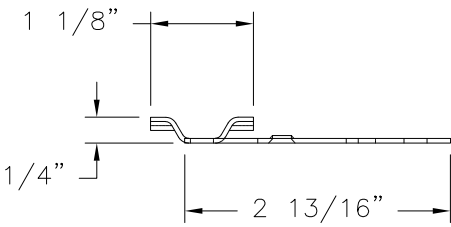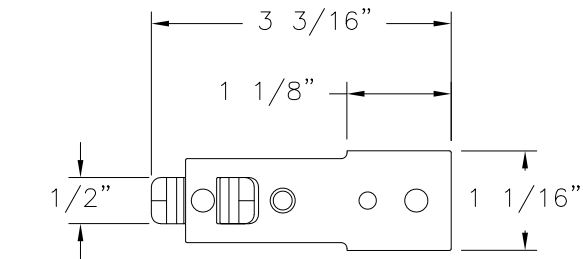

CLIP
GALVANIZED STEEL (.051" THICK)

MI WINDOWS & DOORS, LLC.
650 WEST MARKET STREET
GRATZ, PA 17030

SERIES 1615/1617 PVC SLIDING GLASS DOOR
NON – IMPACT
COMPONENTS

DRAWN:
A.R.

DWG NO.
08-03129

REV
B


SCALE NTS

DATE 06/28/17

SHEET 7 OF 7

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 10/30/2023

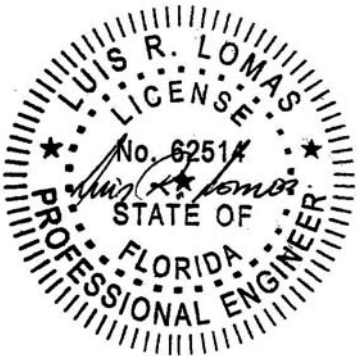

Luis R. Lomas P.E.
FL No.: 62514