


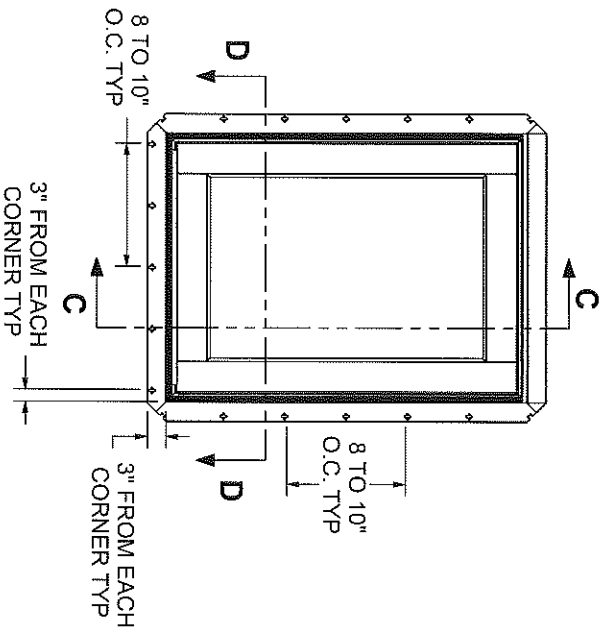


#6 NON-CORROSIVE SCREWS
 1-1/2" MIN PENETRATION INTO FRAMING MEMBER
 3" FROM EACH CORNER
 8-10" ON CENTER THROUGH NAILING FIN
 AROUND THE UNITS ENTIRE PERIMETER TYP


USE SILICONE SEALANT
 AROUND ENTIRE PERIMETER
 BETWEEN NAILING FIN &
 WOOD BUCK BY OTHERS TYP

Weather Shield
Windows & Doors

1209, 1210, 8211
CASEMENT, AWNING, AND PICTURE
NAILING FIN INSTALLATION

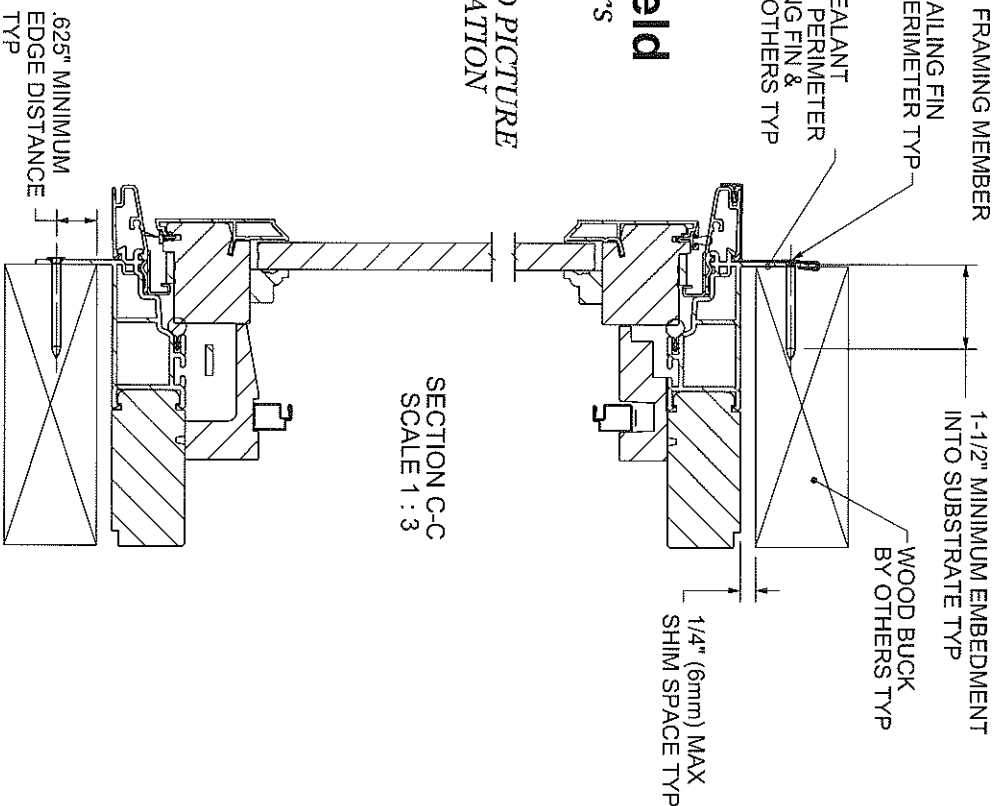

SECTION C-C
 SCALE 1 : 3

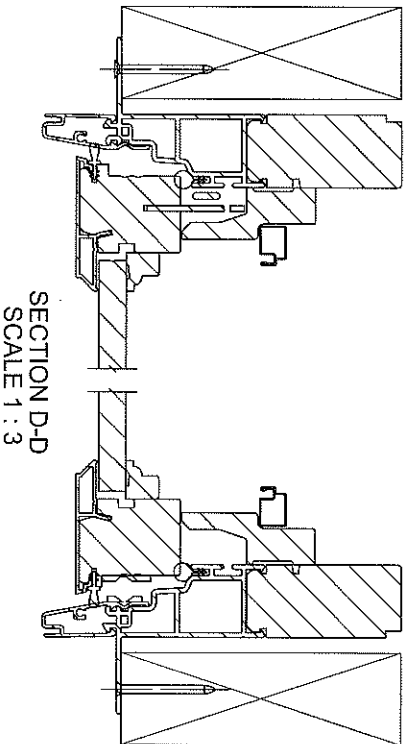

SECTION D-D
 SCALE 1 : 3

THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE WINDOW(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

NOTES(S):
 1. DIMENSIONED VIEWS ARE TYPICAL FOR ALL CROSS SECTION DETAILS.

1. MATERIAL: DIV./ORDER #: DATE ORDERED: Q.C. COMPARATOR CHECK: ☐		PRODUCTS: 1209, 1210, 8211	
DIE #, X-REF #, COMPARATOR #: FINISH: CUF STOCK SIZE: ECO OR W.S. #: 30166		TITLE: INSTALLATION INSTRUCTIONS	
TYP. WALL THICKNESS: W/L FT.: FILE PATH:		DWG. NO.: 85-7438-36	
DO NOT SCALE DRAWING DRAWN BY: JK/EB		DATE: 10-30-14	
DESCRIPTION WHITE SLIP NUMBER ENG.		SCALE: 1/12 SHEET NAME: Shield SHEET 1 OF 1	