


SERIES 1700 MODEL 1702 HP
HORIZONTAL SLIDER
w/ NAILING FIN
"NON-IMPACT"


GENERAL NOTES


1. This product has been evaluated and is in compliance with the 7th Edition (2020) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ). See the Certification Agency Certificate for sizes, specifications and ratings.
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product is required to be protected with an impact resistant covering that complies with FBC Sections 1609.1.2 & R301.2.1.2.
4. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS	
SHEET#	DESCRIPTION
1	Typical elevations, design pressures & general notes
2	Vertical & horizontal cross sections
3	Vertical & horizontal cross sections
4	Buck & frame anchoring
5	Bill of materials, glazing details and components

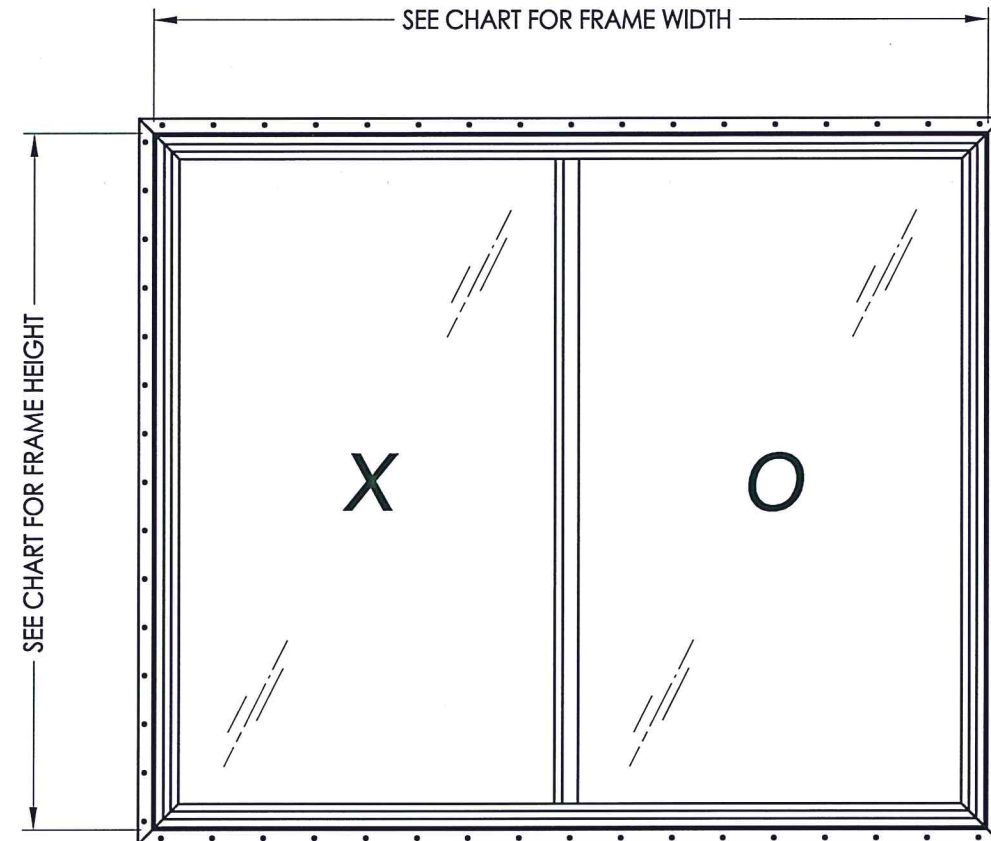

OVERALL FIN DIMENSION	OVERALL FRAME DIMENSION	OVERALL D.L.O. DIMENSION	OVERALL D.L.O. DIMENSION	GLASS TYPE	DESIGN PRESSURE (PSF)	
					POSITIVE	NEGATIVE
65.5" x 62.5"	63.0" x 60.0"	(O) 28.38" x 55.5"	(X) 28.38" x 55.5"	G1	+25.0	-25.0
50.5" x 62.5"	48.0" x 60.0"	(O) 20.88" x 55.5"	(X) 20.88" x 55.5"		+35.0	-35.0




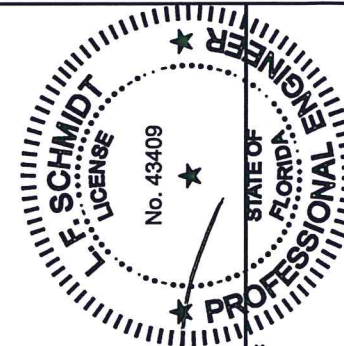
		September 30, 2020	
Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT:	HORIZONTAL SLIDER	PART OR ASSEMBLY:	TYPICAL ELEVATION, DESIGN PRESSURES & GENERAL NOTES
		LFS	BY
		1	9/30/20
		NO.	DATE
		REVISIONS	
DATE: 11/13/19			
SCALE: N.T.S.			
DWG. BY: RW			
CHK. BY: LFS			
DRAWING NO.: FL-26521.7			
SHEET 1 OF 5			

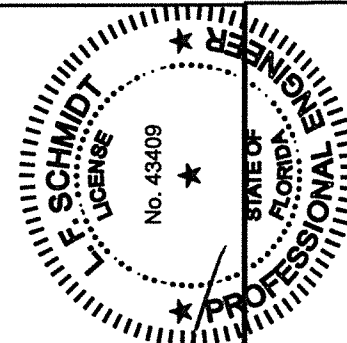

RW
BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

[illegible]


R:\Clients\Associated PERMANENTVA - Florida Product Approvals\EL-26521 Windows - Horizontal Slider (CM)\C - Drawings\EL-26521 (2020)\EL-26521 7.dwg, 3-3

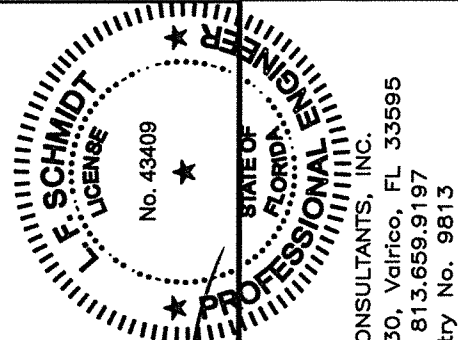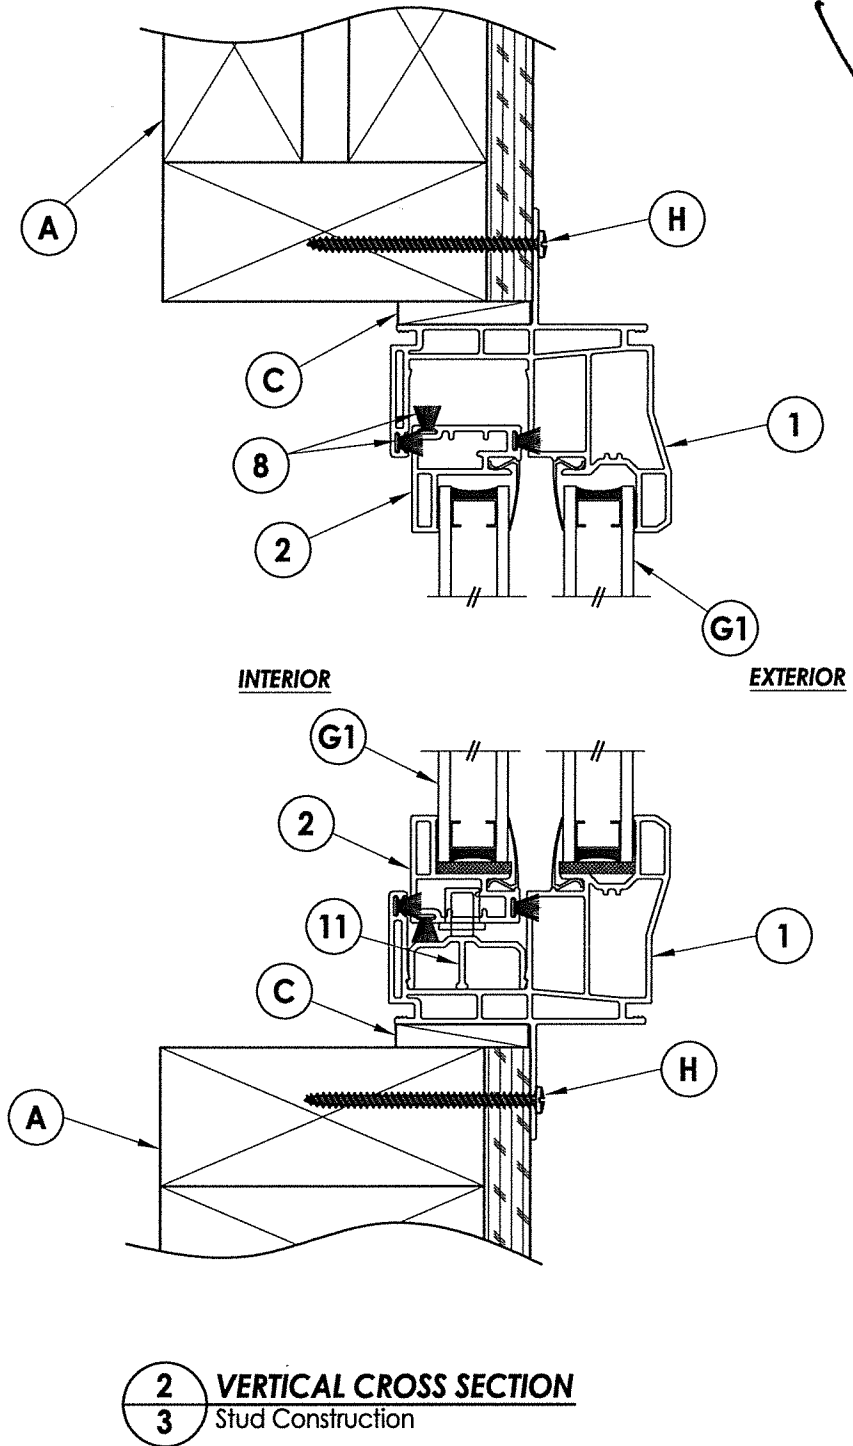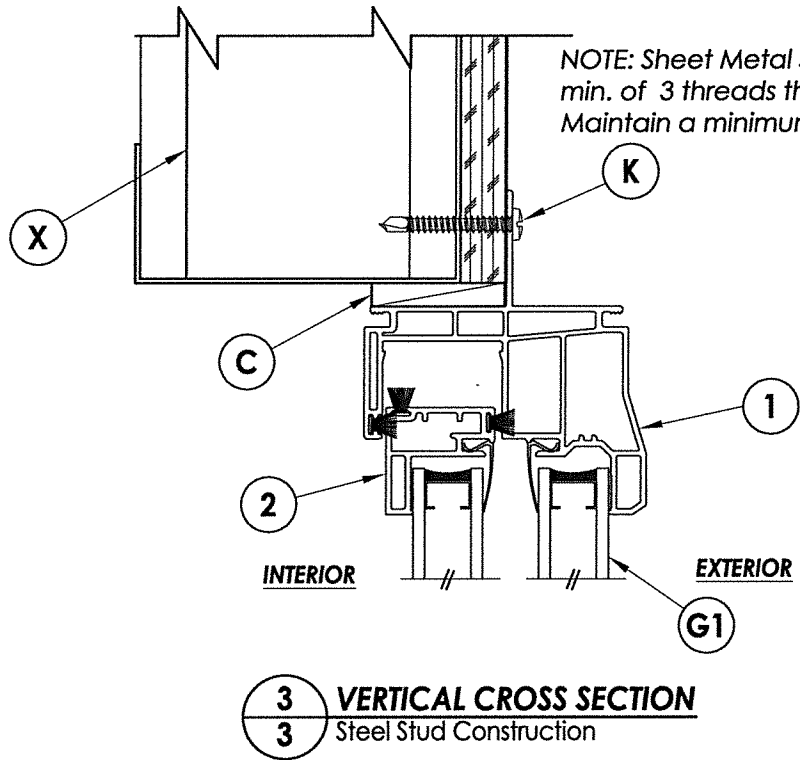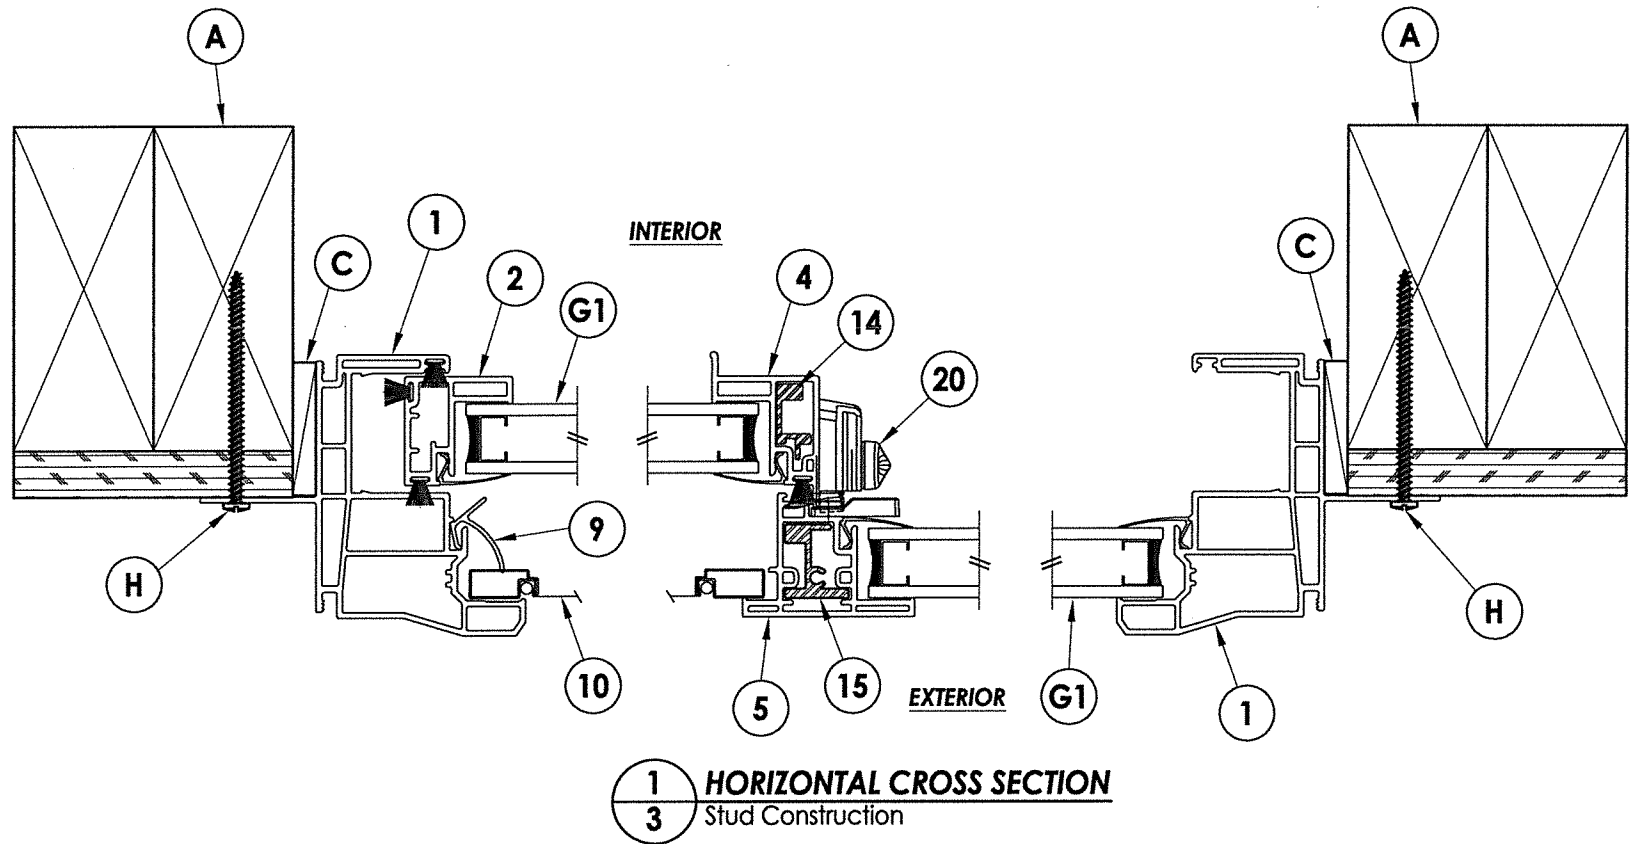


September 30, 2020
Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409
RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:		HORIZONTAL SLIDER	
PART OR ASSEMBLY:		VERTICAL & HORIZONTAL CROSS SECTIONS	
NO.	DATE	REVISIONS	
1	9/30/20	UPDATE TO 7TH ED. (2020)	FBC
			LFS
			BY
DATE: 11/13/19			
SCALE: N.T.S.			
DWG. BY: RW			
CHK. BY: LFS			
DRAWING NO.: FL-26521.7			
SHEET 3 OF 5			


R:\Clients\Associated PERMANENTVA - Florida Product Approvals\FL-26521 Windows - Horizontal Slider (CM)\C - Drawings\FL 26521 (2020)\FL-26521.7.dwg, 3-4

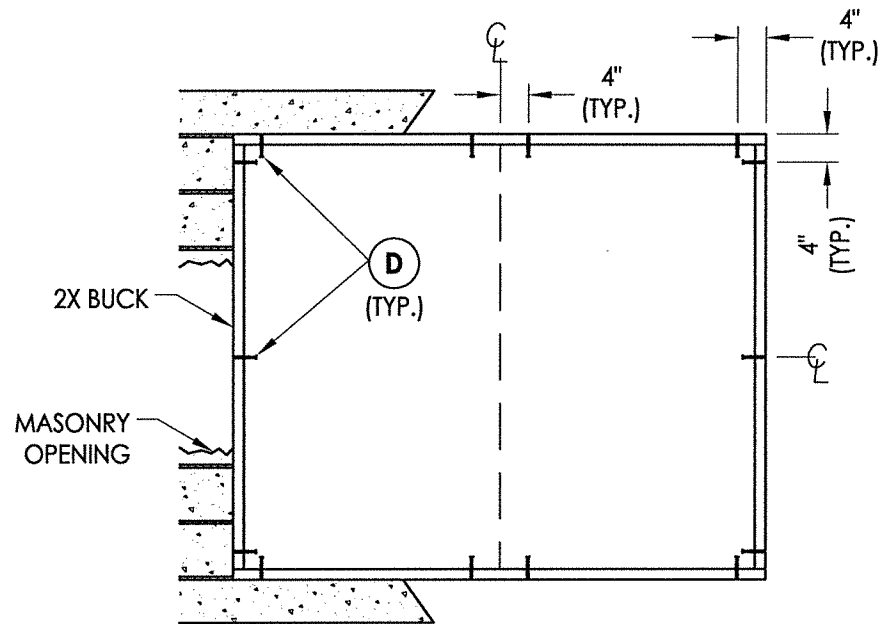

BUCK ANCHORING

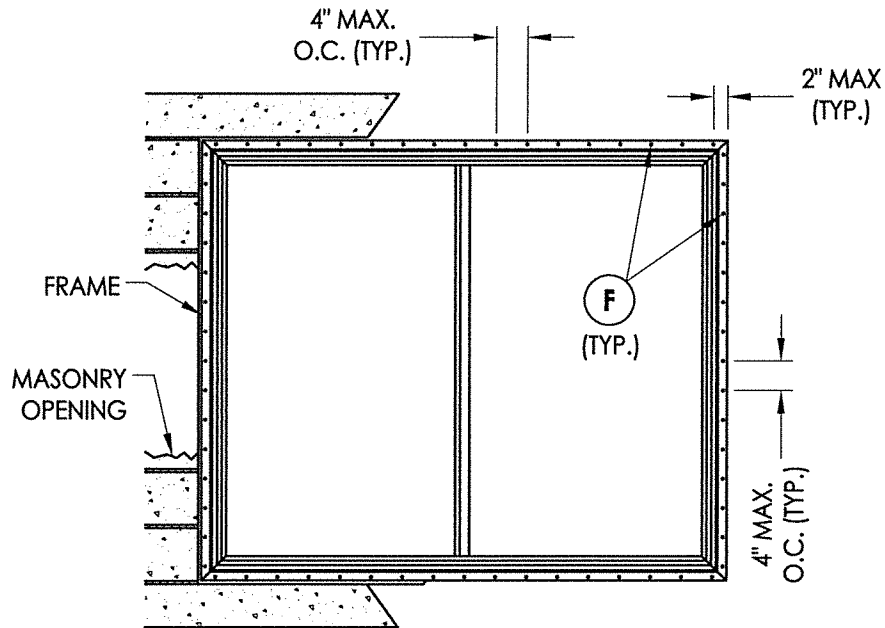

FRAME ANCHORING
MASONRY CONSTRUCTION

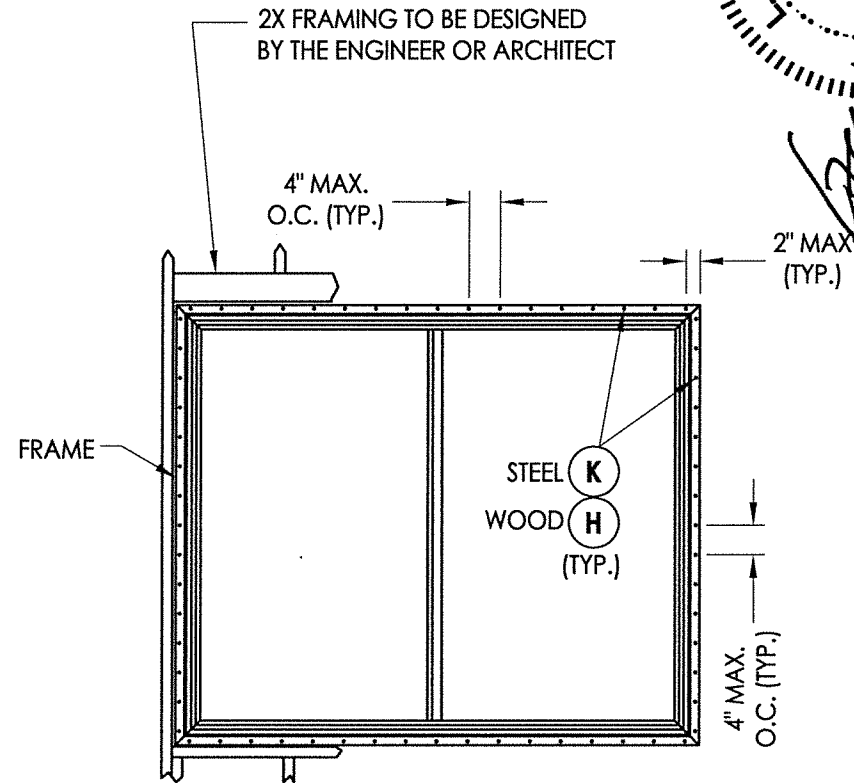

FRAME ANCHORING
STUD CONSTRUCTION


CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.


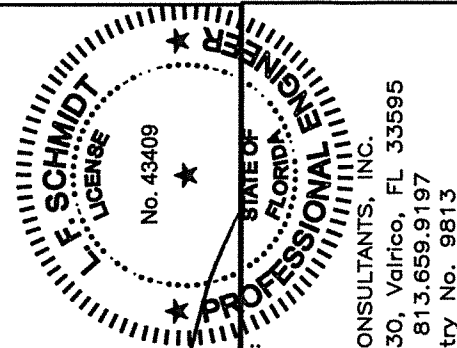


September 30, 2020
Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409
R.W. BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


PRODUCT:	HORIZONTAL SLIDER
PART OR ASSEMBLY:	BUCK & FRAME ANCHORING
DATE:	11/13/19
SCALE:	N.T.S.
DWG. BY:	RW
CHK. BY:	LFS
DRAWING NO.:	FL-26521.7
SHEET	4 OF 5

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	2X FRAMING (SG >= 0.42)	WOOD
B	2X BUCK (SG >= 0.42)	WOOD
C	1/8" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	#8 X 2" PPH SMS (1-3/4" MIN. EMBEDMENT)	STEEL
H	#8 X 2-1/2" PPH SMS (1-3/4" MIN. EMBEDMENT)	STEEL
K	#10 PPH SELF-DRILLING SMS	STEEL
X	STEEL STUD Min. Thk .033" (ASTM A653 GRADE 33 Fy=33 Ksi Min, Fu=45 Ksi Min)	STEEL
1	EXTRUDED VINYL FRAME *	RIGID PVC
2	EXTRUDED VINYL SASH STILE/RAIL *	RIGID PVC
4	EXTRUDED VINYL LOCK STILE *	RIGID PVC
5	EXTRUDED VINYL MEETING STILE *	RIGID PVC
7	EXTRUDED VINYL GLAZING BEAD *	RIGID PVC
8	WEATHERSTRIP (FIN PILE)	-
9	SCREEN CLIP	RIGID PVC
10	SCREEN	-
11	ROLLER TRACK	RIGID PVC
14	SASH STILE REINFORCEMENT (S-047)(6063-T5)	ALUM
15	MEETING STILE REINFORCEMENT (S-065)(6063-T5)	ALUM
20	CAM LOCK	-


*THE APPROVED WHITE RIGID PVC EXTERIOR EXTRUSIONS FOR WINDOWS ARE TO BE PRODUCED BY EXTRUDERS LICENSEES IN "AAMA CERTIFICATION PROGRAMS FOR RIGID PVC EXTRUSIONS."

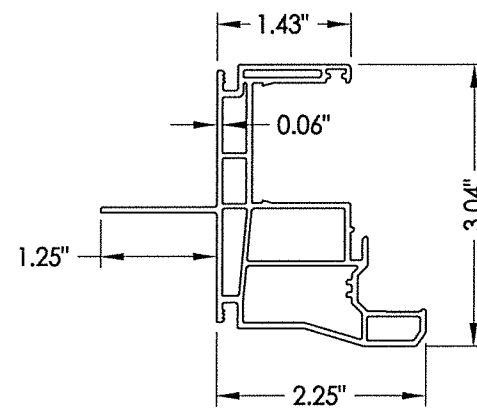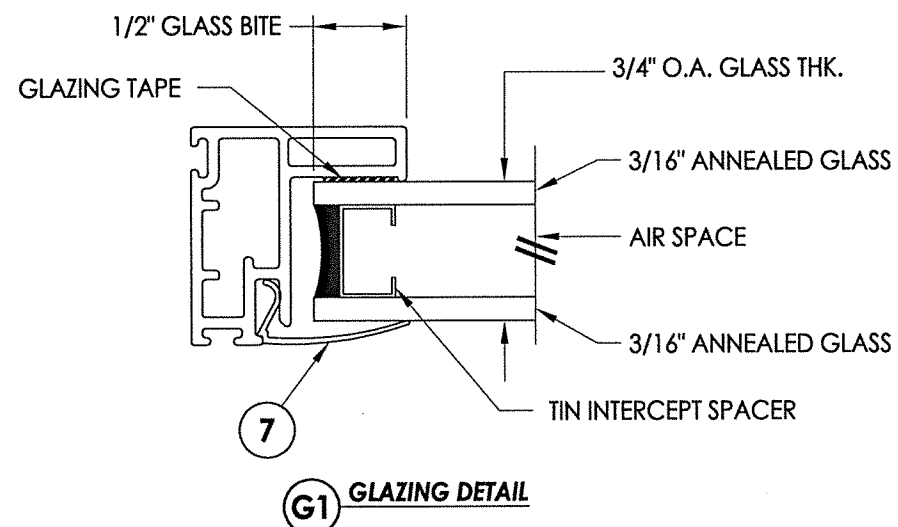


1 FRAME

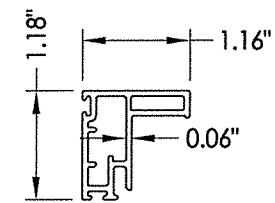


2 SASH STILE/RAIL

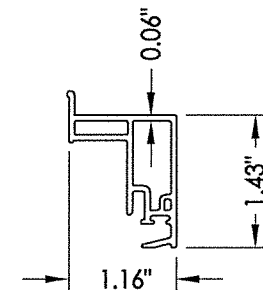


4 LOCK STILE

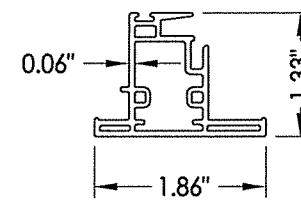


5 MEETING STILE




7 GLAZING BEAD

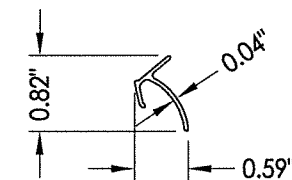


9 SCREEN CLIP




11 ROLLER TRACK



14 SASH STILE REINFORCEMENT

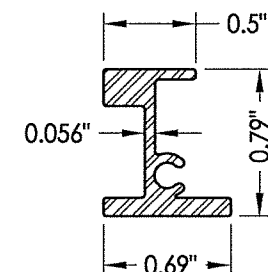

15 MEETING RAIL REINFORCEMENT

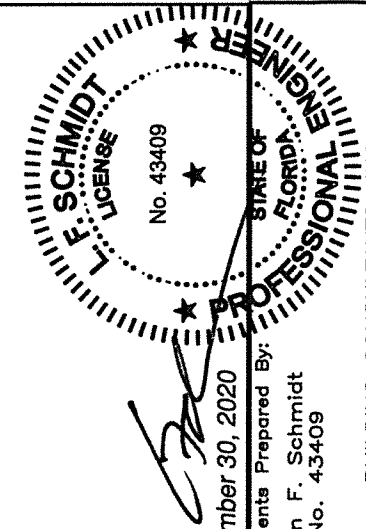

September 30, 2020

Documents Prepared By
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: HORIZONTAL SLIDER

PART OR ASSEMBLY:
**BILL OF MATERIALS, GLAZING
DETAILS & COMPONENTS**

[illegible]