





R:\Clients\Sunrise Windows\A - Florida Product Approvals\FL-26909 - Horizontal Slider Window\C - Drawings\FL 26909 (2020)\FL-26909.6.dwg, 3.2



2X BUCK ANCHORING

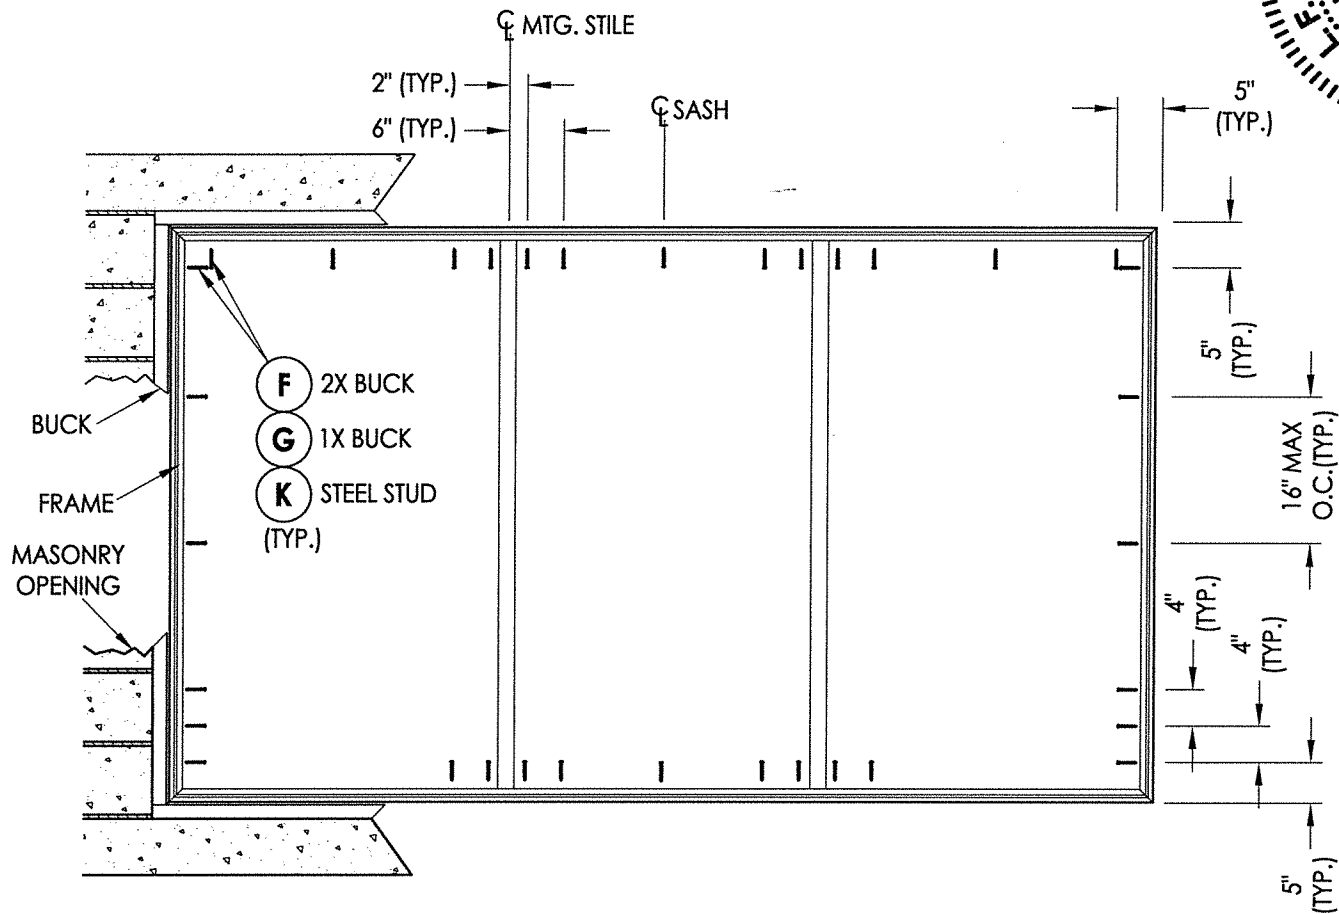

FRAME ANCHORING


CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
ELCO ULTRA CON®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.



July 28, 2020

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry License No. 9813

PRODUCT: SUNRISE WINDOWS

PART OR ASSEMBLY:
BUCK & FRAME ANCHORING

NO.	DATE	REVISIONS
1	7/27/20	UPDATE TO 7TH ED (2020) FBC
		LFS
		BY

DATE: 10/9/18

SCALE: N.T.S.


DWG. BY: TRJ

CHK. BY: LFS


DRAWING NO.:

FL-26909.6


SHEET 3 OF 5

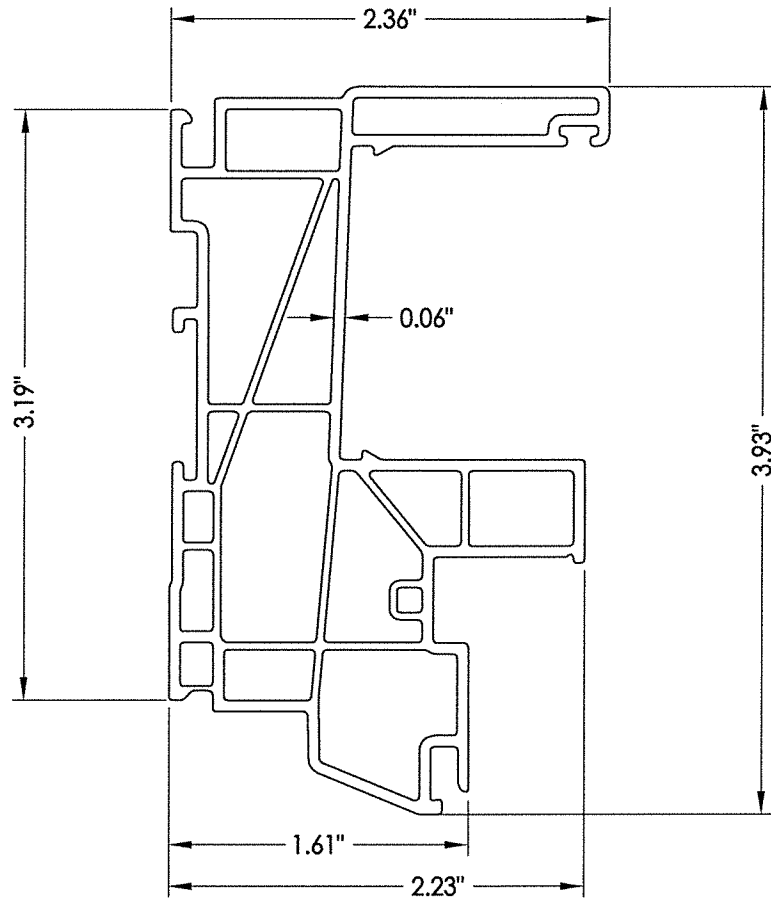


1 FRAME




19 FLORIDA FLANGE
(Optional)




3 HANDLE STILE REINFORCEMENT




9 MEETING STILE REINFORCEMENT




2 GLAZING BEAD




4 BOTTOM RAIL

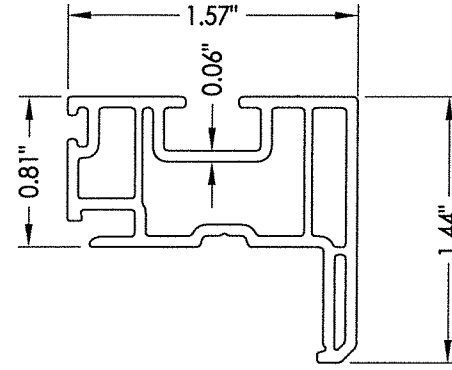


5 TOP RAIL




6 MEETING STILE




7 LOCK STILE

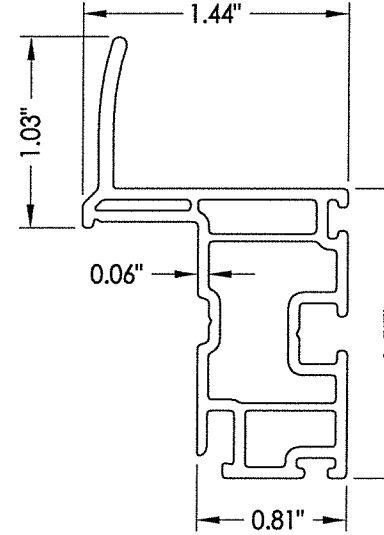


8 HANDLE STILE



10 LOCK STILE REINFORCEMENT



16 ROLLER TRACK

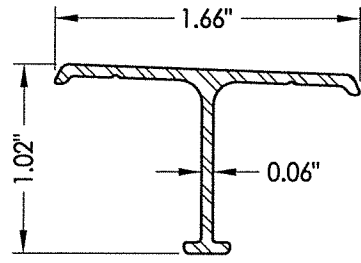

17 ANTI-LIFT

FLORIDA PROFESSIONAL ENGINEER
No. 43409
July 28, 2020
Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409
BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry License No. 9813

PRODUCT: SUNRISE WINDOWS


PART OR ASSEMBLY: COMPONENTS

REVISIONS			
NO.	DATE	DESCRIPTION	BY
1	7/27/20	UPDATE TO 7TH ED (2020) FBC	LFS

DATE: 10/9/18
SCALE: N.T.S.
DWG. BY: TRJ
CHK. BY: LFS
DRAWING NO.: FL-26909.6
SHEET 4 OF 5

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (SG >= 0.42)	WOOD
B	2X BUCK (SG >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH ELCO OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	#10 X 2-1/2" PPH SMS (1-1/4" MIN. EMBEDMENT)	STEEL
G	1/4" X 3-1/4" PFH ELCO OR ITW CONCRETE SCREW	STEEL
J	STEEL STUD Min. Thk .033" (ASTM A653 GRADE 33 Fy=33 ksi min., Fu=45 ksi min.)	STEEL
K	#10 PPH SELF-DRILLING SMS	STEEL
1	EXTRUDED VINYL FRAME (1834)*	RIGID PVC
2	EXTRUDED VINYL GLAZING BEAD (836B)*	RIGID PVC
3	HANDLE STILE REINFORCEMENT (16579)	6063 - T5 ALUM
4	BOTTOM RAIL (1808)*	RIGID PVC
5	TOP RAIL (1879)*	RIGID PVC
6	MEETING STILE (1837)*	RIGID PVC
7	LOCK STILE (1806)*	RIGID PVC
8	HANDLE STILE (1805)*	RIGID PVC
9	MEETING STILE REINFORCEMENT (16943)	6063 - T5 ALUM
10	LOCK STILE REINFORCEMENT (16582)	6063 - T5 ALUM
11	SASH LOCK	-
12	KEEPER	-
14	ROLLER (VISION #1147)	-
16	ROLLER TRACK	6063 - T5 ALUM
17	ANTI-LIFT ALUMINUM	6063 - T5 ALUM
18	#6 X 1/2" PPH SMS	STEEL
19	FLORIDA FLANGE (1859)*	RIGID PVC
20	WEATHERSTRIP	-
21	INTERLOCK SEAL	-

* THE APPROVED WHITE RIGID PVC EXTERIOR EXTRUSIONS FOR WINDOWS ARE TO BE PRODUCED BY EXTRUDERS LICENSEES IN "AAMA CERTIFICATION PROGRAMS FOR RIGID PVC EXTRUSIONS".



G1 GLAZING DETAIL

[illegible]