



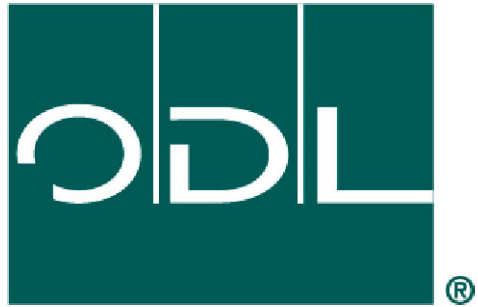

ODL, Inc.
TRANSOM / FIXED LITE
"IMPACT"

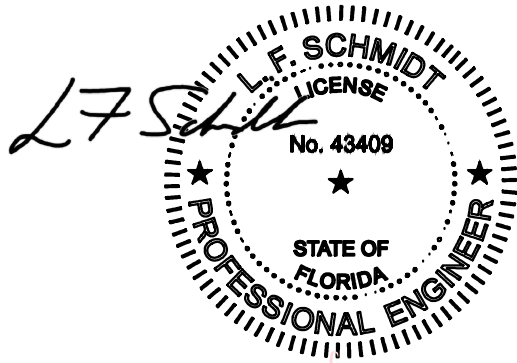

Digitally signed by Lyndon F Schmidt
Date: 2026.03.30 15:50:34 -04'00'


This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA


GENERAL NOTES

1. This product has been evaluated and is in compliance with the 8th Edition (2023) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection, this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
4. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical elevation, design pressures & general notes
2	Horizontal and vertical cross sections
3	Buck & frame anchoring (Half-Round)
4	Buck & frame anchoring (Rectangular)
5	Bill of materials, glazing details & components

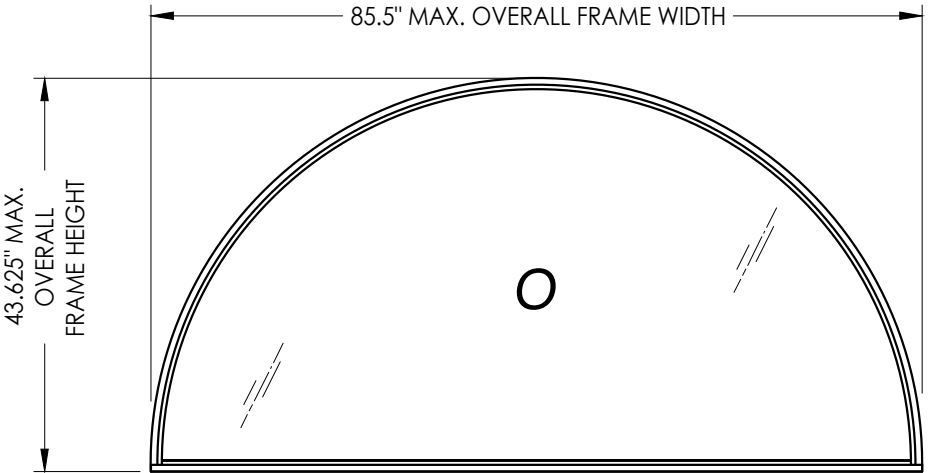

HALF-ROUND FIXED LITE
(Shown w/ Clear Glass)

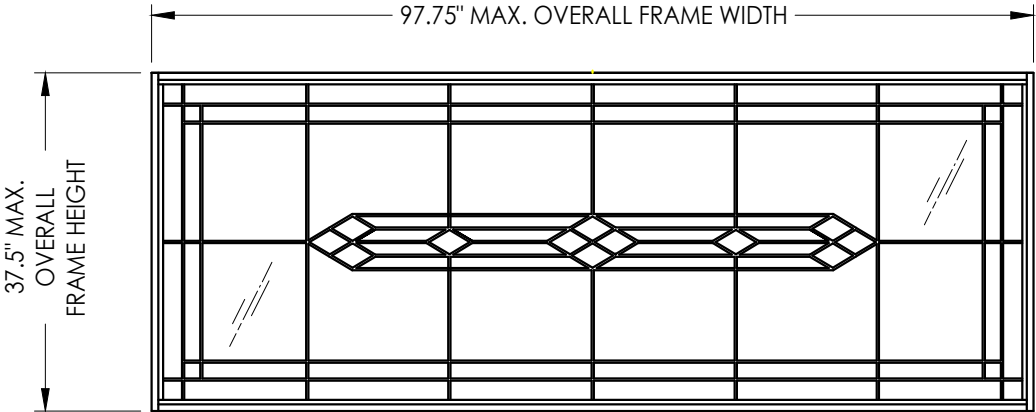

RECTANGULAR FIXED LITE
(Shown w/ Decorative Glass)

UNIT TYPE	OVERALL FRAME DIMENSION	OVERALL D.L.O. DIMENSION	GLASS TYPE	DESIGN PRESSURE (PSF)	
				POSITIVE	NEGATIVE
HALF-ROUND	85.5" x 43.63"	83.0" x 41.13"	G1	+60.0	-65.0
RECTANGULAR	97.75" x 37.5"	95.25" x 35.0"	G1	+60.0	-65.0

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


PRODUCT:
TRANSOM / FIXED LITE

PART OR ASSEMBLY:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES


DATE: 6/13/18
SCALE: N.T.S.
DWG. BY: LFS
CHK. BY: RW
DRAWING NO.: FL-27399.2
SHEET 1 OF 5

Building Consultants, Inc.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


REVISIONS

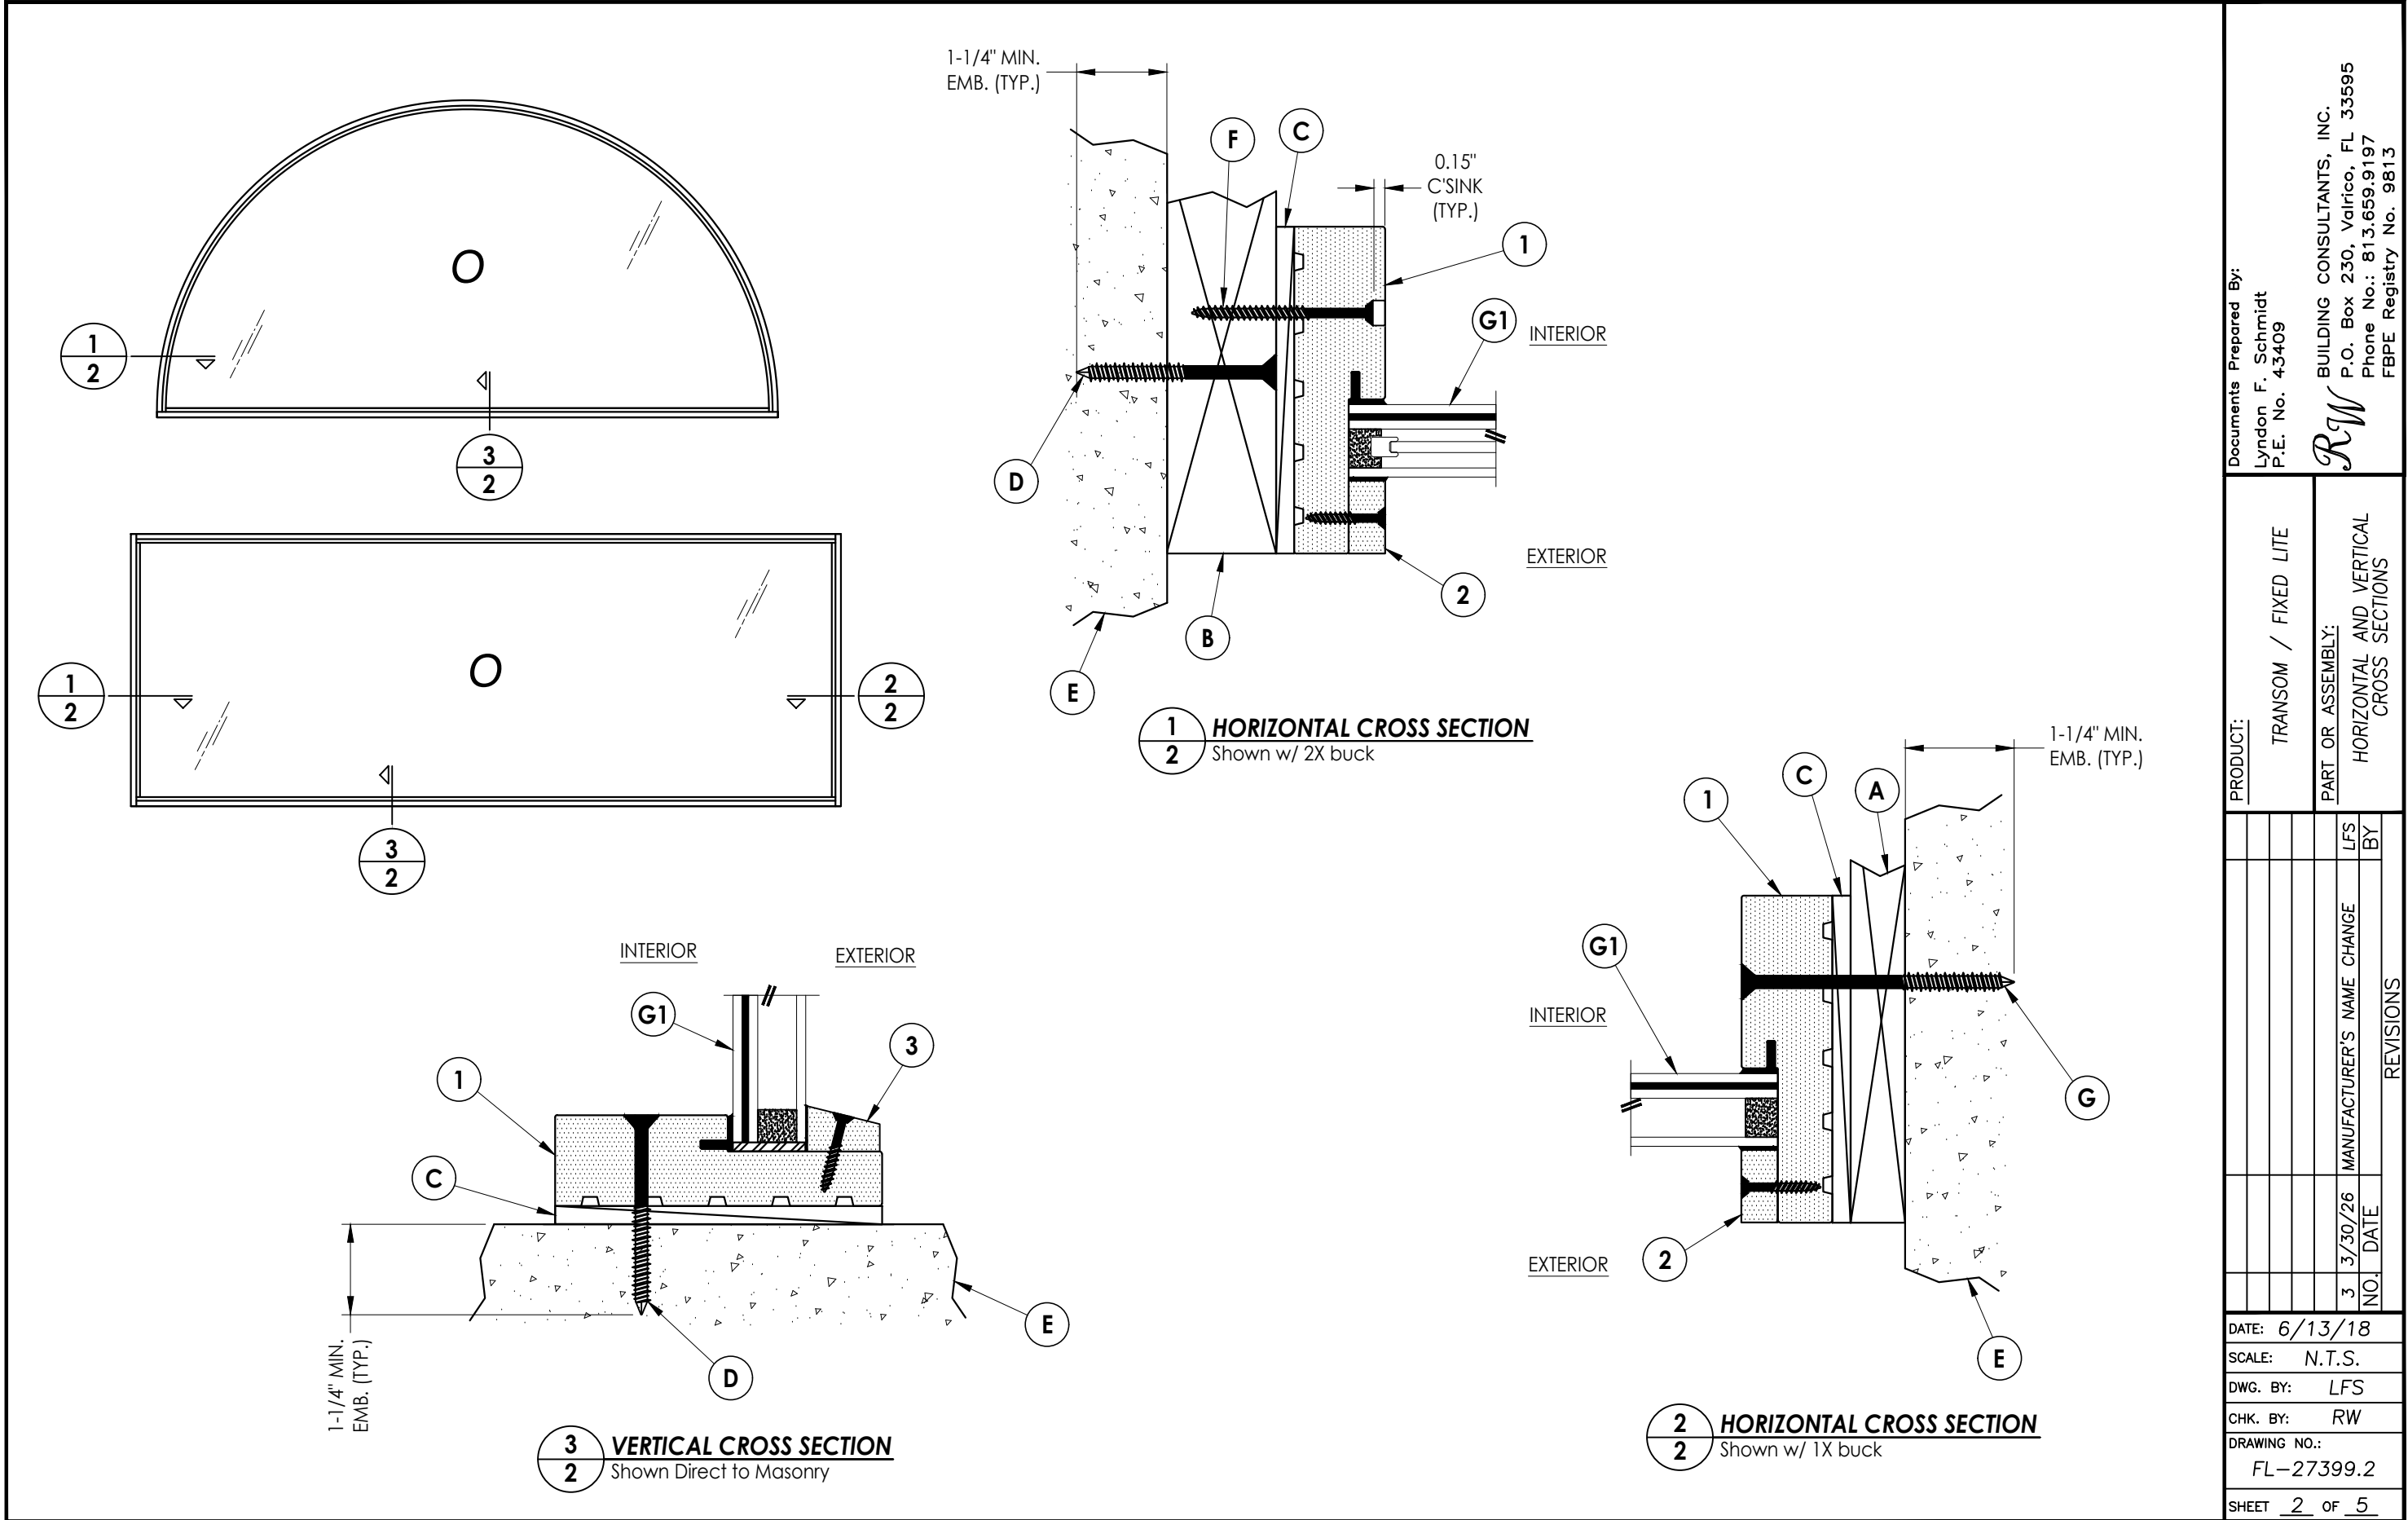

Z:\2023 FBC Drawings\ODL, Inc\FL-27399 R3\FL-27399.2.dwg

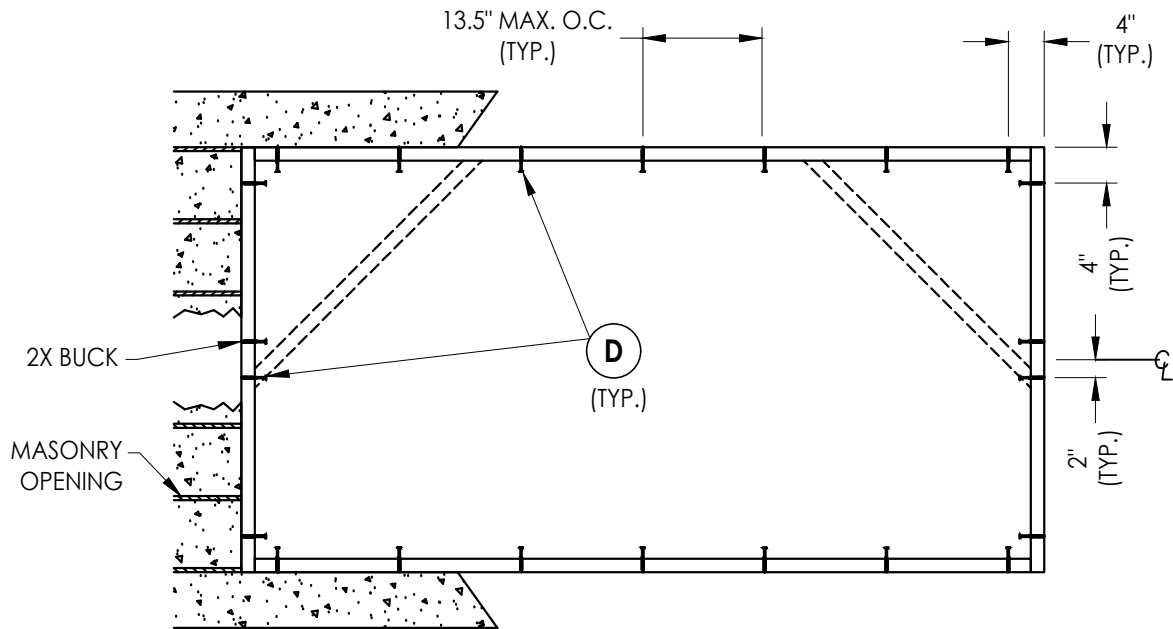

BUCK ANCHORING
HALF-ROUND

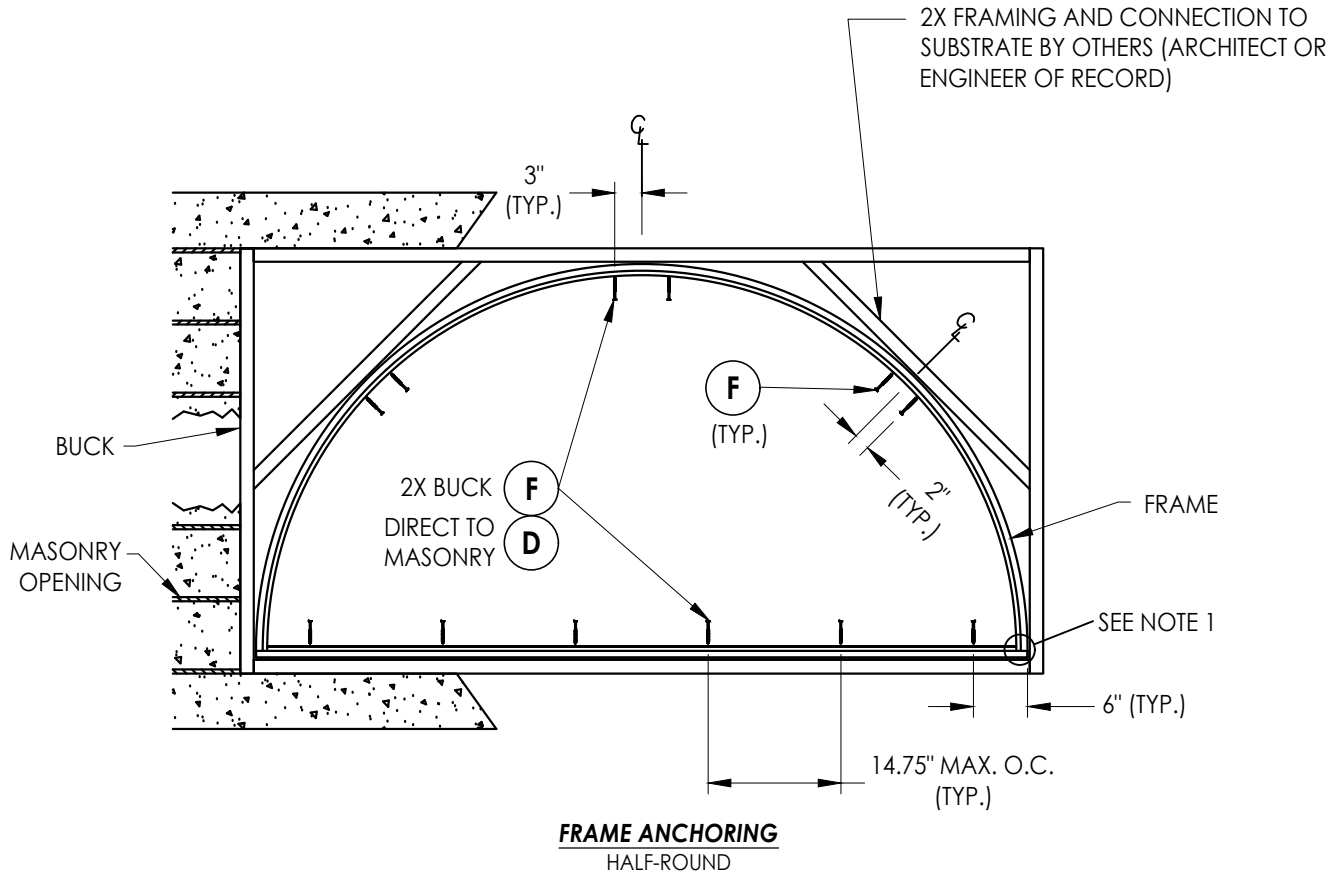

FRAME ANCHORING
HALF-ROUND

CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRA-CON+®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

NOTE:

- FRAME CORNERS SEALED w/ DOW 995 & CONNECTED w/ (3) #10 X 2" FPH WOOD SCREWS (TYP.).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
TRANSOM / FIXED LITE

PART OR ASSEMBLY:
BUCK & FRAME ANCHORING
(HALF-ROUND)

NO.	DATE	MANUFACTURER'S NAME CHANGE	BY
3	3/30/26		LFS

DATE: 6/13/18

SCALE: N.T.S.

DWG. BY: LFS


CHK. BY: RW

DRAWING NO.:


FL-27399.2

SHEET 3 OF 5

Z:\2023 FBC Drawings\ODL, Inc\FL-27399 R3\FL-27399.2.dwg

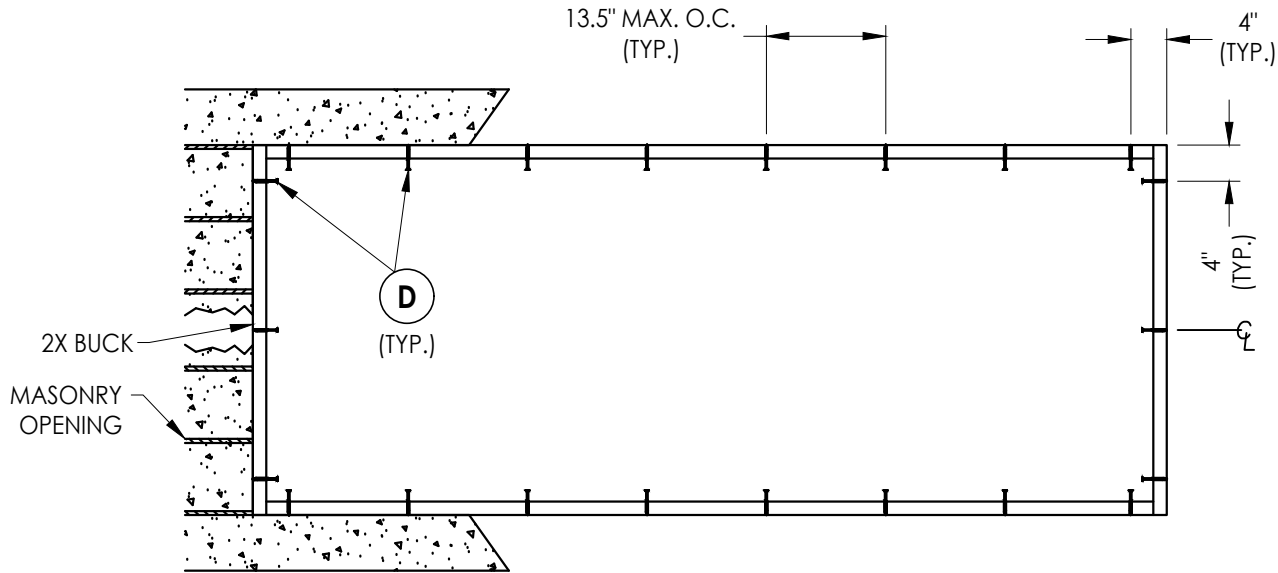

BUCK ANCHORING
RECTANGULAR

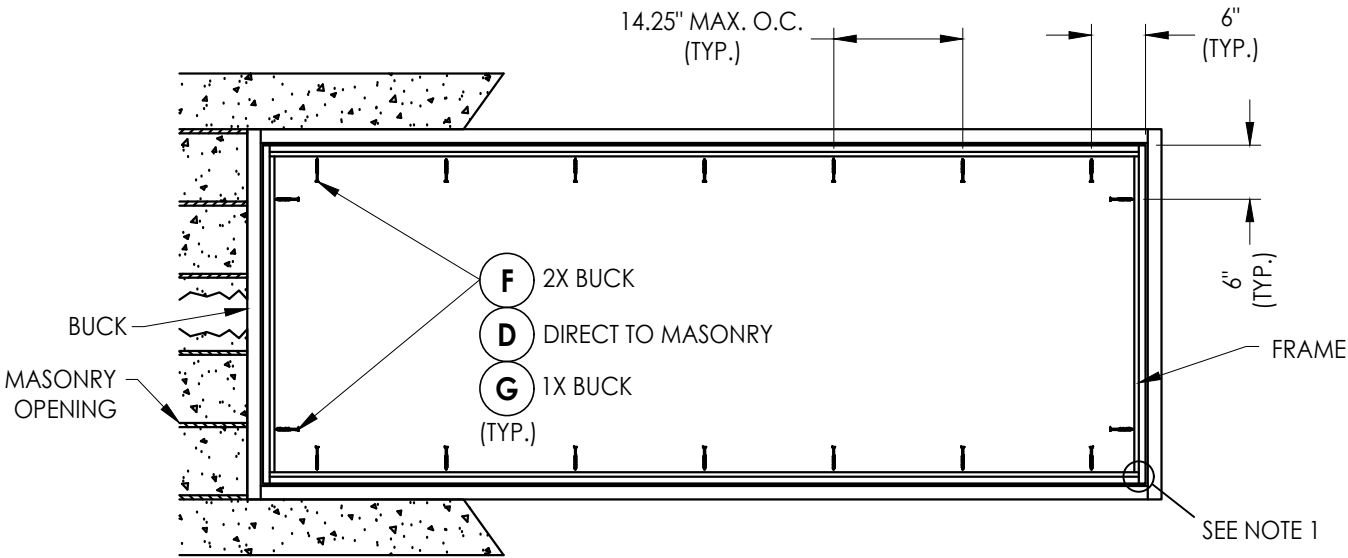

FRAME ANCHORING
RECTANGULAR

CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON+®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

NOTE:

- FRAME CORNERS SEALED w/ DOW 995 & CONNECTED w/ (3) #10 X 2" FPH WOOD SCREWS (TYP.).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:

TRANSOM / FIXED LITE

PART OR ASSEMBLY:

BUCK & FRAME ANCHORING
(RECTANGULAR)

NO.	DATE	MANUFACTURER'S NAME	CHANGE	LFS	BY
3	3/30/26				
REVISIONS					

DATE: 6/13/18

SCALE: N.T.S.

DWG. BY: LFS

CHK. BY: RW

DRAWING NO.:

FL-27399.2

SHEET 4 OF 5

