

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED FIN INSTALLATION	10/22/19	R.L.

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER MASONRY/CONCRETE IS OPTIONAL.
4. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" WINDOW UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
5. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. WINDOW UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
6. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
7. BUCKS SHALL EXTEND BEYOND WINDOW INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
8. FOR FIN INSTALLATION SHIM AS NEEDED. FOR FRAME INSTALLATION SHIM AS REQUIRED AT WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
9. SHIMS SHALL BE MADE FROM MATERIALS CAPABLE OF SUSTAINING APPLICABLE LOADS, LOCATED AND APPLIED IN A THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
10. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
11. FRAME MATERIAL: EXTRUDED RIGID PVC.
12. UNITS MUST BE GLAZED PER ASTM E1300-04/09.
13. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
14. FOR ANCHORING FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 7/8" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

15. FOR ANCHORING FIN INTO STEEL STUDS USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING INTO MASONRY/CONCRETE USE 3/16" TAPCON WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. FOR ANCHORING INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
19. ALL FASTENERS TO BE CORROSION RESISTANT.
20. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD – MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE – MINIMUM COMPRESSIVE STRENGTH OF 3,192 PSI.
 - C. MASONRY – STRENGTH CONFORMANCE TO ASTM C-90, GRADE N, TYPE 1 (OR GREATER).
 - D. METAL STRUCTURE: STEEL 18GA, 33KSI OR ALUMINUM 6063-T5 .048" THICK MINIMUM

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3 – 9	INSTALLATION DETAILS
10	COMPONENTS




MI WINDOWS & DOORS, LLC 650 WEST MARKET STREET GRATZ, PA 17030-0370		
SERIES 3540 CHS TWIN PICTURE WINDOW 88" X 77" NON-IMPACT NOTES		
DRAWN: A.R.	DWG NO. 08-03346	REV A
SCALE NTS	DATE 11/01/18	SHEET 1 OF 10
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 10/29/2019




Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED FIN INSTALLATION	10/22/19	R.L.

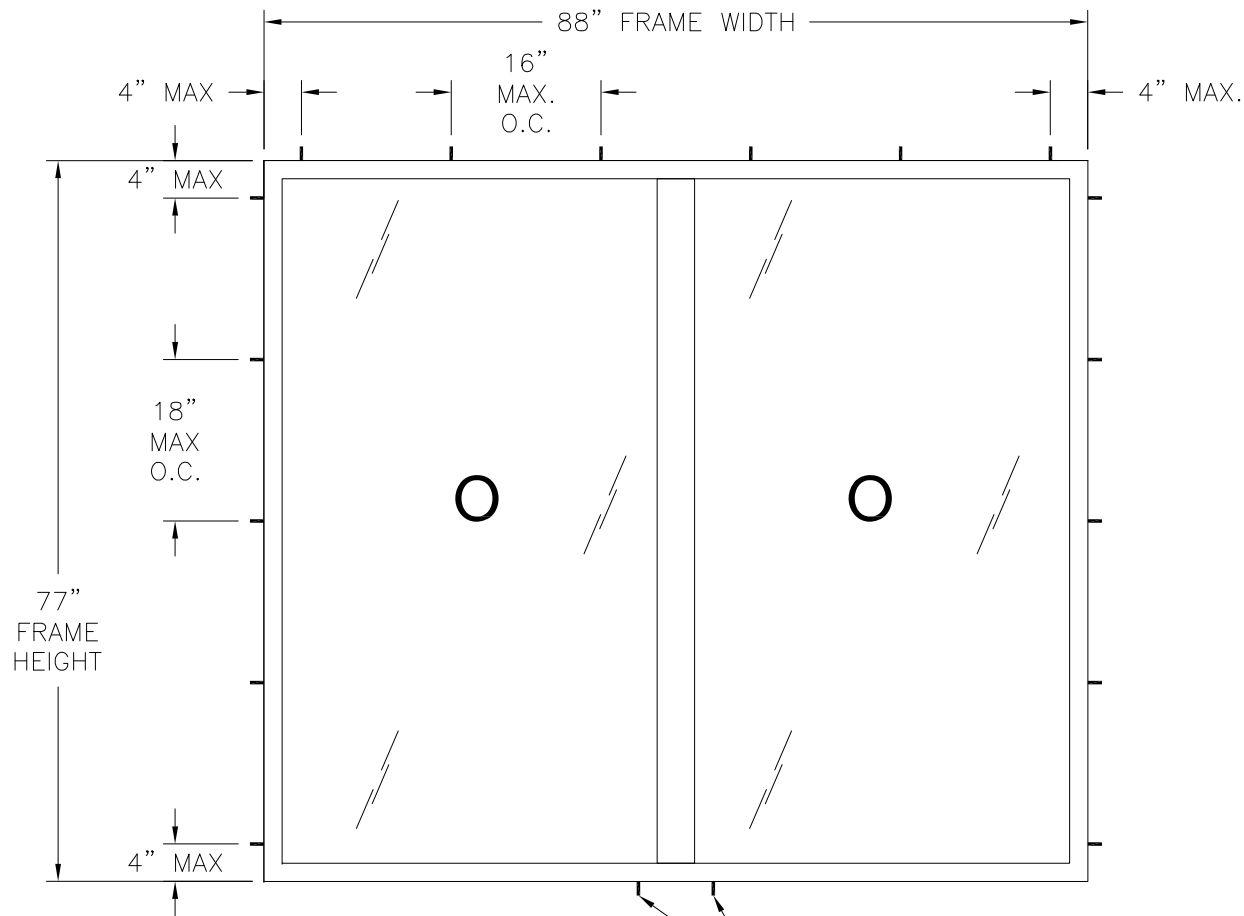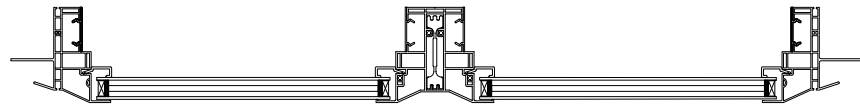

SERIES 3540 CHS TWIN PICTURE WINDOW
EXTERIOR VIEW
FLANGE INSTALLATION

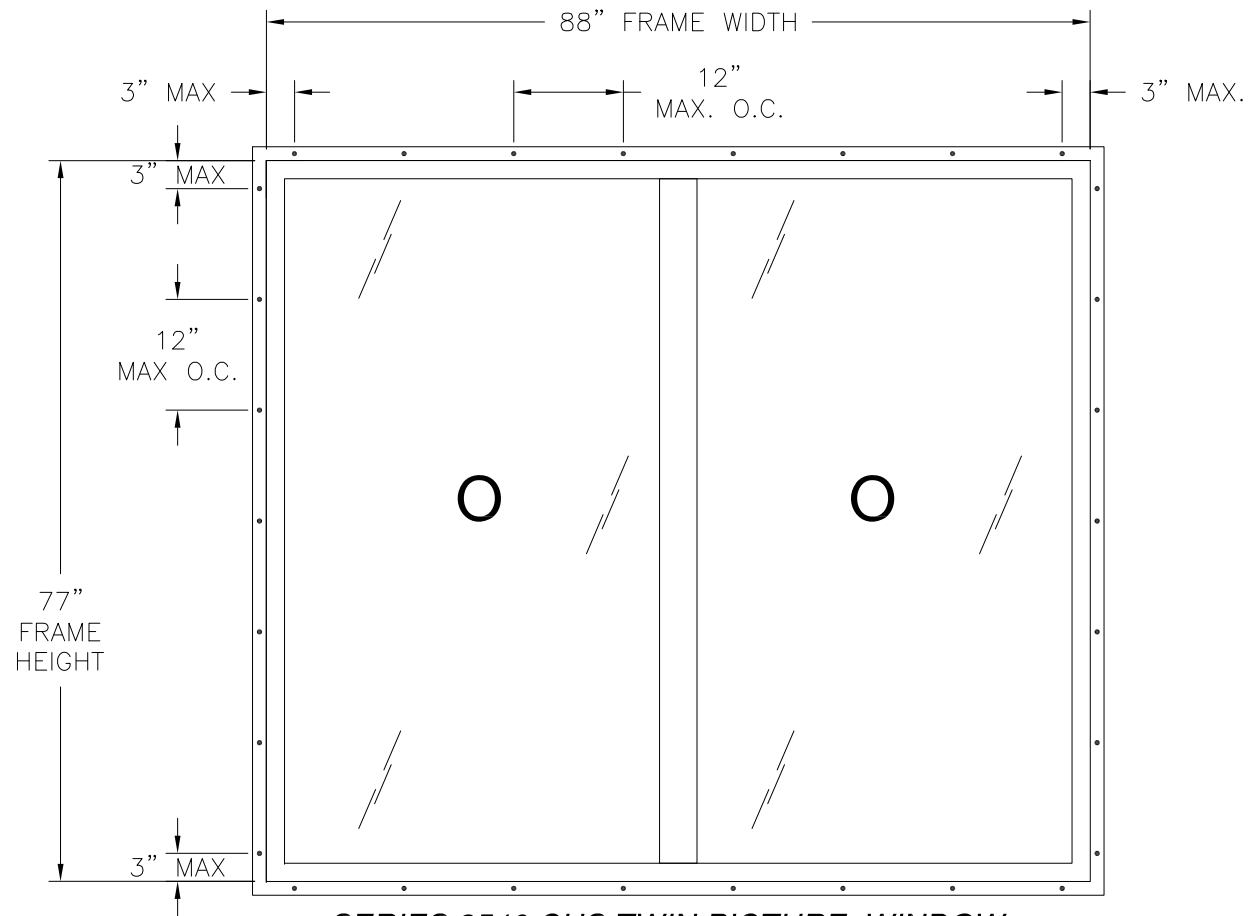

SERIES 3540 CHS TWIN PICTURE WINDOW
EXTERIOR VIEW
FIN INSTALLATION


DESIGN PRESSURE RATING	IMPACT RATING
±40.0PSF	NONE

88" X 77" UNIT SHOWN. OTHER SIZES APPROVED AS LONG AS
FRAME AREA DOES NOT EXCEED 47.05 FT²

NOTES:
1. D.L.O.: 32 1/8" X 73 1/8"


SIGNED: 10/29/2019

MI WINDOWS & DOORS, LLC 650 WEST MARKET STREET GRATZ, PA 17030-0370		
SERIES 3540 CHS TWIN PICTURE WINDOW 88" X 77" NON-IMPACT ELEVATIONS		
DRAWN: A.R.	DWG NO. 08-03346	REV A
SCALE NTS	DATE 11/01/18	SHEET 2 OF 10
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		

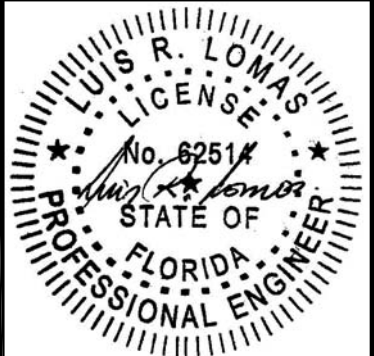


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED FIN INSTALLATION	10/22/19	R.L.

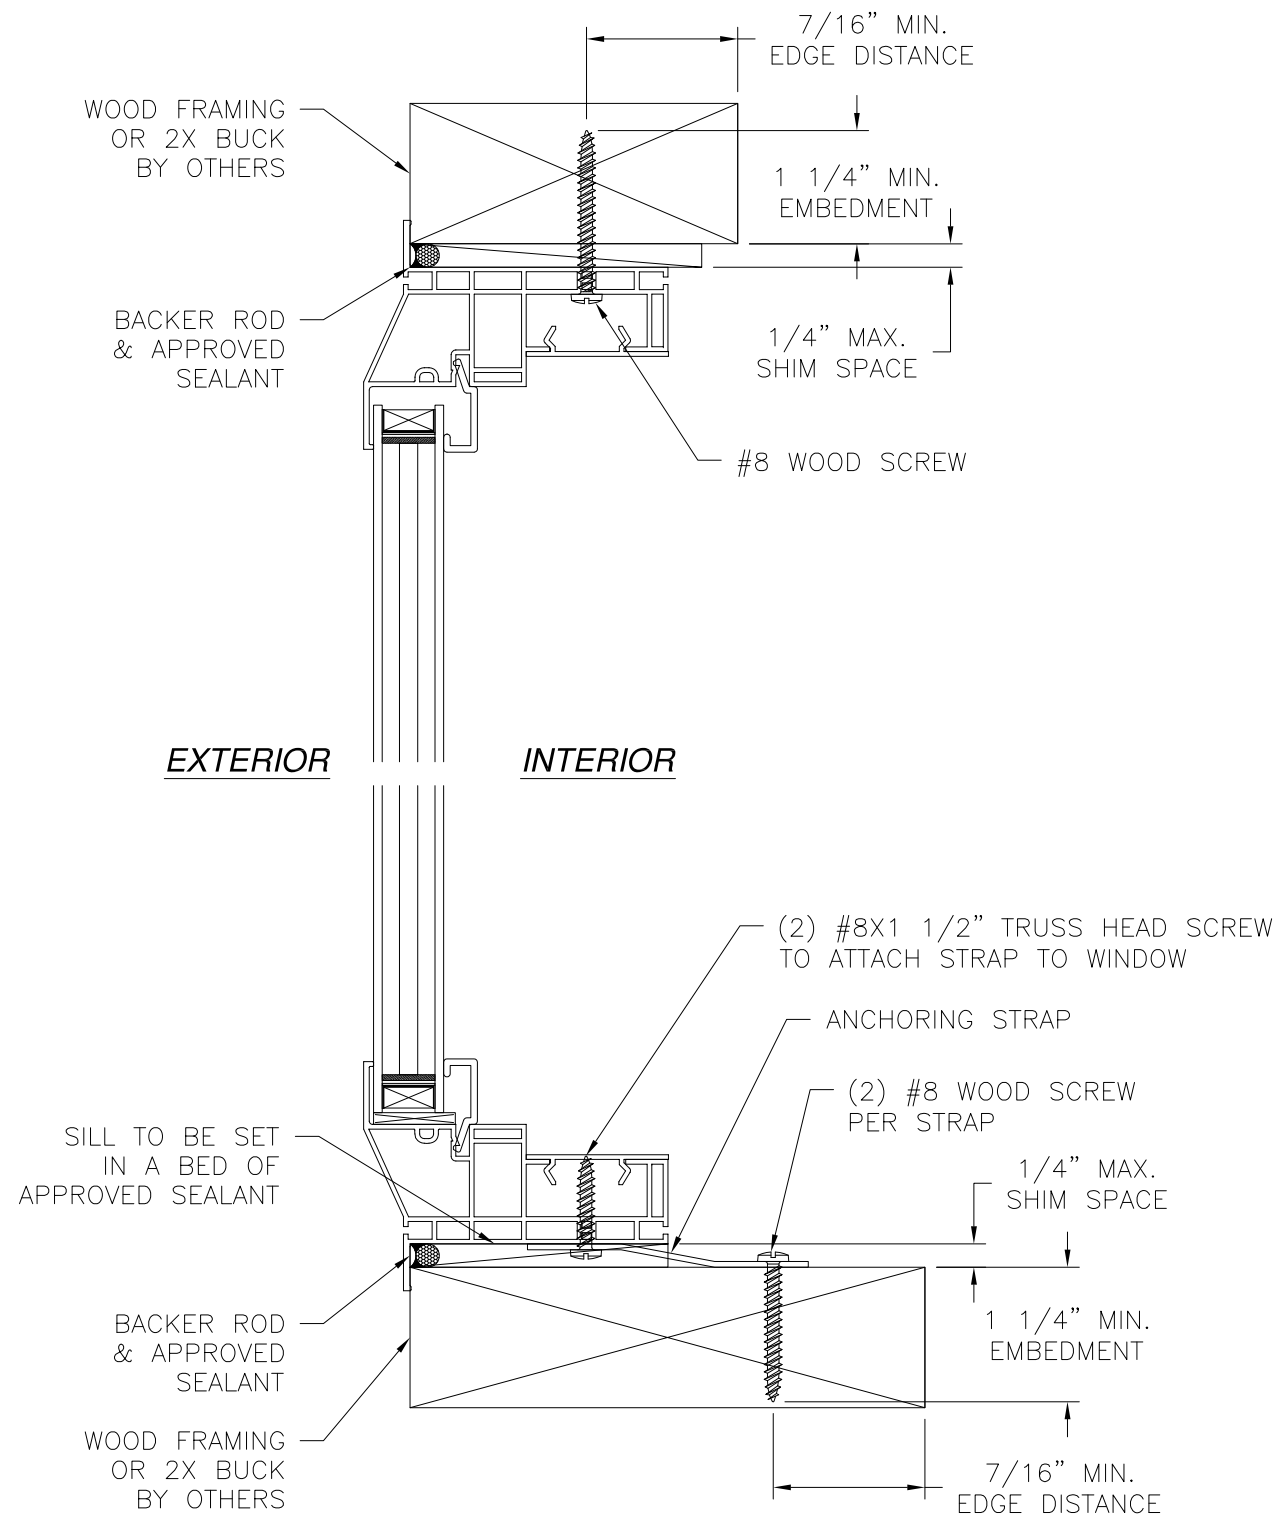

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

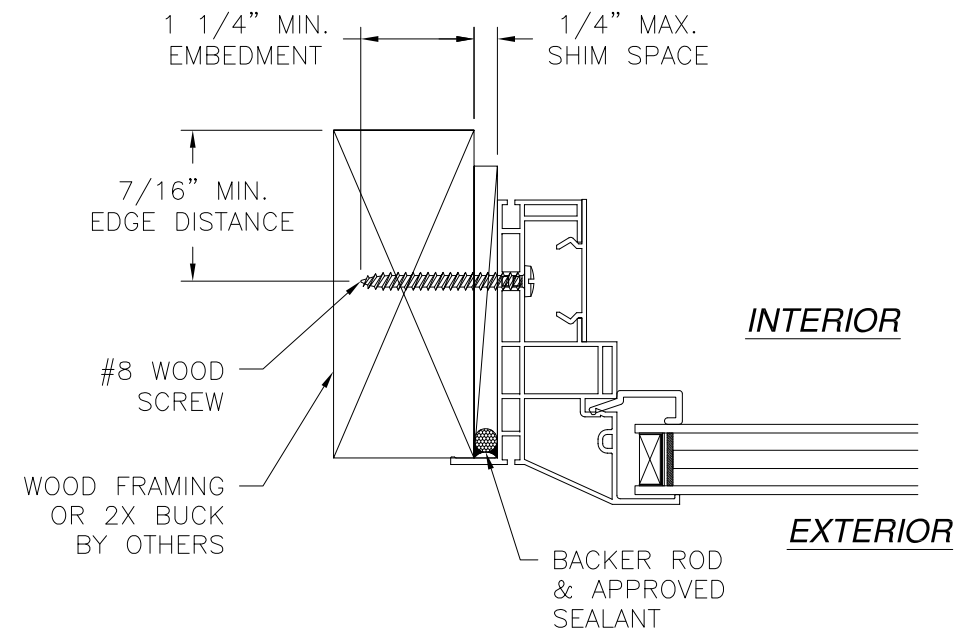


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 10/29/2019

MI WINDOWS & DOORS, LLC 650 WEST MARKET STREET GRATZ, PA 17030-0370		
SERIES 3540 CHS TWIN PICTURE WINDOW 88" X 77" NON-IMPACT INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03346	REV A
SCALE NTS	DATE 11/01/18	SHEET 3 OF 10
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		

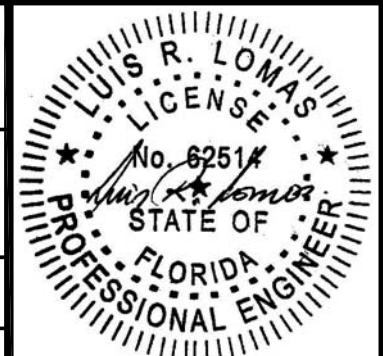


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED FIN INSTALLATION	10/22/19	R.L.

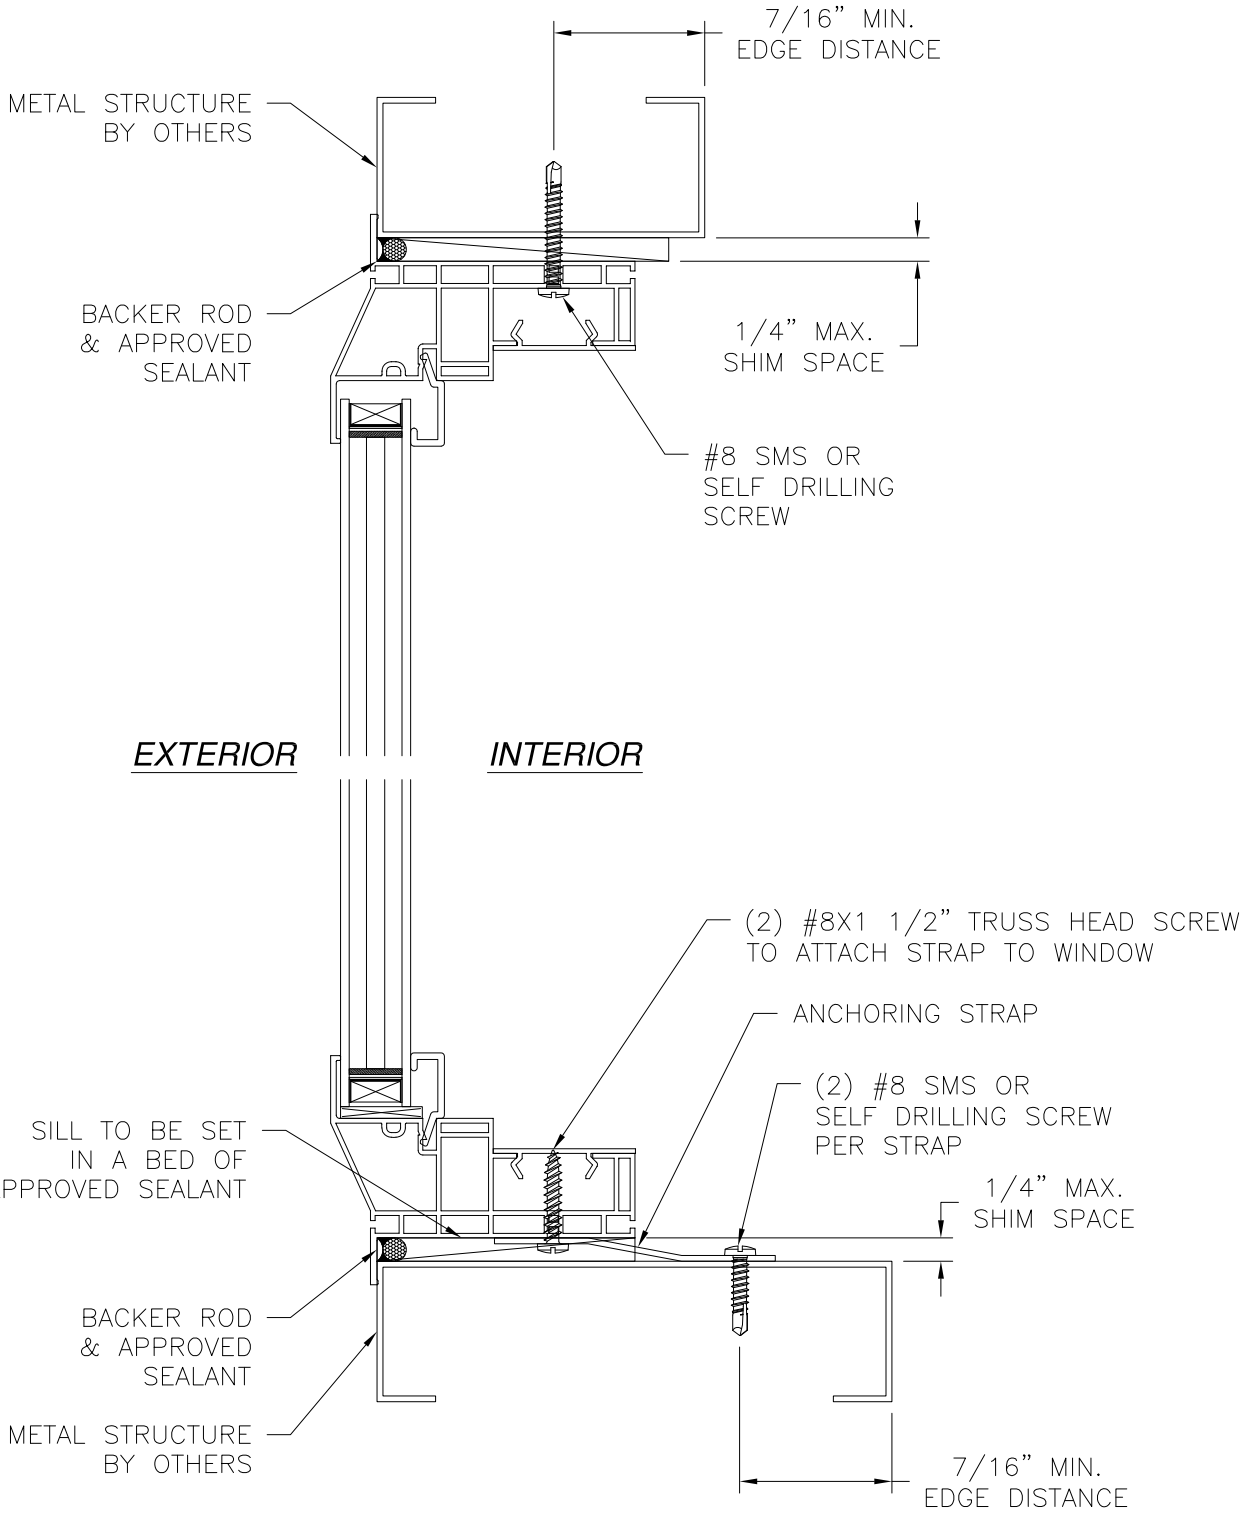

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

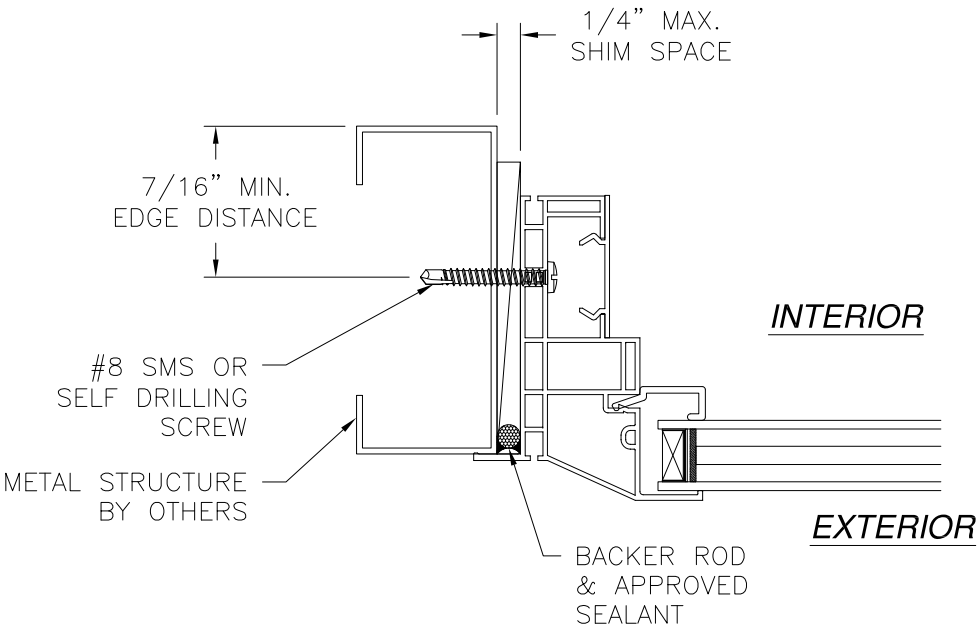

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

NOTES:
 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 10/29/2019

MI WINDOWS & DOORS, LLC
650 WEST MARKET STREET
GRATZ, PA 17030-0370

SERIES 3540 CHS TWIN
PICTURE WINDOW 88" X 77" NON-IMPACT
INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-03346


REV
A

SCALE NTS


DATE 11/01/18

SHEET 4 OF 10


L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com

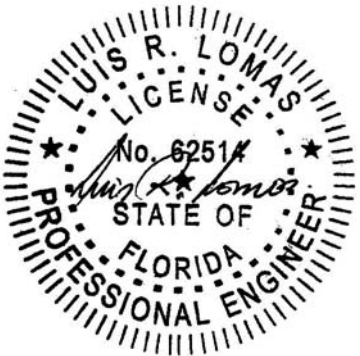

Luis R. Lomas P.E.
FL No.: 62514

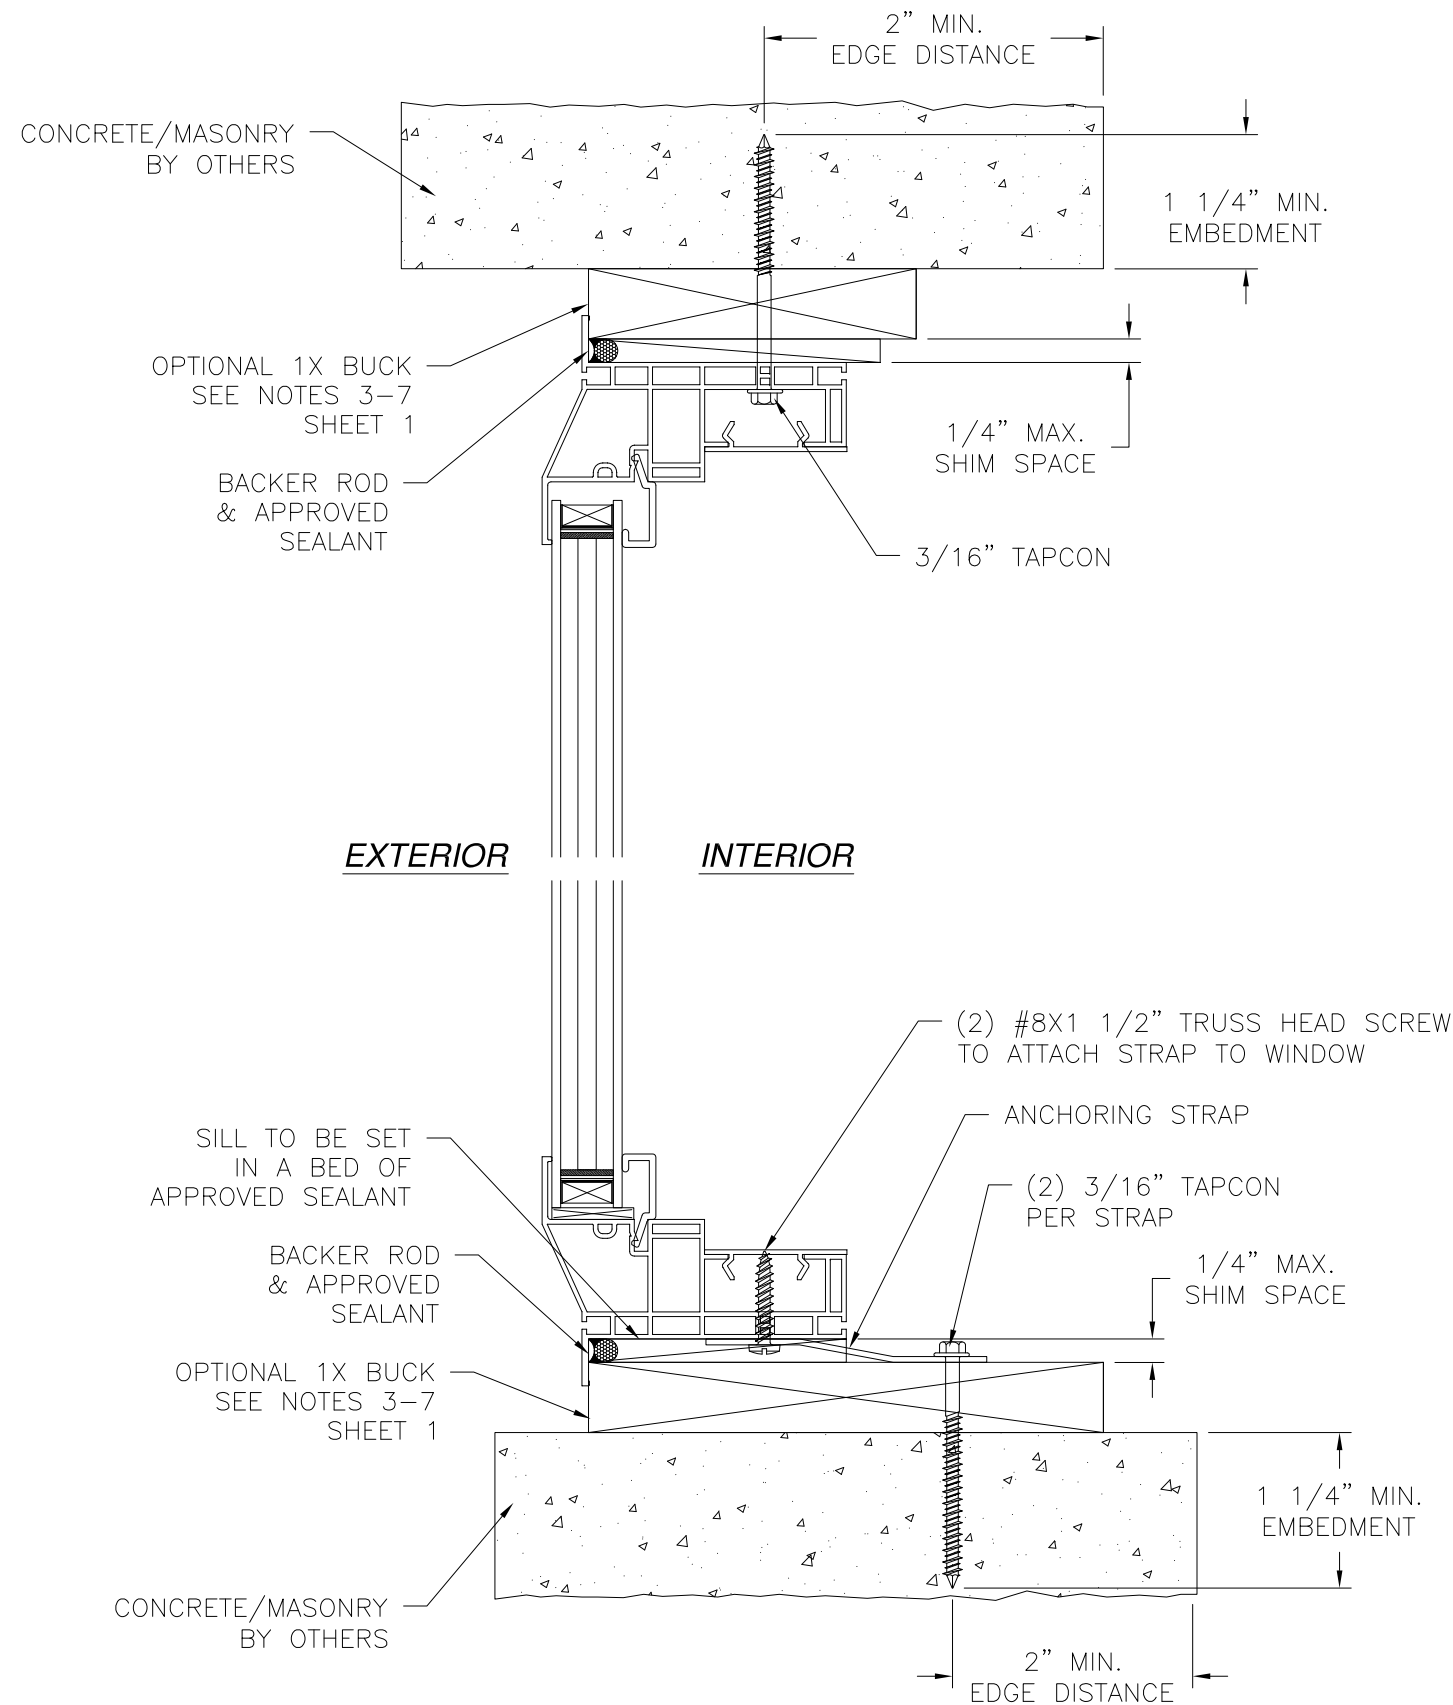

VERTICAL CROSS SECTION
CONCRETE/MASONRY INSTALLATION

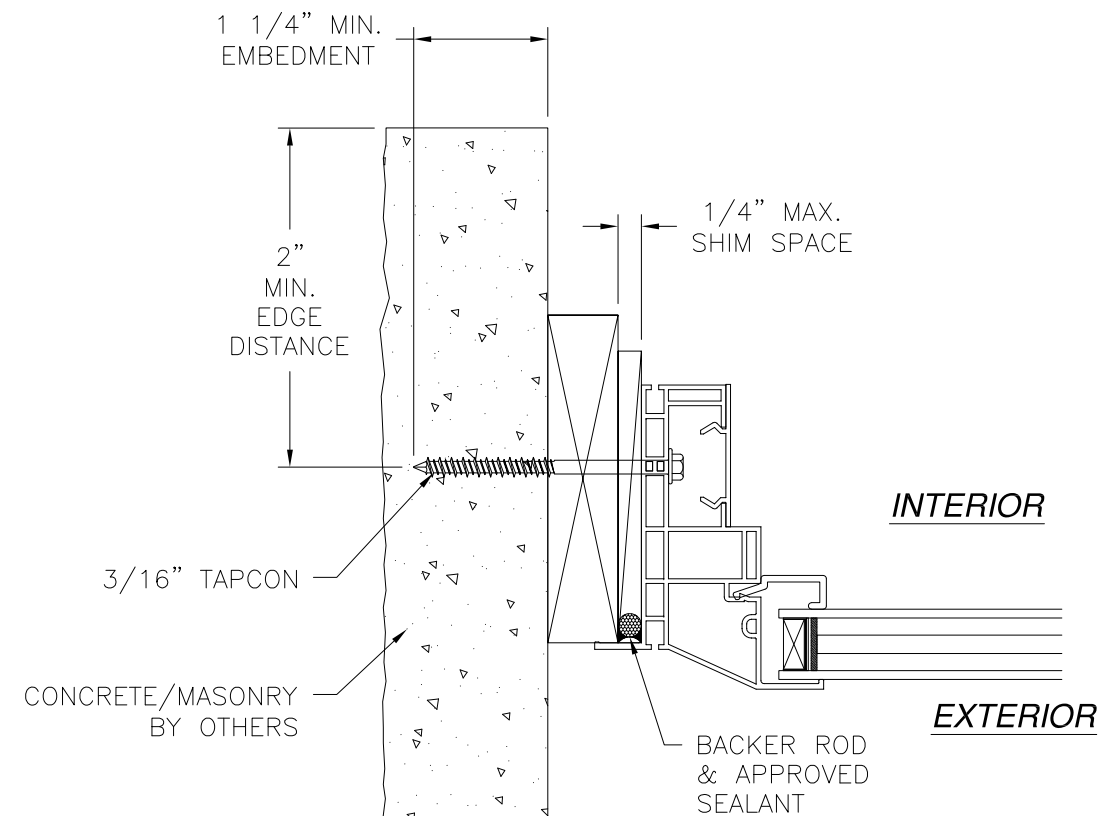


JAMB INSTALLATION DETAIL
MASONRY/CONCRETE INSTALLATION

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED FIN INSTALLATION	10/22/19	R.L.



MI WINDOWS & DOORS, LLC 650 WEST MARKET STREET GRATZ, PA 17030-0370		
SERIES 3540 CHS TWIN PICTURE WINDOW 88" X 77" NON-IMPACT INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03346	REV A
SCALE NTS	DATE 11/01/18	SHEET 5 OF 10
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 10/29/2019

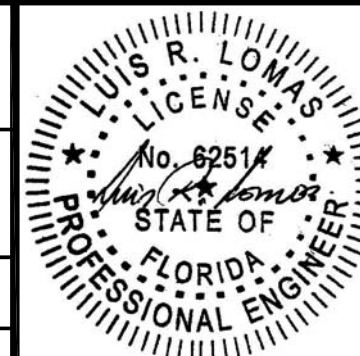


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED FIN INSTALLATION	10/22/19	R.L.

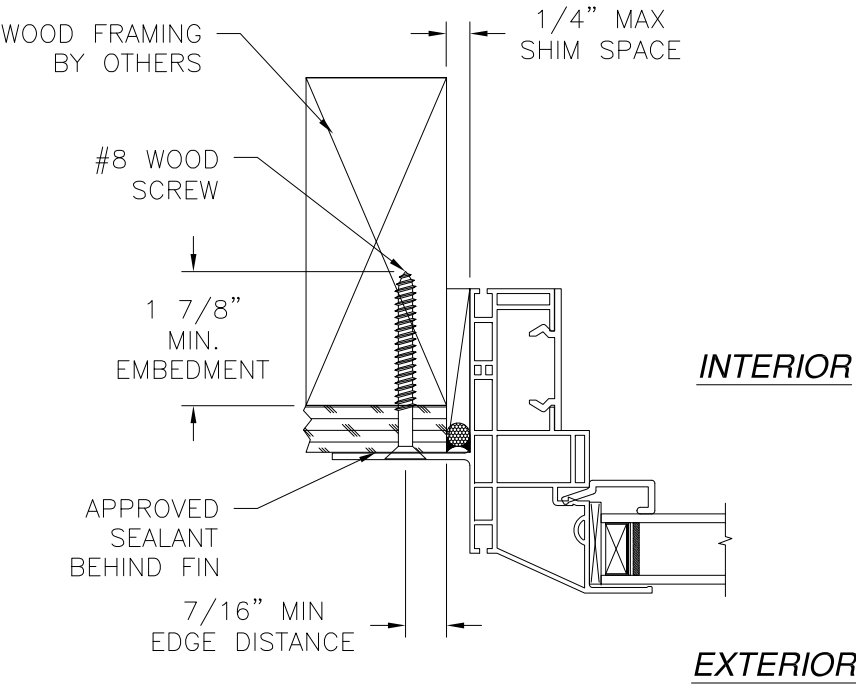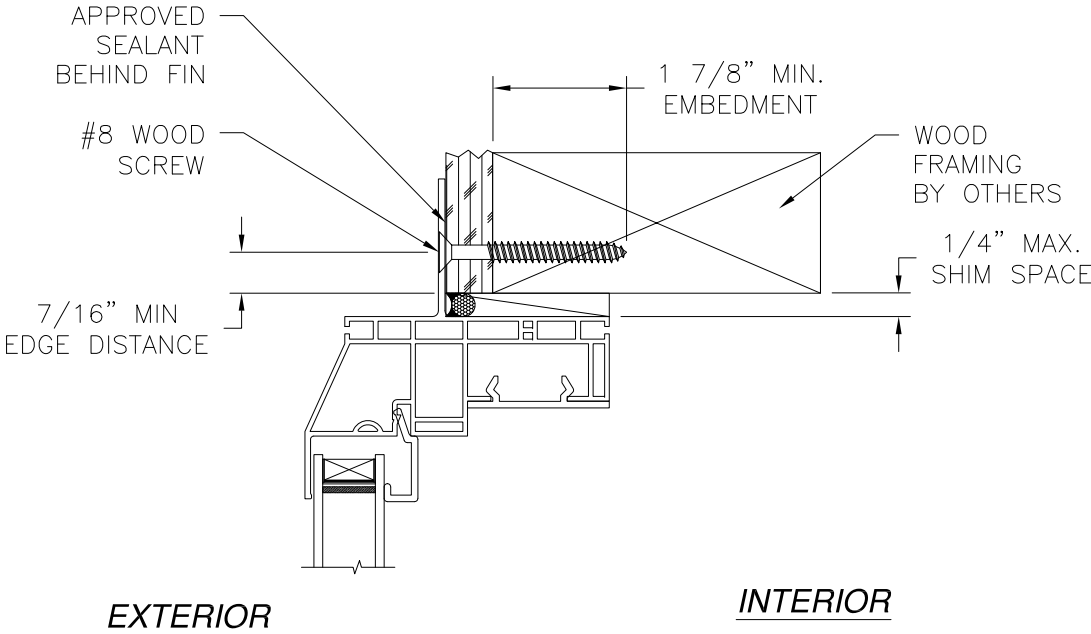

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

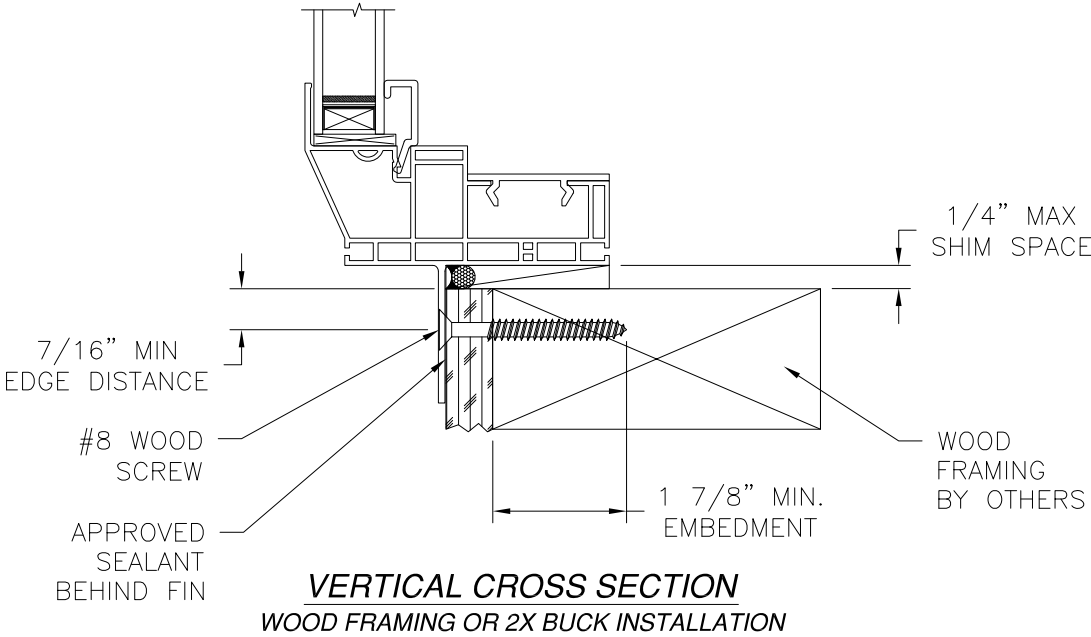

MI WINDOWS & DOORS, LLC
650 WEST MARKET STREET
GRATZ, PA 17030-0370

SERIES 3540 CHS TWIN
PICTURE WINDOW 88" X 77" NON-IMPACT
FIN INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-03346

REV
A


SCALE
NTS

DATE
11/01/18

SHEET
6 OF 10




L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 10/29/2019

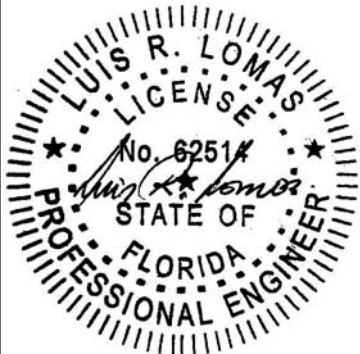

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED FIN INSTALLATION	10/22/19	R.L.

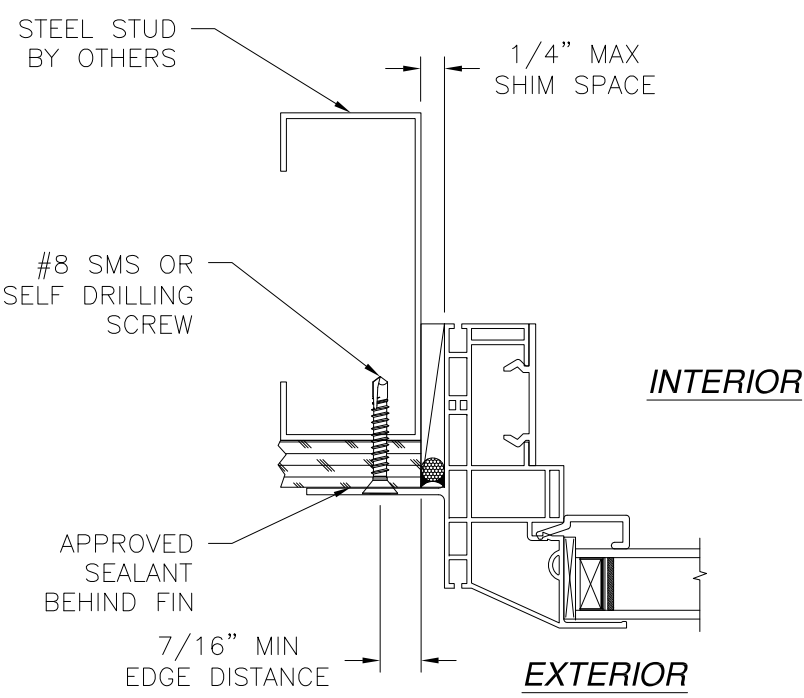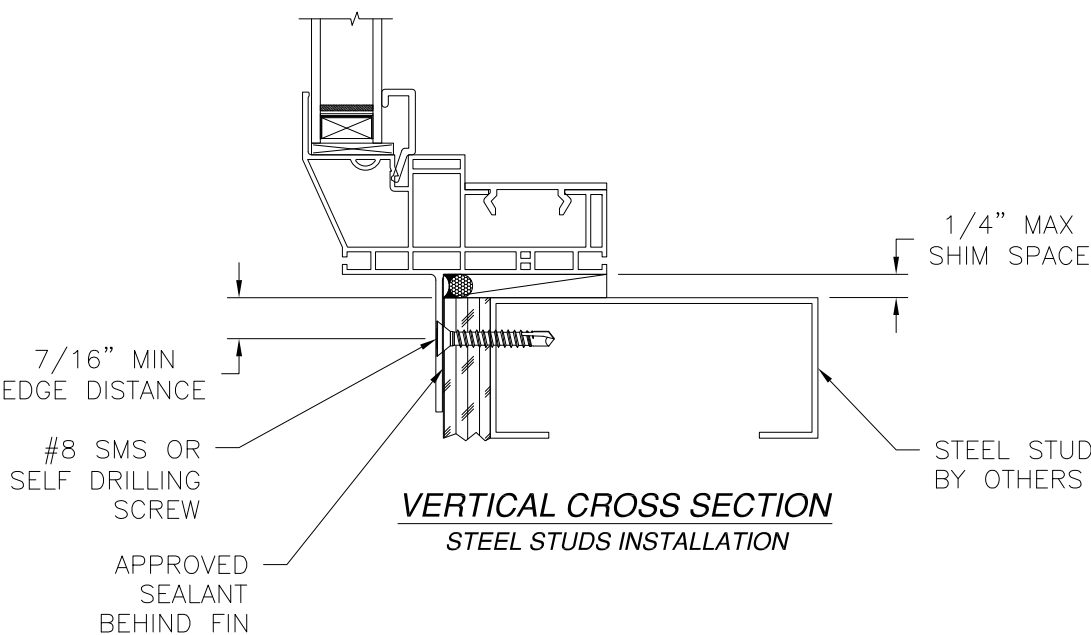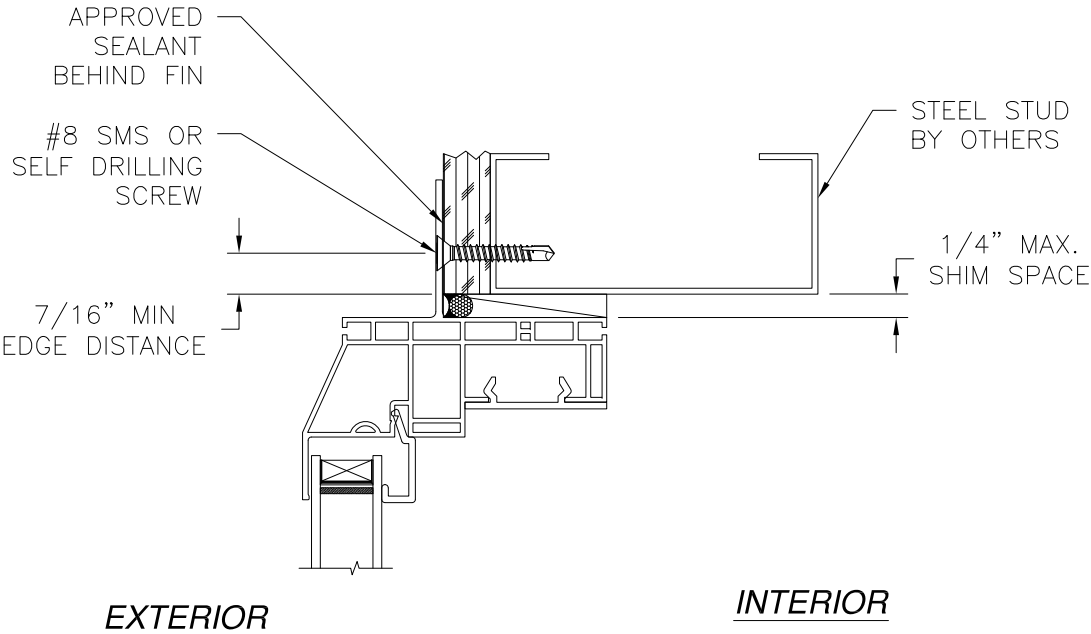

JAMB INSTALLATION DETAIL
STEEL STUDS INSTALLATION

- NOTES:**
- 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 10/29/2019

MI WINDOWS & DOORS, LLC
650 WEST MARKET STREET
GRATZ, PA 17030-0370

SERIES 3540 CHS TWIN
PICTURE WINDOW 88" X 77" NON-IMPACT
FIN INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-03346


REV
A

SCALE NTS

DATE 11/01/18



SHEET 7 OF 10

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com

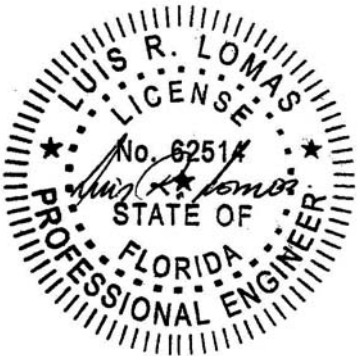


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED FIN INSTALLATION	10/22/19	R.L.

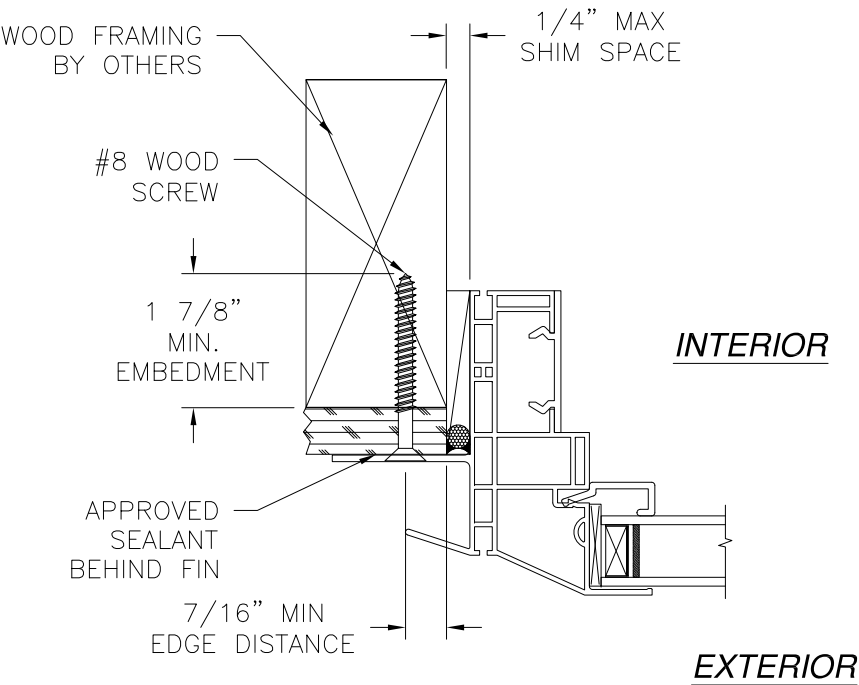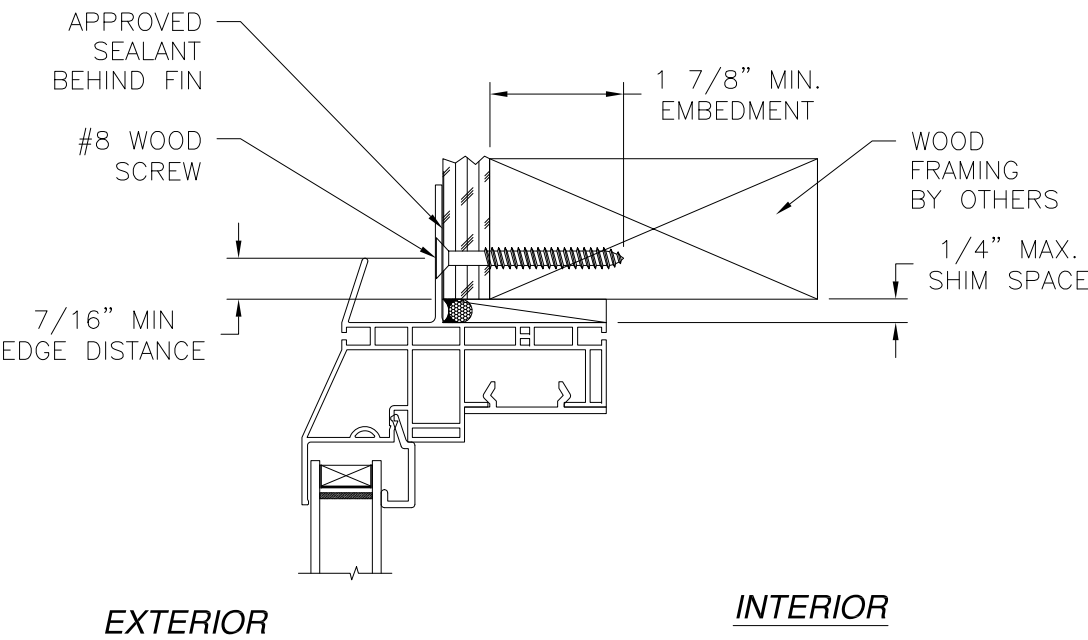

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

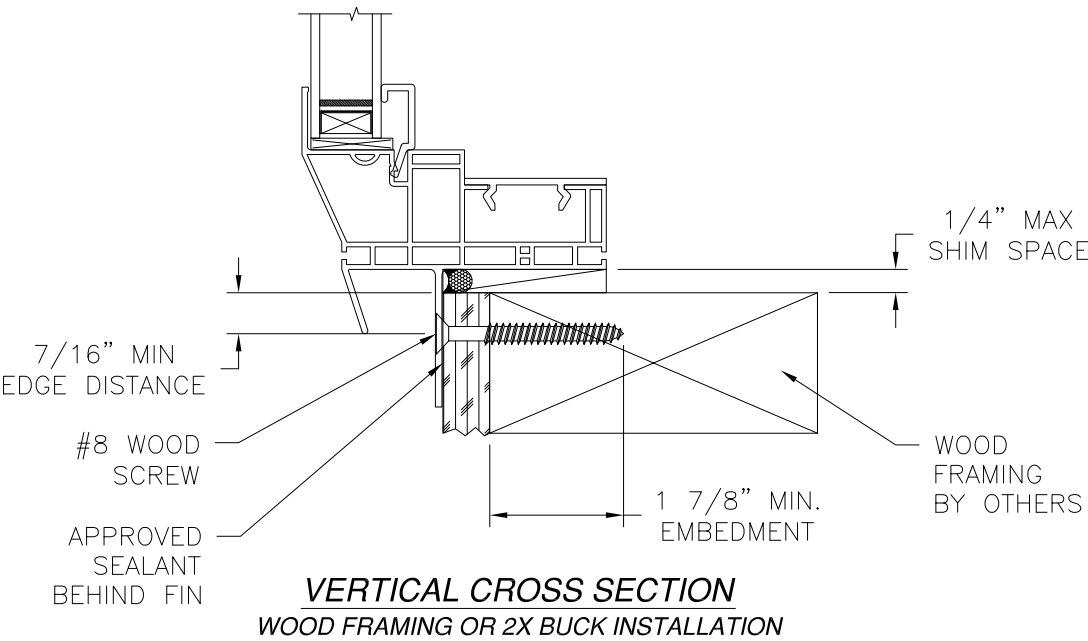

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

SIGNED: 10/29/2019

MI WINDOWS & DOORS, LLC
650 WEST MARKET STREET
GRATZ, PA 17030-0370

SERIES 3540 CHS TWIN
PICTURE WINDOW 88" X 77" NON-IMPACT
FIN INSTALLATION DETAILS W/J-CHANNEL

DRAWN:
A.R.

DWG NO.
08-03346


REV
A

SCALE
NTS

DATE
11/01/18



SHEET
8 OF 10

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com

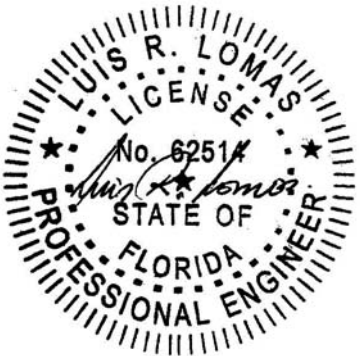


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED FIN INSTALLATION	10/22/19	R.L.

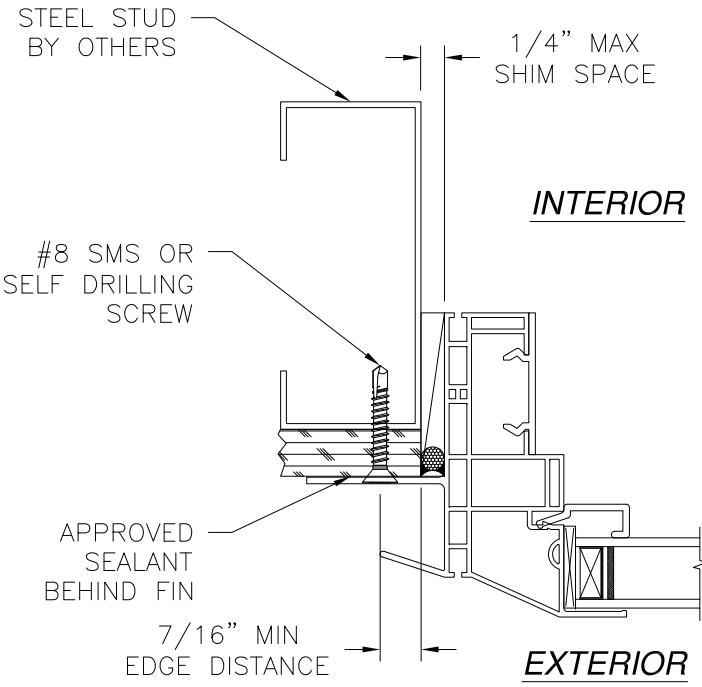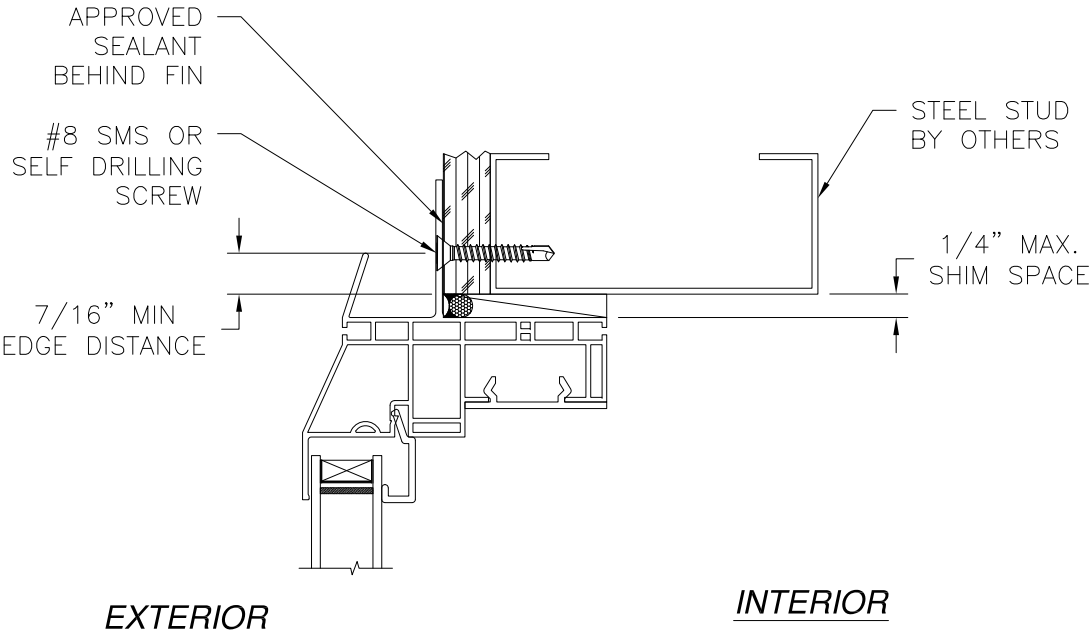

JAMB INSTALLATION DETAIL
STEEL STUDS INSTALLATION

- NOTES:**
- 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

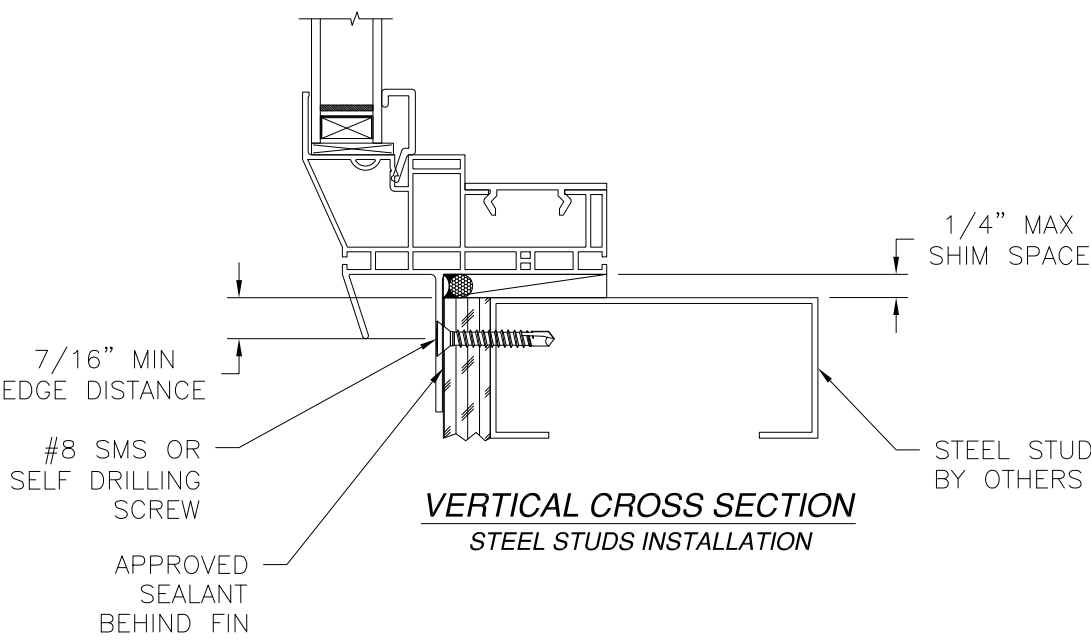

SIGNED: 10/29/2019

MI WINDOWS & DOORS, LLC
650 WEST MARKET STREET
GRATZ, PA 17030-0370

SERIES 3540 CHS TWIN
PICTURE WINDOW 88" X 77" NON-IMPACT
FIN INSTALLATION DETAILS W/J-CHANNEL

DRAWN:
A.R.

DWG NO.
08-03346


REV
A

SCALE NTS

DATE 11/01/18


SHEET 9 OF 10

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com

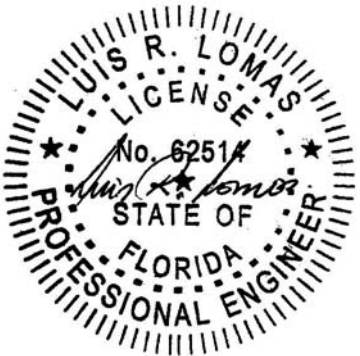


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED FIN INSTALLATION	10/22/19	R.L.

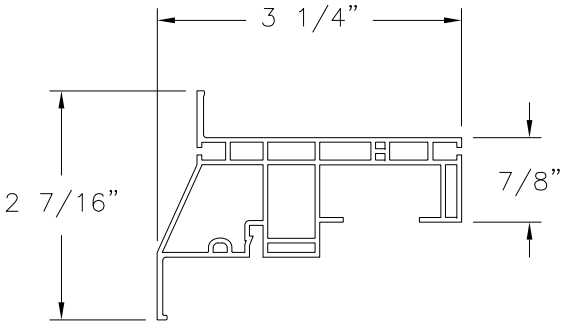


MAIN FRAME
PVC (V-786)

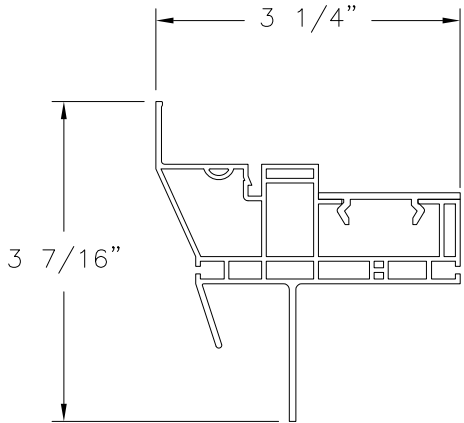


**MAIN FRAME
FIN INSTALLATION W/ J-CHANNEL**
EXTRUDED RIGID PVC (V-538)

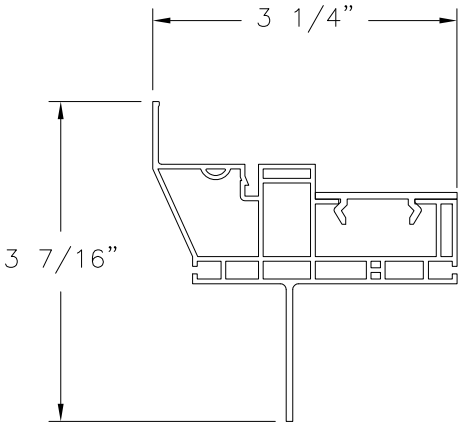


**MAIN FRAME
FIN INSTALLATION**
EXTRUDED RIGID PVC (V-634)

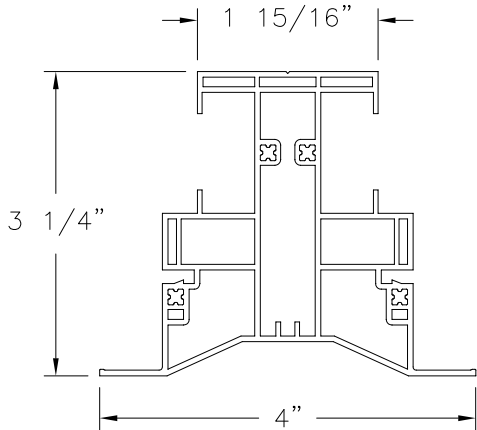


INTERMEDIATE JAMB
PVC (V-736)

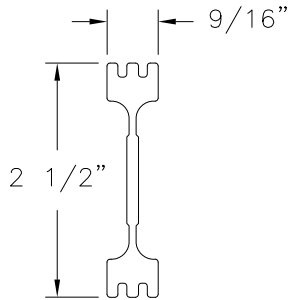


INTERMEDIATE JAMB REINFORCEMENT
ALUMINUM 6063-T5 (M-1994)



GLAZING BEAD
PVC (V-819)

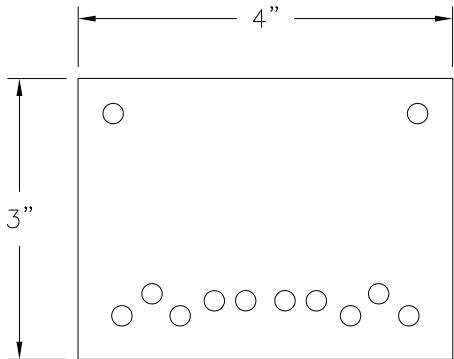

CHS ANCHOR STRAP
GALVANIZED STEEL 16 GA (.0635") THICK
(HD000062)

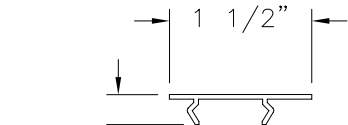

MAIN FRAME SNAP-IN
PVC (V-326)

SIGNED: 10/29/2019

MI WINDOWS & DOORS, LLC
650 WEST MARKET STREET
GRATZ, PA 17030-0370

SERIES 3540 CHS TWIN
PICTURE WINDOW 88" X 77" NON-IMPACT
COMPONENTS

DRAWN:
A.R.

DWG NO.
08-03346


REV
A

SCALE NTS

DATE 11/01/18

SHEET 10 OF 10

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com

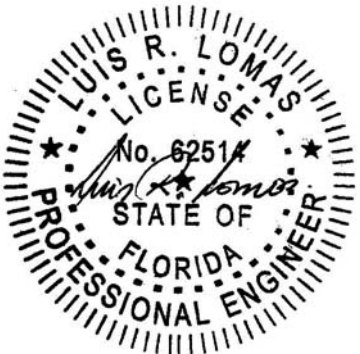

Luis R. Lomas P.E.
FL No.: 62514