





GLAZED FIBERGLASS ENTRY DOOR
SINGLES w/ or w/out SIDELITES

INSWING
"NON-IMPACT"

GENERAL NOTES


- 1. This product has been evaluated and is in compliance with the 9th Edition (2026) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
- 2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
- 3. When used in areas requiring wind borne debris protection, this product is required to be protected with an impact resistant covering that complies with FBC Sections 1609.1.2 & R301.2.1.2.
- 4. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
- 5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical Elevations, Design Pressures & General Notes
2	Door Panel Details & Glazing Details
3	Sidelite Panel Details
4	Elevations
5	Horizontal & Vertical Cross Sections (2X Buck)
6	Horizontal & Vertical Cross Sections (1X Buck)
7	Horizontal & Vertical Cross Sections (Direct to Masonry)
8	Horizontal Cross Sections
9	Vertical Cross Sections
10	Buck Anchoring
11	Frame Anchoring & Hardware Details
12	Bill of Materials & Components

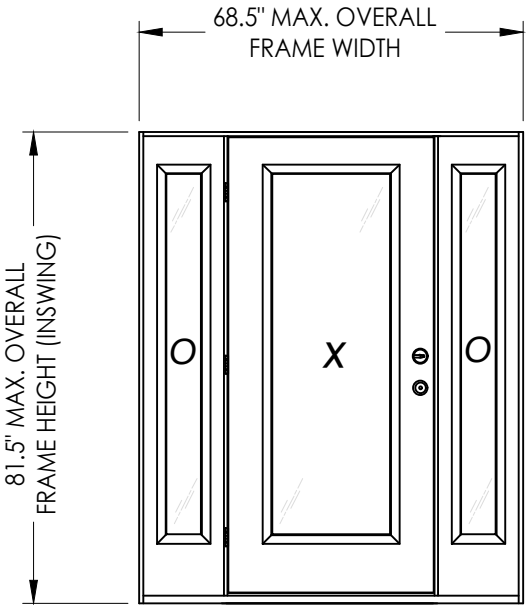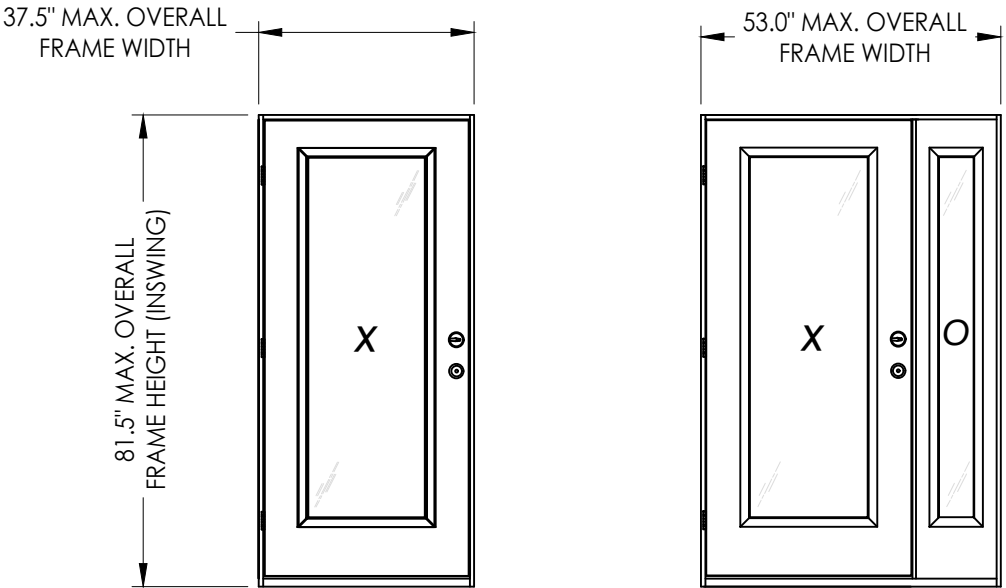

CONTINUOUS HEAD & SILL

CONFIGURATION	MAX. FRAME DIMENSION	INTEGRAL MULLION WIDTH	DESIGN PRESSURE (PSF)	
			INSWING POSITIVE	INSWING NEGATIVE
X	37.5" x 81.5"	N/A	+40.0	-40.0
OX/XO	52.125" x 81.5"	1.625"	+40.0	-40.0
	53.0" x 81.5"	2.5"	+40.0	-40.0
OXO	66.75" x 81.5"	1.625"	+40.0	-40.0
	68.5" x 81.5"	2.5"	+40.0	-40.0

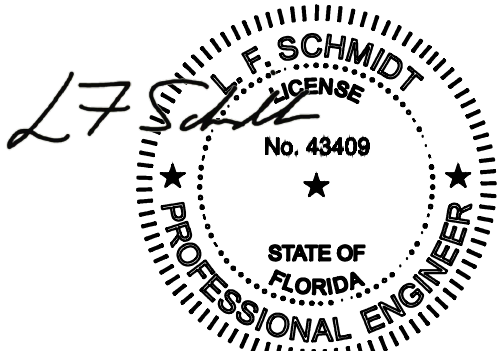

Digitally signed by Lyndon F Schmidt
Date: 2026.07.20 07:24:21 -04'00'

This item has been digitally signed and sealed by L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID ONLY FOR THE STATE OF FLORIDA

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

DOORSCAPES
FIBERGLASS DOOR

PART OR ASSEMBLY:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

DATE: 1/21/19

SCALE: N.T.S.

DWG. BY: MT

CHK. BY: LFS

DRAWING NO.: FL-28831.3





SHEET 1 OF 12

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813



REVISIONS

© 2019 R.W. BUILDING CONSULTANTS INC.

Z:\2023 FBC Drawings\Doorscapes, Inc\FL-28831 R4 FG Door\FL28831.3.dwg

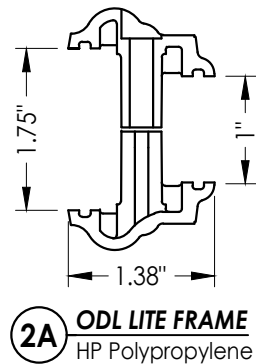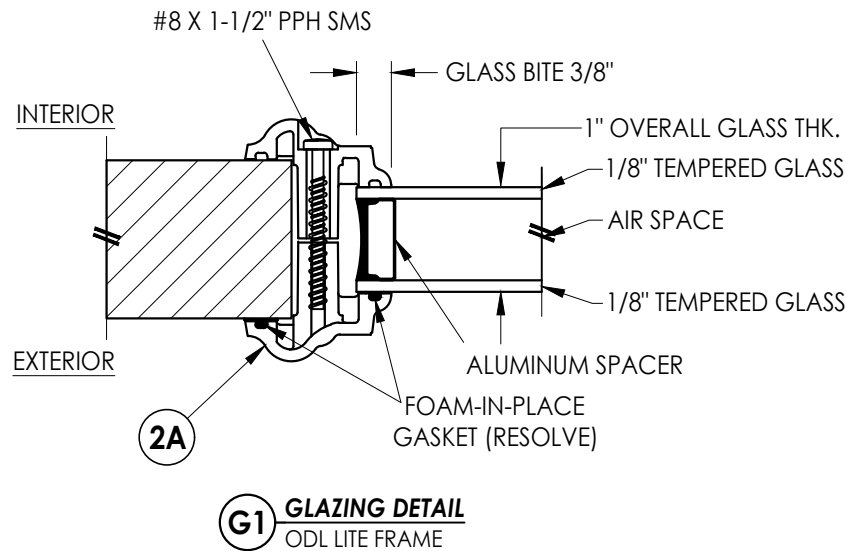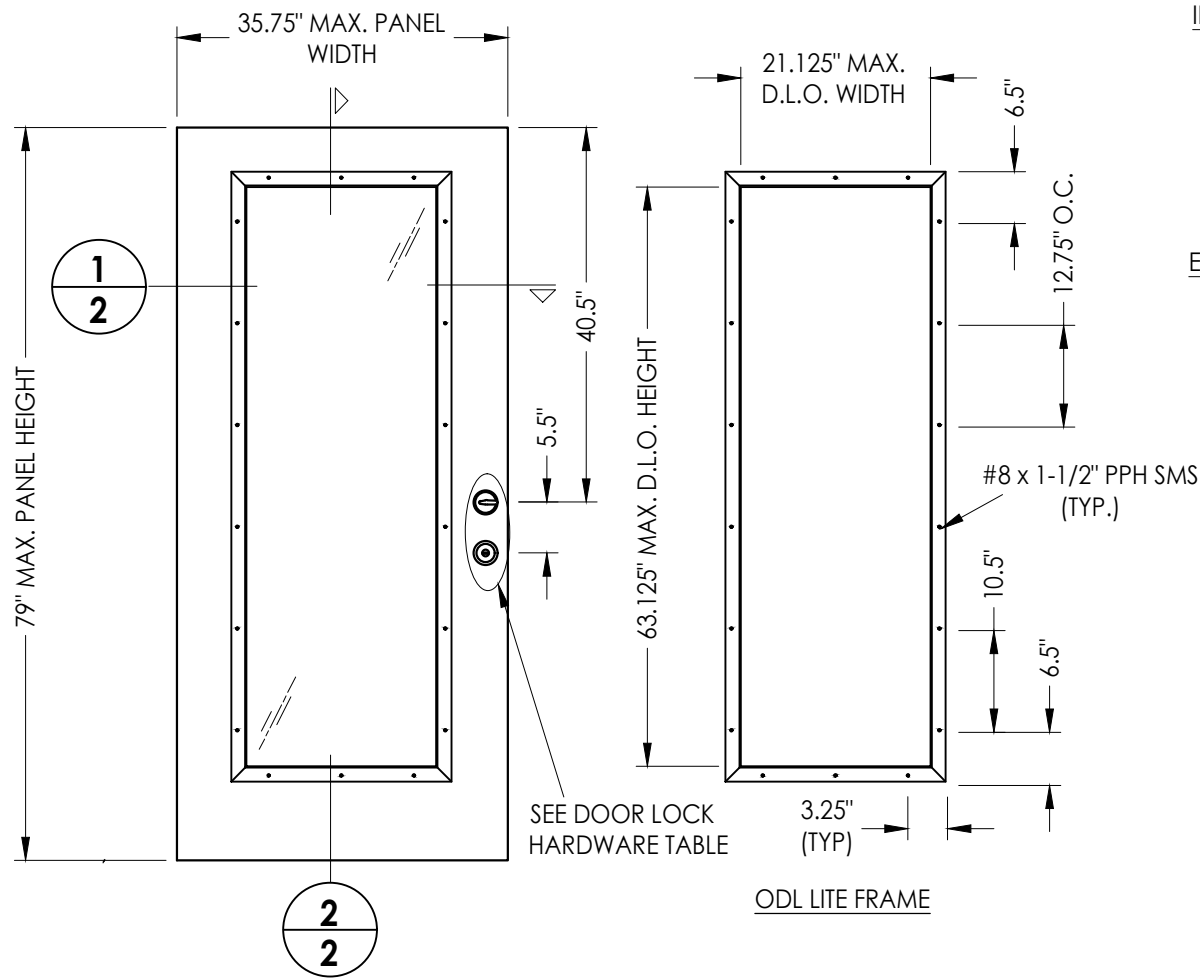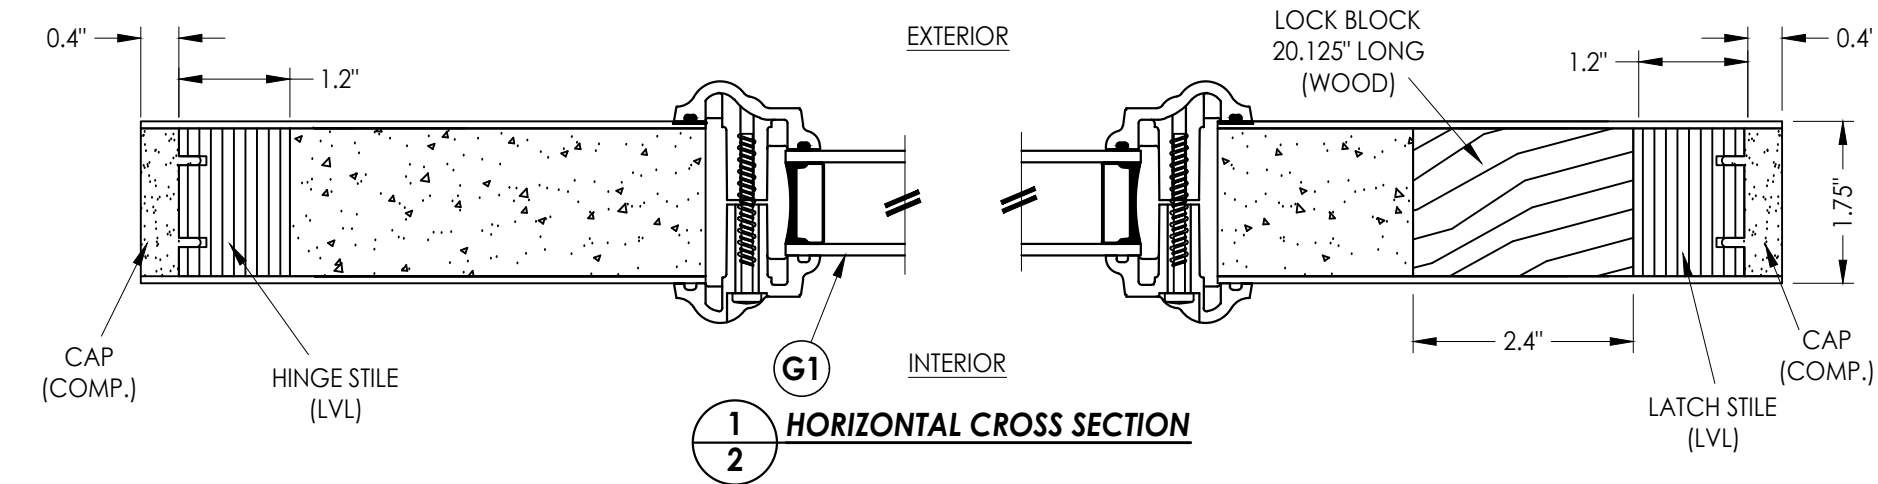


Hardware Table		
Manufacturer	Model	
YALE	Knob:	YE Series (10)
	Deadbolt:	YE Series (82E)

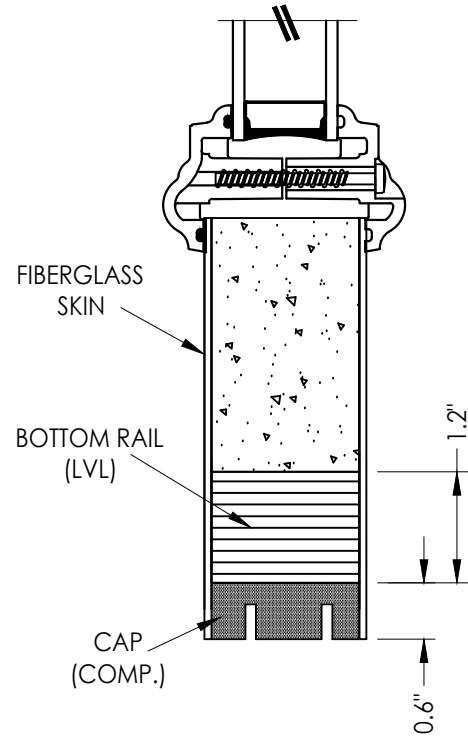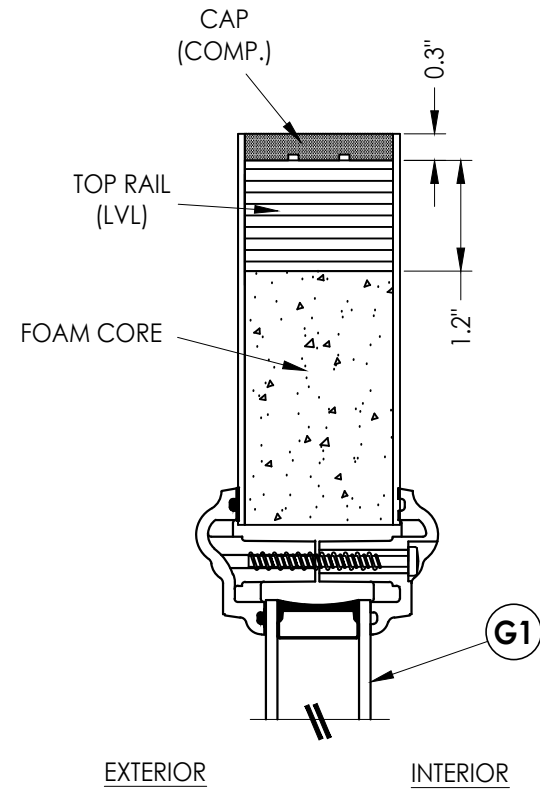


Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: DOORSCAPES FIBERGLASS DOOR		PART OR ASSEMBLY: DOOR PANEL DETAILS & GLAZING DETAILS	
3	7/01/26	UPDATE TO 9TH ED. (2026)	FBC LFS
2	8/01/23	UPDATE TO 8TH ED. (2023)	FBC LFS
1	8/06/20	UPDATE TO 7TH ED. (2020)	FBC LFS
NO.	DATE		BY
REVISIONS			
DATE: 1/21/19			
SCALE: N.T.S.			
DWG. BY: MT			
CHK. BY: LFS			
DRAWING NO.: FL-28831.3			
SHEET 2 OF 12			


Z:\2023 FBC Drawings\Doorscapes, Inc\FL-28831 R4 FG Door\FL28831.3.dwg

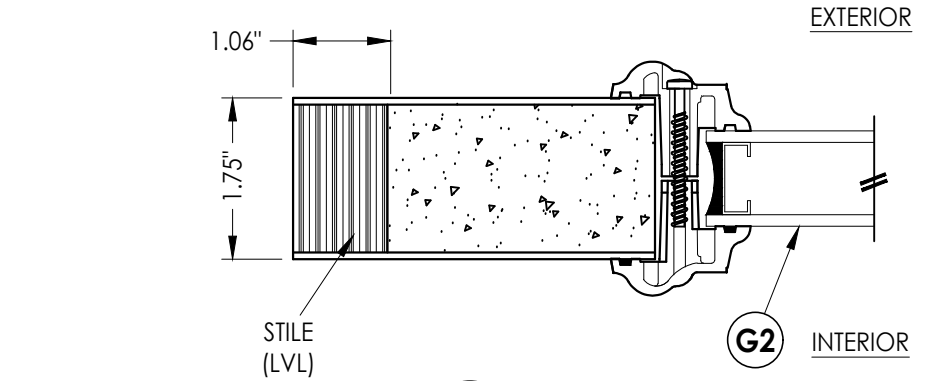


1
3 **HORIZONTAL CROSS SECTION**

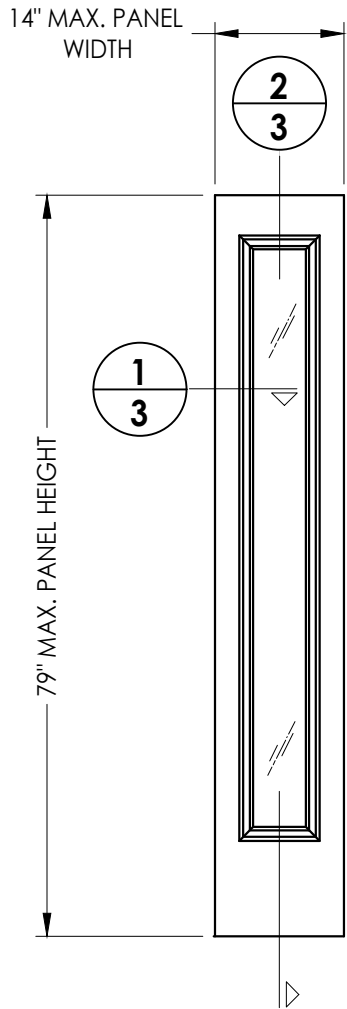


50 **SIDELITE PANEL**
Doorscapes

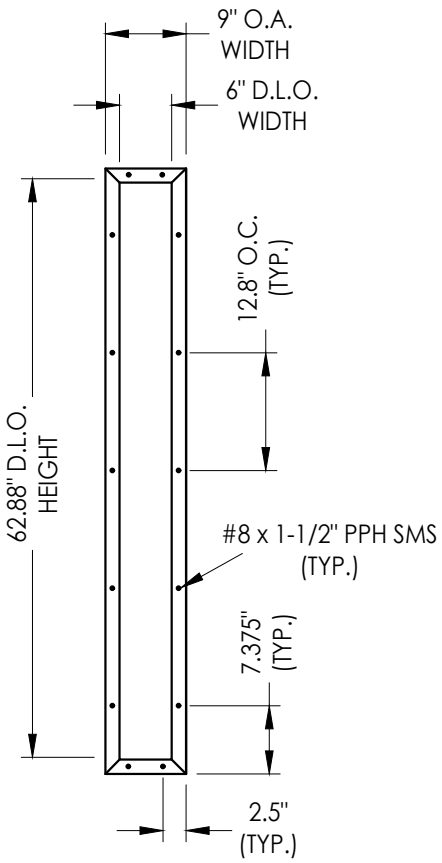


RSL LITE FRAME

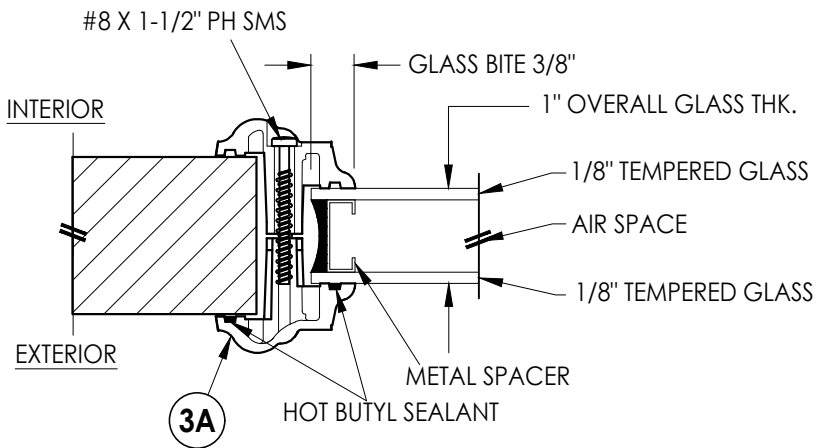

G2 **GLAZING DETAIL**
RSL LITE FRAME

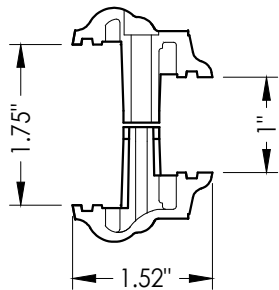

3A **RSL LITE FRAME**
PVC

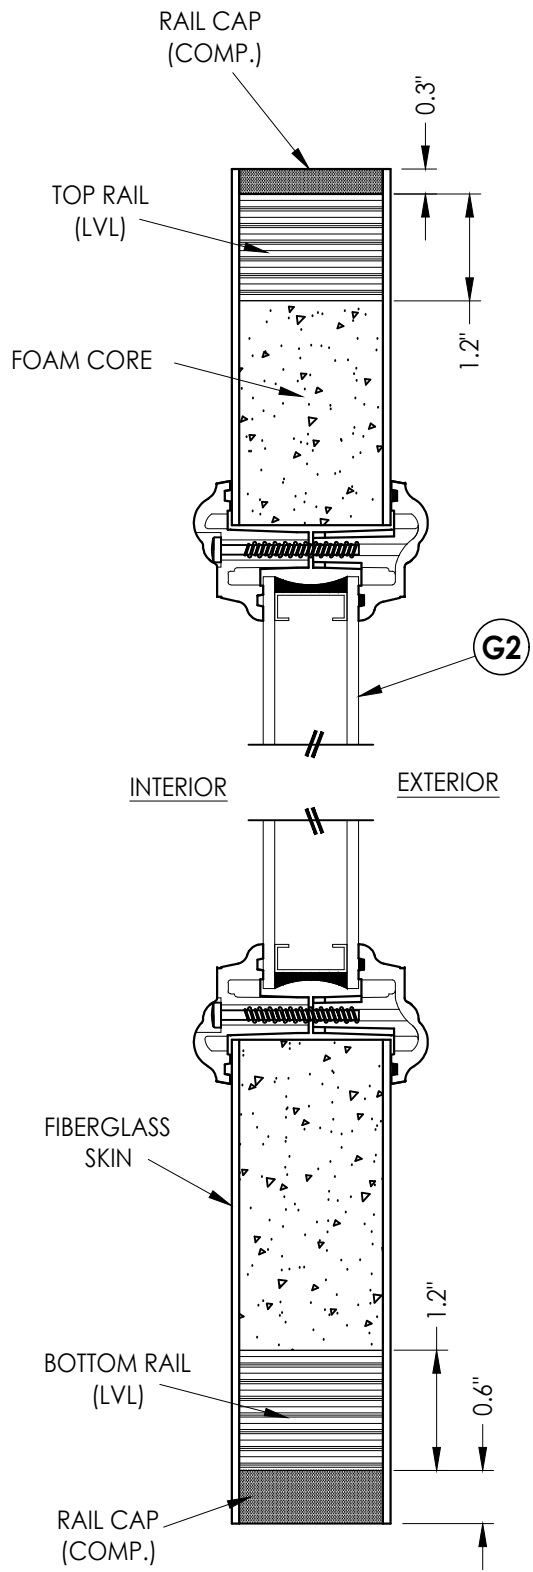

2
3 **VERTICAL CROSS SECTION**

FIBERGLASS SKIN: 0.075" MIN. THK.
FOAM CORE: POLYURETHANE -1.9 PCF MIN.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: **DOORSCAPES**
FIBERGLASS DOOR

PART OR ASSEMBLY:
SIDELITE PANEL DETAILS

NO.	DATE	REVISIONS
3	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	8/01/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	8/06/20	UPDATE TO 7TH ED. (2020) FBC LFS

DATE: 1/21/19


SCALE: N.T.S.

DWG. BY: MT


CHK. BY: LFS

DRAWING NO.: FL-28831.3


SHEET 3 OF 12

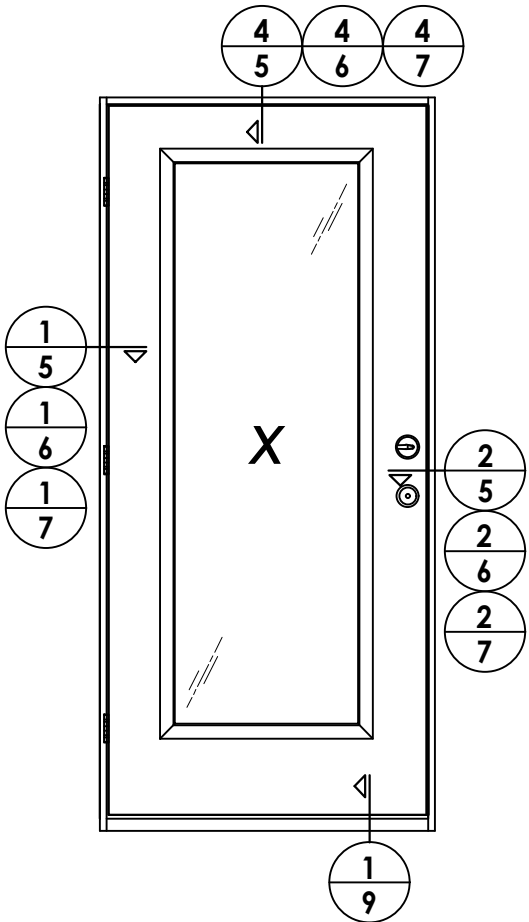

ELEVATION
X

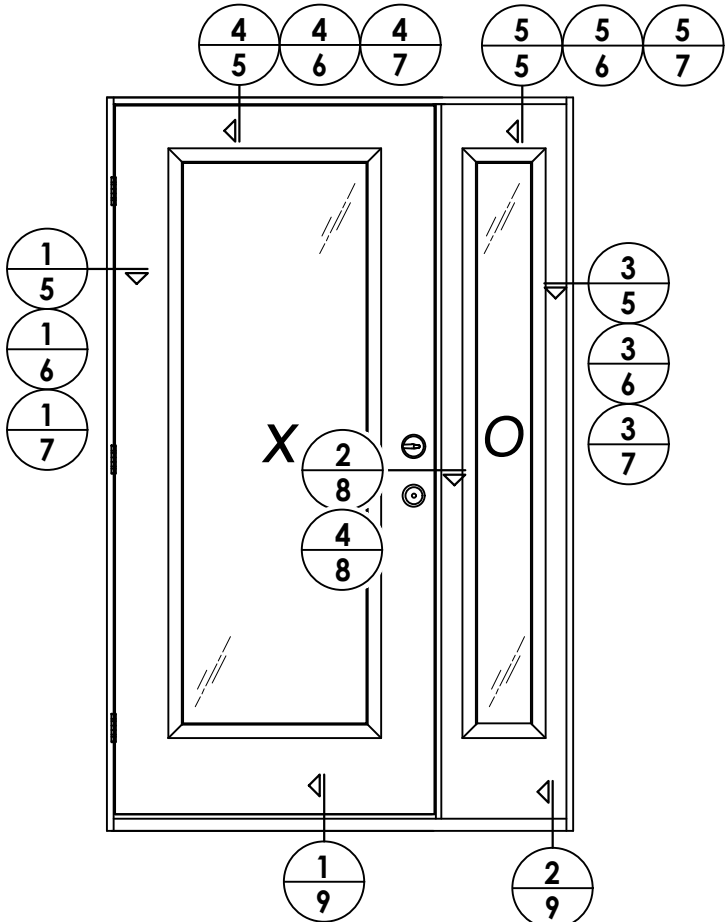

ELEVATION
XO / OX

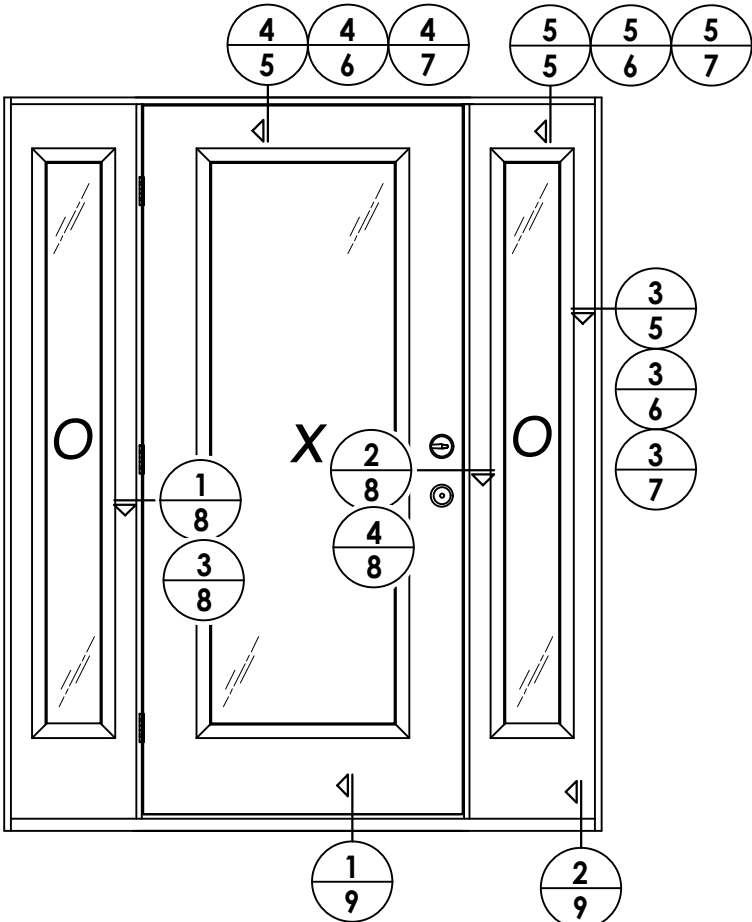

ELEVATION
OXO

DATE: 1/21/19	
SCALE: N.T.S.	
DWG. BY: MT	
CHK. BY: LFS	
DRAWING NO.: FL-28831.3	
SHEET 4	OF 12


NO.	DATE	REVISIONS
3	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	8/01/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	8/06/20	UPDATE TO 7TH ED. (2020) FBC LFS
		BY

PRODUCT:	DOORSCAPES FIBERGLASS DOOR
	PART OR ASSEMBLY: ELEVATIONS


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\DoorScapes, Inc\FL-28831 R4 FG Door\FL28831.3.dwg

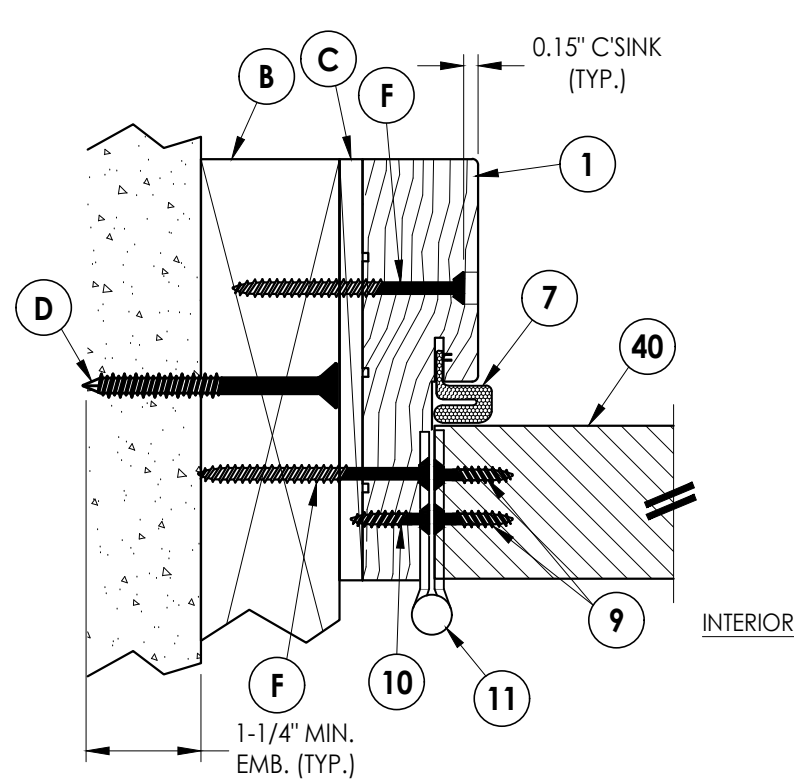


1
5 **HORIZONTAL CROSS SECTION**
Inswing
2X Buck Construction

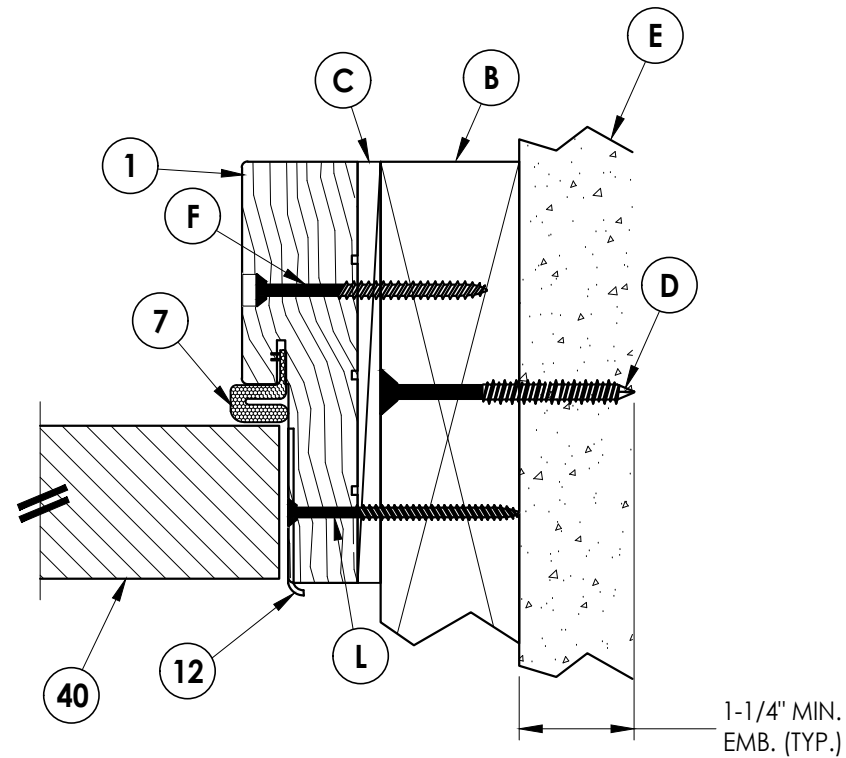


2
5 **HORIZONTAL CROSS SECTION**
Inswing
2X Buck Construction

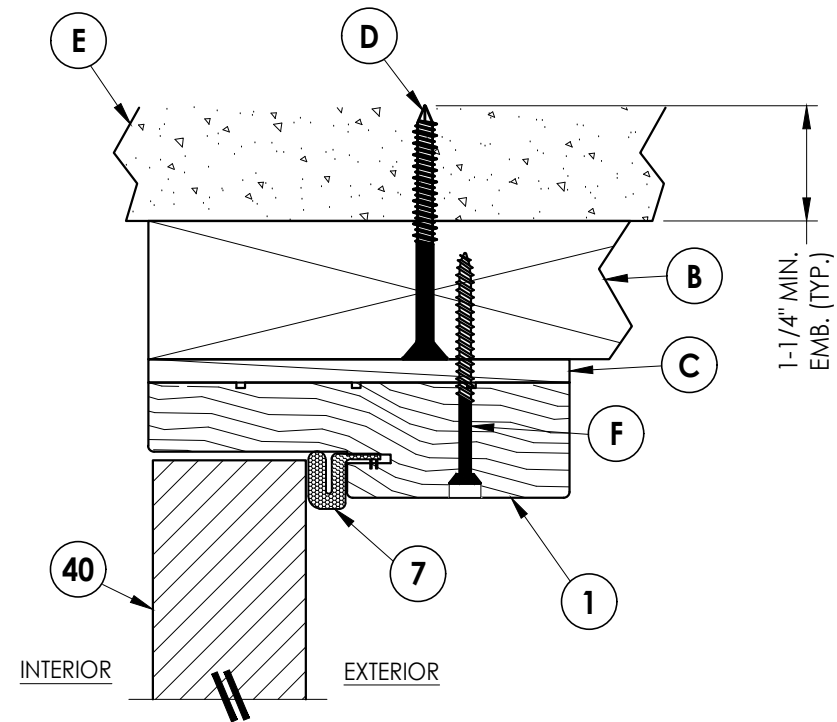

4
5 **VERTICAL CROSS SECTION**
Inswing
2X Buck Construction

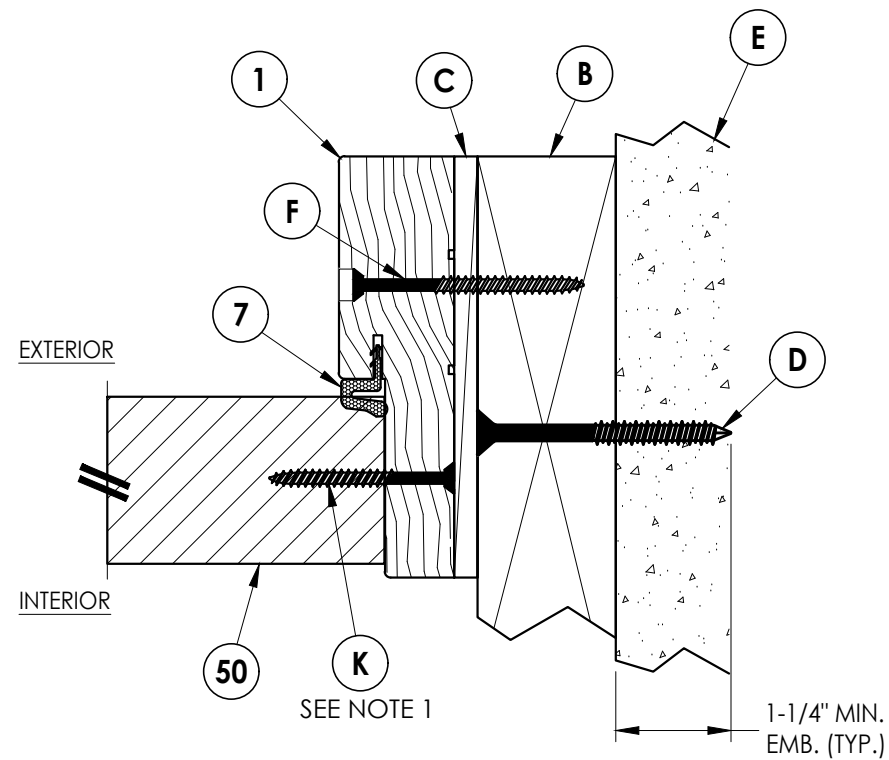

3
5 **HORIZONTAL CROSS SECTION**
Inswing
2X Buck Construction

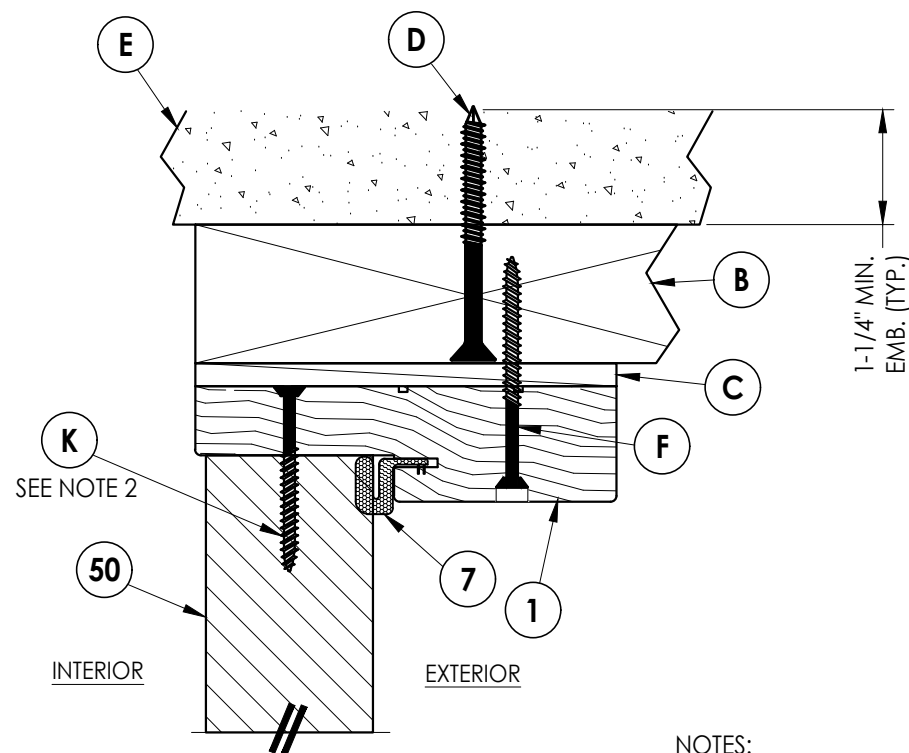

5
5 **VERTICAL CROSS SECTION**
Inswing
2X Buck Construction

NOTES:

- Sidelite attached @ 6" from each end plus 4 more screws equally spaced between (6 screws total per jamb).
- Sidelite attached @ 3" from each end (2 screws total @ head).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


PRODUCT: DOORSCAPES
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (2X BUCK)


NO.	DATE	REVISIONS	BY
3	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
2	8/01/23	UPDATE TO 8TH ED. (2023) FBC	LFS
1	8/06/20	UPDATE TO 7TH ED. (2020) FBC	LFS

DATE:	1/21/19
SCALE:	N.T.S.
DWG. BY:	MT
CHK. BY:	LFS
DRAWING NO.:	FL-28831.3
SHEET	5 OF 12


Z:\2023 FBC Drawings\DoorScapes, Inc\FL-28831 R4 FG Door\FL28831.3.dwg

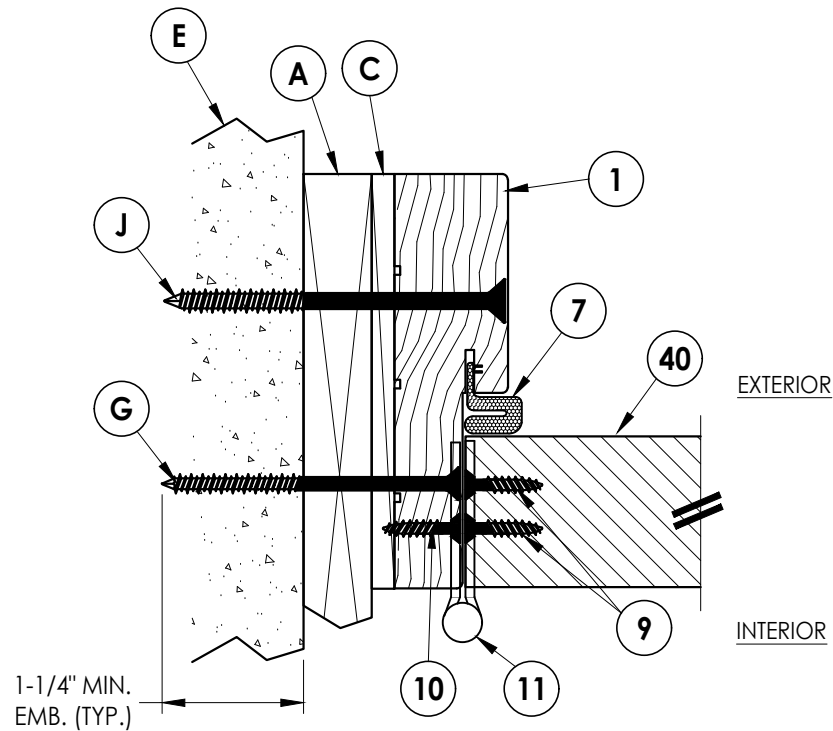


1
6 **HORIZONTAL CROSS SECTION**
Inswing
1X Buck Construction

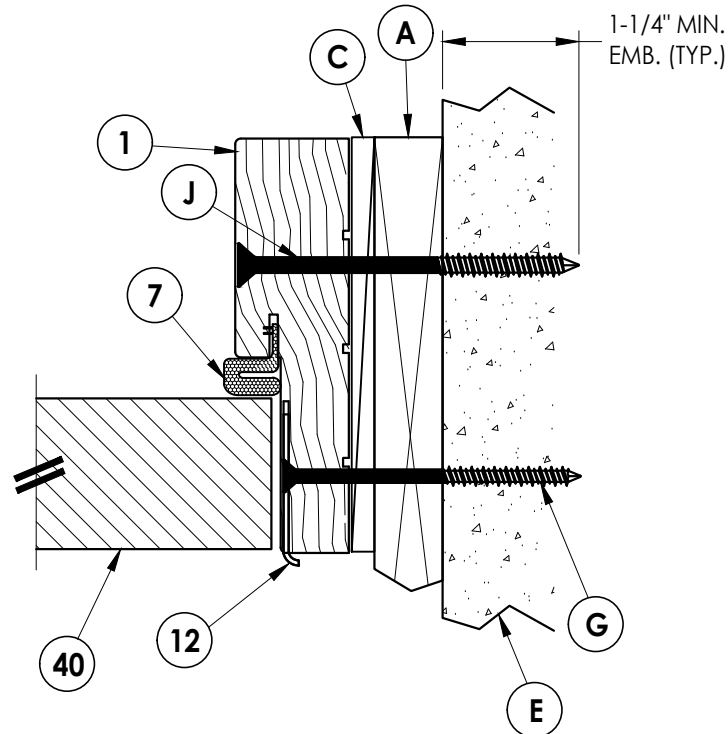


2
6 **HORIZONTAL CROSS SECTION**
Inswing
1X Buck Construction

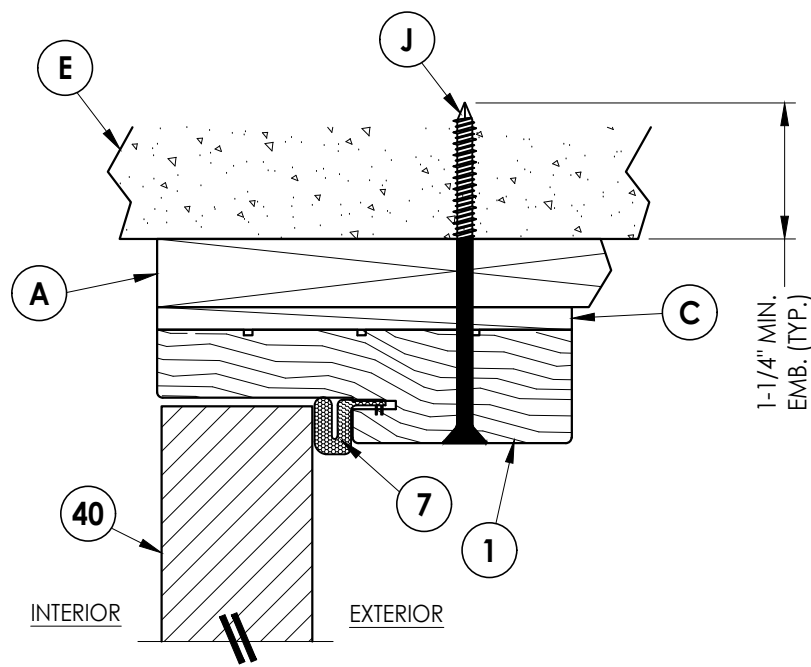

4
6 **VERTICAL CROSS SECTION**
Inswing
1X Buck Construction

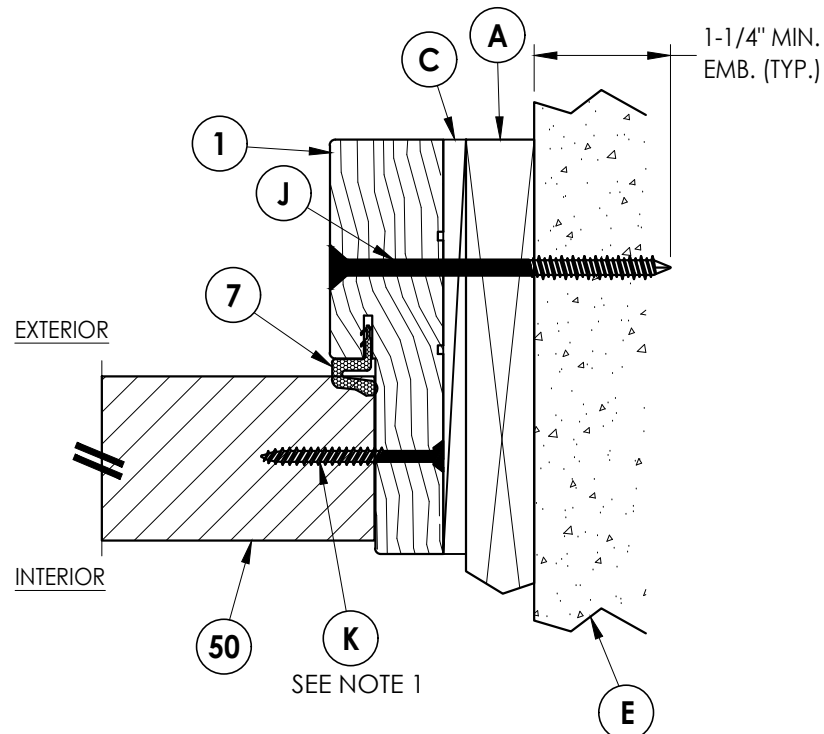

3
6 **HORIZONTAL CROSS SECTION**
Inswing
1X Buck Construction

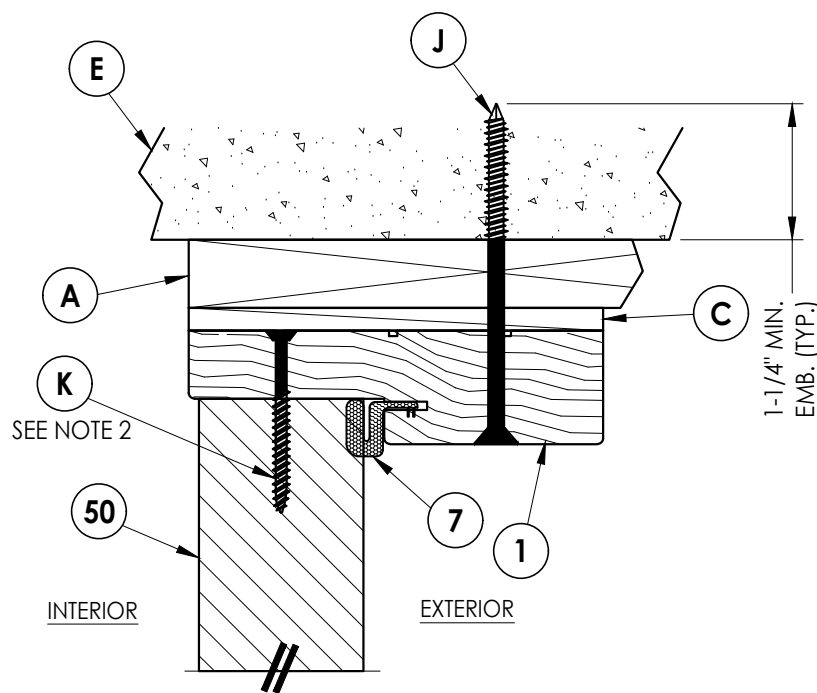

5
6 **VERTICAL CROSS SECTION**
Inswing
1X Buck Construction

NOTES:

- Sidelite attached @ 6" from each end plus 4 more screws equally spaced between (6 screws total per jamb).
- Sidelite attached @ 3" from each end (2 screws total @ head).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: DOORSCAPES
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (1X BUCK)

NO.	DATE	REVISIONS	BY
3	7/01/26	UPDATE TO 9TH ED. (2026)	FBC LFS
2	8/01/23	UPDATE TO 8TH ED. (2023)	FBC LFS
1	8/06/20	UPDATE TO 7TH ED. (2020)	FBC LFS

DATE: 1/21/19

SCALE: N.T.S.

DWG. BY: MT

CHK. BY: LFS

DRAWING NO.:
FL-28831.3

SHEET 6 OF 12

4
7

VERTICAL CROSS SECTION


Inswing
Shown Direct to Masonry

NOTES:


1. Sidelite attached @ 6" from each end plus 4 more screws equally spaced between (6 screws total per jamb).
2. Sidelite attached @ 3" from each end (2 screws total @ head).

DATE: 1/21/19		PRODUCT: DOORSCAPES FIBERGLASS DOOR	
SCALE: N.T.S.		PART OR ASSEMBLY: HORIZONTAL & VERTICAL CROSS SECTIONS (DIRECT TO MASONRY)	
DWG. BY: MT			
CHK. BY: LFS			
DRAWING NO.: FL-28831.3			
SHEET 7 OF 12			


BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

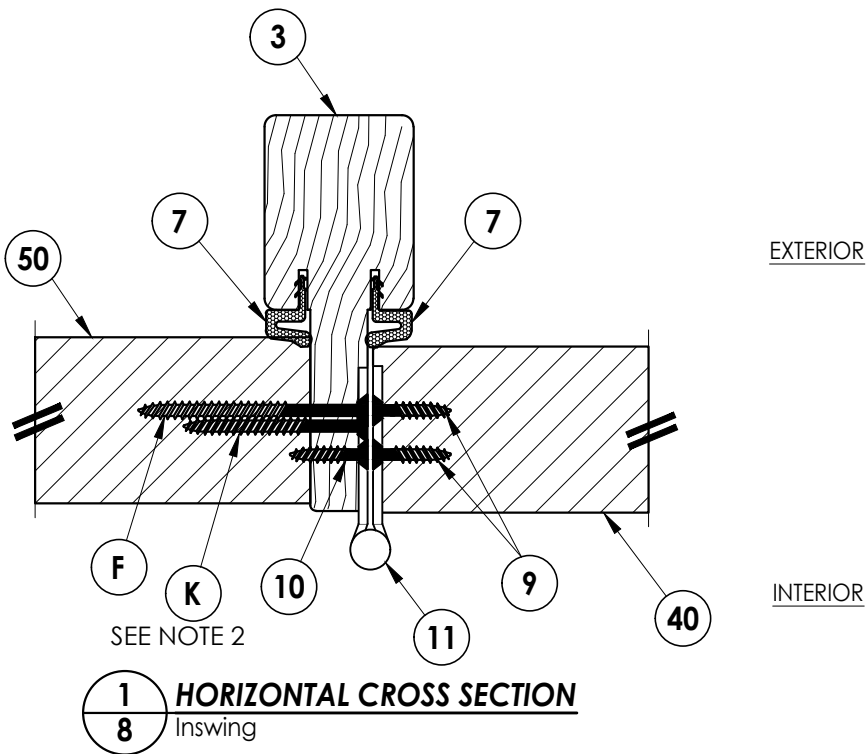


1 **HORIZONTAL CROSS SECTION**
8 Inswing

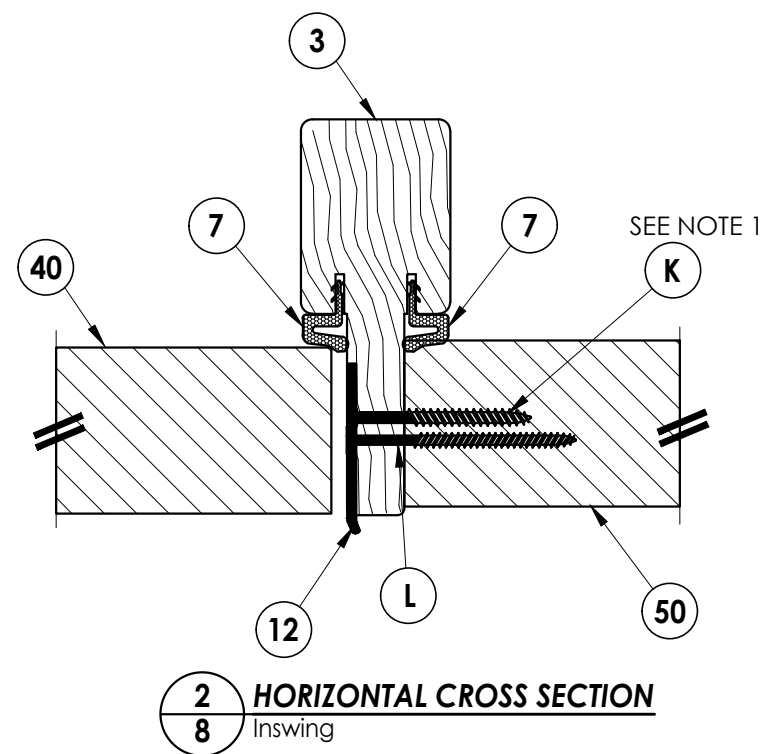

2 **HORIZONTAL CROSS SECTION**
8 Inswing

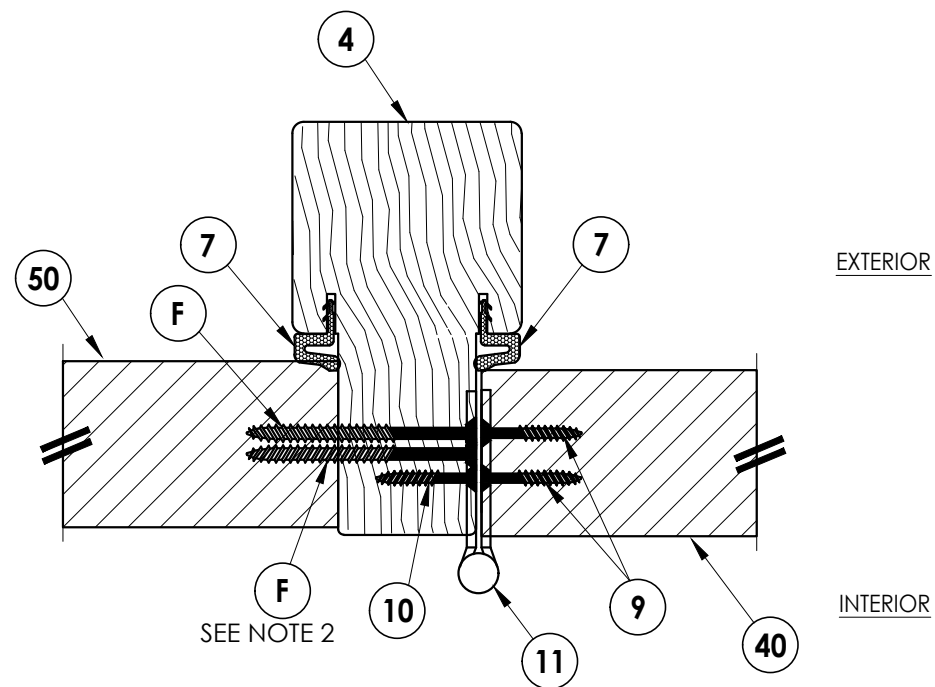

3 **HORIZONTAL CROSS SECTION**
8 Inswing

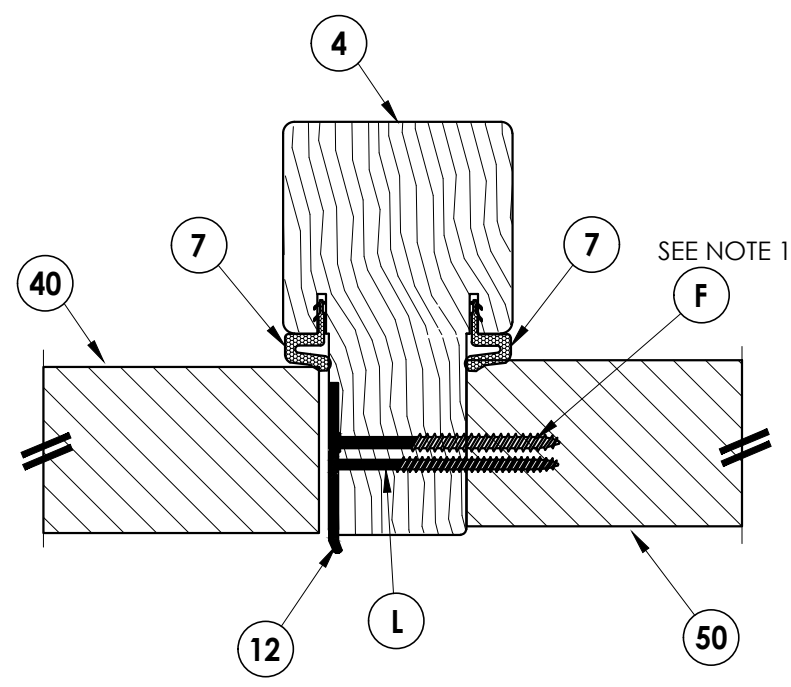

4 HORIZONTAL CROSS SECTION



NOTES:

1. Sidelite attached @ 6" from each end plus 4 more screws equally spaced between (6 screws total per jamb).
2. Sidelite attached w/ 1 screw equally spaced between each hinge (2 screws total per mullion).

3	7/01/26	UPDATE TO 9TH ED.	(2026)	FBC	LFS	
2	8/01/23	UPDATE TO 8TH ED.	(2023)	FBC	LFS	
1	8/06/20	UPDATE TO 7TH ED.	(2020)	FBC	LFS	
NO.	DATE					BY
						REVISIONS
DATE: 1/21/19						
SCALE: N.T.S.						
DWG. BY: MT						
CHK. BY: LFS						
DRAWING NO.: FL-28831.3						
SHEET 8 OF 12						



Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

R^gW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

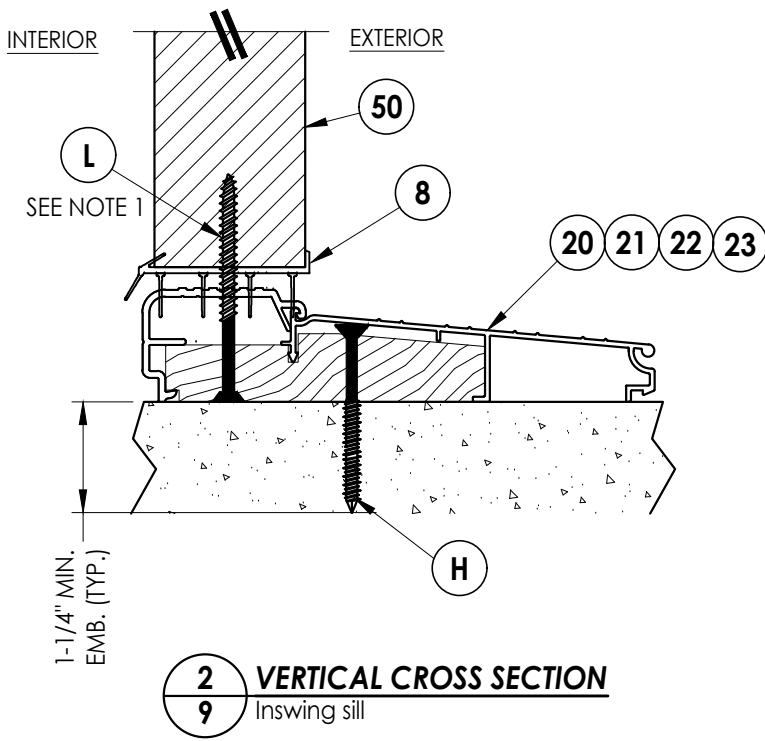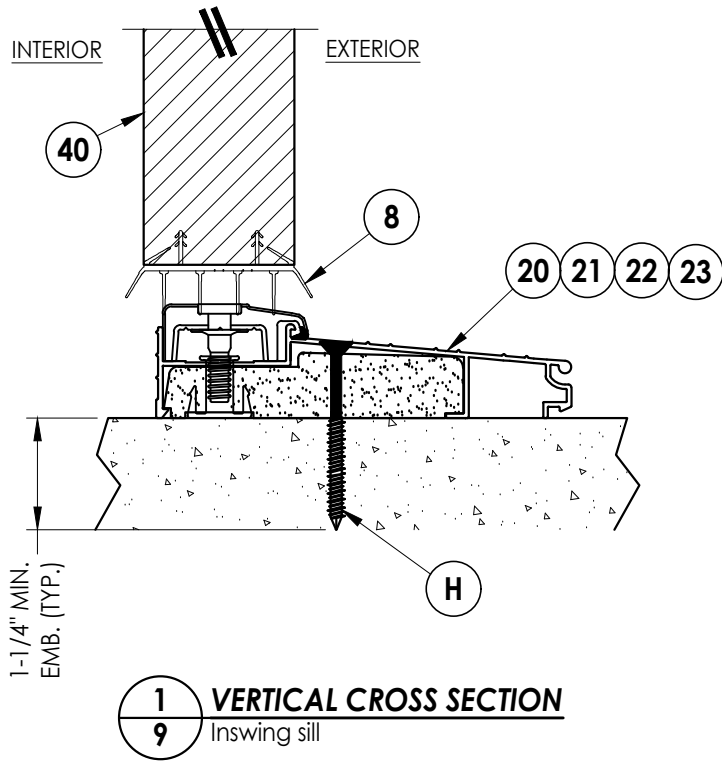

NOTE:
1. Sidelite attached @ 3" from each end (2 screws total @ sill).

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409				BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813			
PRODUCT: DOORSCAPES FIBERGLASS DOOR				PART OR ASSEMBLY: VERTICAL CROSS SECTIONS			
				LFS	FBC	(2026)	UPDATE TO 9TH ED.
				LFS	FBC	(2023)	UPDATE TO 8TH ED.
				LFS	FBC	(2020)	UPDATE TO 7TH ED.
				BY		DATE	NO.
REVISIONS							
DATE: 1/21/19							
SCALE: N.T.S.							
DWG. BY: MT							
CHK. BY: LFS							
DRAWING NO.: FL-28831.3							
SHEET 9 OF 12							

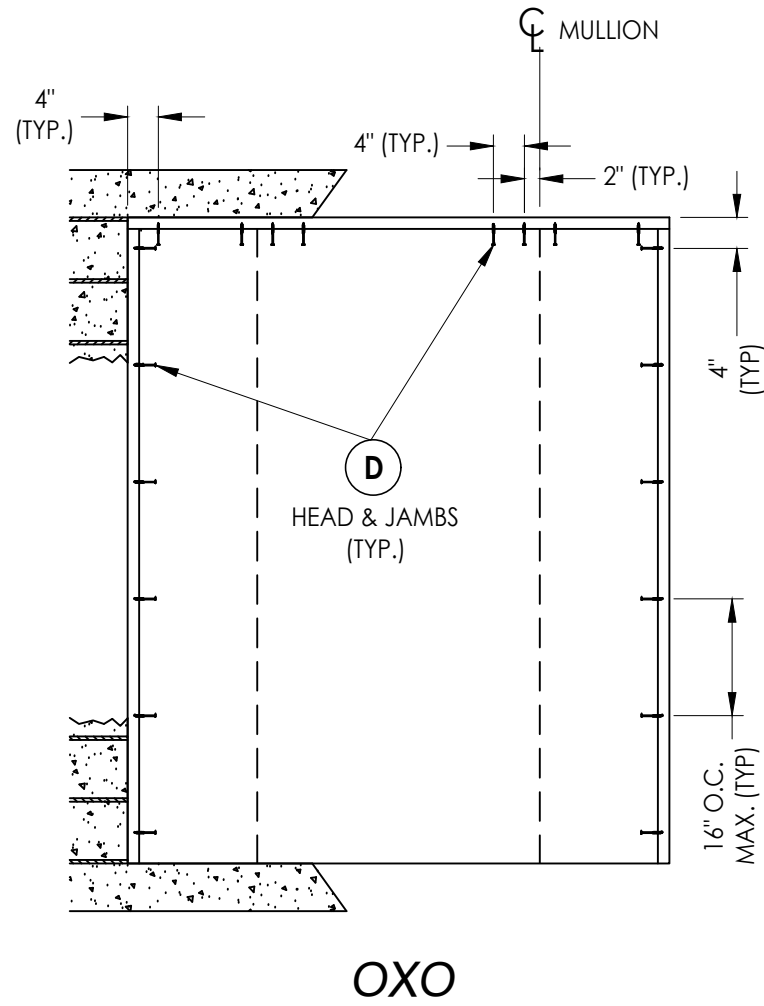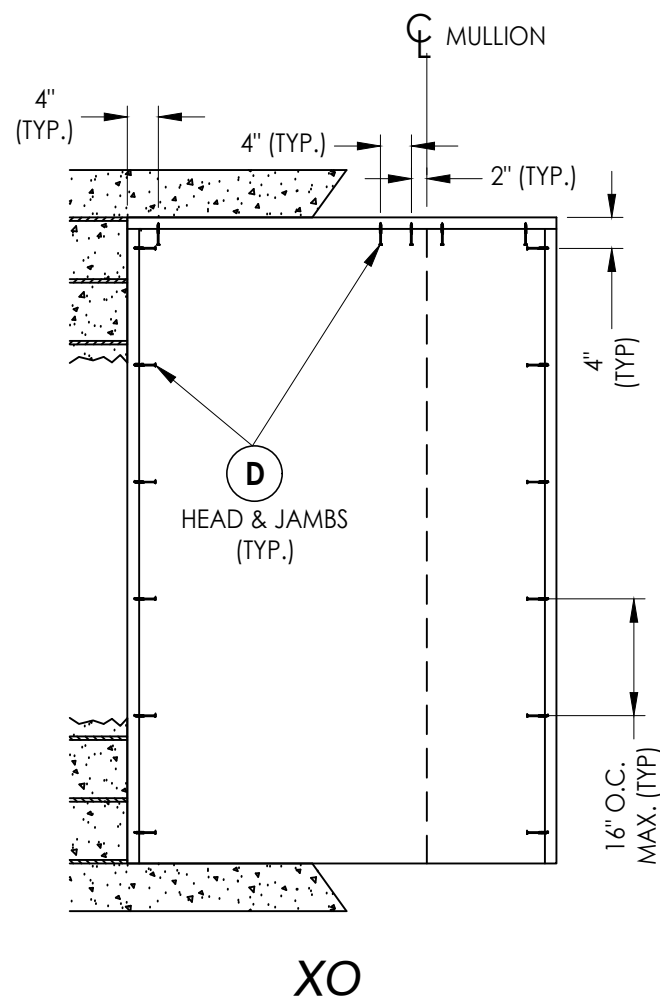

2X BUCK ANCHORING

3	7/01/26	UPDATE TO 9TH ED.	(2026)	FBC	LFS
2	8/01/23	UPDATE TO 8TH ED.	(2023)	FBC	LFS
1	8/06/20	UPDATE TO 7TH ED.	(2020)	FBC	LFS
NO.	DATE				
					REVISIONS


DATE:	1/21/19
SCALE:	N.T.S.
DWG. BY:	MT
CHK. BY:	LFS
DRAWING NO.:	FL-28831.3
SHEET	10 OF 12

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


R^{qW} BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Doorscapes, Inc\FL-28831 R4 FG Door\FL28831.3.dwg


THE HEAD IS ATTACHED TO THE JAMB
w/ (4) #7 X 2" DRYWALL SCREWS (TYP.)

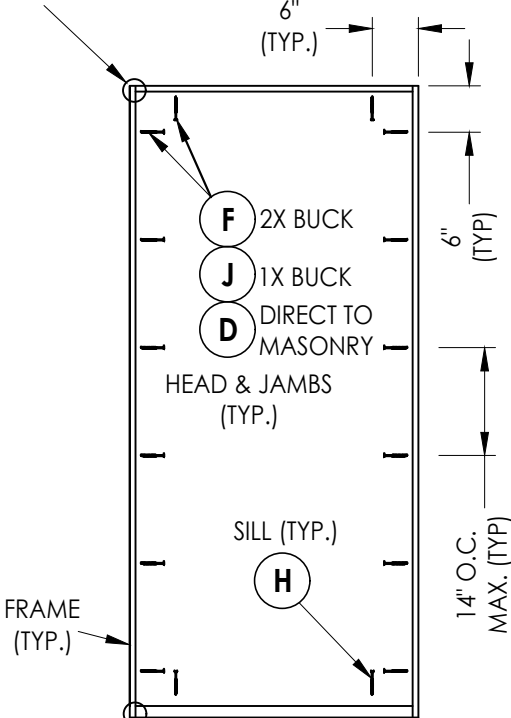

THE THRESHOLD IS ATTACHED TO THE JAMB
w/ (4) 7/16" X 2" STEEL CROWN STAPLES (TYP.)

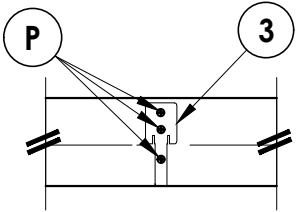


MULLION END DETAIL
(TYP. @ HEAD & SILL)

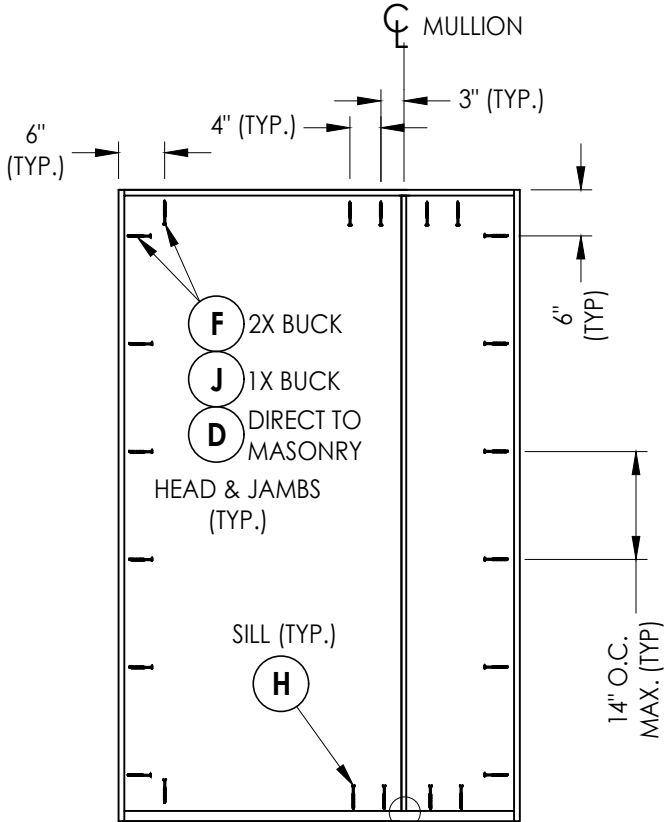

XO/OX


SEE MULLION END
DETAIL (TYP.)

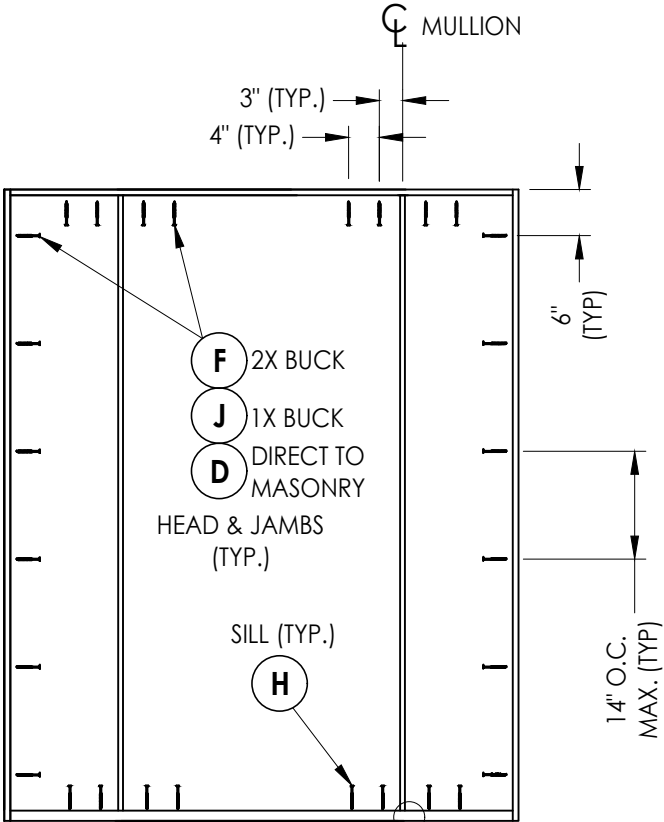


OXO

SEE MULLION END
DETAIL (TYP.)


FRAME ANCHORING

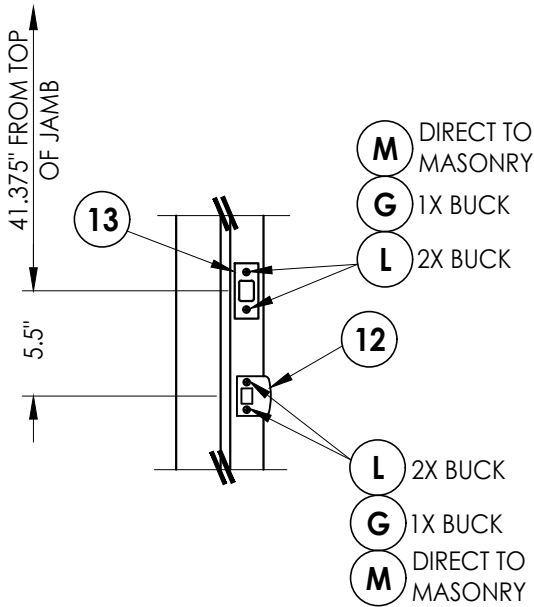

LATCH & DEADBOLT STRIKE DETAILS

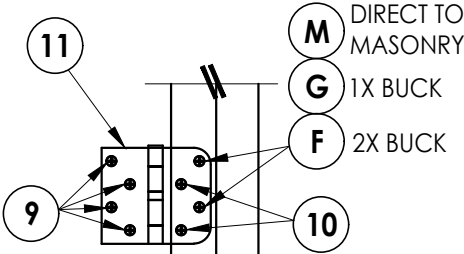

HINGE DETAIL

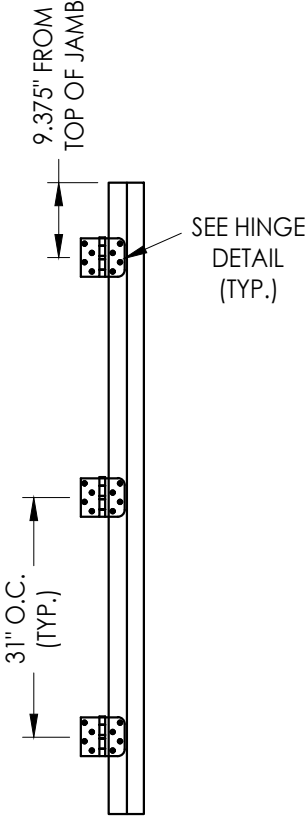

HINGE JAMB

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

RW

PRODUCT:
DOORSCAPES
FIBERGLASS DOOR

PART OR ASSEMBLY:
FRAME ANCHORING
& HARDWARE DETAILS

NO.	DATE	BY	REVISIONS
3	7/01/26	UPDATE TO 9TH ED. (2026)	FBC LFS
2	8/01/23	UPDATE TO 8TH ED. (2023)	FBC LFS
1	8/06/20	UPDATE TO 7TH ED. (2020)	FBC LFS

DATE: 1/21/19

SCALE: N.T.S.

DWG. BY: MT

CHK. BY: LFS

DRAWING NO.:

FL-28831.3

SHEET 11 OF 12

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (G >= 0.42)	WOOD
B	2X BUCK (G >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL
G	3/16" X 3-1/4" PFH ITW CONCRETE SCREW	STEEL
H	1/4" X 2-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
J	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
K	#10 X 2" PFH WOOD SCREW	STEEL
L	#8 X 2-1/2" PFH WOOD SCREW	STEEL
M	3/16" X 2-1/4" PFH ITW CONCRETE SCREW	STEEL
P	#7 X 2-1/2" DRYWALL SCREW	STEEL
1	FINGER JOINT PINE JAMB (G >= 0.42)	WOOD
3	INTEGRAL MULLION - 1.625" WIDE (PINE, G >= 0.42)	WOOD
4	INTEGRAL MULLION - 2.5" WIDE (PINE, G >= 0.42)	WOOD
7	WEATHERSTRIP	FOAM
8	DOOR/SIDELITE BOTTOM SWEEP	VINYL
9	#9 X 1" PFH WOOD SCREW	STEEL
10	#10 X 3/4" PFH WOOD SCREW	STEEL
11	4" X 4" BUTT HINGE	STEEL
12	LATCH STRIKE PLATE	STEEL
13	DEADBOLT STRIKE PLATE	STEEL
20	INSWING THRESHOLD (AFCO A-125)	ALUM/WOOD
21	INSWING THRESHOLD (AFCO A-125)	ALUM/COMP
22	INSWING THRESHOLD (AFCO A-276)	ALUM/WOOD
23	INSWING THRESHOLD (AFCO A-280)	ALUM/WOOD
40	DOOR PANEL - SEE DOOR PANEL DETAIL SHEET FOR DETAILS	-
50	SIDELITE PANEL - SEE SIDELITE PANEL DETAIL SHEET FOR DETAILS	-



CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW BUILDEX TAPCON®	3/16"	1-1/4"	3"	1-1/2"
	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®+	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:

1. Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

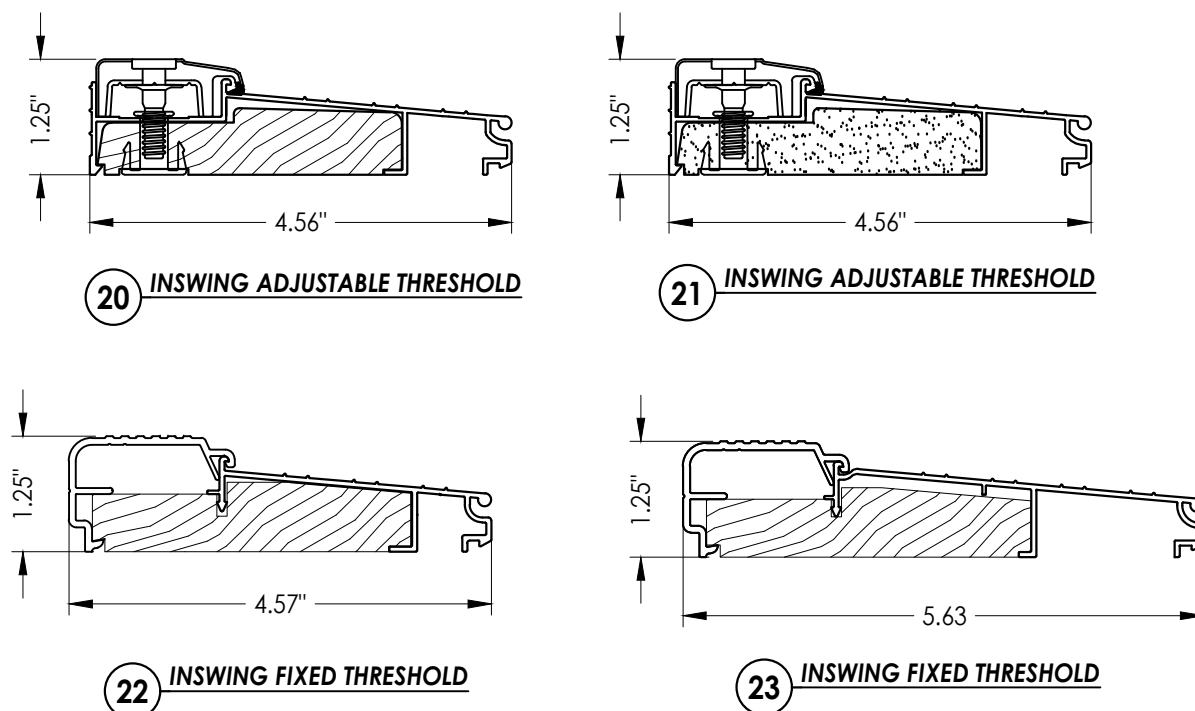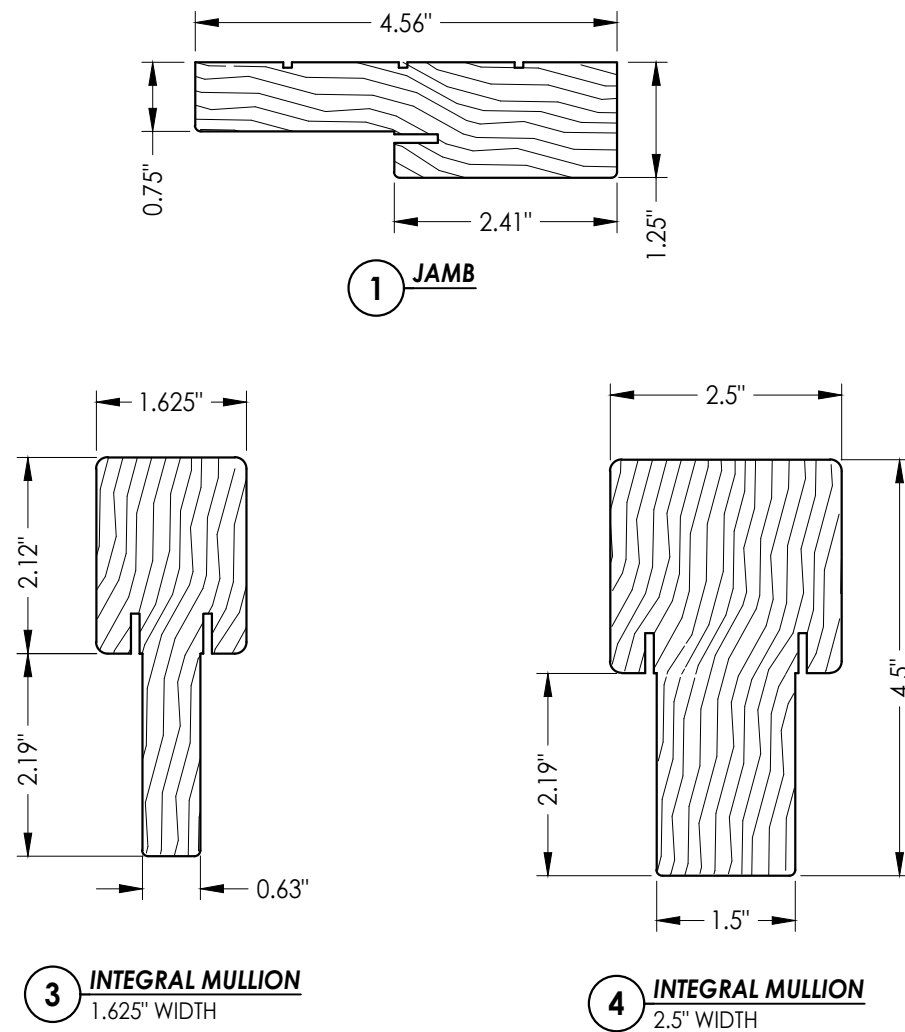

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: DOORSCAPES
FIBERGLASS DOOR

IR ASSEMBLY: BILL OF MATERIALS & COMPONENTS

3	7/01/26	UPDATE TO 9TH ED.	(2026)	FBC LFS
2	8/01/23	UPDATE TO 8TH ED.	(2023)	FBC LFS
1	8/06/20	UPDATE TO 7TH ED.	(2020)	FBC LFS
NO.	DATE			
REVISIONS				

DATE: 1/21/19

SCALE: *N.T.S.*

DWG. BY: *MT*

CHK. BY: *LFS*

DRAWING NO.:

FL-28831.3

SHEET 12 OF 12