

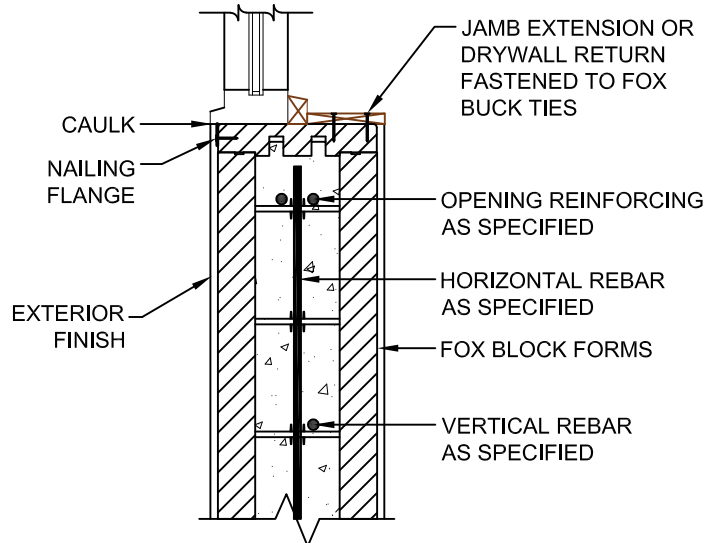
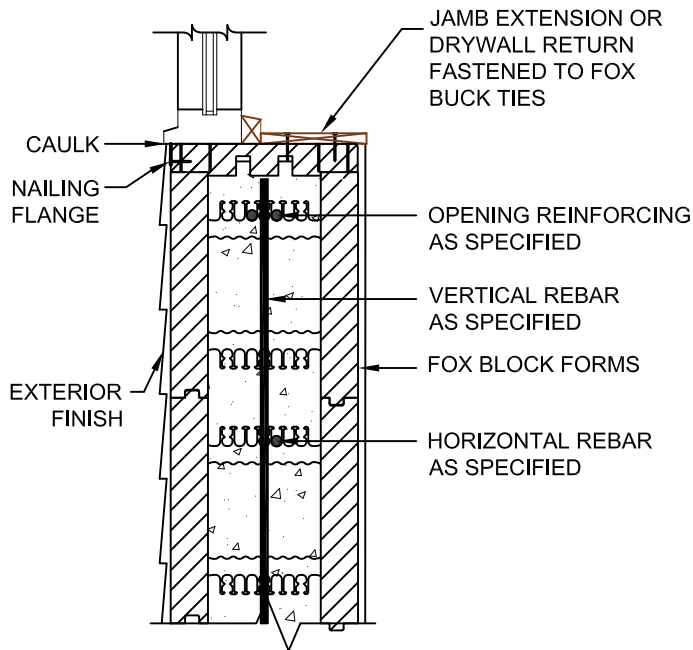
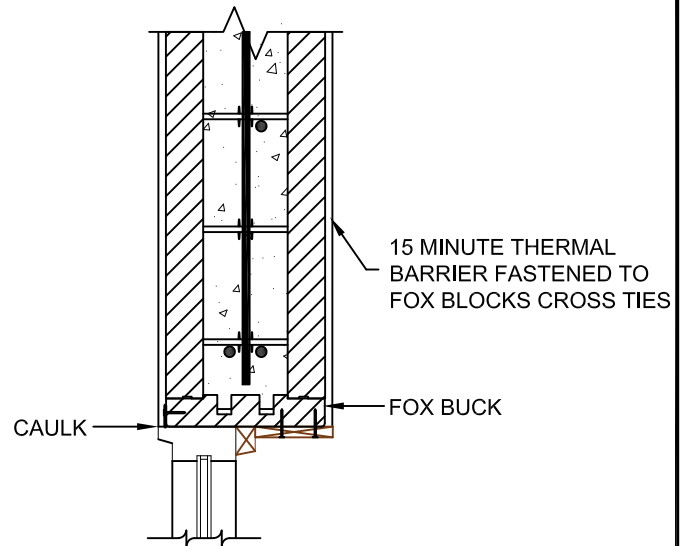


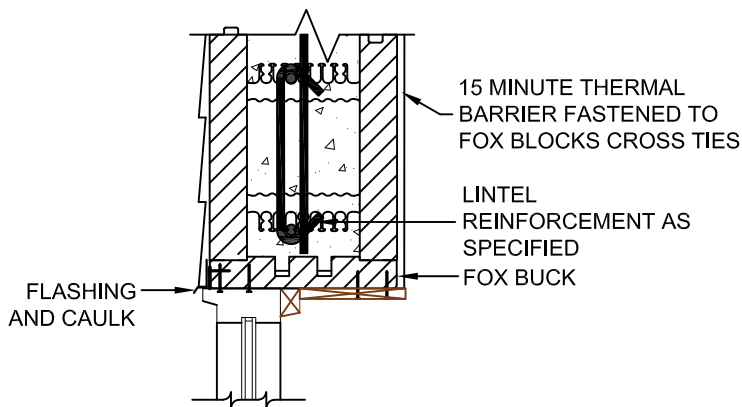

① SILL AND HEADER DETAIL

② JAMB DETAILS

Digitally signed by Hermes F Norero
Reason: I am approving this document
Date: 2020.11.20 22:41:11 -04'00'

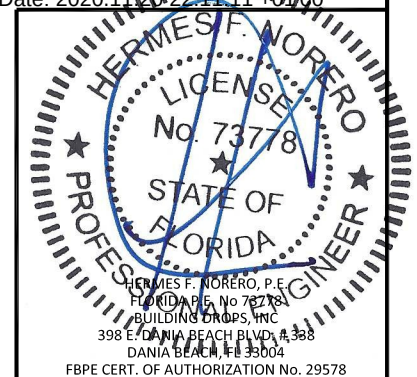

1. The Fox Buck consists of expanded polystyrene (EPS) and plastic polypropylene tie inserts. This is the same material as approved on FL7497.
2. The Fox Buck gets attached to the concrete when the concrete is placed. Verify that concrete fills the crevices in the Fox Buck.
3. The design load of the Fox Buck is 72 PLF.
4. The concrete shall have at 28 days the strength of 4000 psi.
5. Wall reinforcement and concrete specifications shall be designed by a Florida Professional Engineer.
6. Details shown are for 6" wall, 4", 8", 10" and 12" wall details are similar and approved.



This drawing is provided for the convenience of and use by designers. It is the responsibility of designers to modify the drawing as needed and provide information required by the applicable building codes and regulations. Fox Blocks retains the right to make changes to the drawing without notice and assumes no liability in connection with the use of this drawing including modifications, copying or distribution.

Title: WINDOW JAMB, SILL & HEADER DETAIL
FOX BUCK

Drawn:	Date:	Drawing:	Rev.
SM	11-11-20	9-08A	