

CASEMENT INSULATED GLASS 60 DP

ANCHOR TABLE


Number of Anchors		Design		Design	
Window Width.	Window Height	Across Head & Sill	Across Jambes	Pressure Neg.	Pressure Pos.
24.000	24.000	2	2	-60.00	+60.00
24.000	36.000	2	2	-60.00	+60.00
24.000	48.000	2	2	-60.00	+60.00
24.000	60.000	2	3	-60.00	+60.00
24.000	72.000	2	3	-60.00	+60.00
30.000	24.000	2	2	-60.00	+60.00
30.000	36.000	2	2	-60.00	+60.00
30.000	48.000	2	2	-60.00	+60.00
30.000	60.000	2	3	-60.00	+60.00
30.000	72.000	2	3	-60.00	+60.00
36.000	24.000	2	2	-60.00	+60.00
36.000	36.000	2	2	-60.00	+60.00
36.000	48.000	2	2	-60.00	+60.00
36.000	60.000	2	3	-60.00	+60.00
36.000	72.000	2	3	-60.00	+60.00

NOTES ON ANCHOR CALCULATIONS:

- (1) CALCULATIONS DERIVED FROM TESTED UNIT
CM200 TEST REPORT # 13879.03-501-44 NAMI # NI014327
- (2) THE QUANTITY OF ANCHORS ARE FOR EACH SIDE, NOT TOTAL QUANTITY.
- (3) MAX. SPACING AT HEAD CORNER IS 6".
- (4) MAX. SPACING AT JAMB CORNER IS 6".
- (5) MAX. SPACING ACROSS HEAD AND SILL IS 24".
- (6) MAX. SPACING ACROSS JAMBS IS 30".
- (7) MAX. EDGE DISTANCE IS 2-1/2" (SEE DETAILS).


NOTES:


- (1) THIS PRODUCT IS DESIGNED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE.
- (2) SHIM AS REQ'D AT EACH SET OF INSTALLATION ANCHORS USING LOAD BEARING SHIMS. MAX. ALLOWABLE SHIM STACK TO BE 1/4". USE SHIMS WHERE SPACE GREATER THAN 1/16" IS PRESENT.
- (3) WINDOW MATERIAL : PVC.
- (4) 3/16" DIA. CONCRETE SREW ANCHORS MUST BE OF SUFFICIENT LENGTH TO ACHIEVE A MIN. EMBEDMENT OF 1 1/4" INTO CONCRETE OR MASONRY FOR 1 X WOOD BUCK OR A MIN. EMBEDMENT OF 1 1/4" INTO SOLID WOOD FOR 2 X BUCK OR WOOD FRAMED OPENINGS (GREATER THAN 1 3/8" THICK).
- (5) ALL FACTORY APPLIED HOLES IN FRAME MEMBERS NOT DESIGNATED FOR CONCRETE SCREW ANCHORS SHOULD BE FILLED WITH #10 SCREWS OF SUFFICIENT LENGTH TO ACHIEVE A MIN. EMBEDMENT OF 1-1/2" INTO WOOD BUCK.
- (6) USE LATEX CAULK OR EQUIVALENT FOR PERIMETER SEAL AROUND EXTERIOR OF WINDOW.
- (7) WHEN INSTALLING INTO STEEL OR ALUMINUM, #12 SMS MUST HAVE SUFFICIENT LENGTH SO THAT THERE IS FULL THREAD ENGAGEMENT THROUGH THE METAL.
- (8) IF EXACT WINDOW SIZE IS NOT LISTED IN ANCHOR CHART, USE THE NEXT SIZE LARGER WINDOW FOR ANCHOR QUANTY.
- (9) GLASS COMPLIES WITH ASTM E-1300 GLASS CHART REQUIREMENTS.
INSULATED GLASS/LAMINATED: 3/16" ANNEALED X 3/16" ANNEALED 7/8" OAT.
- (10) ALL INSTALLATION ANCHORS MUST BE MADE OF A CORROSION RESISTANT MATERIAL OR COATING.
- (11) NOT ALL CONFIGURATIONS LISTED ON ANCHOR CHART ARE SHOWN ON THIS DRAWING. HOWEVER, INSTALLATION SECTION A-A & B-B APPLY TO ALL CONFIGURATIONS.

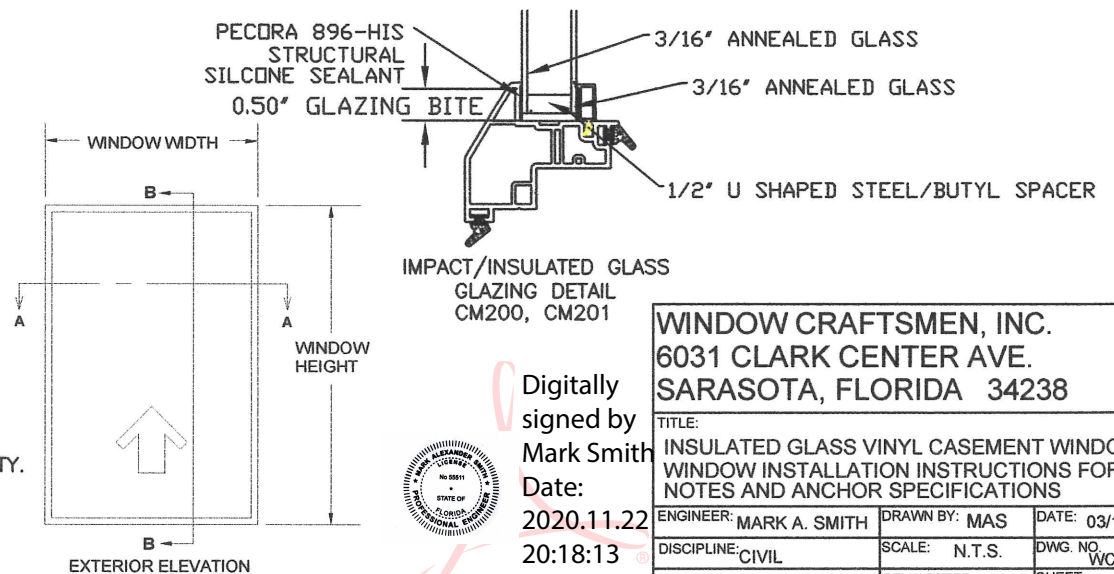

Digitally
signed by
Mark Smith
Date:
2020.11.22
20:18:13
-05'00'

WINDOW CRAFTSMEN, INC. 6031 CLARK CENTER AVE. SARASOTA, FLORIDA 34238		
TITLE: INSULATED GLASS VINYL CASEMENT WINDOW WINDOW INSTALLATION INSTRUCTIONS FOR NOTES AND ANCHOR SPECIFICATIONS		
ENGINEER: MARK A. SMITH	DRAWN BY: MAS	DATE: 03/18/19
DISCIPLINE: CIVIL	SCALE: N.T.S.	DWG. NO. WCI-VCW002
FL. REG. NO.: 55511	REV. LETTER: 0	SHEET 1

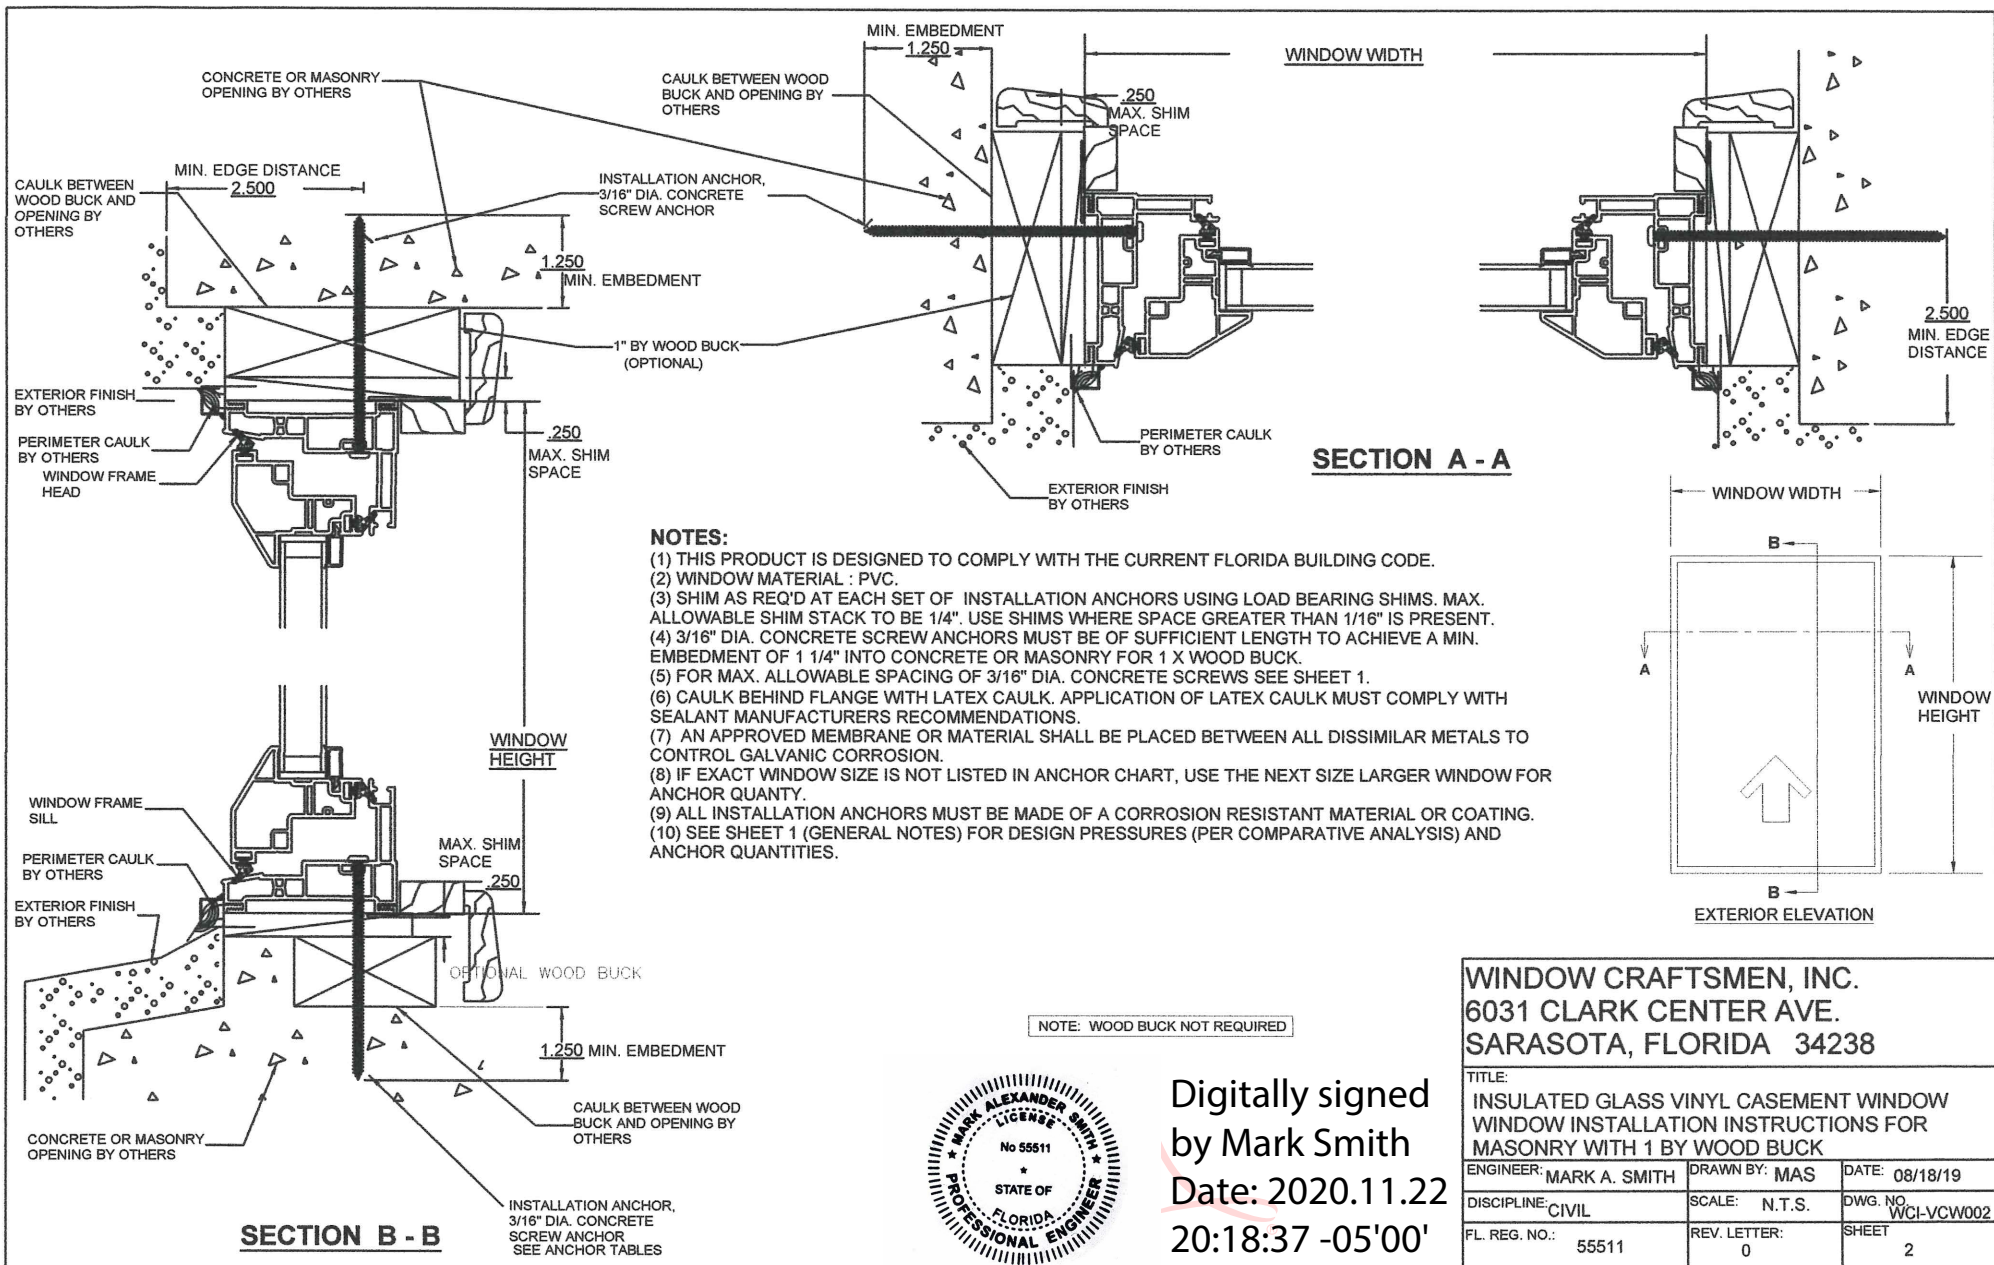

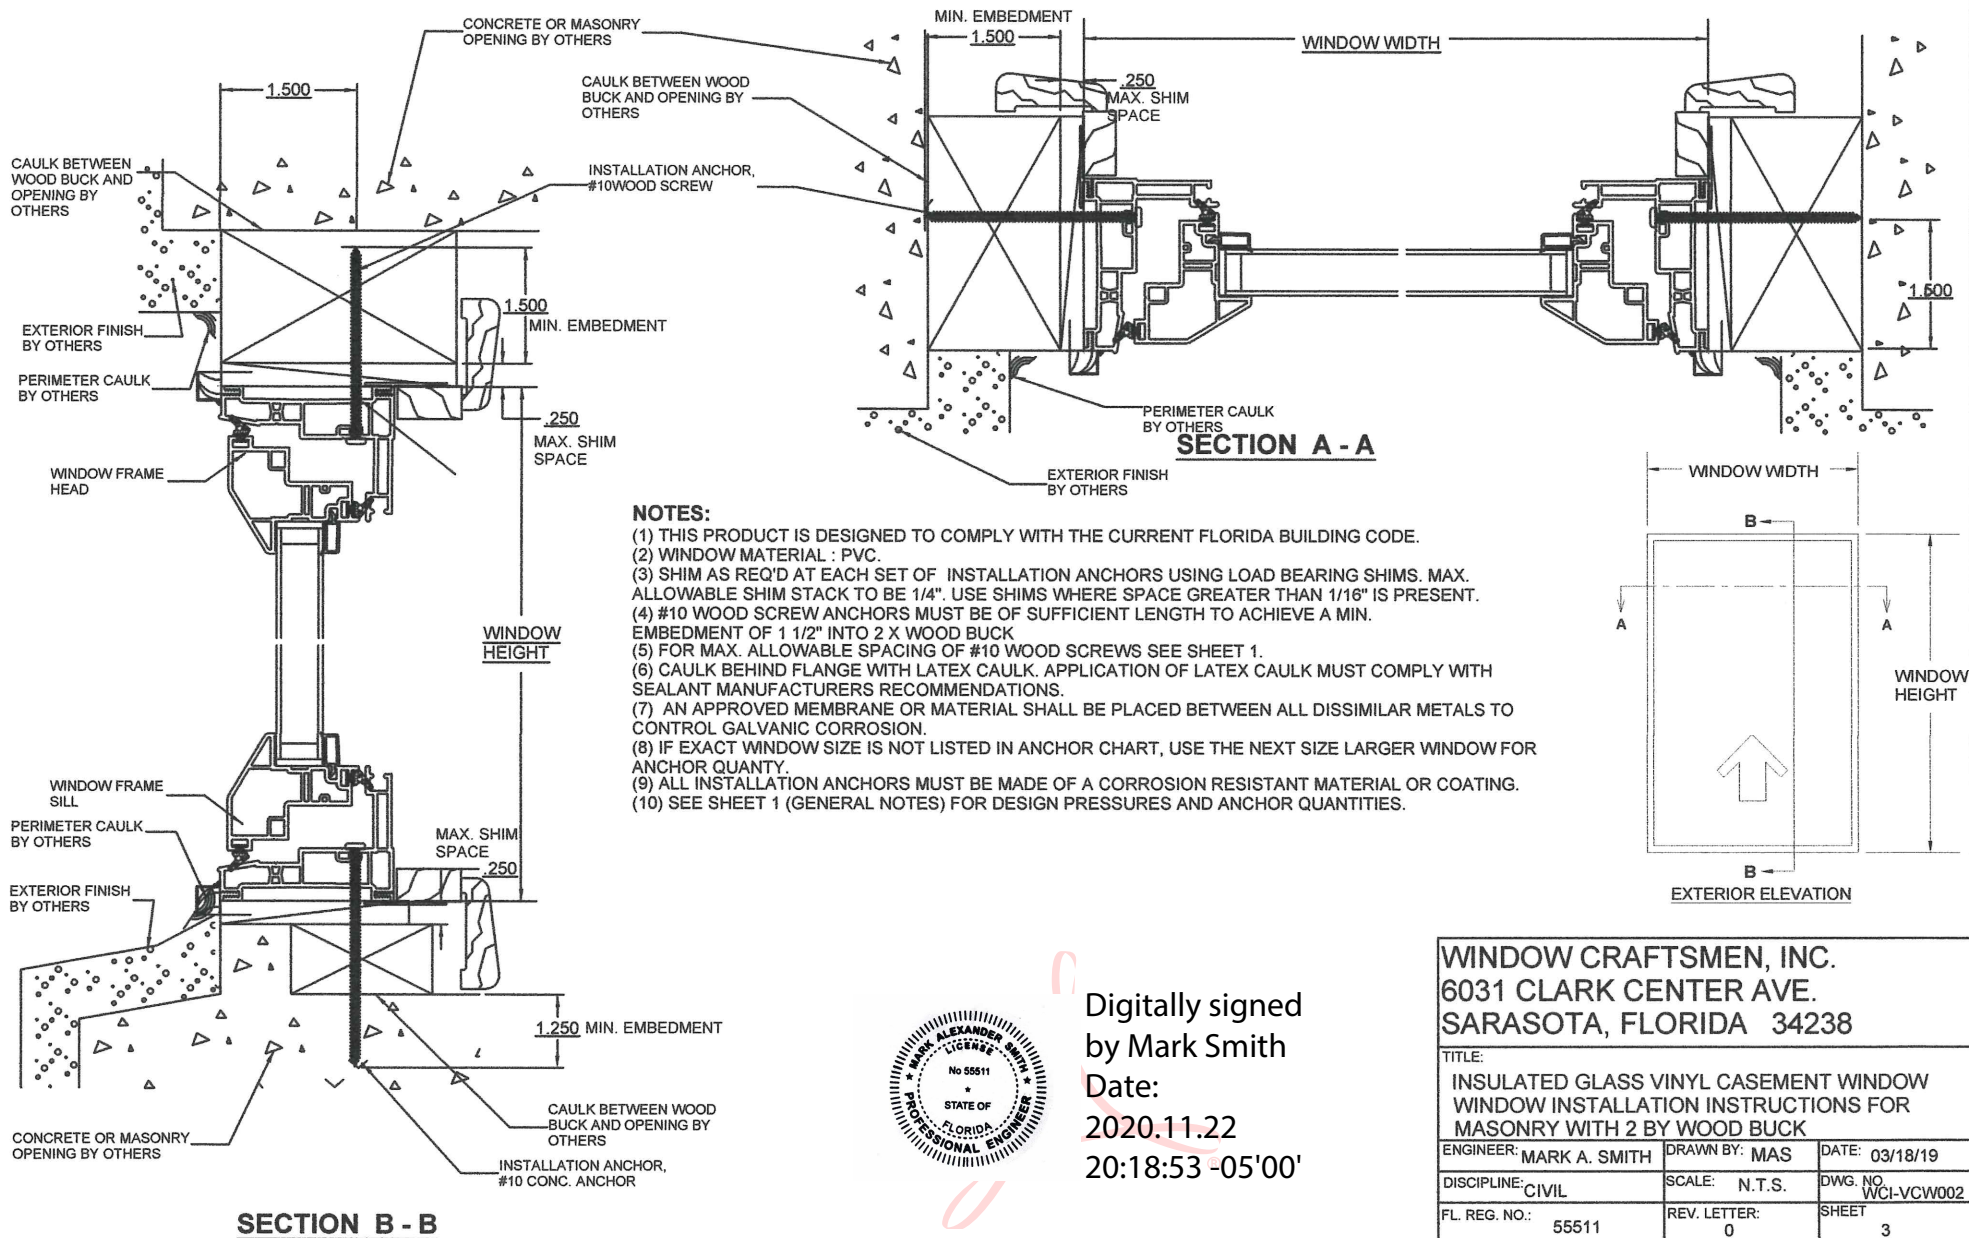


Digitally signed
by Mark Smith
Date:
2020.11.22
20:18:53 -05'00'



WINDOW CRAFTSMEN, INC.
6031 CLARK CENTER AVE.
SARASOTA, FLORIDA 34238

TITLE: INSULATED GLASS VINYL CASEMENT WINDOW WINDOW INSTALLATION INSTRUCTIONS FOR MASONRY WITH 2 BY WOOD BUCK		
ENGINEER: MARK A. SMITH	DRAWN BY: MAS	DATE: 03/18/19
DISCIPLINE: CIVIL	SCALE: N.T.S.	DWG. NO. WCI-VCW002
FL. REG. NO.: 55511	REV. LETTER: 0	SHEET 3

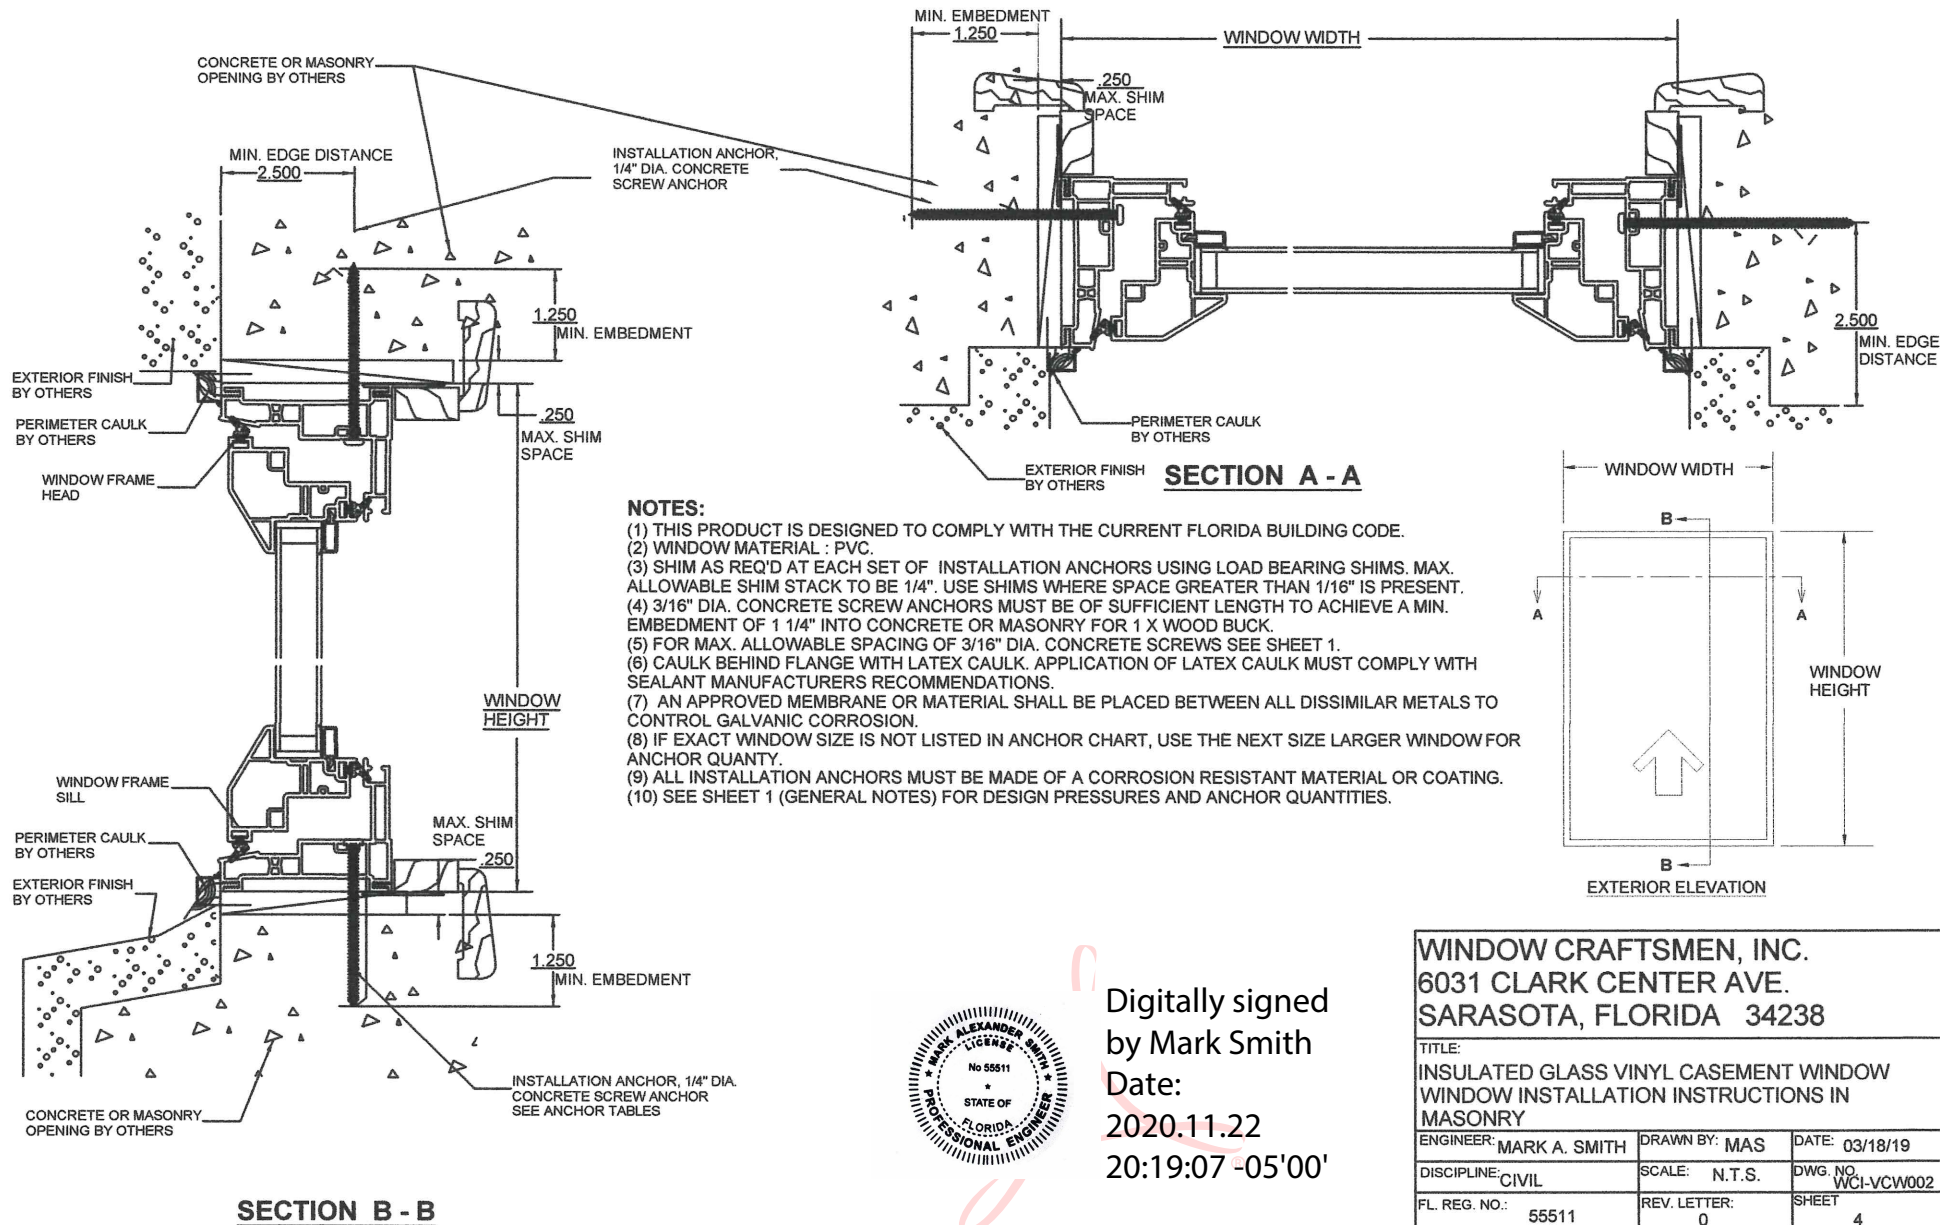

Digitally signed
by Mark Smith
Date:
2020.11.22
20:19:07 -05'00'

WINDOW CRAFTSMEN, INC. 6031 CLARK CENTER AVE. SARASOTA, FLORIDA 34238		
TITLE: INSULATED GLASS VINYL CASEMENT WINDOW WINDOW INSTALLATION INSTRUCTIONS IN MASONRY		
ENGINEER: MARK A. SMITH	DRAWN BY: MAS	DATE: 03/18/19
DISCIPLINE: CIVIL	SCALE: N.T.S.	DWG. NO. WCI-VCW002
FL. REG. NO.: 55511	REV. LETTER: 0	SHEET 4