




Fiber-Classic® & Smooth-Star®

**CUT DOWN COMPOSITE EDGE
OPAQUE FIBERGLASS SINGLE DOOR
w/ SIDELITE(S)
OUTSWING
"IMPACT"**

GENERAL NOTES

1. This product evaluation drawing has been developed in compliance with the 9th Edition (2026) Florida Building Code (FBC) including the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in the "HVHZ" this product complies with Section 1626 of the FBC and does not require an impact resistant covering.
4. When used in areas outside of the "HVHZ" requiring wind borne debris protection, this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996.
5. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
6. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
7. This product meets the water infiltration requirements for the "HVHZ".
8. Outswing configurations using Coastal Sill (item #19) & Composite Sill (item #16) under active doors meet water infiltration requirements for "HVHZ". All other configurations do not meet the water infiltration requirements for the "HVHZ" and shall be installed only in non-habitable areas or at habitable locations protected by an overhang or canopy such that the angle between the edge of canopy or overhang to sill is less than 45 degrees.



TABLE OF CONTENTS			
SHEET#	DESCRIPTION	SHEET#	
1	Typical Elevations, Design Pressures & General Notes	8	Vertical Cross Sections (Thresholds)
2	Door Panel Details	9	Buck Anchoring
3	Sidelite Panel Details	10	Frame Anchoring
4	Elevations	11	Hardware Details
5	Horizontal & Vertical Cross Sections (2X Buck)	12	Glazing Details
6	Horizontal & Vertical Cross Sections (1X Buck)	13	Components
7	Horizontal & Vertical Cross Sections (Direct to Masonry)	14	Bill of Materials

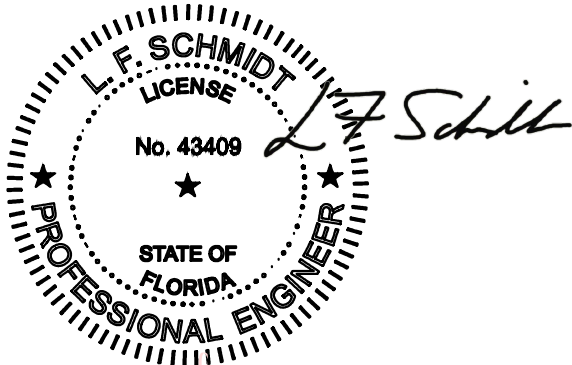

Digitally signed by Lyndon F Schmidt
Date: 2026.08.10 08:20:20 -04'00'

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

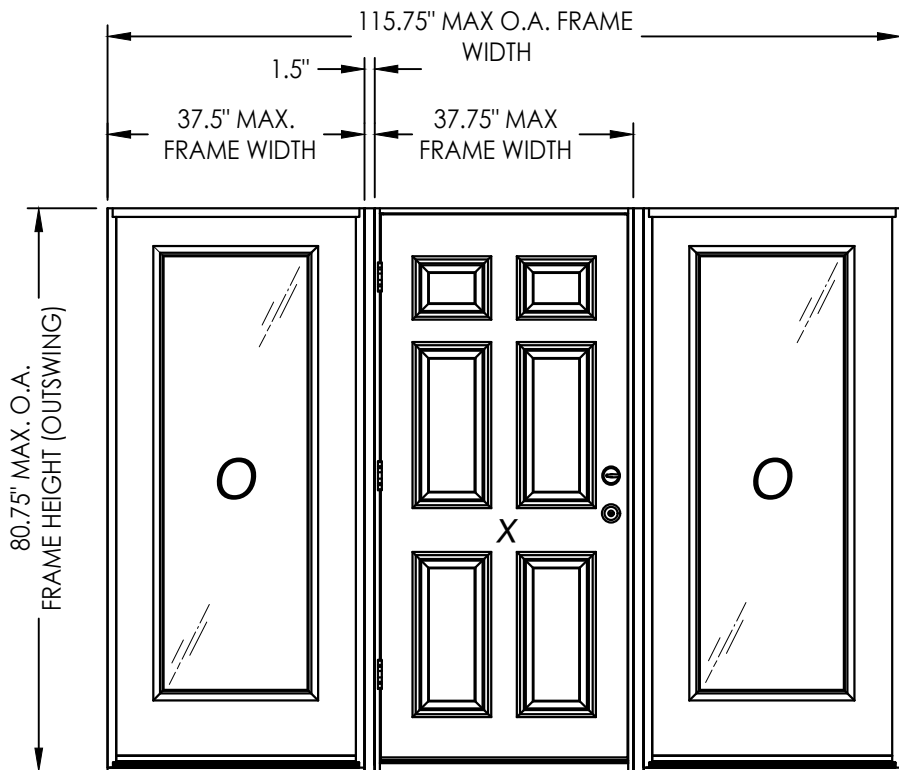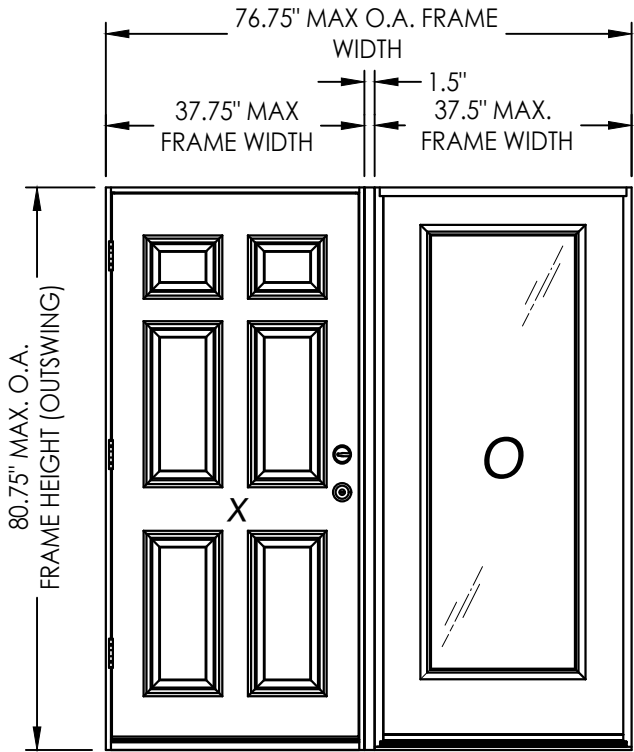


CONFIGURATION	DESIGN PRESSURE (PSF) OUTSWING	
	POSITIVE	NEGATIVE
XO, OX, OXO	+55.0	-55.0

See Sheet 4 for Hardware Specifications

PRODUCT:		THERMA-TRU FIBERGLASS DOOR				RW BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PART OR ASSEMBLY:		TYPICAL ELEVATION, DESIGN PRESSURES & GENERAL NOTES					
3	7/01/26	UPDATE TO 9TH ED. (2026)	FBC	LFS			
2	8/17/23	UPDATE TO 8TH ED. (2023)	FBC	LFS			
1	7/15/20	UPDATE TO 7th ED (2020)	FBC	PO			
NO.	DATE						
					REVISIONS		
DATE: 08/12/19							
SCALE: N.T.S.							
DWG. BY: RW							
CHK. BY: LFS							
DRAWING NO.: FL-30077.14							
SHEET 1 OF 14							

Z:\2023 FBC Drawings\Therma-Tru\FL-30077 R3\FL-30077.13-15.dwg





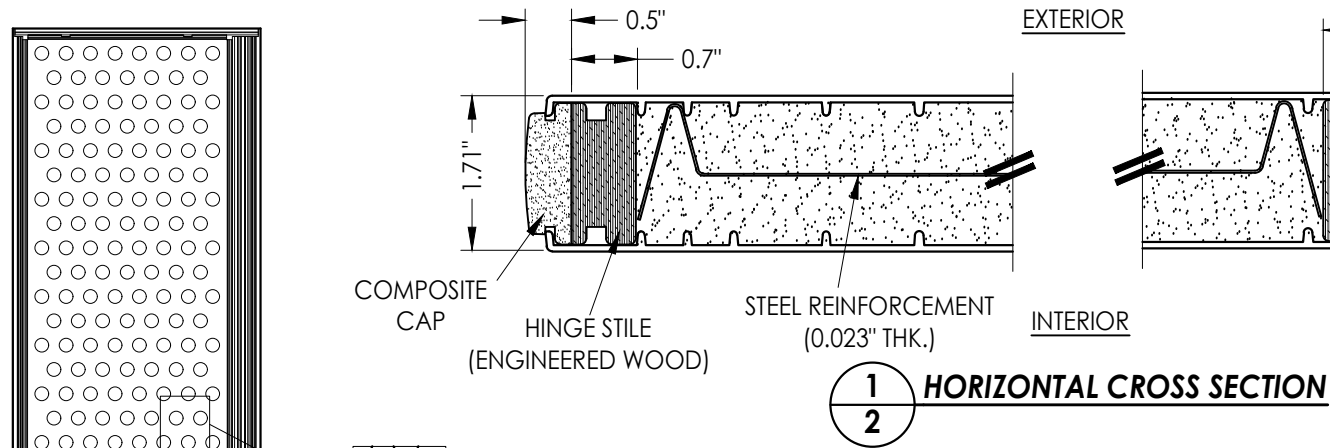


DETAIL A-A
PANEL REINFORCEMENT
(0.023" Thick Steel)

STEEL REINFORCEMENT
28.86% OPEN
AREA MAX.

2" DIA.
MAX.

* #8 X 2.5" PFH WS (TYP. @ EACH DOOR CORNER)

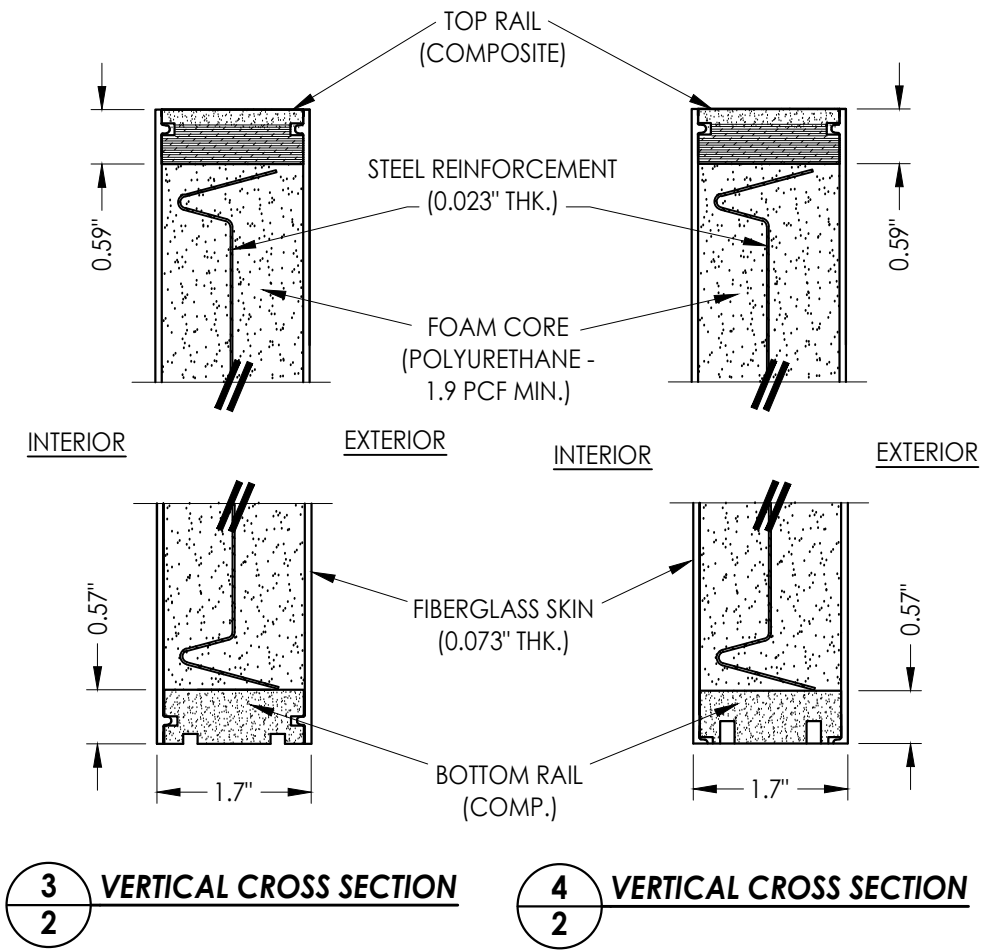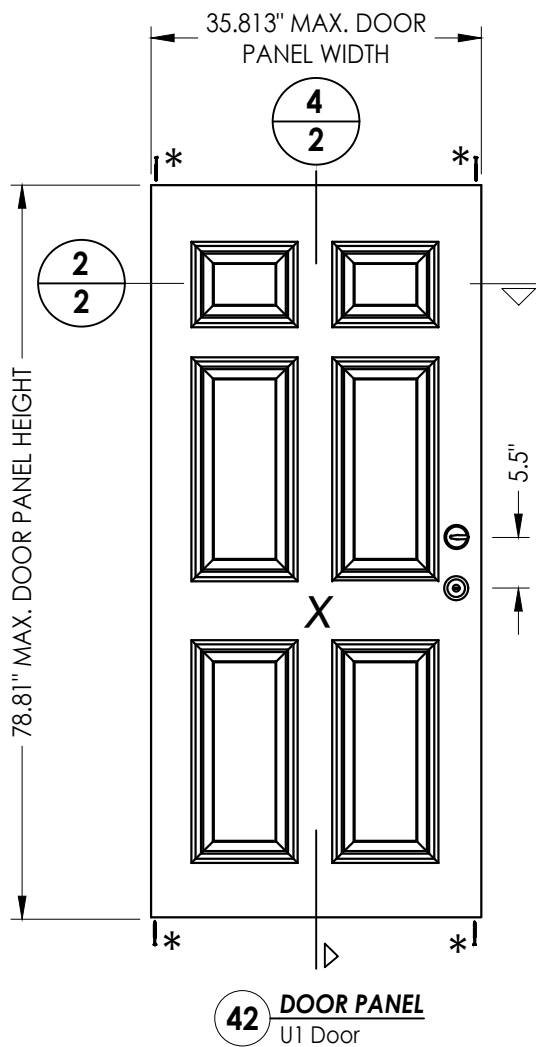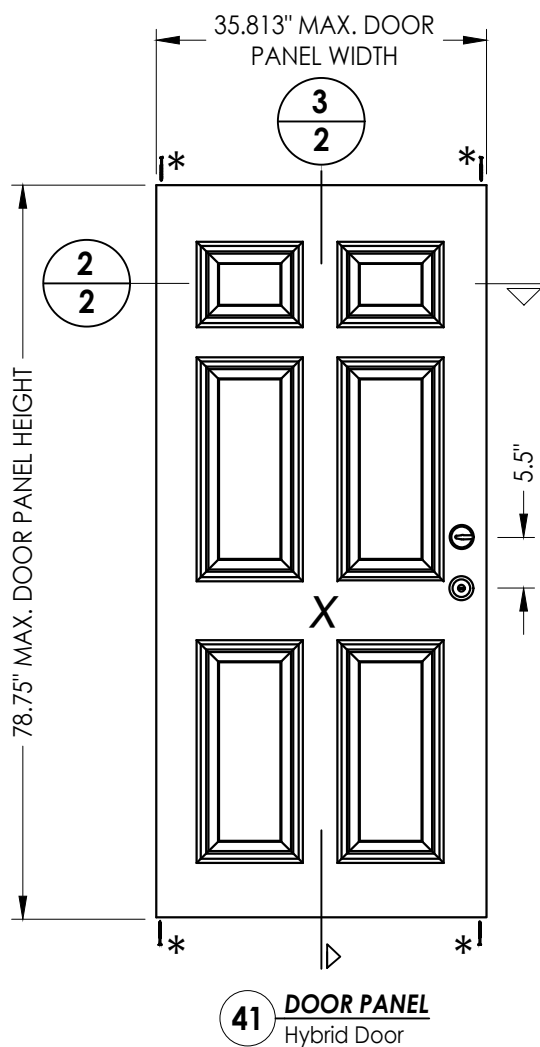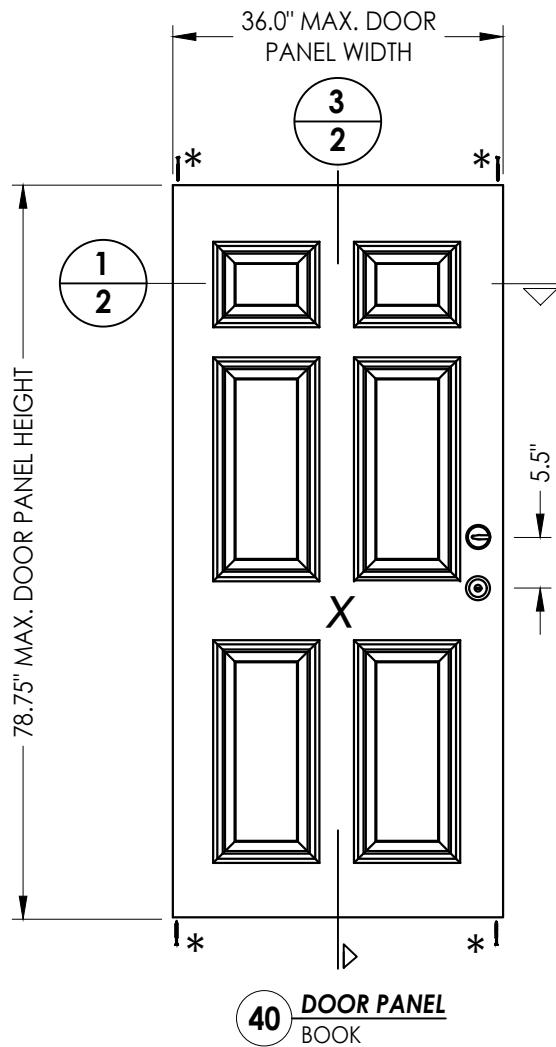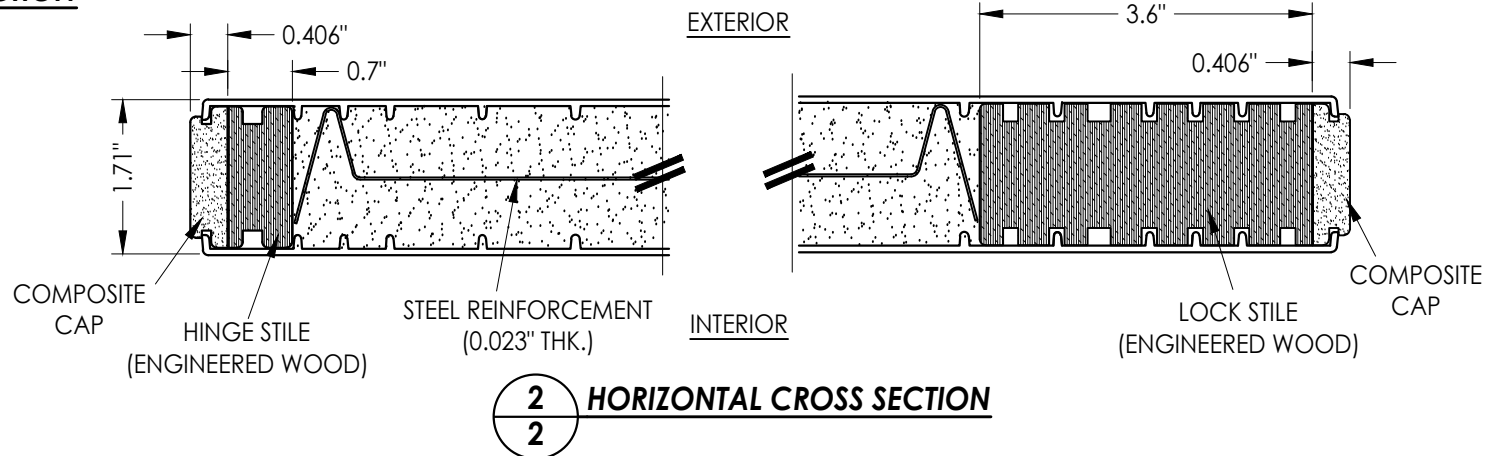

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR


PART OR ASSEMBLY:
DOOR PANEL DETAILS

NO.	DATE	BY
3	7/01/26	UPDATE TO 9TH ED. (2026) FBC
2	8/17/23	UPDATE TO 8TH ED. (2023) FBC
1	7/15/20	UPDATE TO 7TH ED (2020) FBC




REVISIONS

DATE: 08/12/19
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-30077.14
SHEET 2 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-30077 R3\FL-30077.13-15.dwg

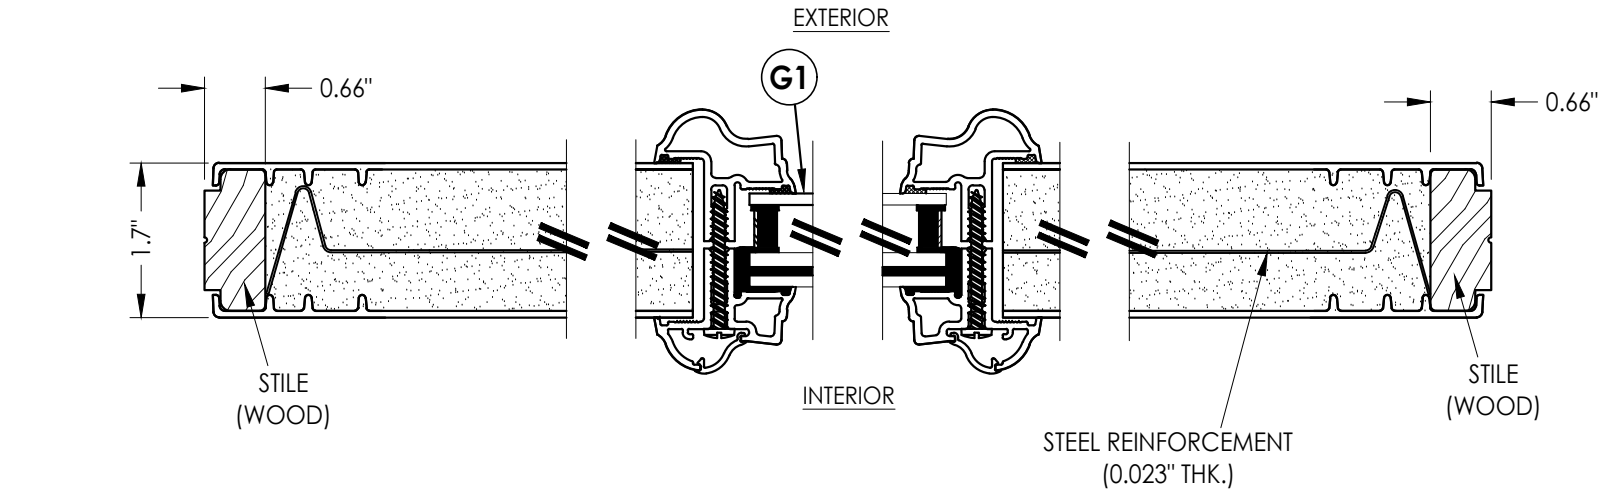

1
3 **HORIZONTAL CROSS SECTION**

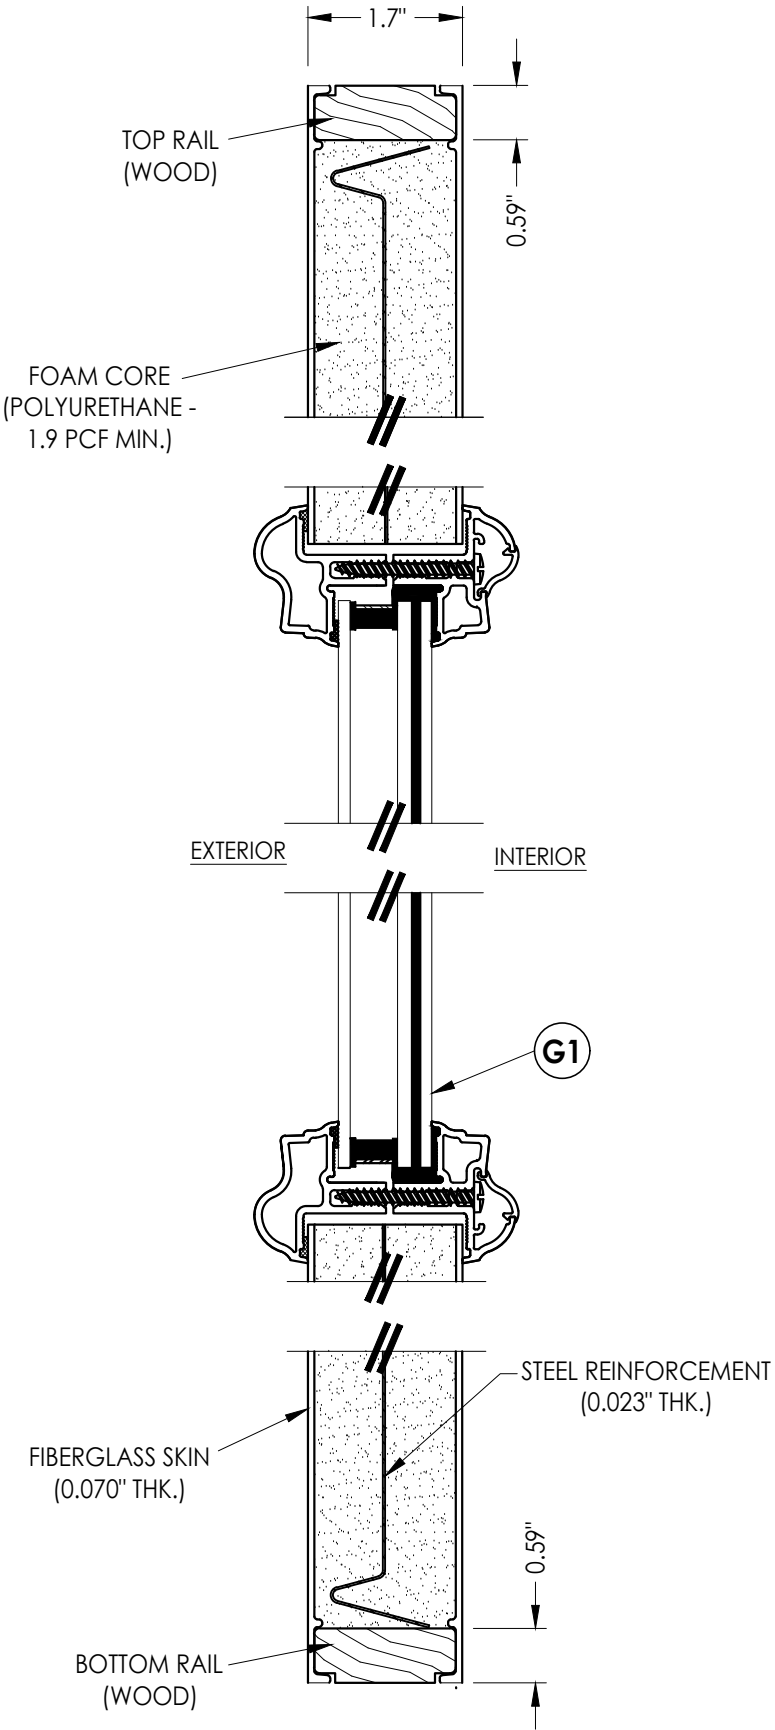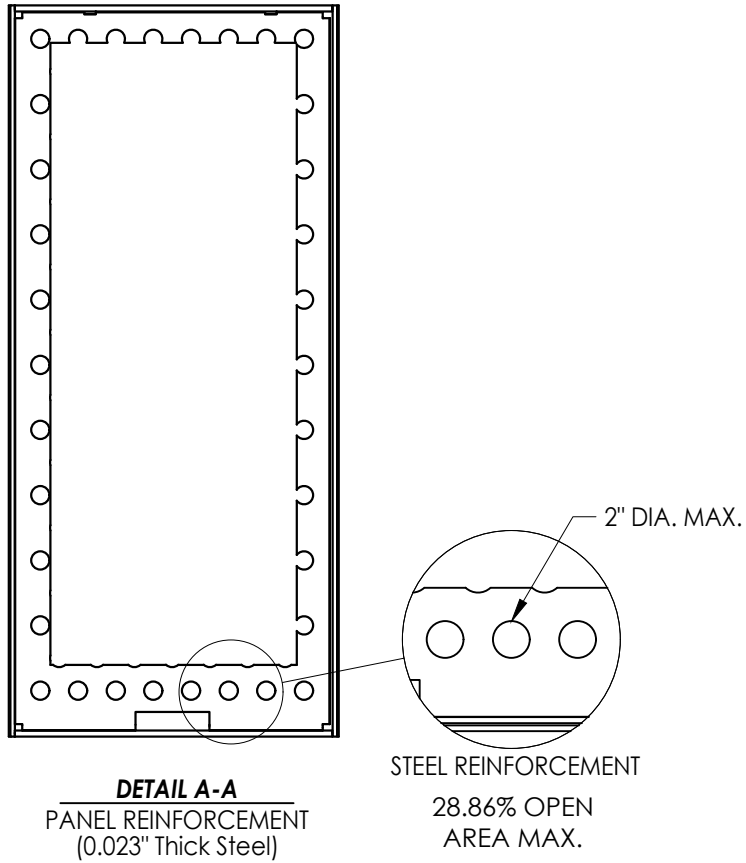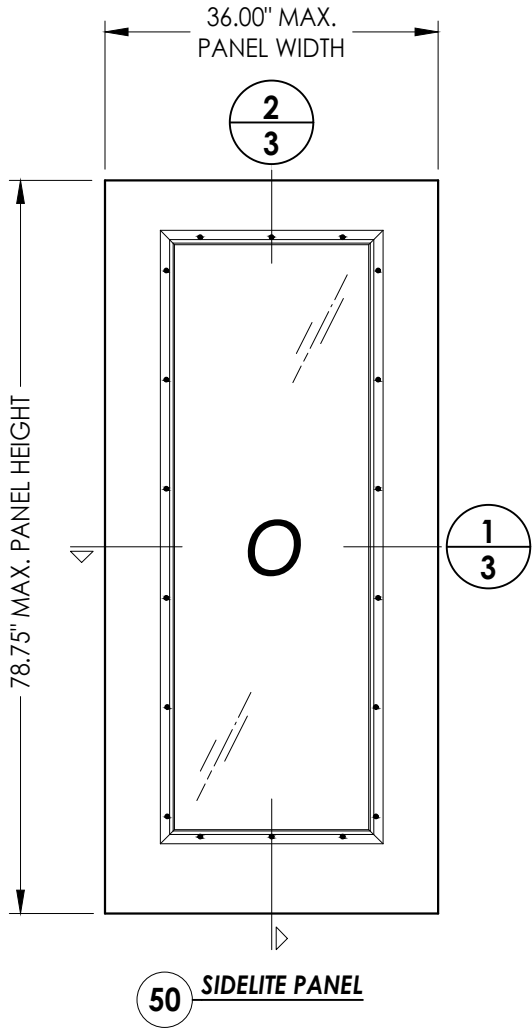

2
3 **VERTICAL CROSS SECTION**

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
SIDELITE PANEL DETAILS

NO.	DATE	REVISIONS			
		BY	PO	LFS	LFS
3	7/01/26	UPDATE TO 9TH ED. (2026)	FBC	FBC	LFS
2	8/17/23	UPDATE TO 8TH ED. (2023)	FBC	FBC	LFS
1	7/15/20	UPDATE TO 7th ED (2020)	FBC	FBC	PO

DATE: 08/12/19

SCALE: N.T.S.


DWG. BY: RW

CHK. BY: LFS

DRAWING NO.: FL-30077.14


SHEET 3 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-30077 R3\FL-30077.13-15.dwg

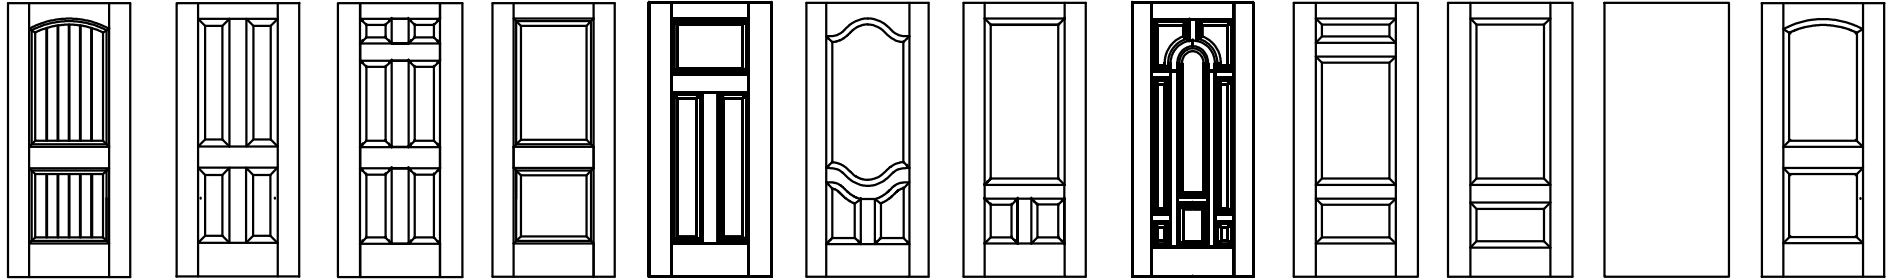


Fiber-Classic/Smooth-Star Door Panel Options

Panel options shown are for illustration and are representative only
(similar opaque panel configurations are allowed)

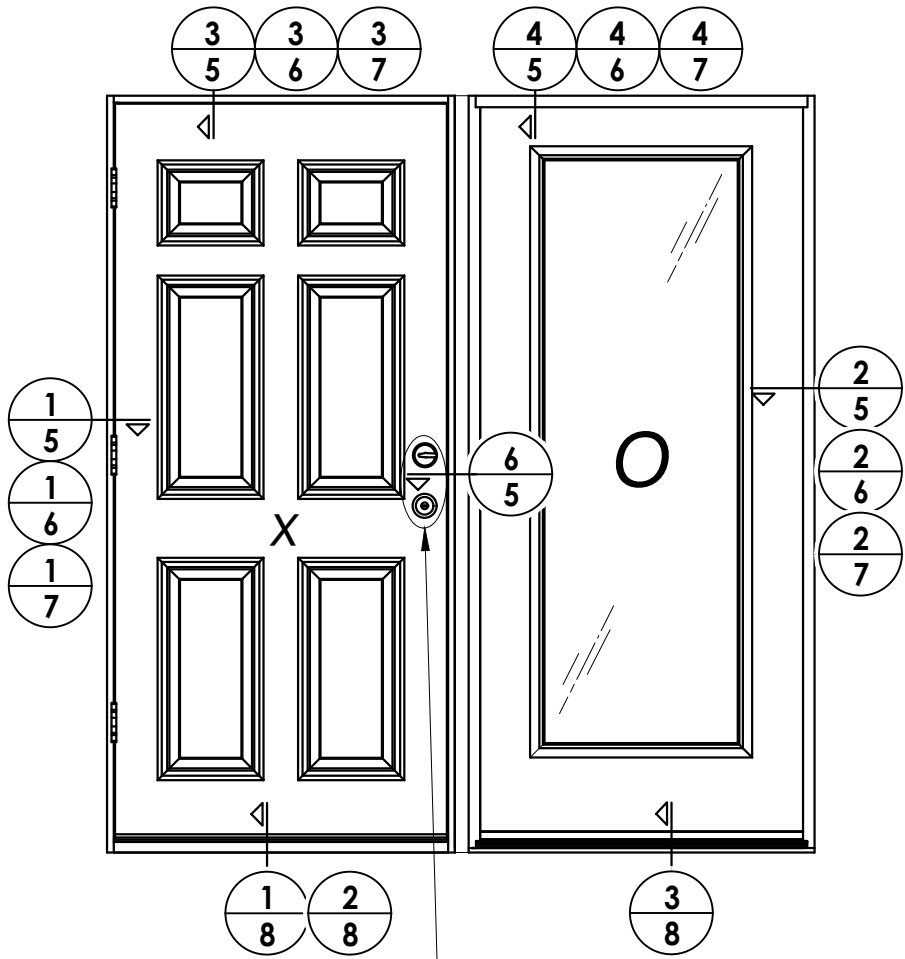

ELEVATION
XO

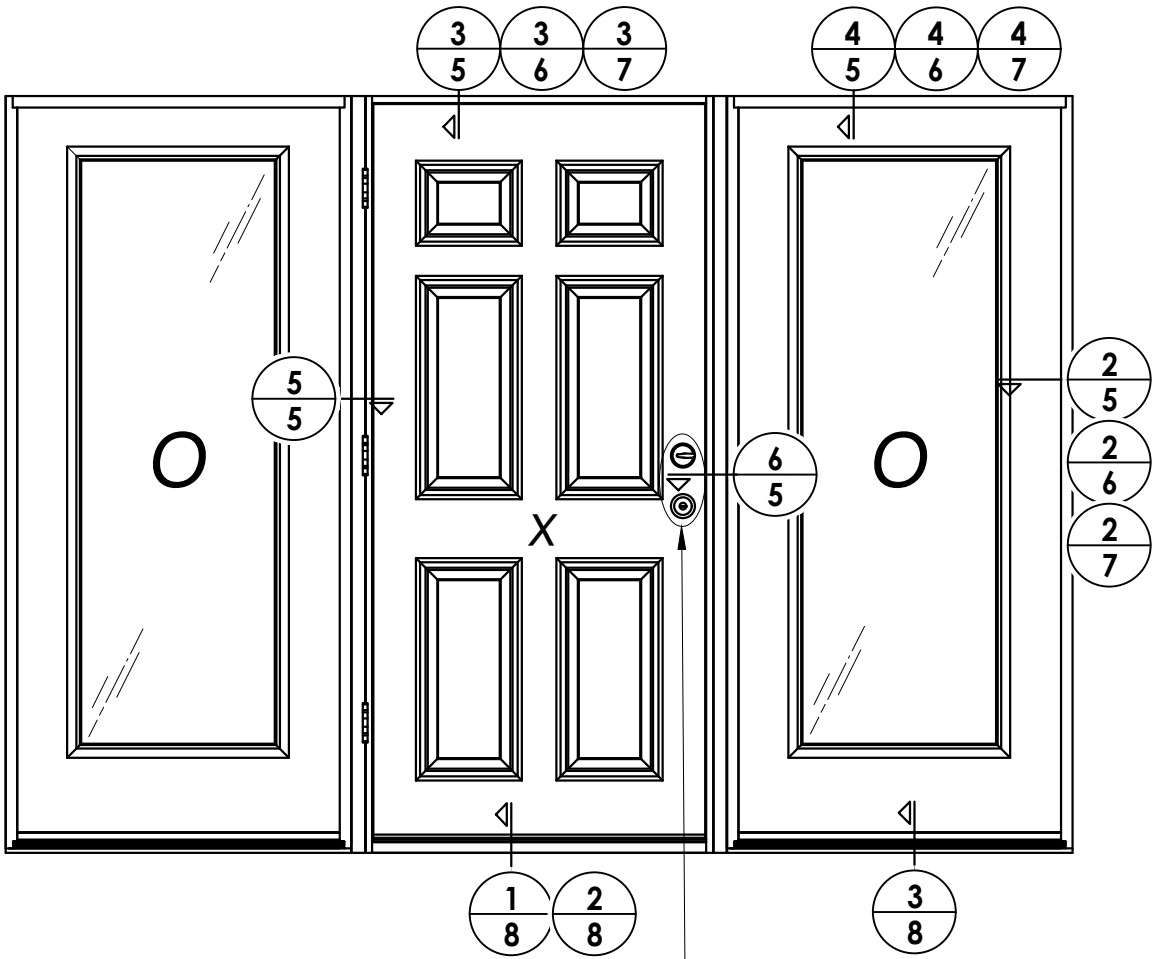

ELEVATION
OXO

HARDWARE TABLE		
MANUFACTURER	MODEL	
SCHLAGE	KNOB:	F51
	DEADBOLT:	B60
KWIKSET	KNOB:	SIGNATURE SERIES
	DEADBOLT:	SIGNATURE SERIES (980)
HOPPE (THERMA-TRU)	MULTIPOINT : MPDGART	
	(3 pt. Manual Tongue)	


REVISIONS			
NO.	DATE	BY	
3	7/01/26	UPDATE TO 9TH ED. (2026)	FBC LFS
2	8/17/23	UPDATE TO 8TH ED. (2023)	FBC LFS
1	7/15/20	UPDATE TO 7th ED. (2020)	FBC PO

DATE:	08/12/19
SCALE:	N.T.S.
DWG. BY:	RW
CHK. BY:	LFS
DRAWING NO.:	FL-30077.14
SHEET	4 OF 14


PRODUCT:	THERMA-TRU FIBERGLASS DOOR
PART OR ASSEMBLY:	ELEVATIONS

Documents Prepared By:	Lyndon F. Schmidt P.E. No. 43409
R.W. BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	


Z:\2023 FBC Drawings\Therma-Tru\FL-30077 R3\FL-30077.13-15.dwg

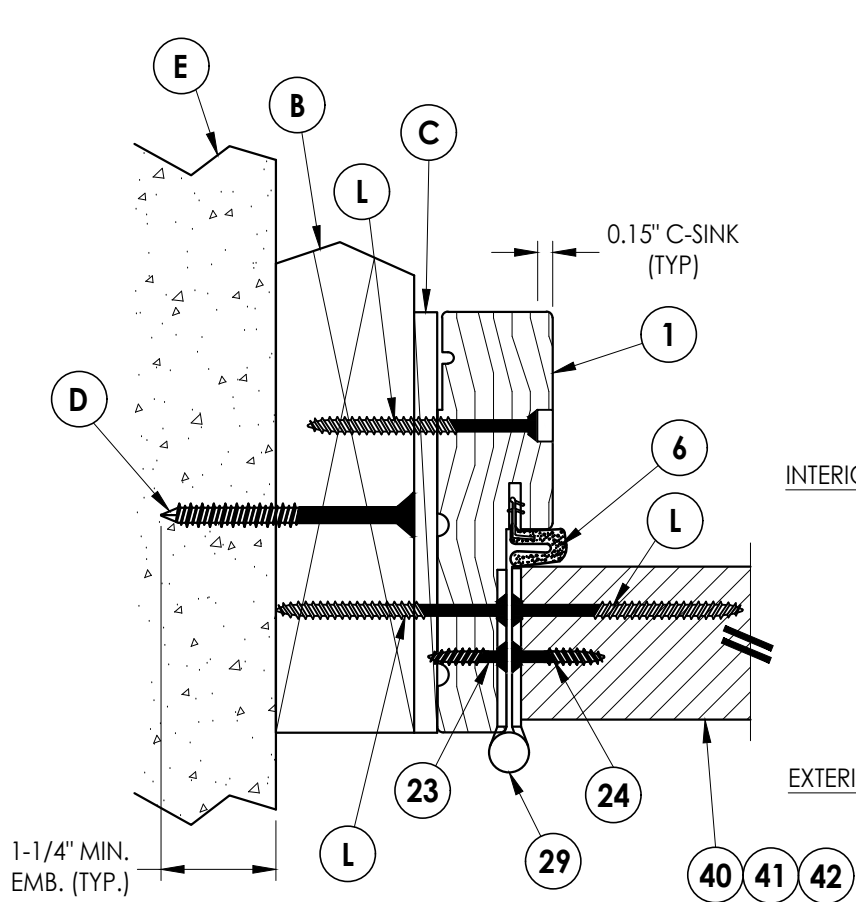


1
5 **HORIZONTAL CROSS SECTION**
Shown w/ 2X Buck

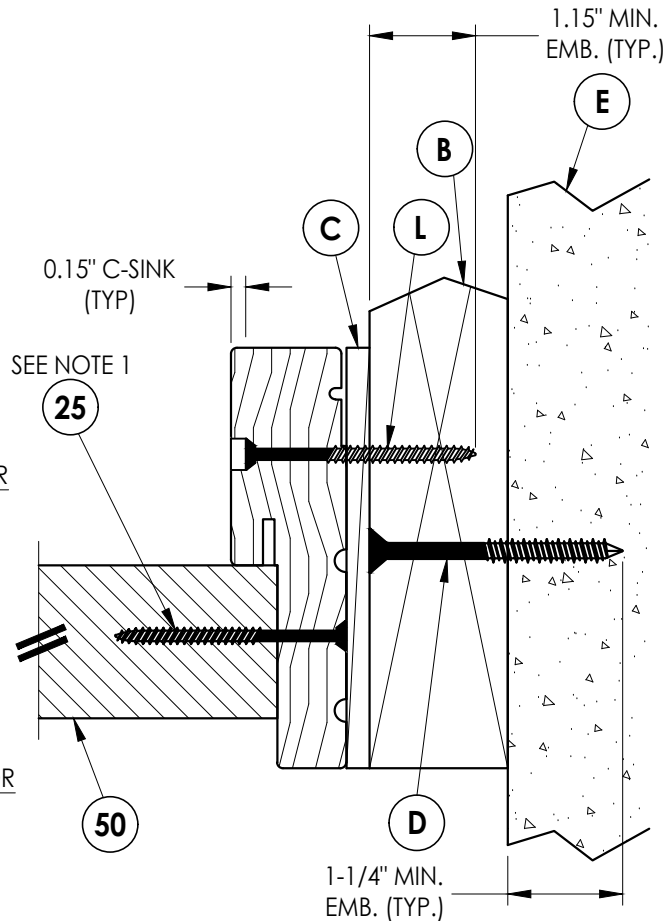


2
5 **HORIZONTAL CROSS SECTION**
Shown w/ 2X Buck

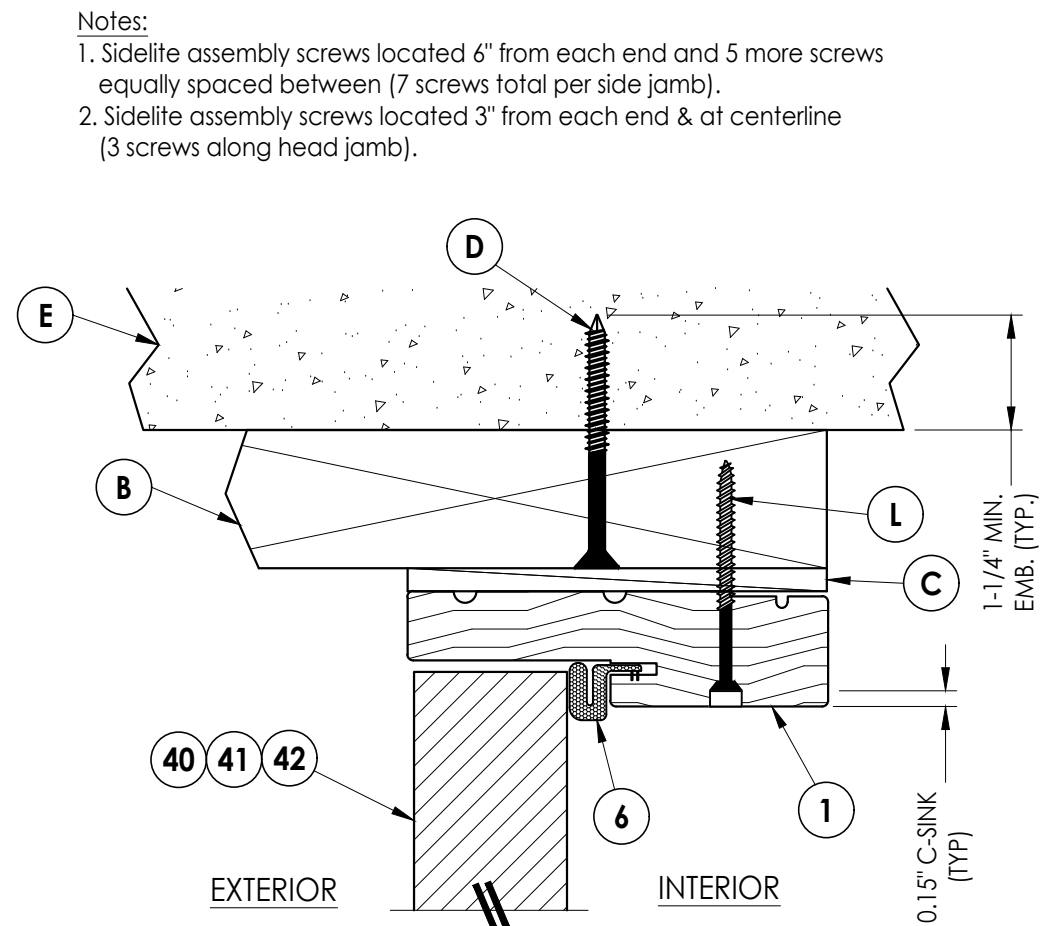


3
5 **VERTICAL CROSS SECTION**
Shown w/ 2X Buck

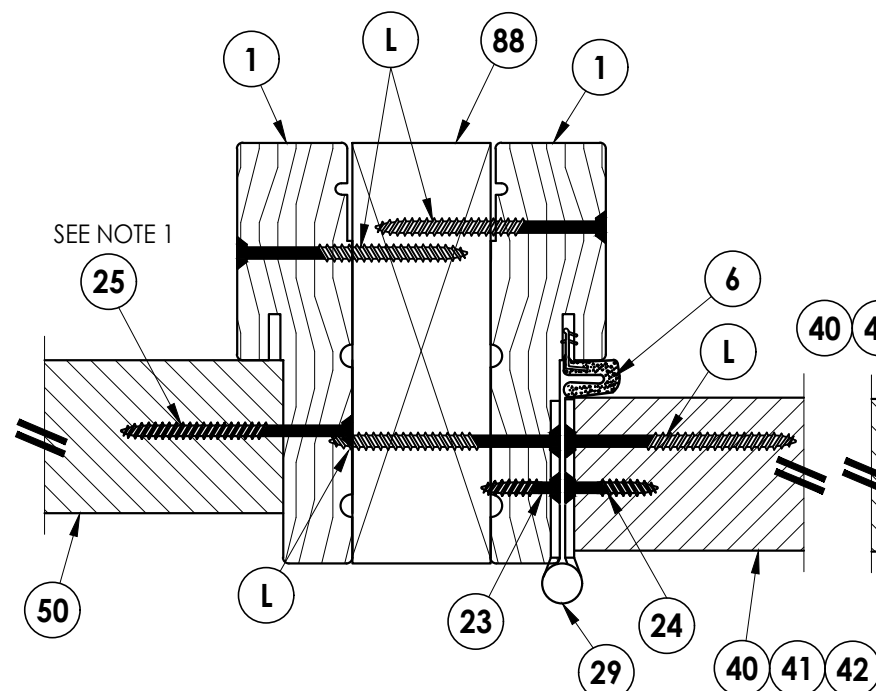

5
5 **HORIZONTAL CROSS SECTION**

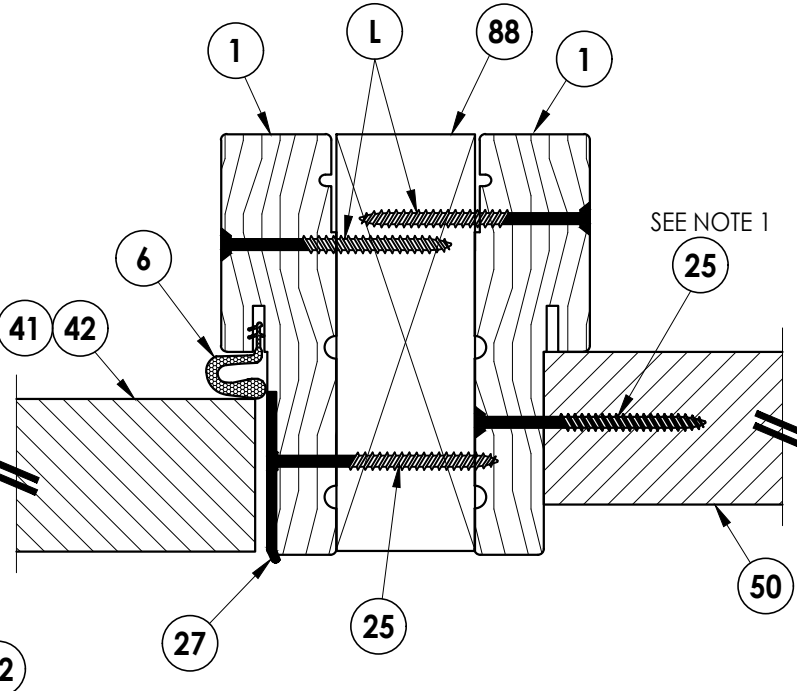

6
5 **HORIZONTAL CROSS SECTION**

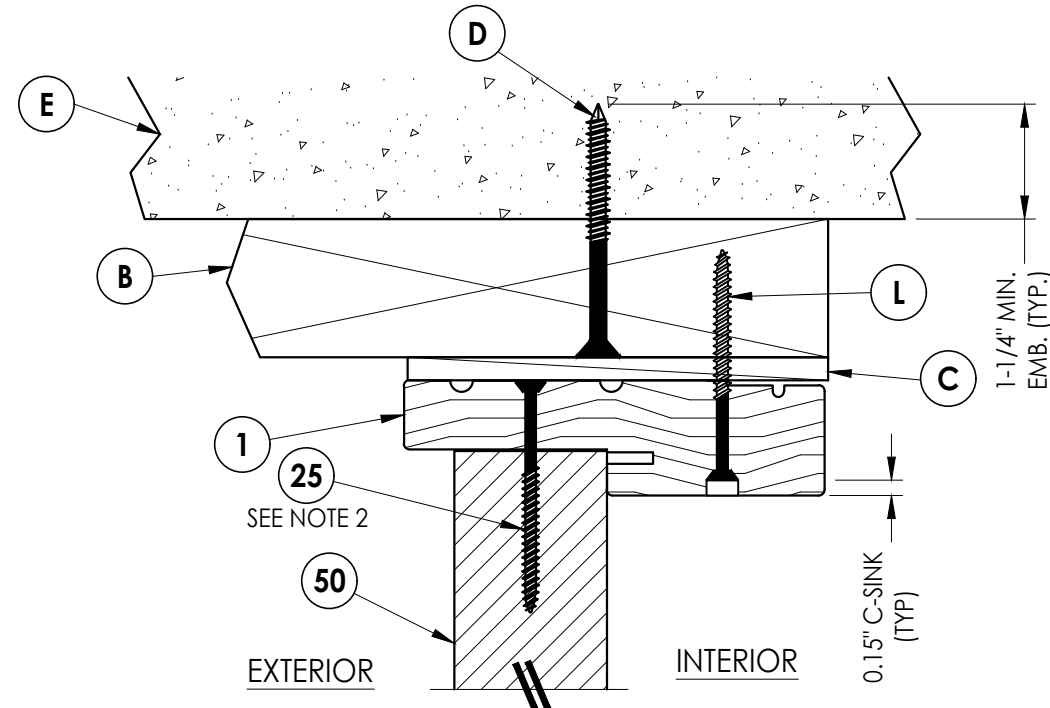

4
5 **VERTICAL CROSS SECTION**
Shown w/ 2X Buck

- Notes:
1. Sidelite assembly screws located 6" from each end and 5 more screws equally spaced between (7 screws total per side jamb).
 2. Sidelite assembly screws located 3" from each end & at centerline (3 screws along head jamb).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (2X BUCK)

NO.	DATE	REVISIONS
3	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	8/17/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	7/15/20	UPDATE TO 7th ED (2020) FBC PO

DATE: 08/12/19

SCALE: N.T.S.

DWG. BY: RW


CHK. BY: LFS

DRAWING NO.:

FL-30077.14

SHEET 5 OF 14

1. Sidelite assembly screws located 6" from each end and 5 more screws equally spaced between (7 screws total per side jamb).
2. Sidelite assembly screws located 3" from each end & at centerline (3 screws along head jamb).




DATE:	08/12/19
SCALE:	N.T.S.
DWG. BY:	RW
CHK. BY:	LFS
DRAWING NO.:	FL-30077.14
SHEET	<u>6</u> OF <u>14</u>

R^gW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2019 R.W. BUILDING CONSULTANTS INC.


Z:\2023 FBC Drawings\Therma-Tru\FL-30077 R3\FL-30077.13-15.dwg

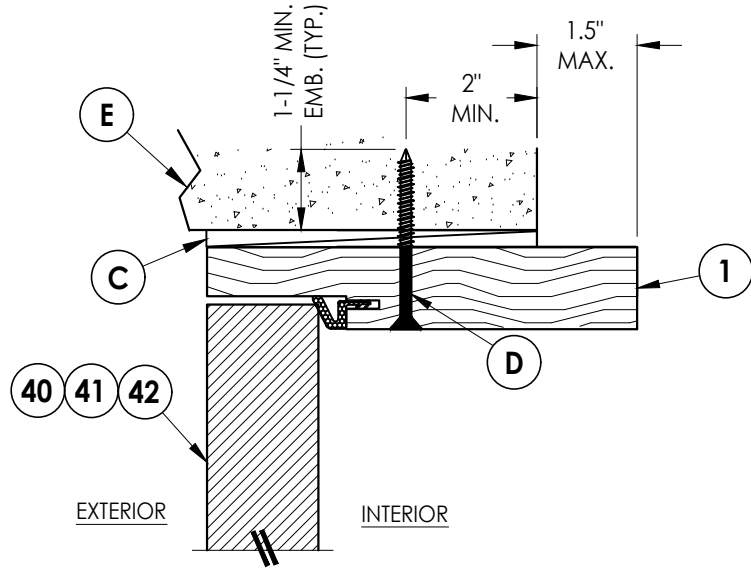


3
7 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
6-9/16" jamb

Notes:


1. Sidelite assembly screws located 6" from each end plus 5 more equally spaced between (7 screws total per side jamb).
2. Sidelite assembly screws located 3" from each end & at centerline (3 screws along head jamb).

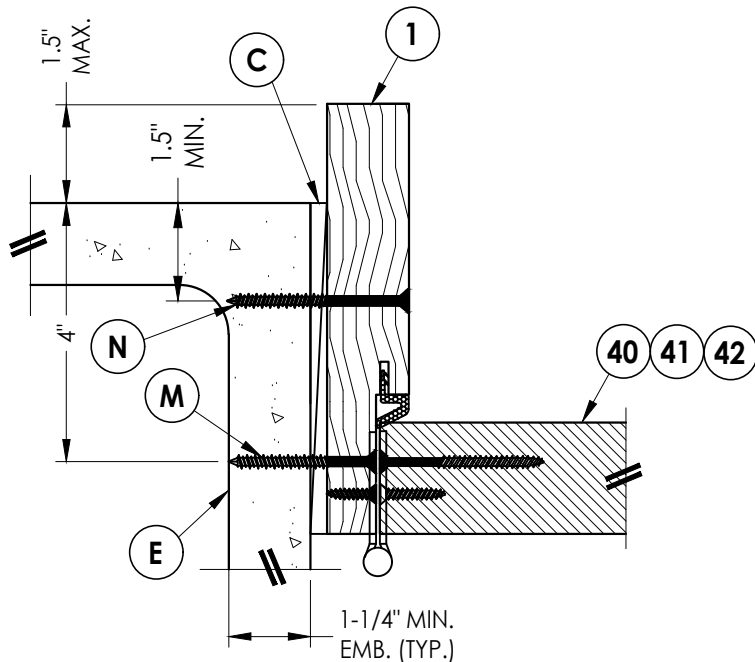

1
7 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
6-9/16" jamb

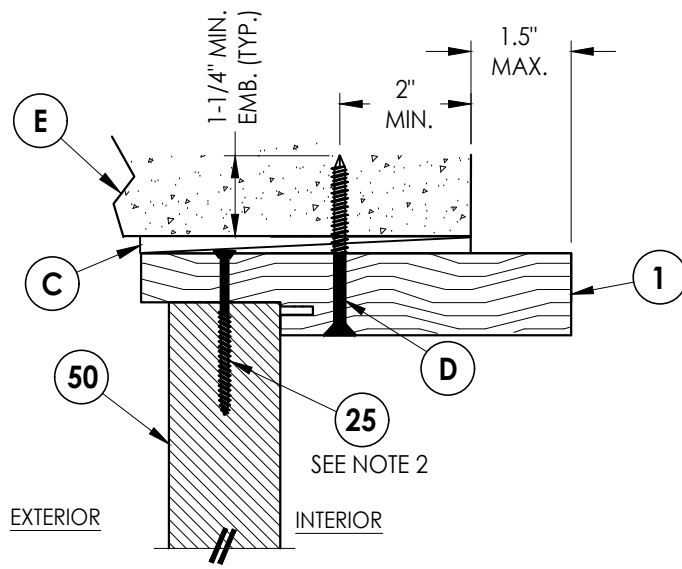

4
7 **VERTICAL CROSS SECTION**
Shown Direct to Masonry
6-9/16" jamb

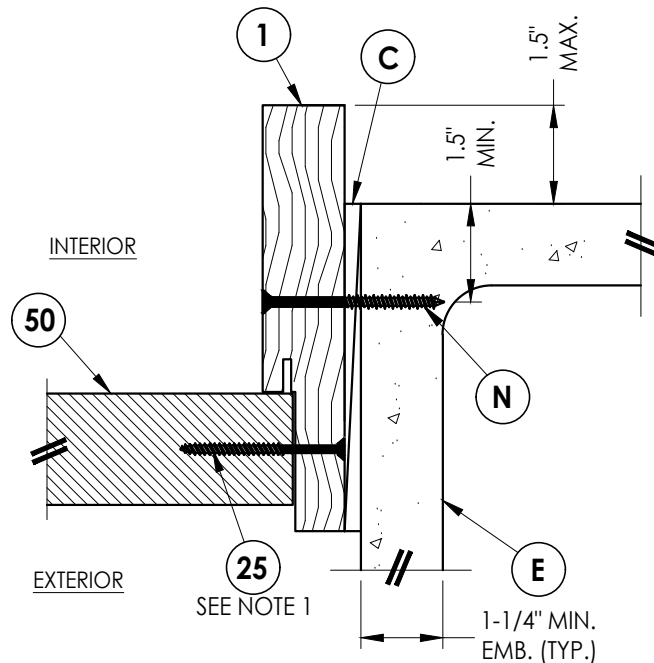

2
7 **VERTICAL CROSS SECTION**
Shown Direct to Masonry
6-9/16" jamb

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: **THERMA-TRU
FIBERGLASS DOOR**

PART OR ASSEMBLY:
**HORIZONTAL & VERTICAL
SECTIONS (DIRECT TO MASONRY)**

NO.	DATE	REVISIONS
3	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	8/17/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	7/15/20	UPDATE TO 7th ED (2020) FBC PO
NO.	DATE	BY

DATE: 08/12/19

SCALE: N.T.S.

DWG. BY: RW

CHK. BY: LFS




DRAWING NO.:

FL-30077.14

SHEET 7 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-30077 R3\FL-30077.13-15.dwg

- Notes:
- Sill Item #'s 17, 18, & 19 are attached to jambs w/ (3) #8 X 2-1/2" pfh screws at each end.
Sill Item # 16 is attached to jambs w/ (2) #8 X 2-1/2" pfh screws at each end.
Sill Item #15 is attached to jambs utilizing (2) #10 X 2" pph screws at each end.
 - Sidelite assembly screws located 3" from each end & at centerline (3 screws along sill).

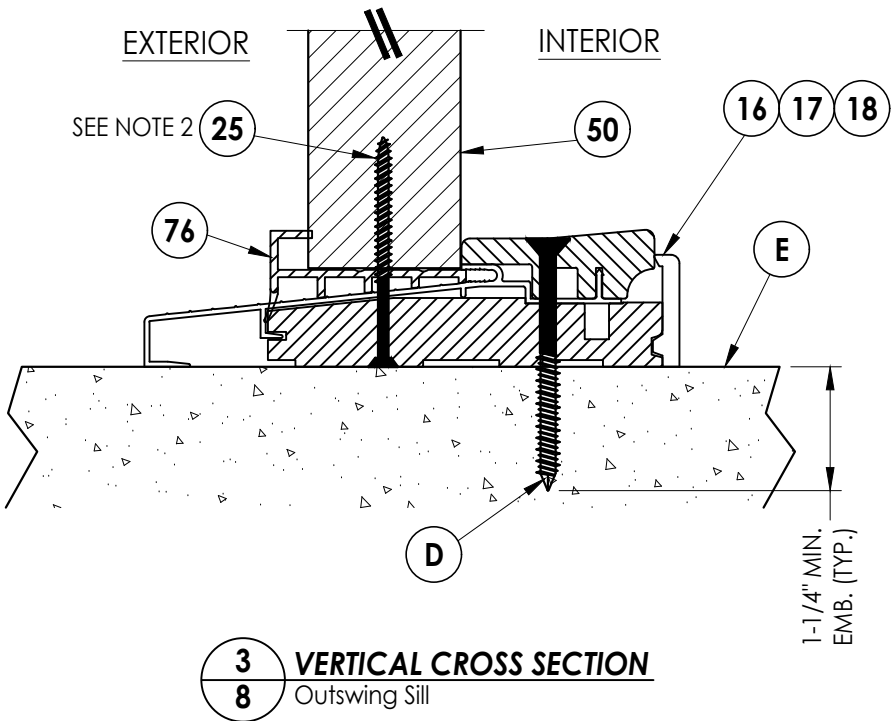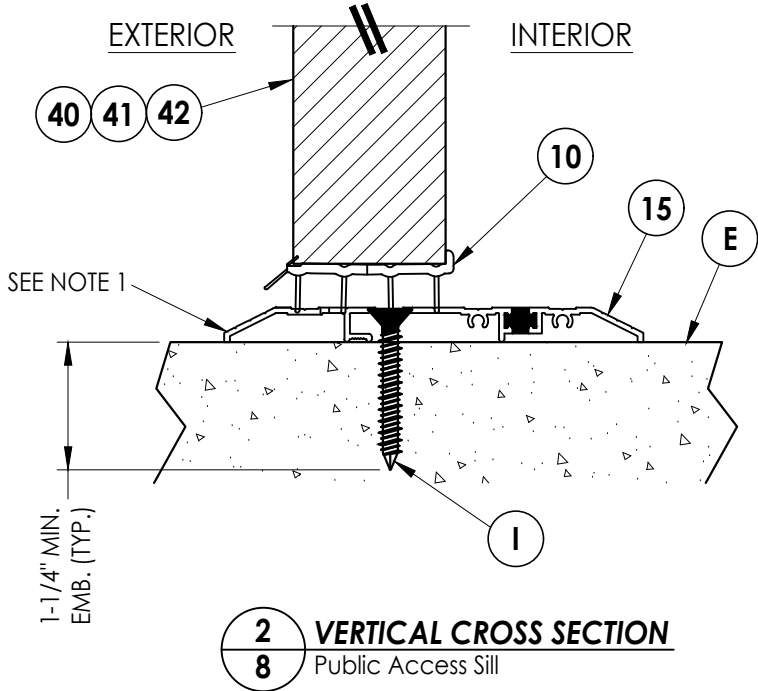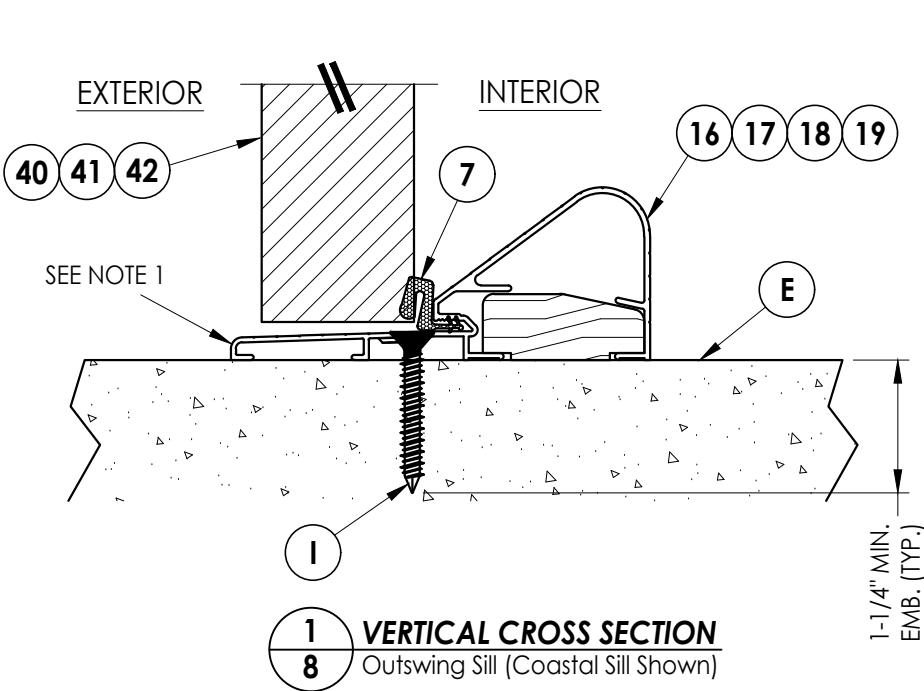

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813



PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
VERTICAL CROSS
SECTIONS (THRESHOLDS)

NO.	DATE	REVISIONS			
		BY	PO	LFS	LFS
3	7/01/26	UPDATE TO 9TH ED. (2026)	FBC		
2	8/17/23	UPDATE TO 8TH ED. (2023)	FBC		
1	7/15/20	UPDATE TO 7th ED (2020)	FBC		

DATE: 08/12/19
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.:
FL-30077.14
SHEET 8 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-30077 R3\FL-30077.13-15.dwg

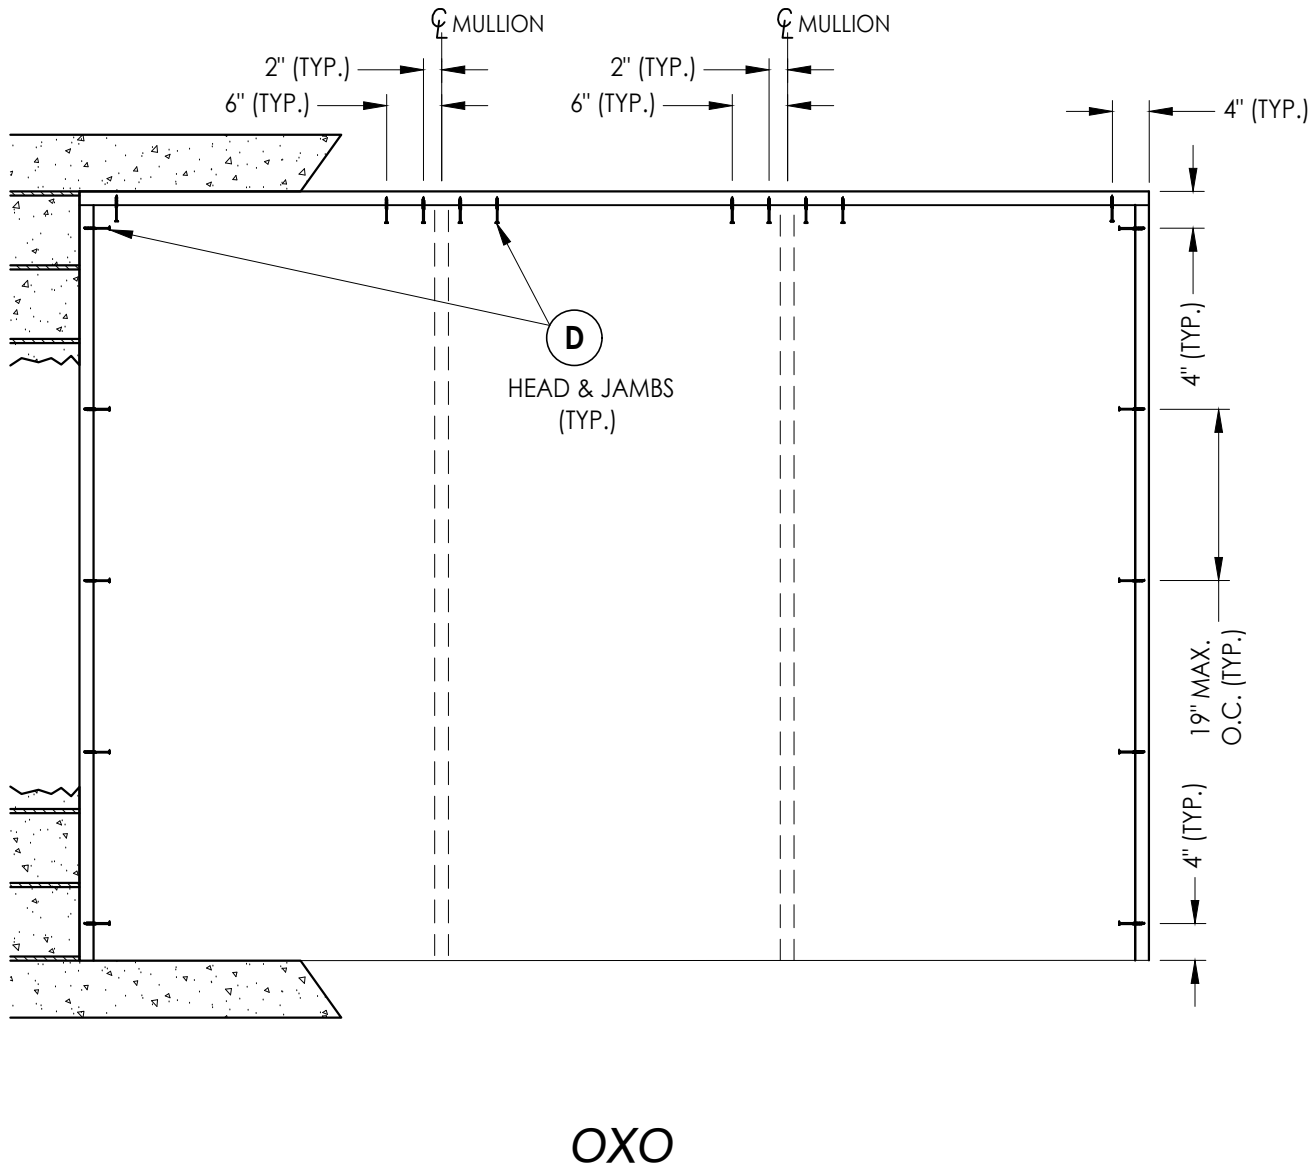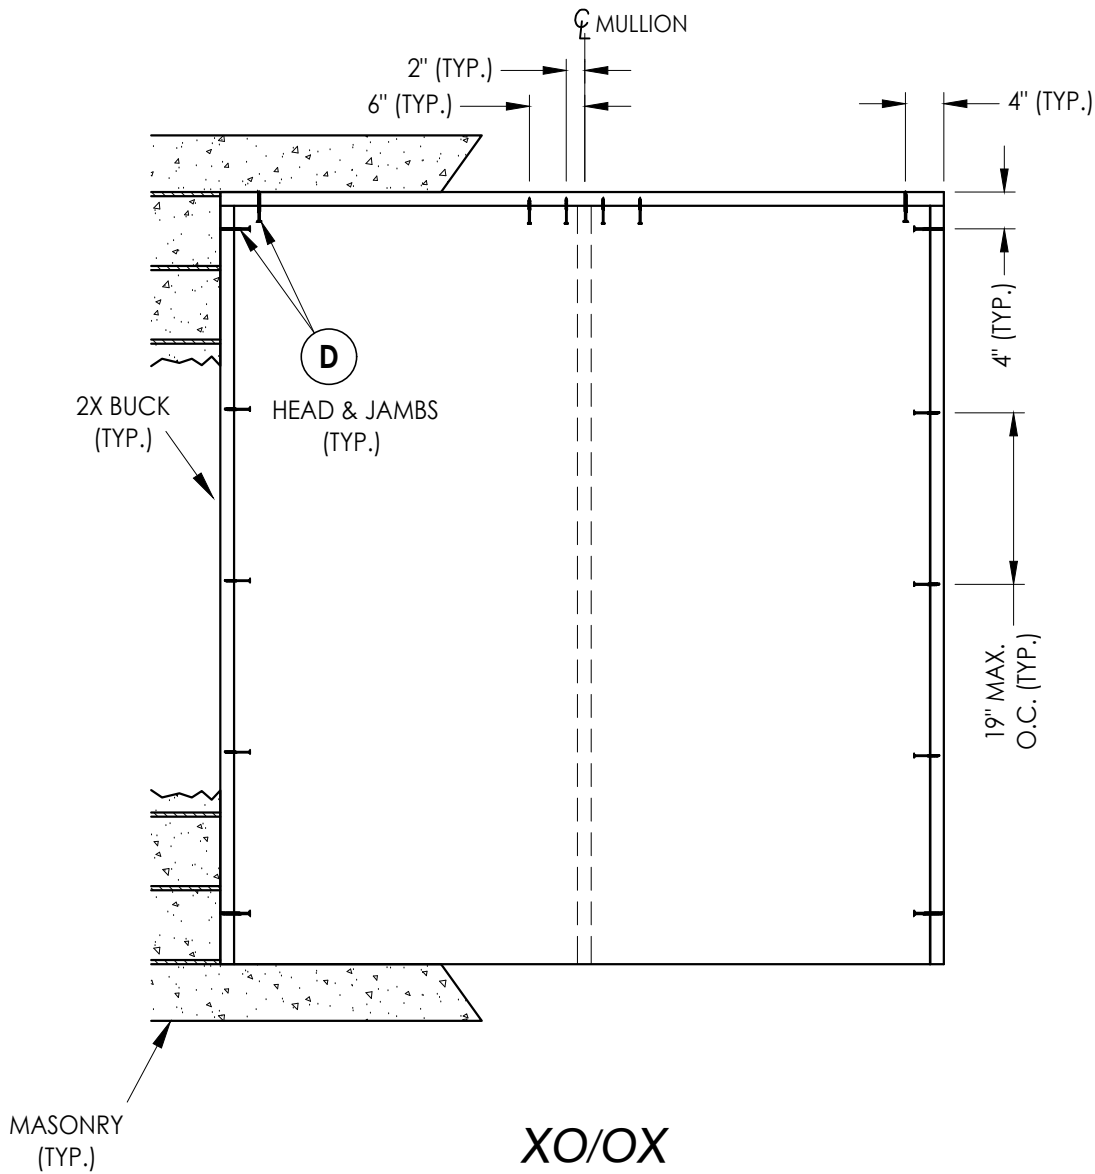

2X BUCK ANCHORING


DATE: 08/12/19	
SCALE: N.T.S.	
DWG. BY: RW	
CHK. BY: LFS	
DRAWING NO.: FL-30077.14	
SHEET	9 OF 14

NO.	DATE	REVISIONS
3	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	8/17/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	7/15/20	UPDATE TO 7th ED (2020) FBC PO
		BY

PRODUCT:	THERMA-TRU FIBERGLASS DOOR
	PART OR ASSEMBLY: BUCK ANCHORING

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409	RW BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813

Z:\2023 FBC Drawings\Therma-Tru\FL-30077 R3\FL-30077.13-15.dwg

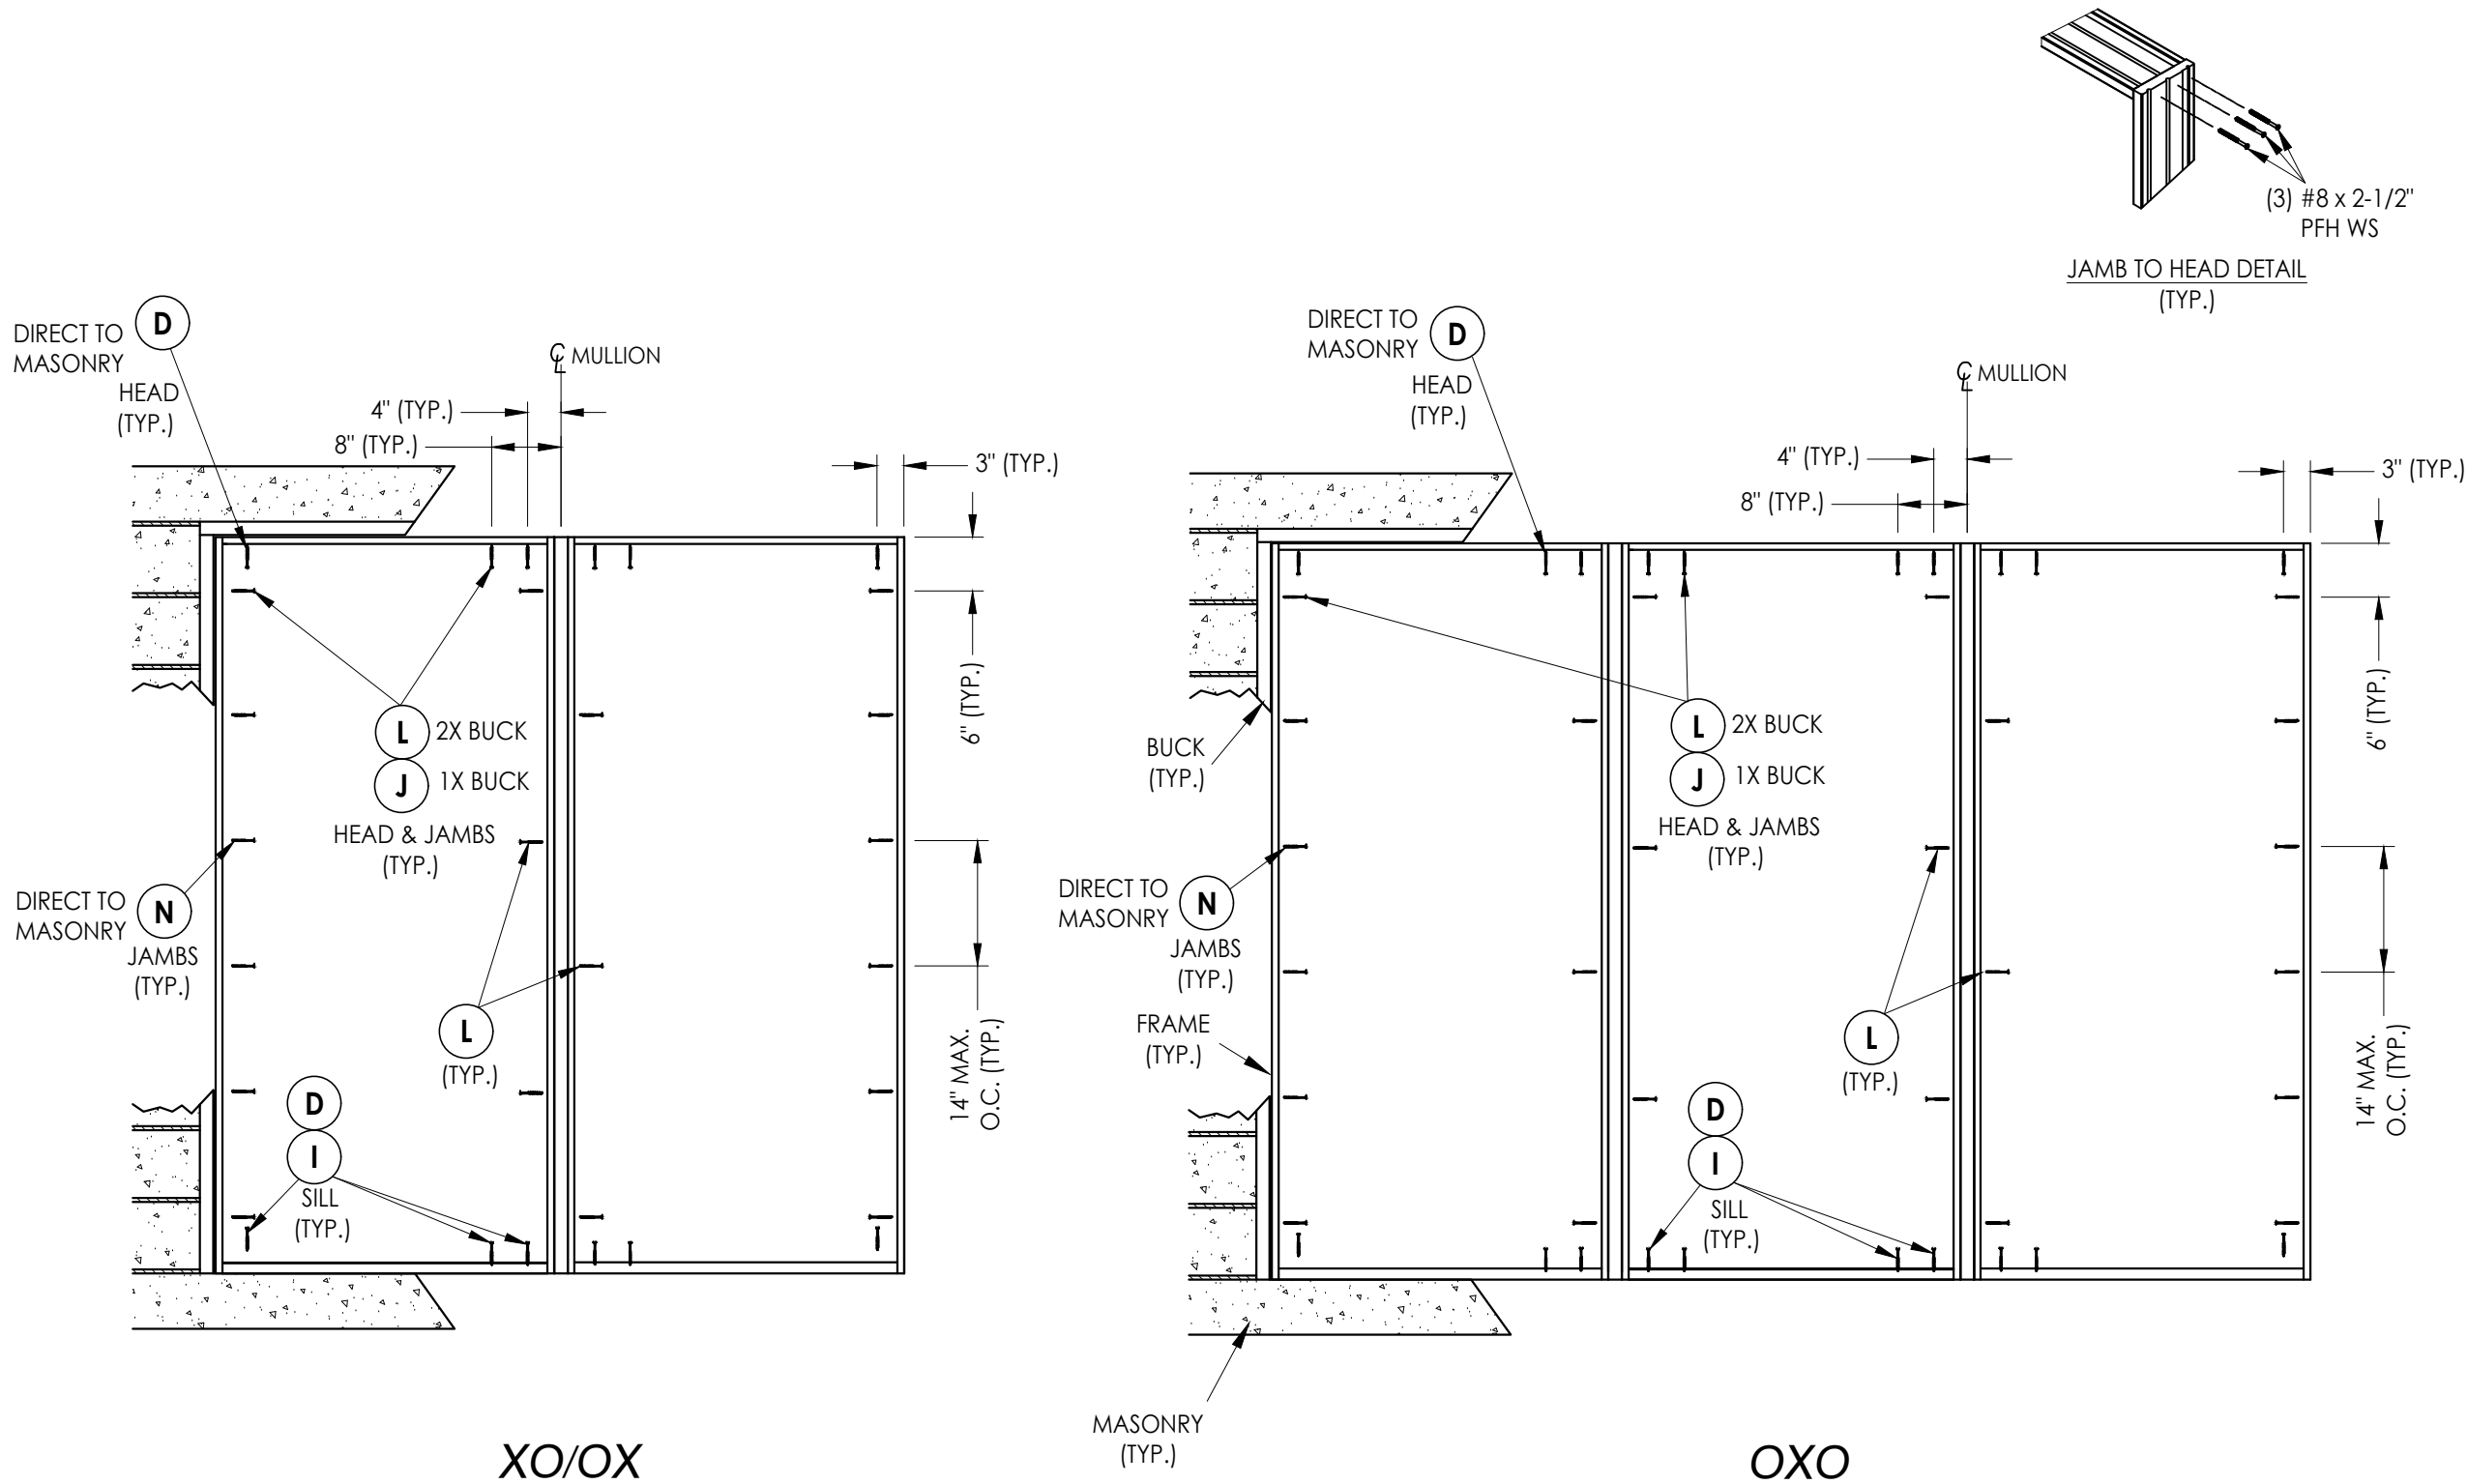

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
FRAME ANCHORING

NO.	DATE	REVISIONS
3	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	8/17/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	7/15/20	UPDATE TO 7th ED (2020) FBC PO
		BY

DATE: 08/12/19

SCALE: N.T.S.


DWG. BY: RW

CHK. BY: LFS


DRAWING NO.:
FL-30077.14

SHEET 10 OF 14


Z:\2023 FBC Drawings\Therma-Tru\FL-30077 R3\FL-30077.13-15.dwg

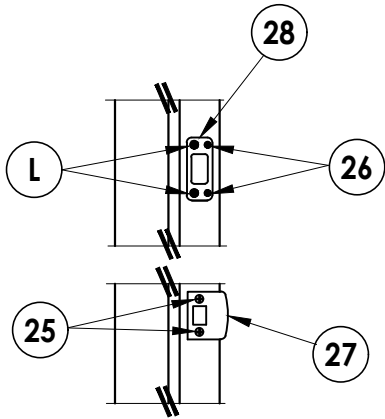


LATCH & DEADBOLT DETAIL
Kwikset

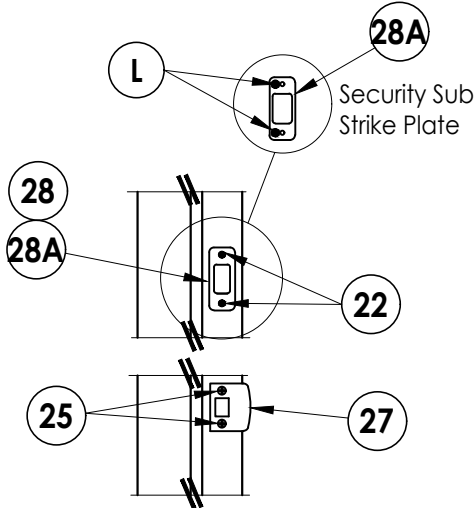


LATCH & DEADBOLT DETAIL
Schlage

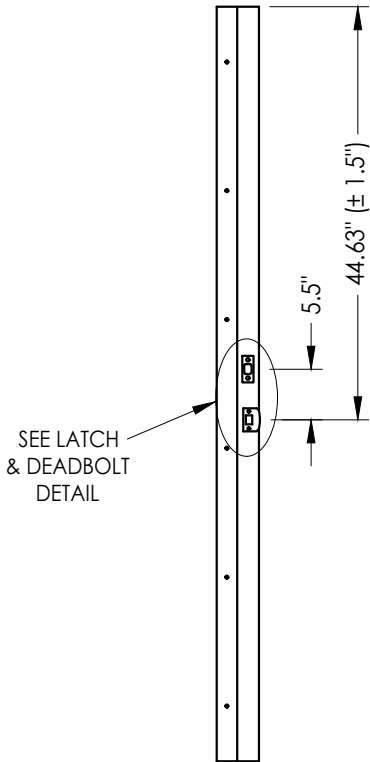


STRIKE JAMB
Latch and Deadbolt

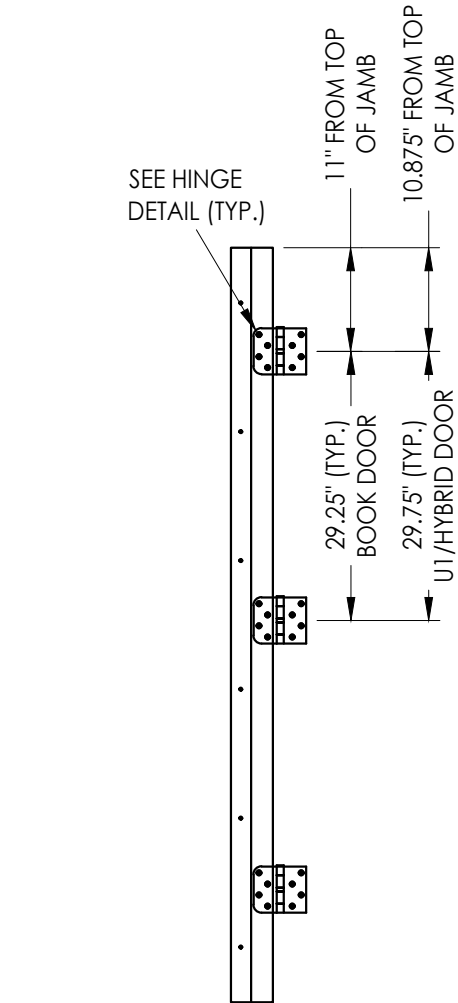


HINGE JAMB

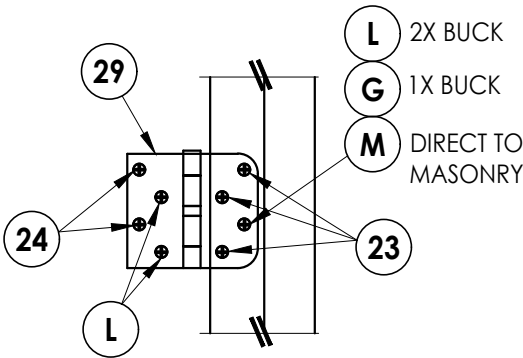


HINGE DETAIL

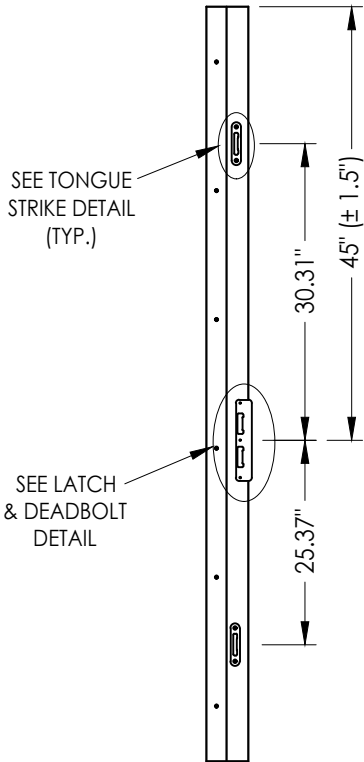

STRIKE JAMB
Multipoint Lock

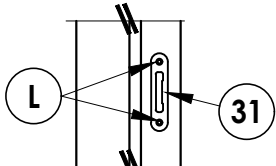

TONGUE STRIKE DETAIL
Multipoint Lock

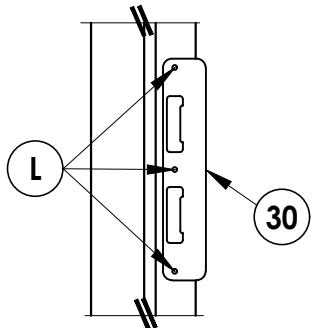

LATCH & DEADBOLT DETAIL
Multipoint Lock

MULTIPOINT LOCK STRIKE DETAILS

DATE: 08/12/19

SCALE: N.T.S.

DWG. BY: RW

CHK. BY: LFS

DRAWING NO.:

FL-30077.14

SHEET 11 OF 14

PRODUCT:

THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:

HARDWARE DETAILS

REVISIONS

Documents Prepared By:

Lyndon F. Schmidt
P.E. No. 43409


RW BUILDING CONSULTANTS, INC.

P.O. Box 230, Valrico, FL 33595


Phone No.: 813.659.9197

FBPE Registry No. 9813



Z:\2023 FBC Drawings\Therma-Tru\FL-30077 R3\FL-30077.13-15.dwg

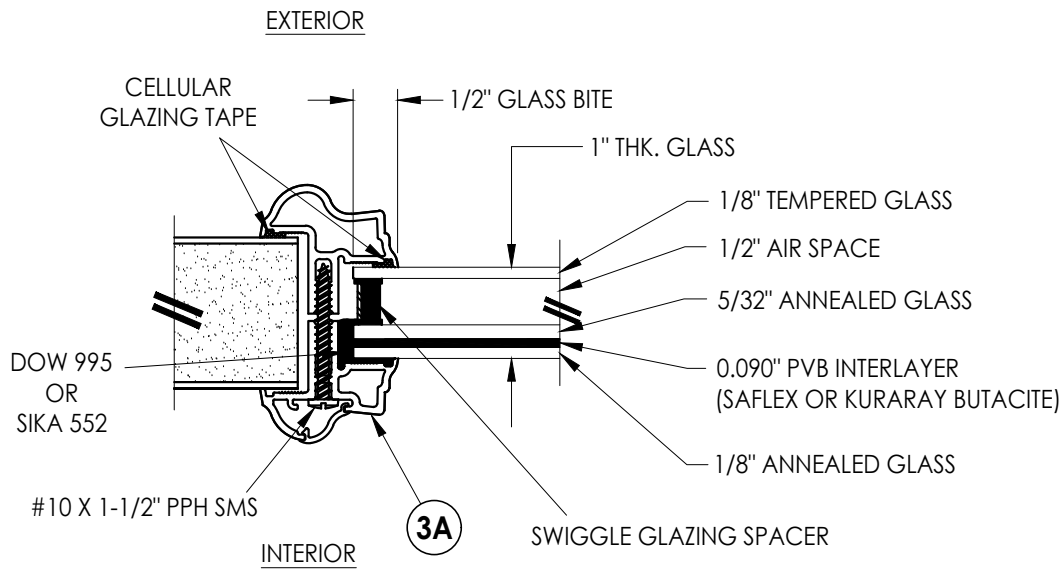


G1 GLAZING DETAIL
Aluminum Impact Lite Frame
Door Panels & Sidelites

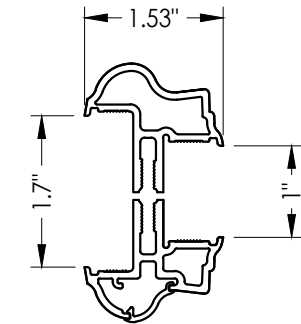


3A ALUMINUM FRAME
Aluminum Impact Lite Frame
Door Panels & Sidelites

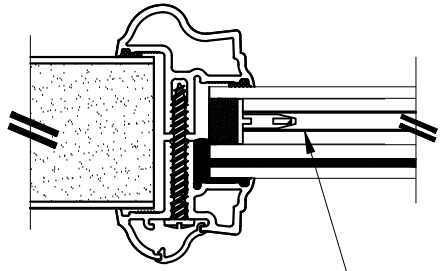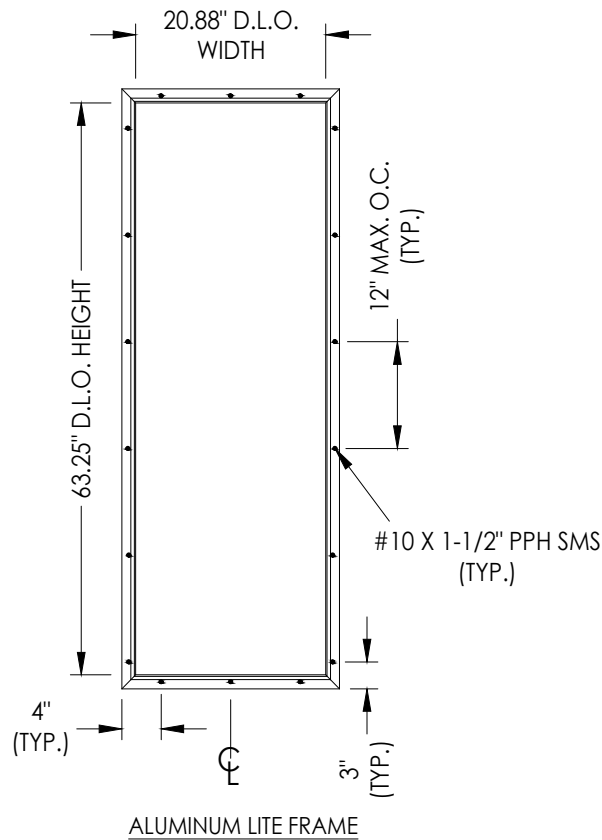


INTERNAL GRID (GBG)

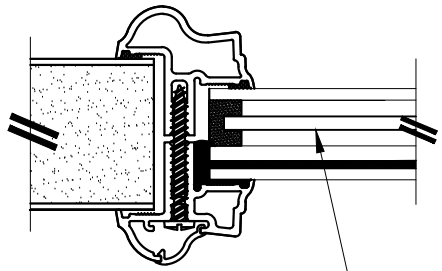

PRIVACY INSERT

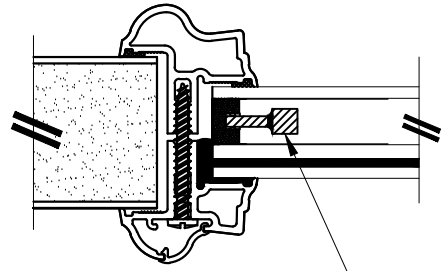

WROUGHT IRON INSERT

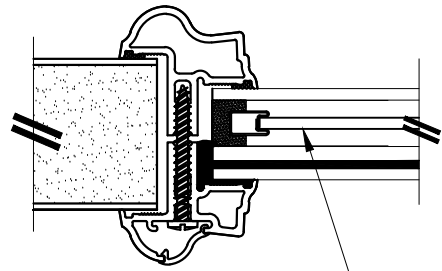

DECORATIVE INSERT

1" LAMINATED INSULATED IMPACT GLASS INSERT OPTIONS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:

GLAZING DETAILS

NO.	DATE	REVISIONS
3	7/01/26	UPDATE TO 9TH ED. (2026) FBC
2	8/17/23	UPDATE TO 8TH ED. (2023) FBC
1	7/15/20	UPDATE TO 7th ED (2020) FBC
NO.	DATE	BY

DATE: 08/12/19

SCALE: N.T.S.

DWG. BY: RW


CHK. BY: LFS

DRAWING NO.:


FL-30077.14

SHEET 12 OF 14


Z:\2023 FBC Drawings\Therma-Tru\FL-30077 R3\FL-30077.13-15.dwg

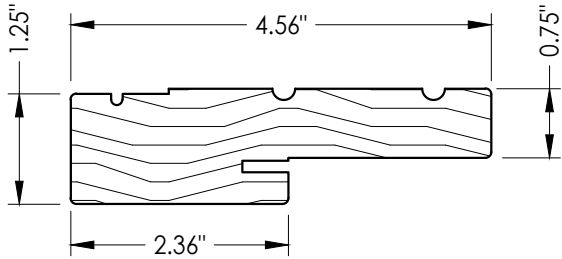


1 WOOD JAMB

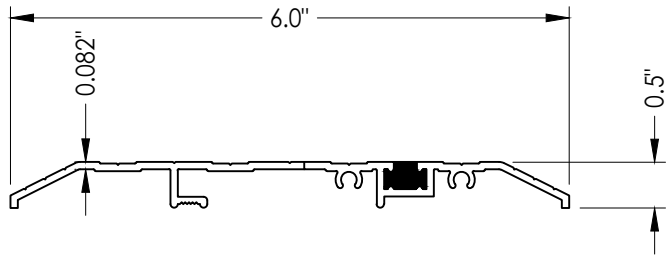


15 PUBLIC ACCESS THRESHOLD

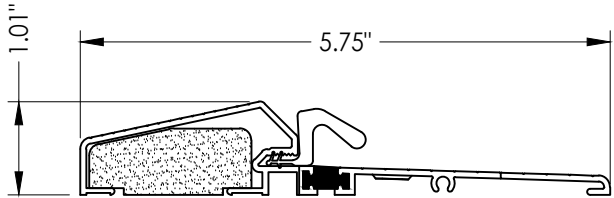


18 OUTSWING THRESHOLD
Composite / Aluminum Sill
(Thermal Break)

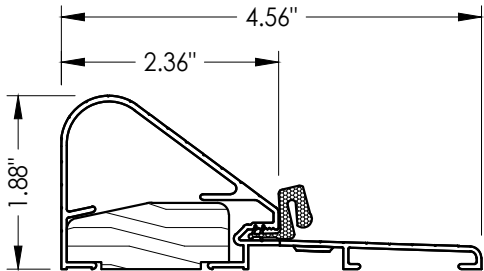


19 COASTAL OUTSWING THRESHOLD
Wood / Aluminum Sill

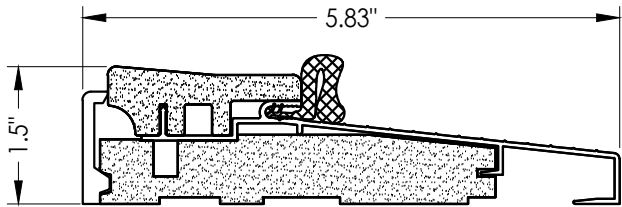


16 OUTSWING THRESHOLD
Composite Sill

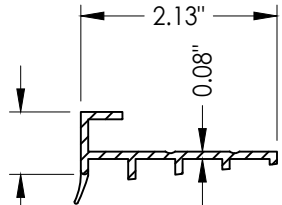

76 SIDELITE SPACER
Outswing

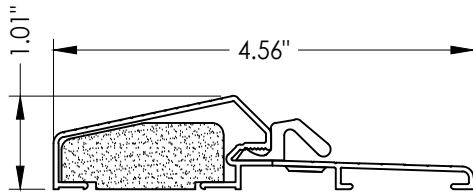

17 OUTSWING THRESHOLD
Composite / Aluminum Sill



10 SWEEP

REVISIONS			
NO.	DATE	BY	DESCRIPTION
3	7/01/26	LFS	UPDATE TO 9TH ED. (2026) FBC
2	8/17/23	LFS	UPDATE TO 8TH ED. (2023) FBC
1	7/15/20	PO	UPDATE TO 7th ED (2020) FBC

DATE: 08/12/19

SCALE: N.T.S.

DWG. BY: RW

CHK. BY: LFS

DRAWING NO.: FL-30077.14

SHEET 13 OF 14

PRODUCT:	
THERMA-TRU FIBERGLASS DOOR	
PART OR ASSEMBLY:	
COMPONENTS	

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Therma-Tru\FL-30077 R3\FL-30077.13-15.dwg

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (SG >= 0.42)	WOOD
B	2X BUCK (SG >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
G	3/16" X 3-1/4" ITW CONCRETE SCREW	STEEL
I	1/4" X 1-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
J	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL
M	3/16" X 2-1/4" ITW CONCRETE SCREW	STEEL
N	3/16" X 2-3/4" ITW CONCRETE SCREW	STEEL
1	JAMB (FINGER JOINT PINE)	WOOD
6	WEATHERSTRIP (MEDIUM REACH)	FOAM
7	WEATHERSTRIP (LONG REACH)	FOAM
10	SWEEP (USE W/ PUBLIC ACCESS THRESHOLD)	VINYL
15	PUBLIC ACCESS THRESHOLD	ALUM
16	OUTSWING THRESHOLD	ALUM/COMP
17	OUTSWING THRESHOLD	ALUM/COMP
18	OUTSWING THRESHOLD	ALUM/COMP
19	COASTAL OUTSWING THRESHOLD	ALUM/WOOD
22	#8 X 3/4" PFH WOOD SCREW	STEEL
23	#10 X 3/4" PFH WOOD SCREW	STEEL
24	#10 X 1" PFH WOOD SCREW	STEEL

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
25	#8 X 2-1/2" PFH WOOD SCREW	STEEL
26	#8 X 5/8" PFH WOOD SCREW	STEEL
27	LATCH STRIKE PLATE	STEEL
28	DEADBOLT STRIKE PLATE	STEEL
28A	DEADBOLT SUB STRIKE PLATE	STEEL
29	4" X 4" HINGE	STEEL
30	LATCH & DEADBOLT STRIKE PLATE (TONGUE SYSTEM)	ALUM/COMP
31	MULTIPOINT STRIKE PLATE (TONGUE SYSTEM)	ALUM/COMP
40	DOOR PANEL (BOOK)	-
41	DOOR PANEL (HYBRID)	-
42	DOOR PANEL (U1)	-
50	SIDELITE	-
76	SIDELITE SPACER (OUTSWING)	PVC
88	2X MULLION (SG >= 0.55)	WOOD

CORROSION RESISTANCE - SALTWATER ENVIRONMENTS
Fasteners & connectors in areas within 3000 ft (914 m) of a saltwater coastline shall comply with FBC Sections 1711.1 or R332.1.

CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON+®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	AS SHOWN	1-1/2"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: THERMA-TRU FIBERGLASS DOOR		PART OR ASSEMBLY: BILL OF MATERIALS	
		LFS	
		FBC	
	UPDATE TO 9TH ED. (2026)	FBC	
3	7/01/26		
		LFS	
		FBC	
	UPDATE TO 8TH ED. (2023)	FBC	
2	8/17/23		
		FBC	
		FBC	
	UPDATE TO 7th ED (2020)	FBC	
1	7/15/20		
	NO. DATE		
REVISIONS			
DATE: 08/12/19			
SCALE: N.T.S.			
DWG. BY: RW			
CHK. BY: LFS			
DRAWING NO.: FL-30077.14			
SHEET 14 OF 14			