



Vinyl Designers Single Slider
71 1/2" x 71 1/2" Overall Frame Size
Thru-Frame Installation / Non-Impact

TEST REPORT SUMMARY:

- MAXIMUM OVERALL COMBINATION FRAME SIZE:
71 1/2" (1816mm) x 71 1/2" (1816mm)
- OVERALL DESIGN PRESSURE: ± 25.06 psf
- STRUCTURAL TEST PRESSURE: ± 37.59 psf
- RATING: **LC-PG25**

CCL Listing #448-H-005.30-.34	ELEMENT TEST REPORT #: ESP031818P-2467		
Vinyl Designers Single Slider Thru-Frame Installation / WDMA Instructions / Non-Impact			
SHEET: 1 OF 2		UPDATED: 1/06/2020	DRAWN BY: B.K.

INSTALLATION NOTES:



1. USE 2" x PINE FOR WOOD BUCK
2. PLACE WOOD SHIMS EVERY 6-10"
3. 1/4" MAXIMUM SHIM SPACE AT HEAD, SILL AND EACH JAMB
4. INSTALL #8 X 1-1/4" PPH GALVANIZED SCREWS THROUGH THE FRAME SPACED 102MM (4") FROM EACH CORNER AND 292MM-381MM (11-1/2"- 15") ON CENTER AT THE SIDES, AND 356MM (14") ON CENTER AT THE HEAD AND SILL INTO THE FRAMING MATERIAL.
5. BACKER ROD WITH A CONTINUOUS CAP BEAD OF SILICONE SEALANT BETWEEN THE FRAME AND THE ROUGH OPENING AROUND THE ENTIRE PERIMETER OF THE UNIT.
6. 1" MINIMUM FASTENER EMBEDMENT INTO FRAMING MATERIAL
7. MAXIMUM WINDOW SIZE: B.U.S. (Basic Unit Size) =
71 1/2" (1816mm) x 71 1/2" (1816mm)

GENERAL INSTALLATION NOTES:

- Check rough opening for proper size, plumb, level and square.
- Make all necessary adjustments to ensure rough opening is plumb, level & square.
- Sill must be flat, level and capable of supporting the weight of the unit.
- Opening must allow a maximum of 1/4" shim space at head, sill and jambs.
- Wood buck, framing, fasteners, sealant and all wall system materials are provided by others

FLASHING

- For units that have to meet a specific DP (Design Pressure) rating, any kind of building wrap must be folded and taped away from each rough opening before the unit is installed. Unit must come in contact with the building's bare sheathing. A bead of silicone must be applied to the backside of the nail fin where it meets the unit, at head and jambs.
- Once unit is installed and flashed properly, the building wrap must be reapplied and trimmed flush with the unit's exterior. A bead of sealant must be placed along the seam joint of the building wrap and the unit. Tape the corner cuts in the building wrap.

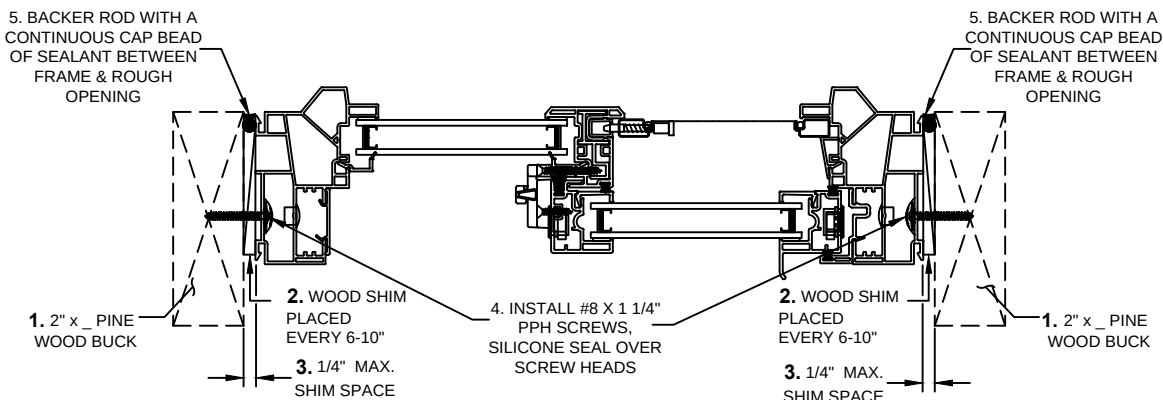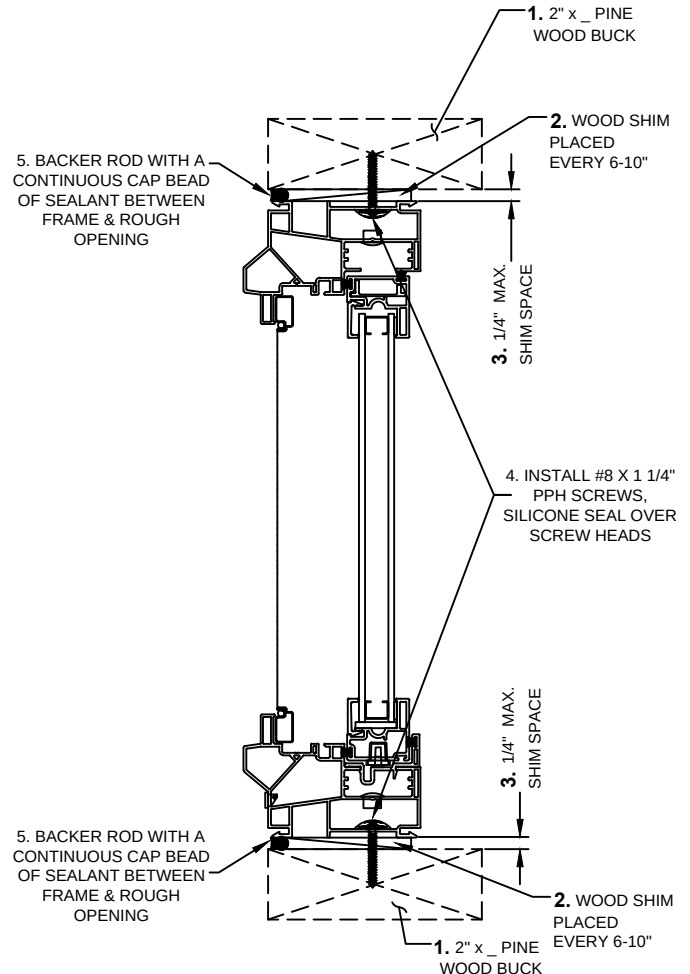

Installation requirements may vary in particular locations and in other types of construction. Proper installation is essential, and Sierra Pacific Windows, recommends consultation with an AAMA Certified Installer, or other qualified, registered building professional before installation of any Sierra Pacific product. Proper installation of Sierra Pacific products is the responsibility of the installer. Sierra Pacific is not responsible for proper installation. Sierra Pacific is not responsible for the design of, conditions in, or performance of building construction beyond the perimeters of the Sierra Pacific units. Sierra Pacific is not responsible for proper integration of the Sierra Pacific units with the weather-repellent systems of the building.



Vinyl Designers Single Slider
71 1/2" x 71 1/2" Overall Unit Frame Size
Thru-Frame Installation / Non-Impact

TEST REPORT SUMMARY:

- MAXIMUM OVERALL COMBINATION FRAME SIZE:
71 1/2" (1816mm) x 71 1/2" (1816mm)
- OVERALL DESIGN PRESSURE: ± 25.06 psf
- STRUCTURAL TEST PRESSURE: ± 37.59 psf
- RATING: LC-PG25

CCL Listing #448-H-005.30-.34


ELEMENT TEST REPORT #: **ESP031818P-2467**

Vinyl Designers Single Slider
Thru-Frame Installation / WDMA Instructions / Non-Impact

SHEET: 2 OF 2

UPDATED: 1/06/2020

DRAWN BY: B.K.

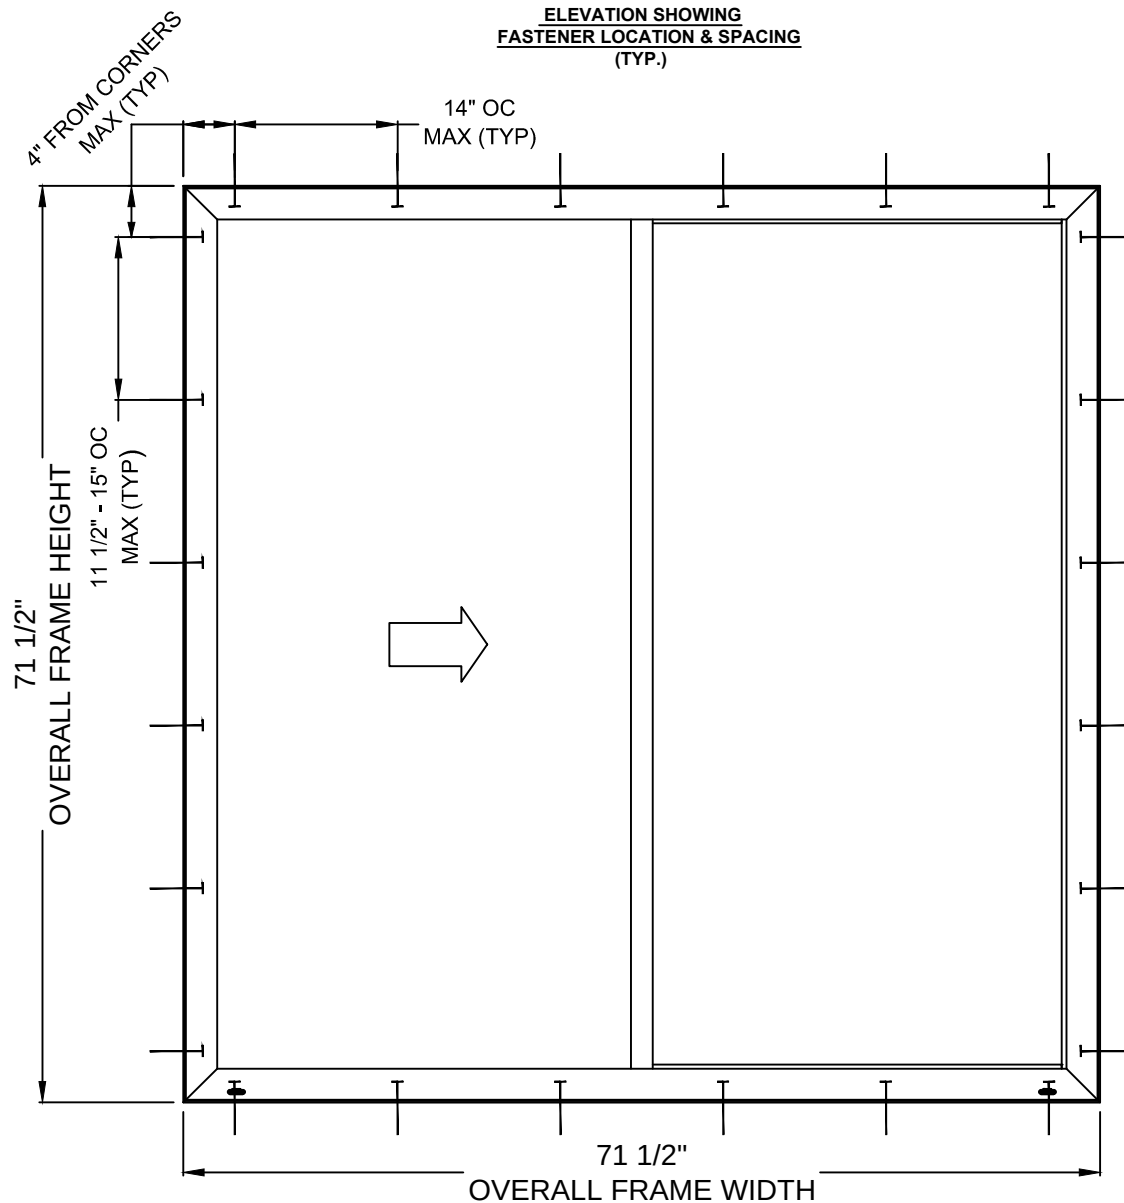

Installation requirements may vary in particular locations and in other types of construction. Proper installation is essential, and Sierra Pacific Windows, recommends consultation with an AAMA Certified Installer, or other qualified, registered building professional before installation of any Sierra Pacific product. Proper installation of Sierra Pacific products is the responsibility of the installer. Sierra Pacific is not responsible for proper installation. Sierra Pacific is not responsible for the design of, conditions in, or performance of building construction beyond the perimeters of the Sierra Pacific units. Sierra Pacific is not responsible for proper integration of the Sierra Pacific units with the weather-repellent systems of the building.