NOTES:

1. NON–IMPACT RESISTANT GLAZING OPTION – .090" MINIMUM SSB GLAZING IN MOLDED FRAMES INSTALLED IN TOP OR INTERMEDIATE SECTION (WITH OR WITHOUT DECORATIVE INSERTS) MEETS UNIFORM STATIC WIND PRESSURES SHOWN ON THIS DRAWING. GLAZING IS NOT IMPACT RESISTANT AND DOES NOT MEET THE REQUIREMENTS FOR WIND–BORNE DEBRIS REGIONS. SEE PAGE 2 FOR DETAIL.

2. IMPACT RESISTANT GLAZING OPTION – 1/4" POLYCARBONATE IN ALUMINUM FRAMES INSTALLED IN TOP OR INTERMEDIATE SECTION (WITH OR WITHOUT DECORATIVE INSERTS) MEETS UNIFORM STATIC WIND PRESSURES SHOWN ON THIS DRAWING. GLAZING IS IMPACT RESISTANT AND DOES MEET THE REQUIREMENTS FOR WIND–BORNE DEBRIS REGIONS. SEE PAGE 2 FOR DETAIL.

3. VINYL OR WOOD DOOR STOP NAILED USING 6D NAILS AT A MAXIMUM OF 6" O.C. MUST OVERLAP TOP AND BOTH ENDS OF PANELS MINIMUM 7/16" TO MEET NEGATIVE PRESSURES.

4. SLIDE LOCK OR LOCK BAR LOCK REQUIRED.

5. LOUVER OPTION – .040" MINIMUM LOUVERS IN MOLDED FRAMES SCREWED TOGETHER WITH A MINIMUM OF (10) #8x1" SCREWS (3X ALONG THE HORIZONTAL AND 2X ALONG THE VERTICAL) INSTALLED IN THE BOTTOM SECTION. MAXIMUM LOUVER DIMENSIONS SHALL BE 15" x 19" CUTOUT. LOUVERS ARE NOT IMPACT RESISTANT AND DO NOT MEET THE REQUIREMENTS FOR WIND–BORNE DEBRIS REGIONS.

6. FACER STEEL TO HAVE A MINIMUM 29 GA THICKNESS AND BACKER STEEL TO HAVE A MINIMUM 29 GA THICKNESS.

7. THE DESIGN OF THE SUPPORTING STRUCTURAL ELEMENTS SHALL BE THE RESPONSIBILITY OF THE PROFESSIONAL OF RECORD FOR THE BUILDING OR STRUCTURE AND IN ACCORDANCE WITH CURRENT BUILDING CODES FOR THE LOADS LISTED ON THIS DRAWING.

8. DOOR JAMB TO BE MINIMUM 2x4 STRUCTURAL GRADE LUMBER. REFER TO JAMB CONNECTION SUPPLEMENT FOR ATTACHMENT TO SUPPORTING STRUCTURE.

9. FOR LOW HEAD ROOM LIFT CONDITIONS, TOP BRACKET SHALL BE A 13 GA LHR 7/4 TOP BRACKET WITHOUT PUSHNUTS AND WITH A MINIMUM OF (3) 1/4–14x7/8" SELF DRILLING CRIMPTITE SCREWS IN LIEU OF THE BRACKET SHOWN ON THIS DRAWING. U–BAR ON TOP SECTION SHALL BE INSTALLED ON TOP OF LHR TOP BRACKETS.

10. THE DOORS ARE DESIGNED AND MANUFACTURED TO COMPLY WITH THE 2018 IRC AND THE 2018 IBC.

11. PROFESSIONAL ENGINEER SEAL PROVIDED FOR VERIFICATION OF WIND LOAD CONSTRUCTION DETAIL.

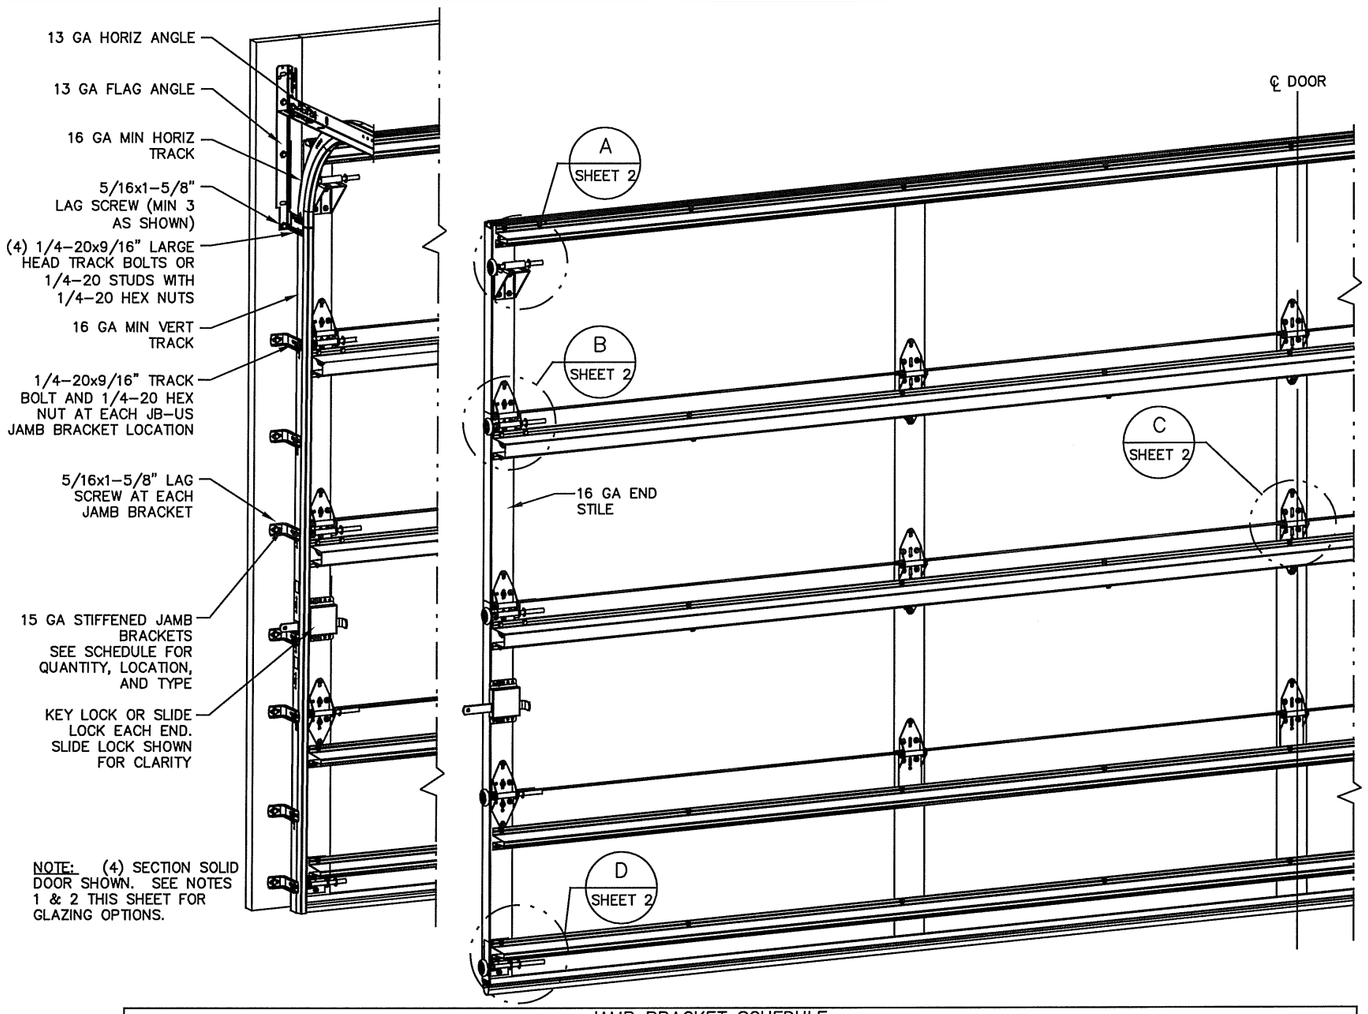

JAMB BRACKET SCHEDULE

DOOR HEIGHT	NO. OF SECTIONS	NO. OF JAMB BRACKETS (EACH JAMB)	LOCATION OF CENTERLINE OF JAMB BRACKETS MEASURED FROM BOTTOM OF TRACK (ALL DIMENSIONS ± 2")
6'–6"	4	7	2" (JB–US), 10" (JB–US), 21–3/4" (JB–US), 29–3/4" (JB–US), 39" (JB–US), 48" (JB–US), 57–1/4" (JB–US)
7'–0"	4	7	2" (JB–US), 10" (JB–US), 21–3/4" (JB–US), 29–3/4" (JB–US), 42" (JB–US), 52–1/2" (JB–US), 63–1/4" (JB–US)
7'–6"	4 OR 5	8	2" (JB–US), 10" (JB–US), 18–3/4" (JB–US), 26–3/4" (JB–US), 36" (JB–US), 45" (JB–US), 54–1/4" (JB–US), 74–1/2" (JB–US)
8'–0"	4 OR 5	8	2" (JB–US), 10" (JB–US), 21–3/4" (JB–US), 29–3/4" (JB–US), 39" (JB–US), 48" (JB–US), 57–1/2" (JB–US), 75–1/2" (JB–US)
> 8'–0"			SEE NOTE BELOW

NOTE:
(JB–US) FOLLOWING DIMENSION DENOTES SLOTTED JAMB BRACKET ATTACHED TO TRACK WITH 1/4–20x9/16" TRACK BOLT AND NUT AS SHOWN ABOVE.

ALL DOORS GREATER THAN 8' IN HEIGHT REQUIRE USE OF CONTINUOUS WALL ANGLE. SEE SUPPLEMENT TRACK CHART FOR DETAILS.

SUPERIMPOSED DESIGN PRESSURE LOADS ON SUPPORTING STRUCTURE

DOOR WIDTH	DOOR HEIGHT	UNIFORM LOAD EACH JAMB (PLF)
14'–2"	ALL	+212.5/–237.3
15'–2"	ALL	+227.5/–254.0
16'–2"	ALL	+242.5/–270.8

DWAYNE J KORNISH
LICENSE
No. 77945
STATE OF FLORIDA
PROFESSIONAL ENGINEER

12/10/2024

DWAYNE J. KORNISH, PE
4576 COUNTY ROAD 160
MOUNT HOPE, OHIO
FL PE 77945
TX PE 117868

PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR VERIFICATION OF WINDLOAD CONSTRUCTION DETAILS.

REVISIONS

– NEW MODELS PER WL014
SW 10/20/2024

The Genuine. The Original.
OVERHEAD DOOR®

A DIVISION OF OVERHEAD DOOR CORP
3395 ADDISON DRIVE
PENSACOLA, FLORIDA 32514
(850) 474–9890

STATIC PRESSURE RATINGS	APPROVED SIZES	SCALE: N.T.S.		SIZE: A
DESIGN (PSF): +30.00/–33.50	MAX WIDTH: 16'–2"		DATE	NAME
TEST (PSF): +45.00/–50.25	MAX HEIGHT: 24'–0"	DRAWN	10/20/24	SW
IMPACT/CYCLIC RATED (YES/NO): YES	MAX SECTION HEIGHT: 24"	CHECKED	–	TLC

MODELS 160/190/490/593/594/591/592/596/599/5740/5760/7560

SHEET 1 OF 3

WINDLOAD SPECIFICATION OPTION CODE 2247

DRAWING PART NO. 412864

REV. –

12 GA COMMERCIAL TOP FRAME BRACKET WITH 13 GA ROLLER CARRIER ATTACHED WITH (4) 1/4–20x3/4" SELF DRILLING SCREWS



DETAIL A

ADD (2) 1/4–14x7/8" SELF DRILLING CRIMPTITE SCREWS (INSIDE OF EACH INSIDE END HINGE)

2" STEEL ROLLER AND 7/16" PUSH NUT AT EACH ROLLER LOCATION. 1/4" MAX BETWEEN PUSH NUT AND OUTER HINGE. OPTIONAL NYLON, 10/11–BALL BEARING ROLLER AVAILABLE

WIDE BODY END HINGE EACH ATTACHED WITH (4) 1/4–14x7/8" SELF DRILLING CRIMPTITE SCREWS
#1 IS 14 GA
#2 AND HIGHER IS 13 GA



DETAIL B

14 GA WIDE BODY INTERMEDIATE HINGE ATTACHED WITH (4) 1/4–14x7/8" SELF DRILLING CRIMPTITE SCREWS



DETAIL C

14 GA BOTTOM BRACKET ATTACHED WITH (3) 1/4–14x7/8" SELF DRILLING CRIMPTITE SCREWS



2" 20GA STEEL STRIP WITH VHB TAPE ADHERED TO EACH SECTION, LINED UP WITH CENTER HINGES

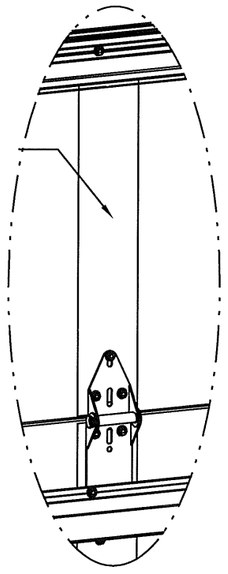

HINGE LOCATIONS

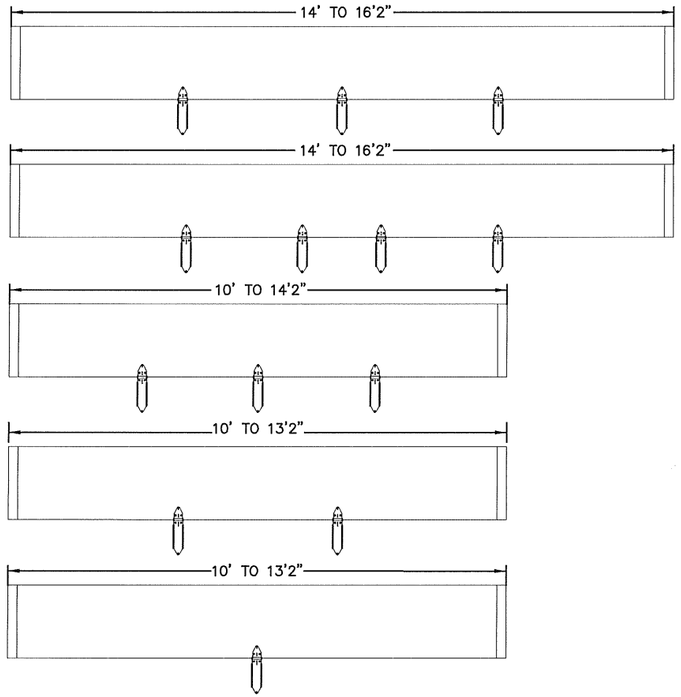

(10) SECTION DOORS WITH
(3) 3" 18 GA 80 KSI U–BARS
(8) 4" 18 GA 60 KSI U–BARS
LOCATED AS SHOWN

(9) SECTION DOORS WITH
(3) 3" 18 GA 80 KSI U–BARS
(7) 4" 18 GA 60 KSI U–BARS
LOCATED AS SHOWN

(8) SECTION DOORS WITH
(3) 3" 18 GA 80 KSI U–BARS
(6) 4" 18 GA 60 KSI U–BARS
LOCATED AS SHOWN

(7) SECTION DOORS WITH
(3) 3" 18 GA 80 KSI U–BARS
(5) 4" 18 GA 60 KSI U–BARS
LOCATED AS SHOWN

(6) SECTION DOORS WITH
(3) 3" 18 GA 80 KSI U–BARS
(4) 4" 18 GA 60 KSI U–BARS
LOCATED AS SHOWN

(5) SECTION DOORS WIT3
(3) 3" 18 GA 80 KSI U–BARS
(3) 4" 18 GA 60 KSI U–BARS
LOCATED AS SHOWN

(4) SECTION DOORS WITH
(3) 3" 18 GA 80 KSI U–BARS
(2) 4" 18 GA 60 KSI U–BARS
LOCATED AS SHOWN

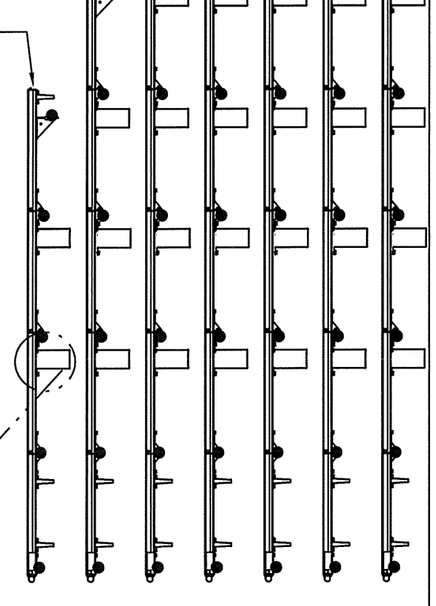

ALL U–BARS SHALL BE ATTACHED WITH (2) 1/4–14x7/8" SELF DRILLING CRIMPTITE SCREWS AT EACH HINGE LOCATION AND BETWEEN ALL END HINGES AND INTERMEDIATE HINGES. A MINIMUM OF (12) FASTENERS ARE TO BE USED.

DWAYNE J KORNISH
LICENSE
No. 77945
STATE OF FLORIDA
PROFESSIONAL ENGINEER

12/10/2024

DWAYNE J. KORNISH, PE
4576 COUNTY ROAD 160
MOUNT HOPE, OHIO
FL PE 77945
TX PE 117868

PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR VERIFICATION OF WINDLOAD CONSTRUCTION DETAILS.

The Genuine. The Original.

OVERHEAD DOOR®

A DIVISION OF OVERHEAD DOOR CORP
3395 ADDISON DRIVE
PENSACOLA, FLORIDA 32514
(850) 474–9890

STATIC PRESSURE RATINGS		APPROVED SIZES		SCALE: N.T.S.		SIZE: A
DESIGN (PSF):	+30.00/–33.50	MAX WIDTH:	16'–2"		DATE	NAME
TEST (PSF):	+45.00/–50.25	MAX HEIGHT:	24'–0"	DRAWN	10/20/24	SW
IMPACT/CYCLIC RATED (YES/NO):	YES	MAX SECTION HEIGHT:	24"	CHECKED	–	TLC
MODELS 160/190/490/593/594/591/592/596/599/5740/5760/7560				SHEET 2 OF 3		
WINDLOAD SPECIFICATION OPTION CODE 2247				DRAWING PART NO. 412864		REV. –

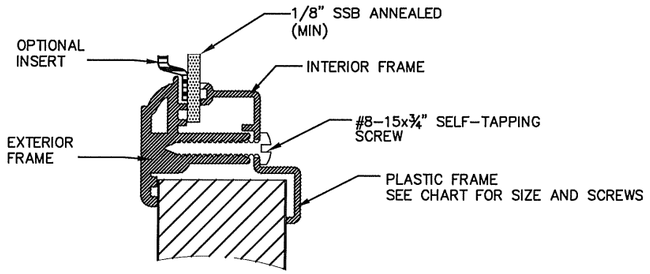

DETAIL H
NON-IMPACT GLAZING

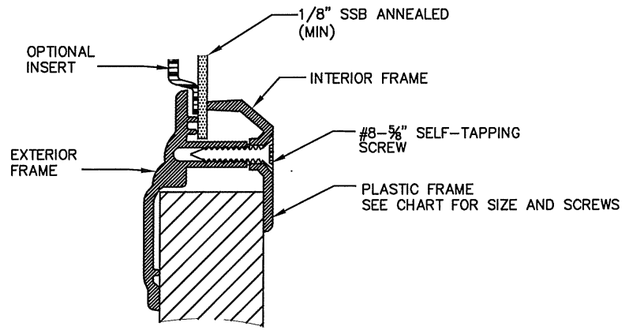

DETAIL I
NON-IMPACT GLAZING

OUTSIDE FRAME SIZE	DAYLIGHT OPENING (DLO)	SCREW QTY EA HORIZ LEG	SCREW QTY EA VERT LEGS	SCREW QTY TOTAL	DETAIL
17"X51"	14X48	5	3	16	H
15.1X44"	11.5"X40.5"	8	3	22	I
14.9X20.8"	11"X17"	3	3	12	I
7"X40.8	4"X37.8"	5	2	14	I
15.3"X44.1"	11.3"X40.1"	6	3	18	J
14.6"X20.8"	10.6"X16.8"	3	2	10	J
13"X38"	9"X34"	5	2	14	J

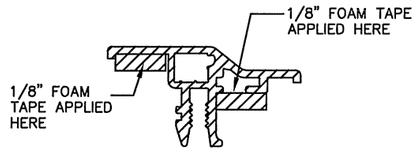

ALUMINUM FRAME
(STATIC RATED ALTERNATE FRAME OPTION)

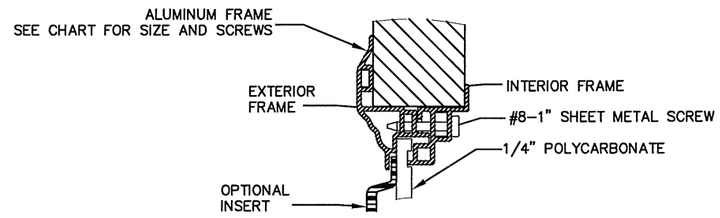

DETAIL J
IMPACT GLAZING

DWAYNE J KORNISH
LICENSE
No. 77945
STATE OF
FLORIDA
PROFESSIONAL ENGINEER

12/10/2024

DWAYNE J. KORNISH, PE
4576 COUNTY ROAD 160
MOUNT HOPE, OHIO
FL PE 77945
TX PE 117868

PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR VERIFICATION OF WINDLOAD CONSTRUCTION DETAILS.

The Genuine. The Original.
OVERHEAD DOOR®

A DIVISION OF OVERHEAD DOOR CORP
3395 ADDISON DRIVE
PENSACOLA, FLORIDA 32514
(850) 474–9890

STATIC PRESSURE RATINGS		APPROVED SIZES		SCALE: N.T.S.		SIZE: A
DESIGN (PSF):	+30.00/33.50	MAX WIDTH:	16'–2"		DATE	NAME
TEST (PSF):	+45.00/–50.25	MAX HEIGHT:	24'–0"	DRAWN	10/20/24	SW
IMPACT/CYCLIC RATED (YES/NO):	YES	MAX SECTION HEIGHT:	24"	CHECKED	–	TLC

MODELS 160/190/490/593/594/591/592/596/599/5740/5760/7560

SHEET 3 OF 3

WINDLOAD SPECIFICATION OPTION CODE 2247

DRAWING PART NO. 412864

REV. –