

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER MASONRY/CONCRETE IS OPTIONAL.
4. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2” UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
5. WHERE WOOD BUCK THICKNESS IS 1–1/2” OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS.
6. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
7. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
8. FOR FIN INSTALLATION SHIM AS NEEDED. FOR FRAME INSTALLATION SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.
9. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
10. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
11. FRAME MATERIAL: EXTRUDED RIGID PVC.
12. UNITS MUST BE GLAZED PER ASTM E1300–04/09, SEE SHEET 14 FOR GLASS DETAILS.
13. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
14. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #12 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

15. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 1/4” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #12 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. ALL FASTENERS TO BE CORROSION RESISTANT.
18. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - C. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
 - D. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI OR ALUMINUM 6063–T5 FU=30KSI .048” THICK MINIMUM

SIGNED: 02/05/2018

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2 – 4	ELEVATIONS
5 – 13	INSTALLATION DETAILS
14	P–HOOK INSTALLATION DETAILS AND GLAZING DETAIL

VIWIN TECH WINDOWS AND DOORS
2400 IRVIN COBB DRIVE
PADUCAH, KY 42003

GRAND VISTA SLIDING DOOR
IMPACT
NOTES

DRAWN:
A.R.

DWG NO.
08–03195


REV
–

SCALE NTS


DATE 11/07/17

SHEET 1 OF 14


L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com

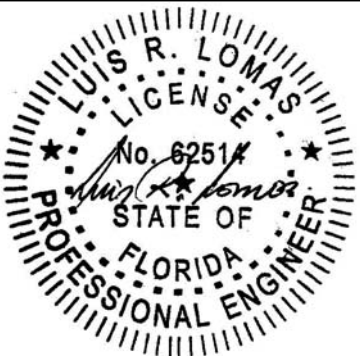

Luis R. Lomas P.E.
FL No.: 62514

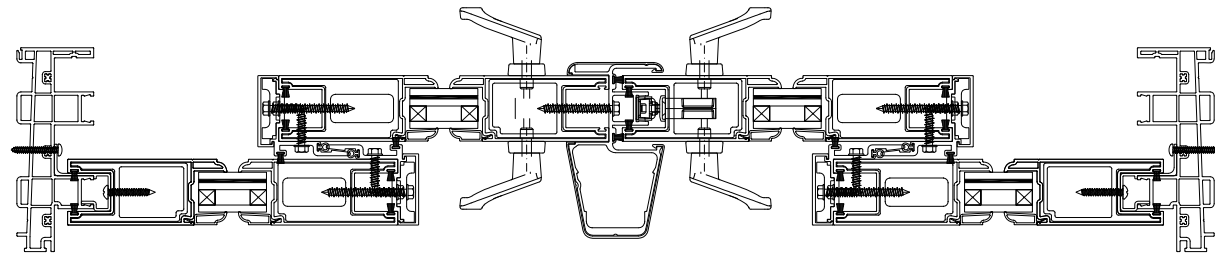

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

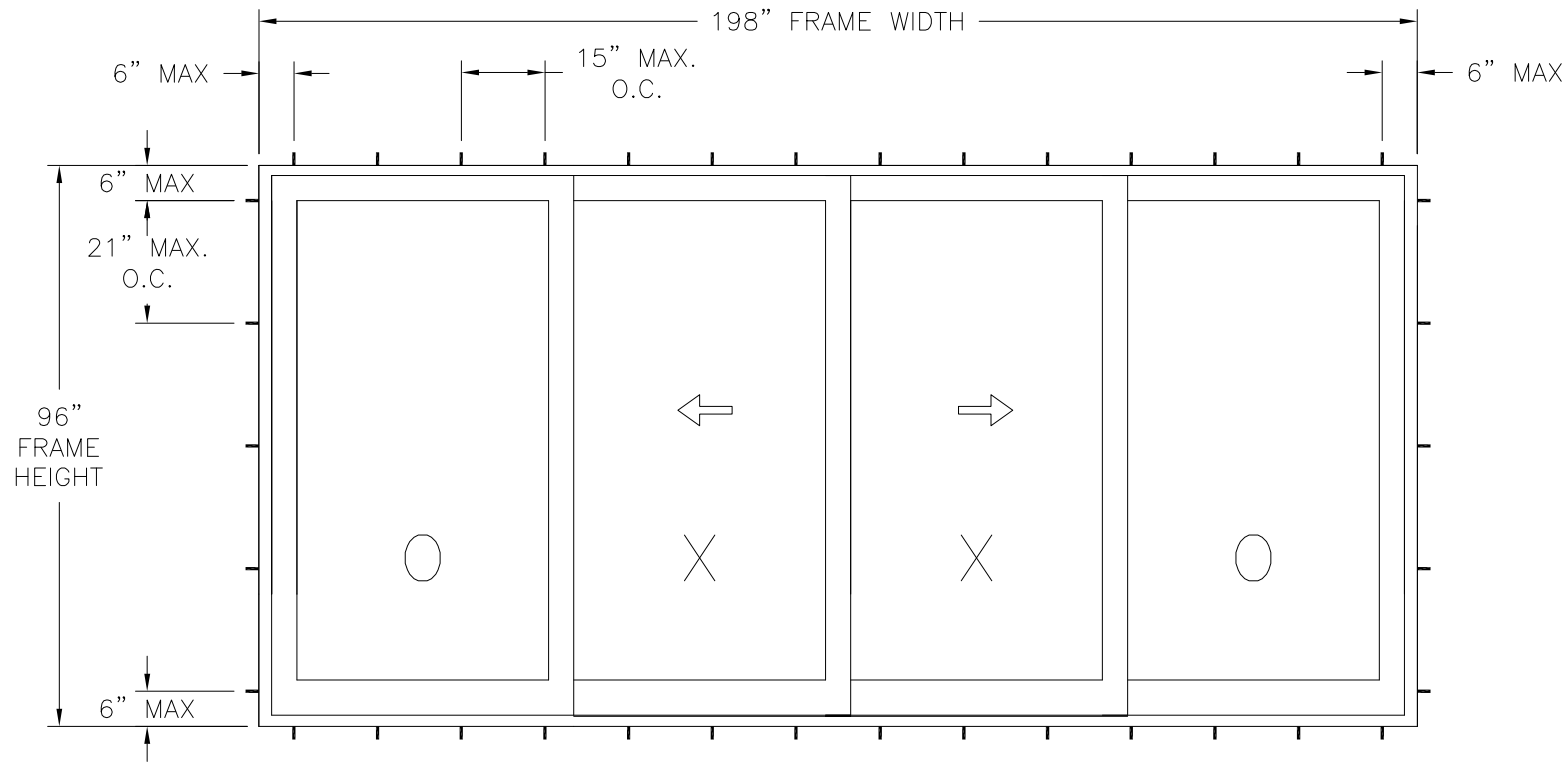

- NOTES:
- 1. PANEL SIZE: 50 1/4" x 92 3/4"
 - 2. MAXIMUM D.L.O.: 41 1/2" x 84 1/4"

GRAND VISTA SLIDING DOOR 2TRACK

EXTERIOR VIEW

FOUR PANELS ON 2TRACK FRAME SHOWN, 3TRACK AND 4TRACK ARE APPROVED. UNLIMITED NUMBER OF PANELS IN UNLIMITED CONFIGURATIONS, WITH OR WITHOUT POCKETS, ARE APPROVED AS LONG AS INDIVIDUAL PANEL AREA DOES NOT EXCEED 32.36 FT² AND USES VERTICAL CONDITIONS AS SHOWN IN APPROVAL DRAWING.

DESIGN PRESSURE RATING	IMPACT RATING
+65.0/-80.0PSF	LARGE AND SMALL MISSILE IMPACT

MISSILE LEVEL D, WIND ZONE 4
WITH 3.285" SILL RISER

DESIGN PRESSURE RATING	IMPACT RATING
+70.0/-80.0PSF	LARGE AND SMALL MISSILE IMPACT

MISSILE LEVEL D, WIND ZONE 4
WITH 3.785" SILL RISER

HARDWARE SCHEDULE

A.	(1) METAL SINGLE HANDLE 2P MORTISE LOCKS, 52 1/2" FROM TOP OF LOCK STILES
B.	(1) METAL ASTRAGAL STILE AND LOCK JAMB AT LOCK LOCATION
C.	ALUMINUM REINFORCEMENT (650650 PD) AT PANEL TOP, BOTTOM RAIL, INTERLOCK AND LOCKSTILE
D.	EXTRUDED ALUMINUM TUBE AT INTERLOCKING STILES
E.	TANDEM ROLLER (AMESBURY 1983) AT EACH END OF ACTIVE BOTTOM RAIL
F.	ALUMINUM ASTRAGAL AT ACTIVE PANEL
G.	HOOK (650650 PD)
H.	3.785" ALUMINUM SILL RISER
I.	3.285" ALUMINUM SILL RISER
J.	HANDLE SET AT 54.33" FROM TOP OF LOCK STILE

SIGNED: 02/05/2018

VIWIN TECH WINDOWS AND DOORS

2400 IRVIN COBB DRIVE
PADUCAH, KY 42003

GRAND VISTA SLIDING DOOR
IMPACT
OXXO 2TRACK ELEVATION



DRAWN: A.R.	DWG NO. 08-03195	REV -
SCALE NTS	DATE 11/07/17	SHEET 2 OF 14

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com



Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

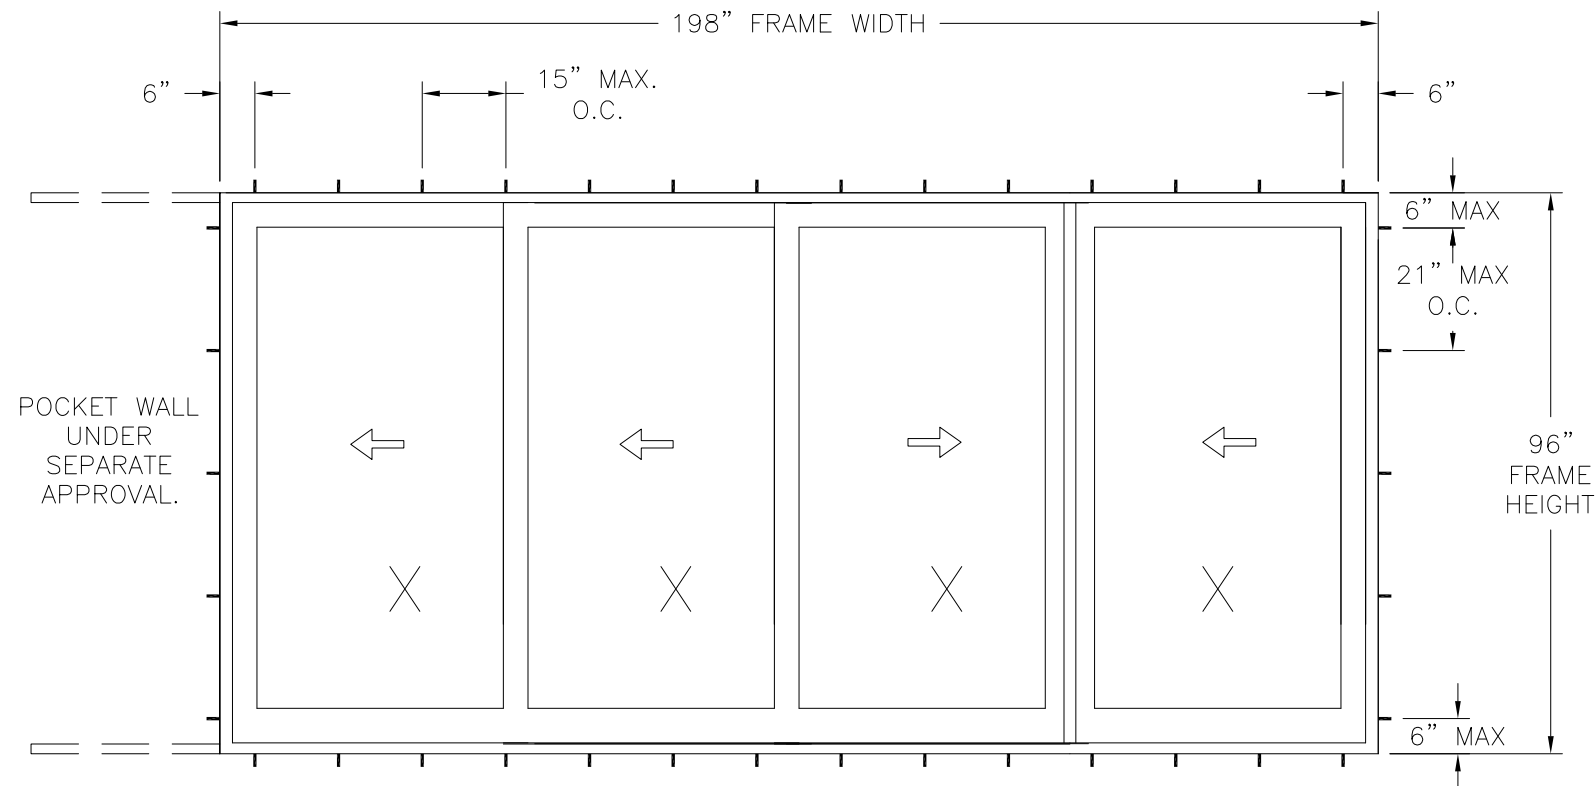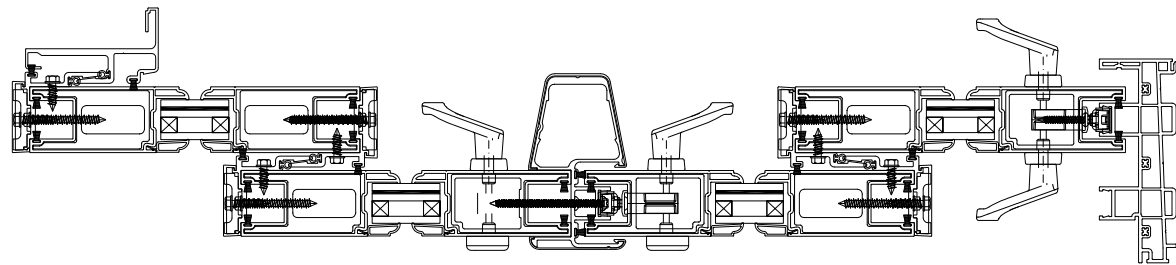

GRAND VISTA SLIDING DOOR 2TRACK

EXTERIOR VIEW

FOUR PANELS ON 2TRACK FRAME SHOWN, 3TRACK AND 4TRACK ARE APPROVED. UNLIMITED NUMBER OF PANELS IN UNLIMITED CONFIGURATIONS, WITH OR WITHOUT POCKETS, ARE APPROVED AS LONG AS INDIVIDUAL PANEL AREA DOES NOT EXCEED 32.36 FT² AND USES VERTICAL CONDITIONS AS SHOWN IN APPROVAL DRAWING.

DESIGN PRESSURE RATING	IMPACT RATING
+70.0/-80.0PSF	LARGE AND SMALL MISSILE IMPACT

- NOTES:
- PANEL SIZE: 50 1/4" x 92 3/4"
 - MAXIMUM D.L.O.: 41 1/2" x 84 1/4"

MISSILE LEVEL D, WIND ZONE 4
WITH 3.285" OR 3.785" SILL RISER


HARDWARE SCHEDULE	
A.	(1) METAL SINGLE HANDLE 2P MORTISE LOCKS, 52 1/2" FROM TOP OF LOCK STILES
B.	(1) METAL ASTRAGAL STILE AND LOCK JAMB AT LOCK LOCATION
C.	ALUMINUM REINFORCEMENT (650650 PD) AT PANEL TOP, BOTTOM RAIL, INTERLOCK AND LOCKSTILE
D.	EXTRUDED ALUMINUM TUBE AT INTERLOCKING STILES
E.	TANDEM ROLLER (AMESBURY 1983) AT EACH END OF ACTIVE BOTTOM RAIL
F.	ALUMINUM ASTRAGAL AT ACTIVE PANEL
G.	HOOK (650650 PD)
H.	3.785" ALUMINUM SILL RISER
I.	3.285" ALUMINUM SILL RISER
J.	HANDLE SET AT 54.33" FROM TOP OF LOCK STILE

VIWIN TECH WINDOWS AND DOORS 2400 IRVIN COBB DRIVE PADUCAH, KY 42003		
GRAND VISTA SLIDING DOOR IMPACT XXXX 2TRACK ELEVATION		
DRAWN: A.R.	DWG NO. 08-03195	REV -
SCALE NTS	DATE 11/07/17	SHEET 3 OF 14
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		


SIGNED: 02/05/2018



Luis R. Lomas P.E.
FL No.: 62514

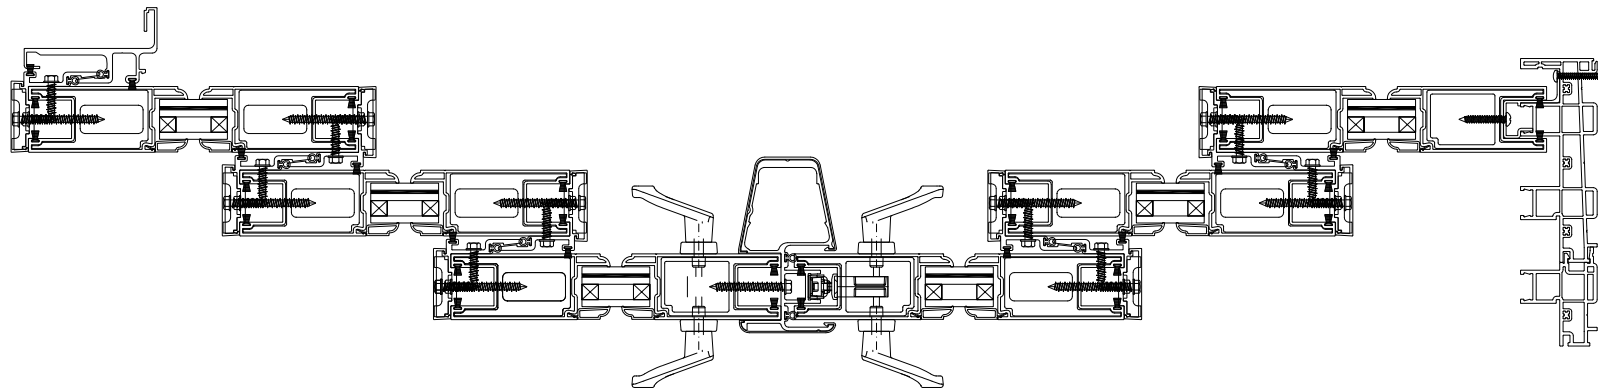

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

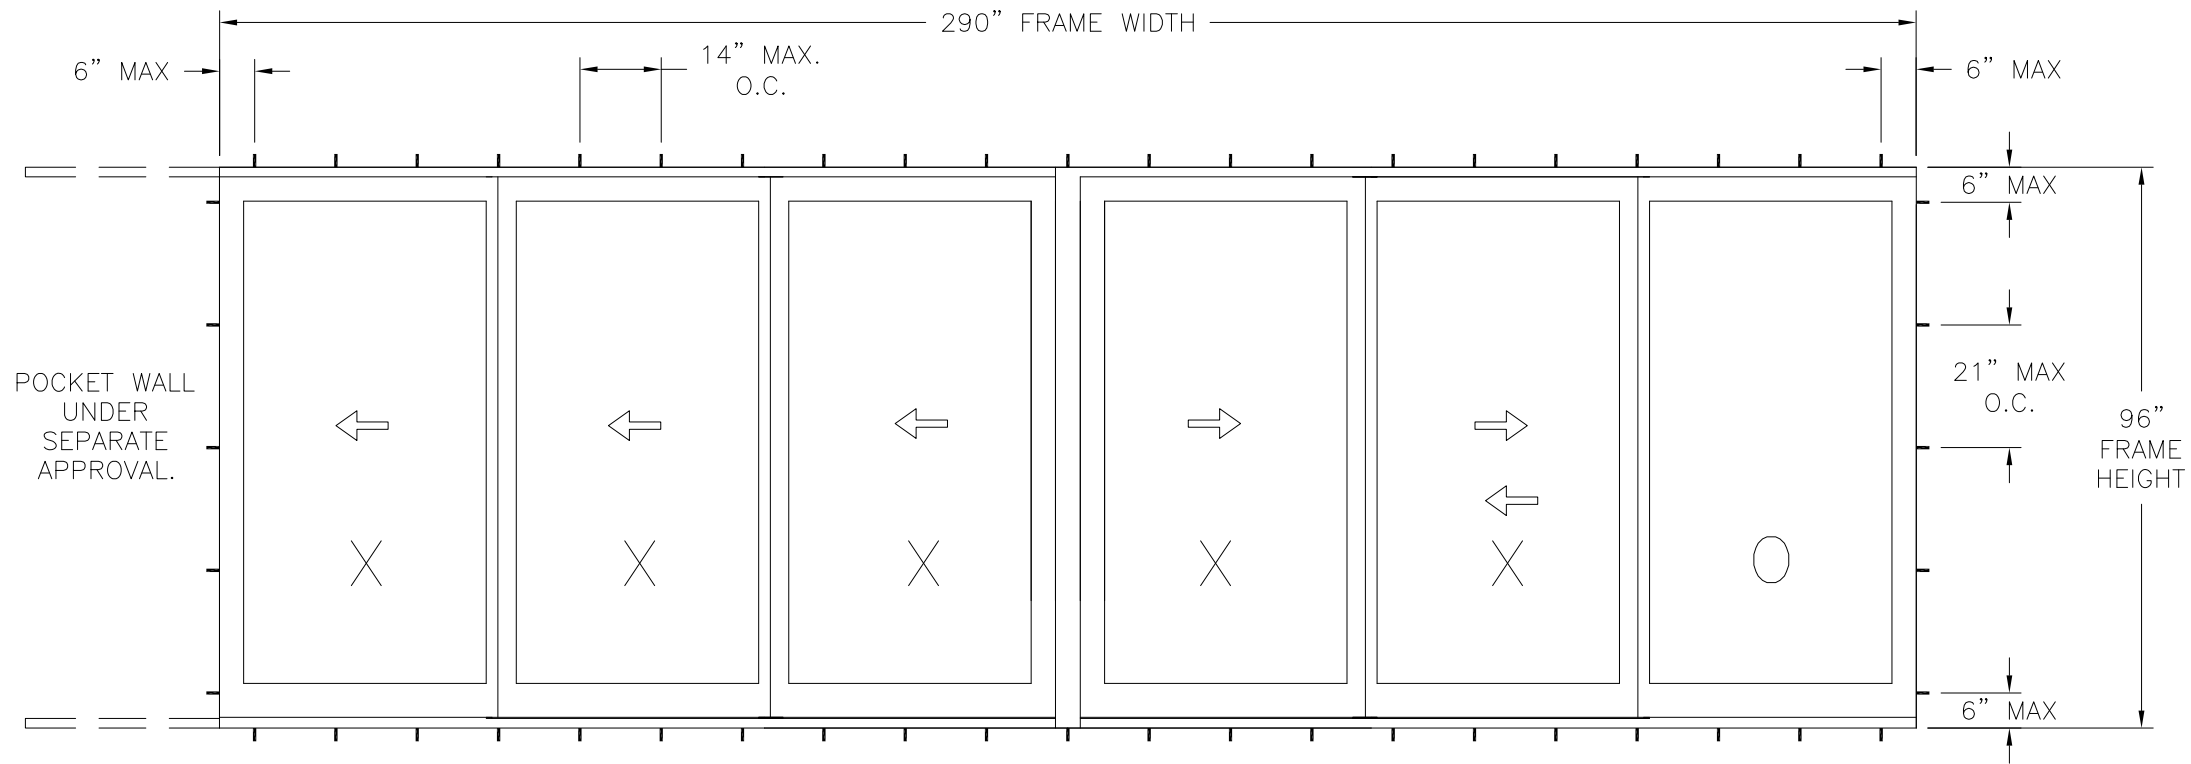

GRAND VISTA SLIDING DOOR 3TRACK

EXTERIOR VIEW

SIX PANELS ON 3TRACK FRAME SHOWN, 2TRACK AND 4TRACK ARE APPROVED. UNLIMITED NUMBER OF PANELS IN UNLIMITED CONFIGURATIONS, WITH OR WITHOUT POCKETS, ARE APPROVED AS LONG AS INDIVIDUAL PANEL AREA DOES NOT EXCEED 32.36 FT² AND USES VERTICAL CONDITIONS AS SHOWN IN APPROVAL DRAWING.

DESIGN PRESSURE RATING	IMPACT RATING
+70.0/-80.0PSF	LARGE AND SMALL MISSILE IMPACT

MISSILE LEVEL D, WIND ZONE 4
WITH 3.285" OR 3.785" SILL RISER

- NOTES:
- PANEL SIZE: 50 1/4" x 92 3/4"
 - MAXIMUM D.L.O.: 41 1/2" x 84 1/4"

HARDWARE SCHEDULE	
A.	(1) METAL SINGLE HANDLE 2P MORTISE LOCKS, 52 1/2" FROM TOP OF LOCK STILES
B.	(1) METAL ASTRAGAL STILE AND LOCK JAMB AT LOCK LOCATION
C.	ALUMINUM REINFORCEMENT (650650 PD) AT PANEL TOP, BOTTOM RAIL, INTERLOCK AND LOCKSTILE
D.	EXTRUDED ALUMINUM TUBE AT INTERLOCKING STILES
E.	TANDEM ROLLER (AMESBURY 1983) AT EACH END OF ACTIVE BOTTOM RAIL
F.	ALUMINUM ASTRAGAL AT ACTIVE PANEL
G.	HOOK (650650 PD)
H.	3.785" ALUMINUM SILL RISER
I.	3.285" ALUMINUM SILL RISER
J.	HANDLE SET AT 54.33" FROM TOP OF LOCK STILE


VIWIN TECH WINDOWS AND DOORS 2400 IRVIN COBB DRIVE PADUCAH, KY 42003		
GRAND VISTA SLIDING DOOR IMPACT XXXXXX 3TRACK ELEVATION		
DRAWN: A.R.	DWG NO. 08-03195	REV -
SCALE NTS	DATE 11/07/17	SHEET 4 OF 14
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 02/05/2018




Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

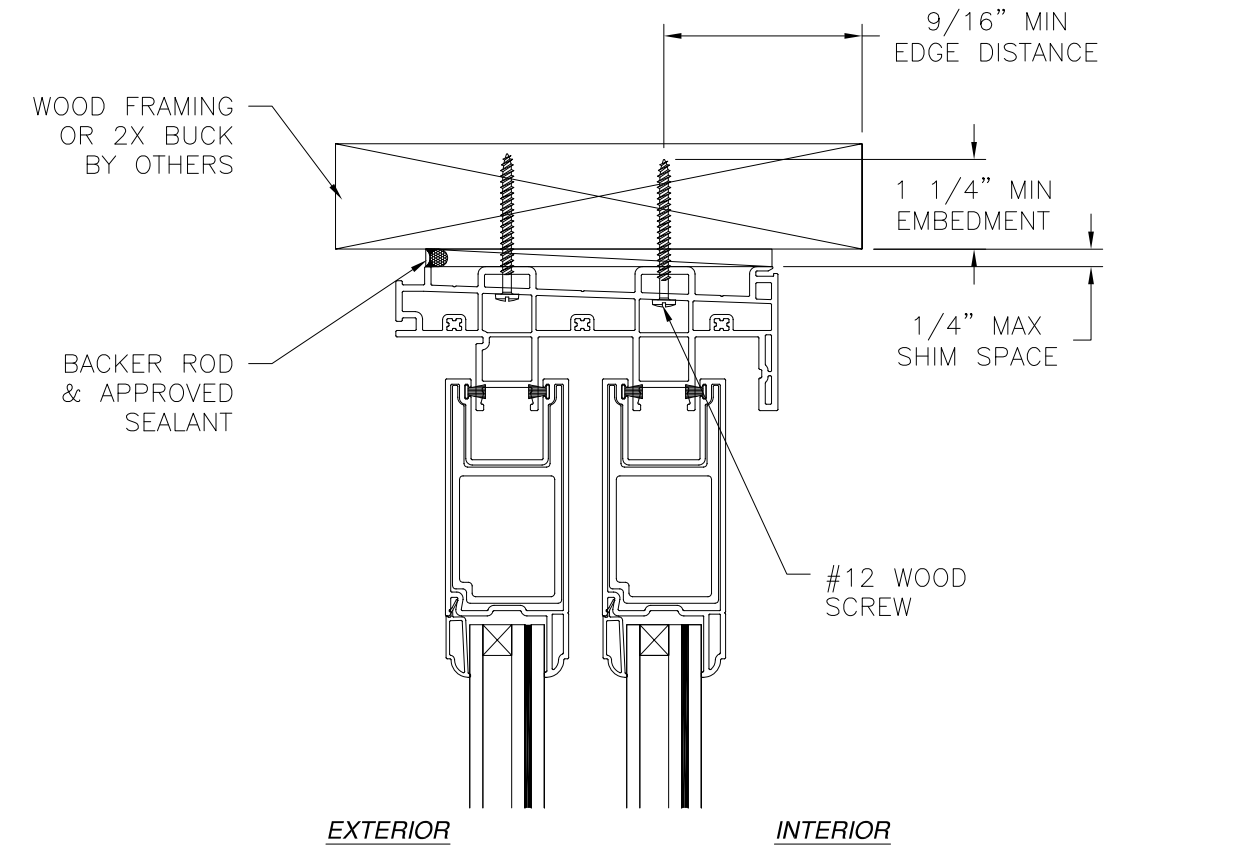

EXTERIOR INTERIOR

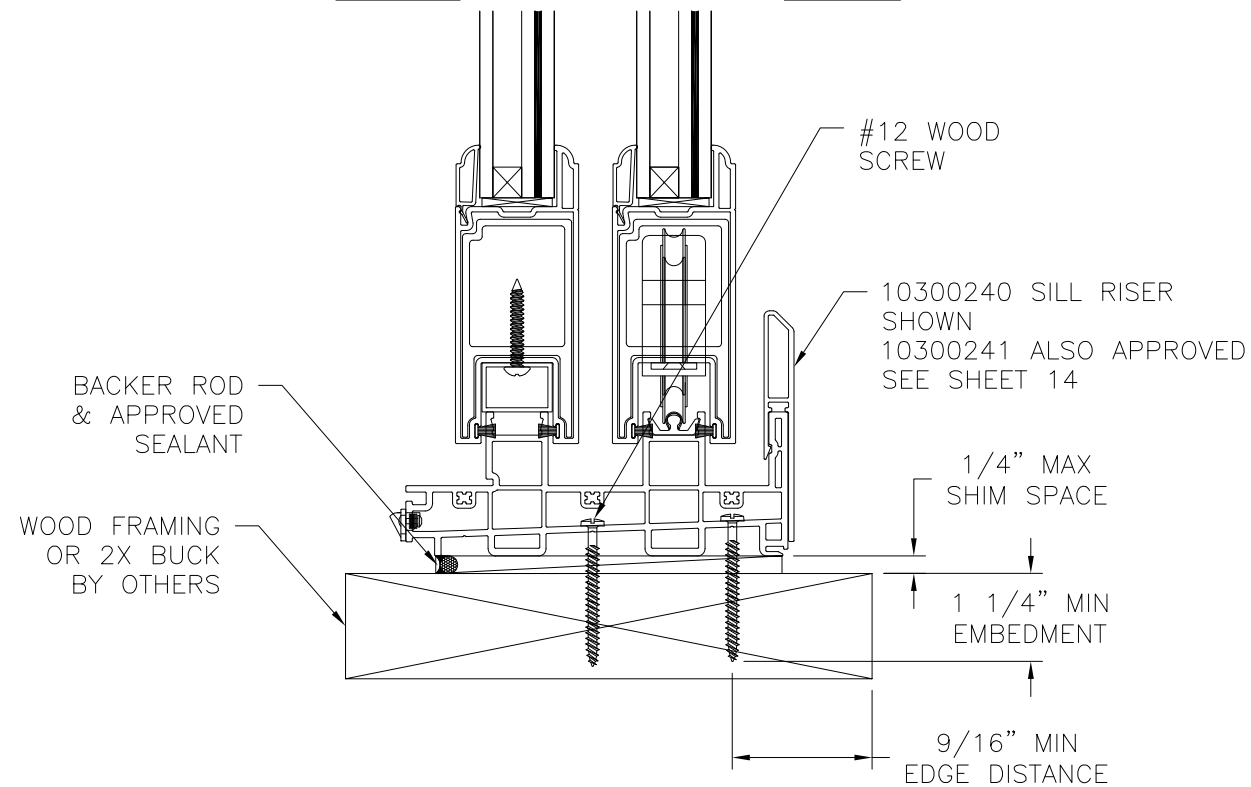

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

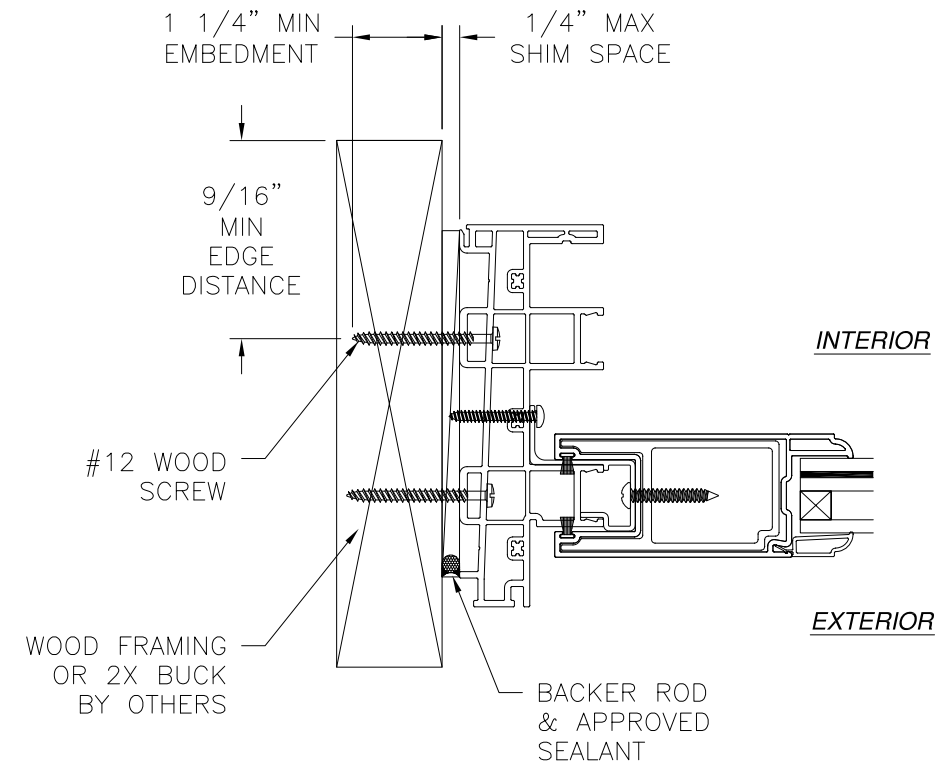


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112



SIGNED: 02/05/2018

VIWIN TECH WINDOWS AND DOORS 2400 IRVIN COBB DRIVE PADUCAH, KY 42003		
GRAND VISTA SLIDING DOOR IMPACT 2TRACK INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03195	REV -
SCALE NTS	DATE 11/07/17	SHEET 5 OF 14
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@rlomaspe.com		

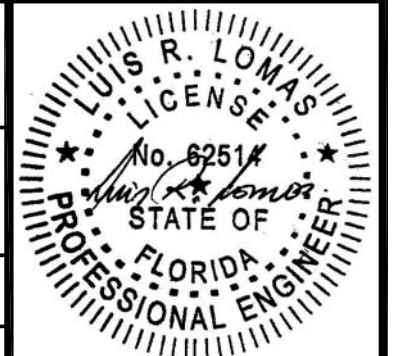


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

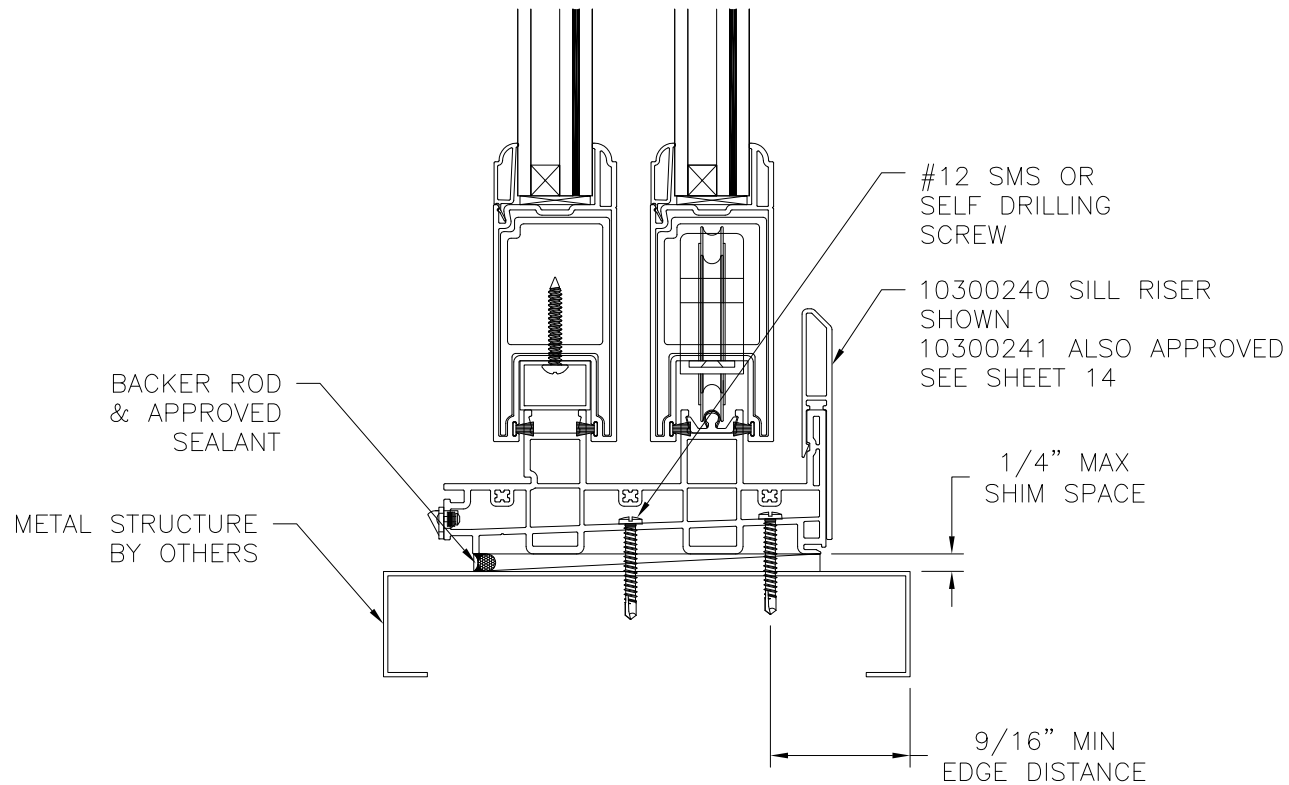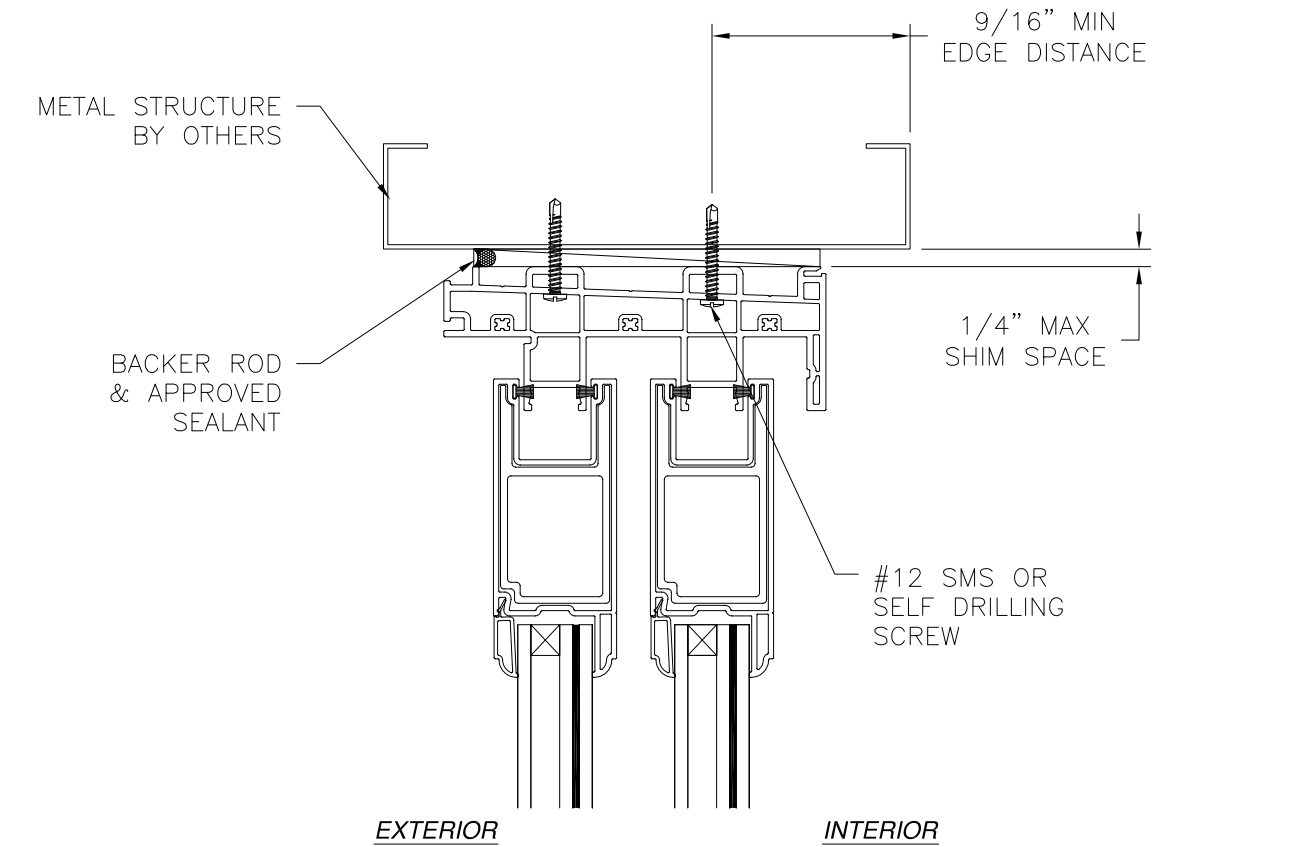

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

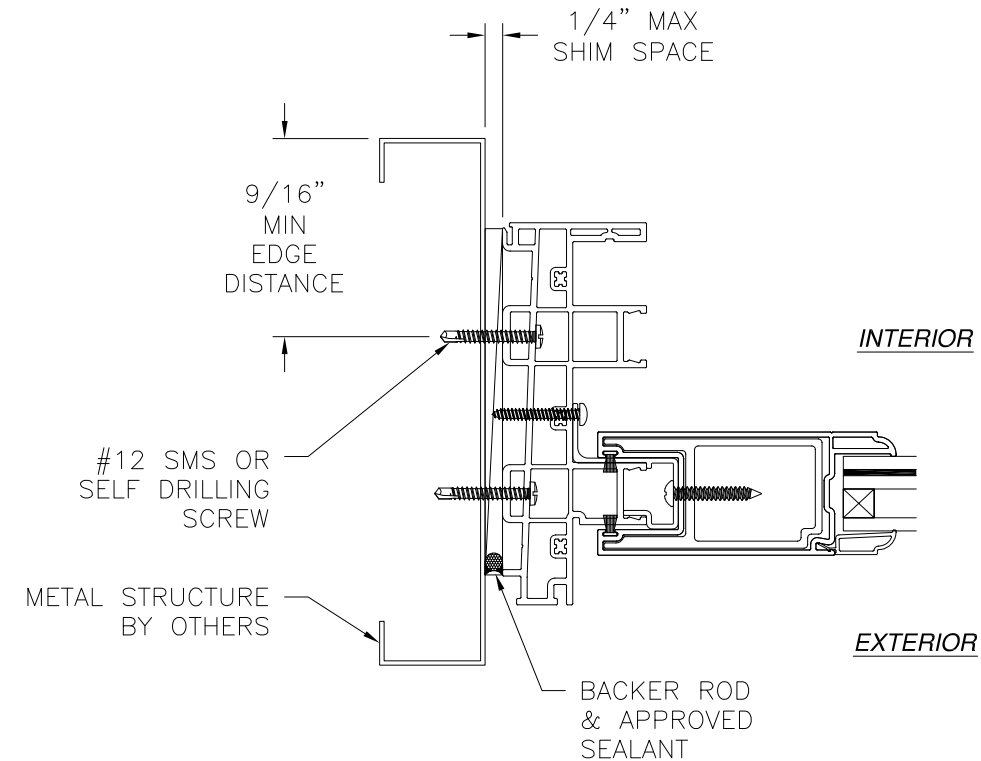


JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

NOTES:



1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 02/05/2018

VIWIN TECH WINDOWS AND DOORS 2400 IRVIN COBB DRIVE PADUCAH, KY 42003		
GRAND VISTA SLIDING DOOR IMPACT 2TRACK INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03195	REV -
SCALE NTS	DATE 11/07/17	SHEET 6 OF 14
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		

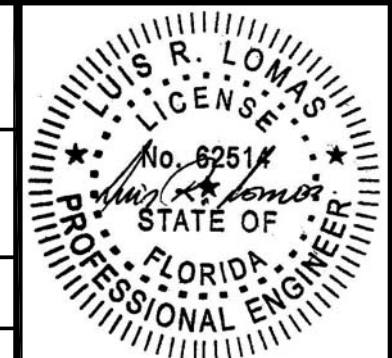

Luis R. Lomas P.E.
FL No.: 62514

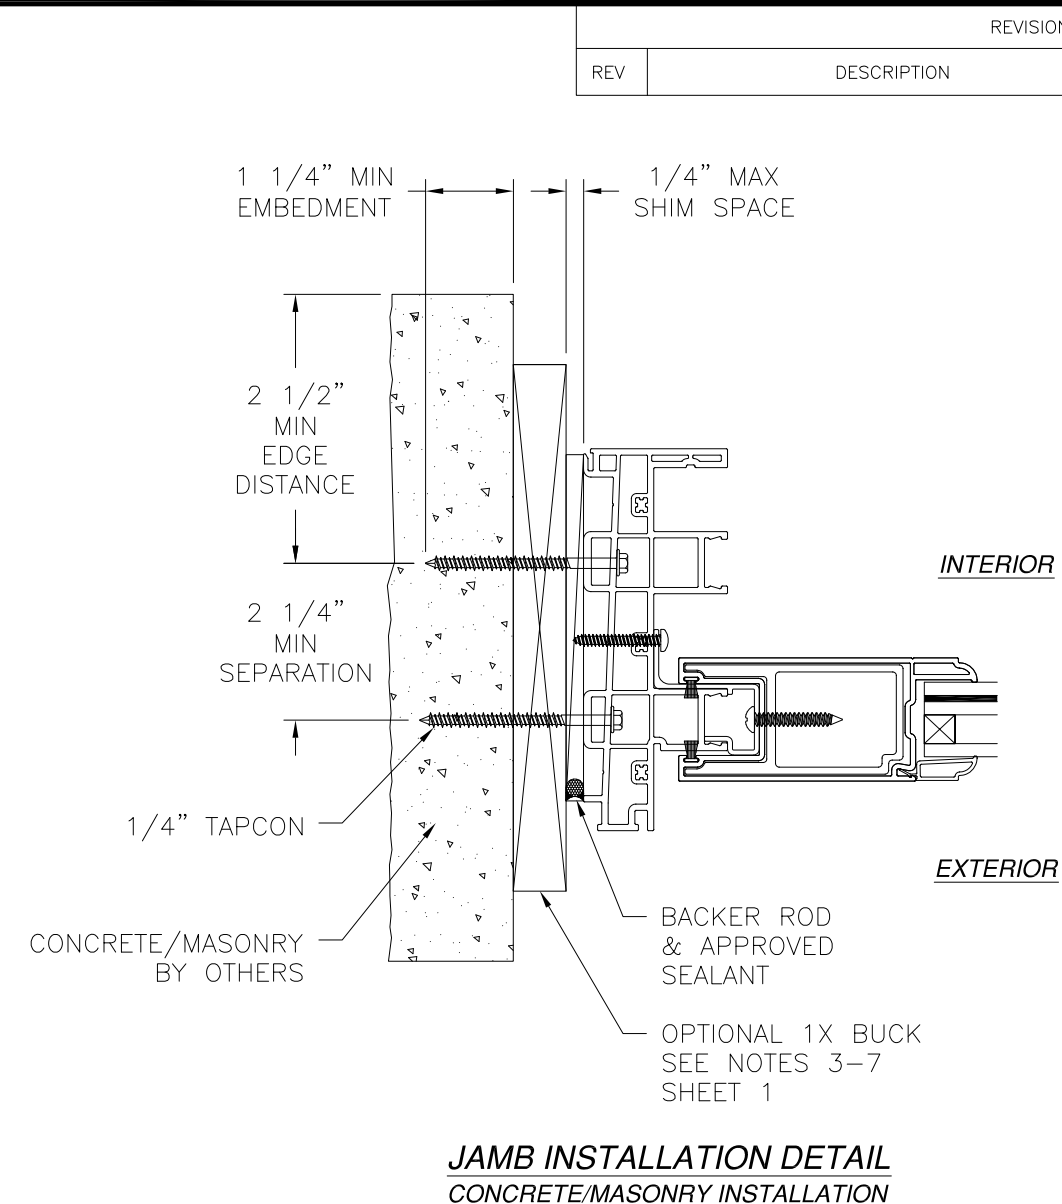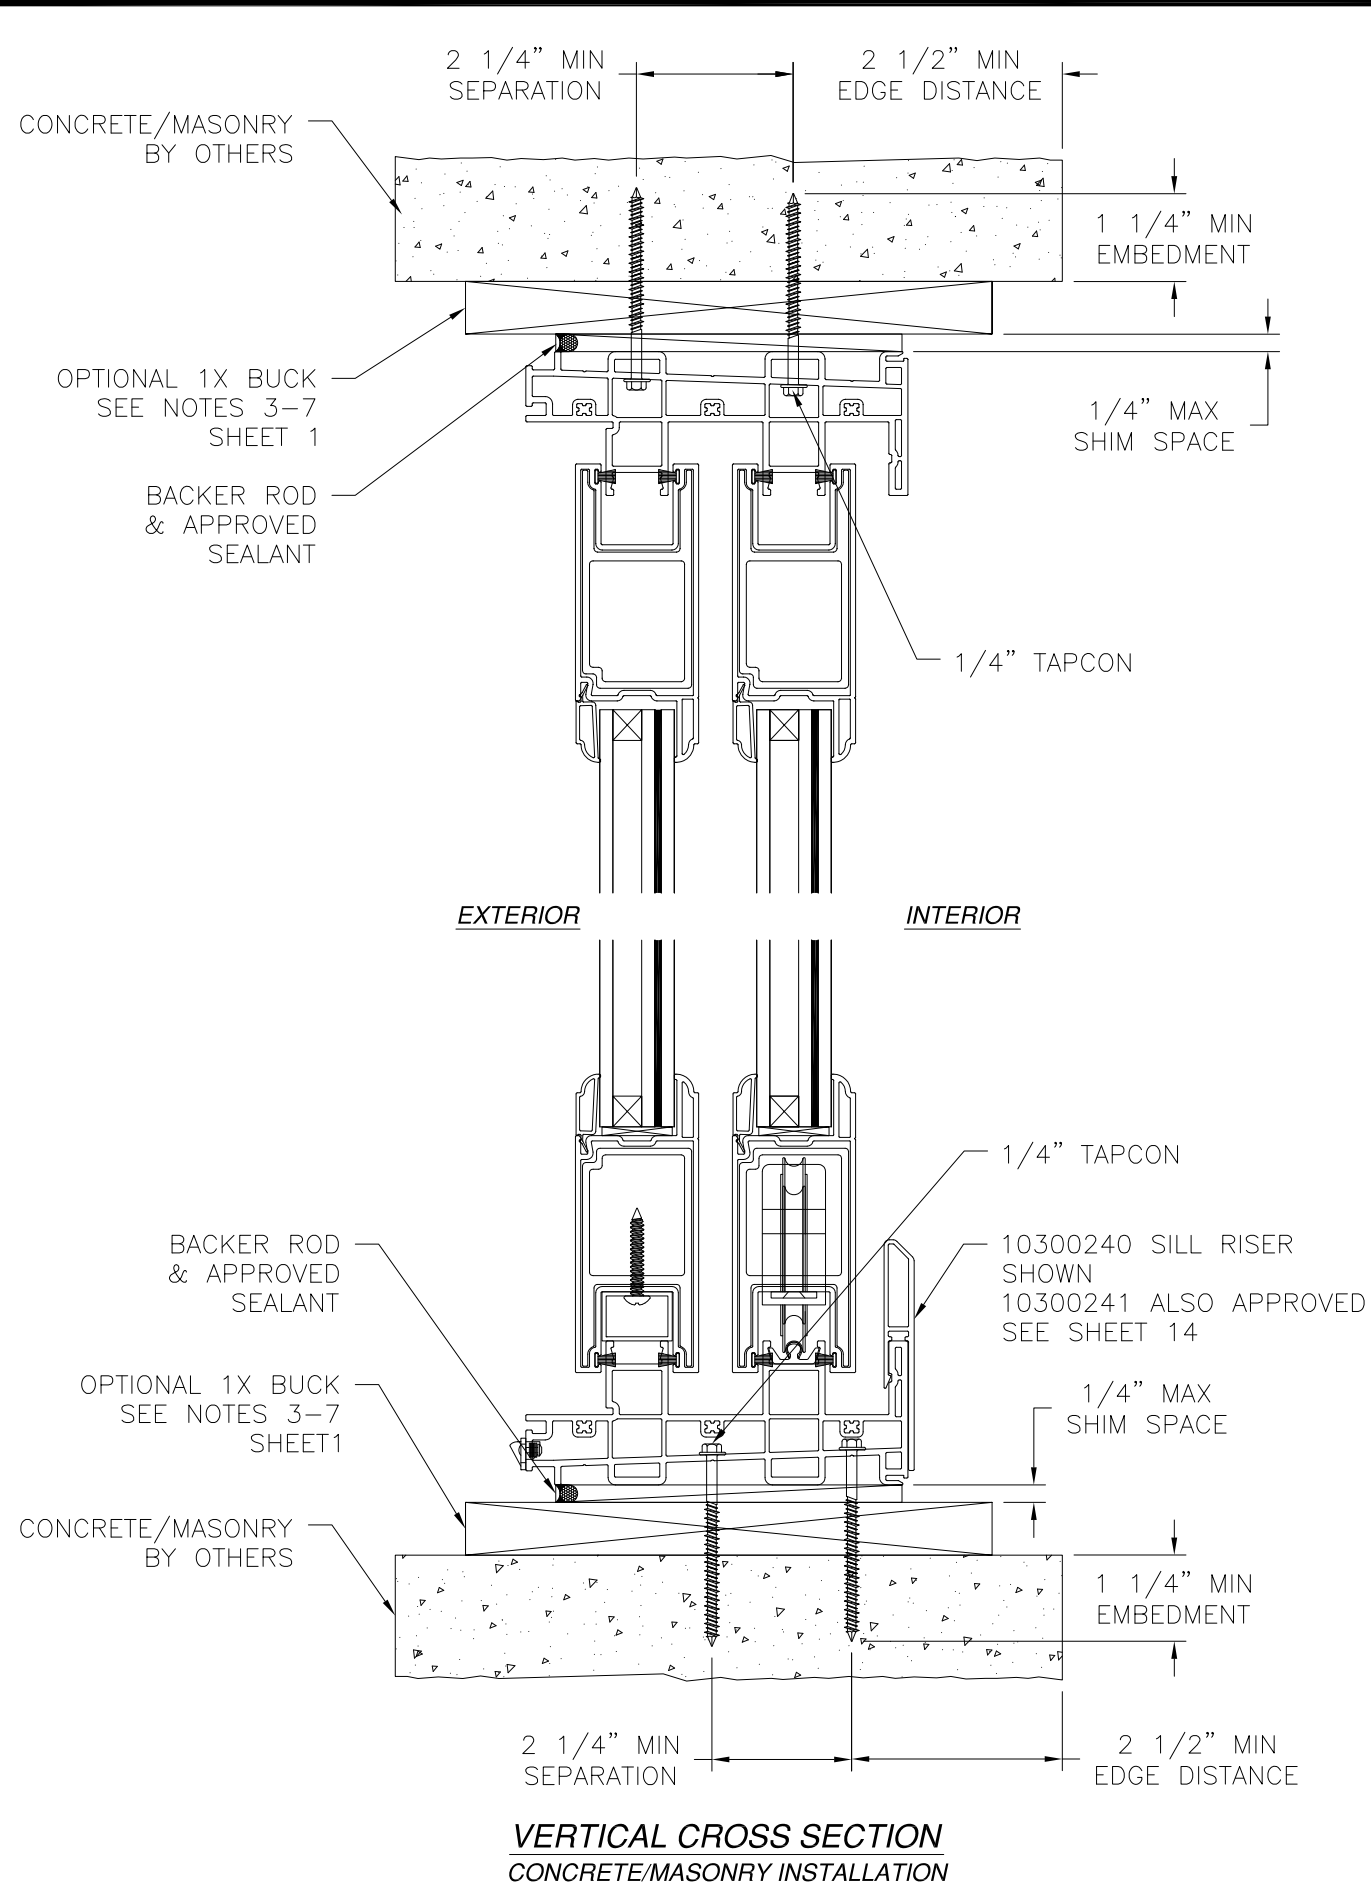


- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED



VIWIN TECH WINDOWS AND DOORS 2400 IRVIN COBB DRIVE PADUCAH, KY 42003		
GRAND VISTA SLIDING DOOR IMPACT 2TRACK INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03195	REV -
SCALE NTS	DATE 11/07/17	SHEET 7 OF 14
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 02/05/2018

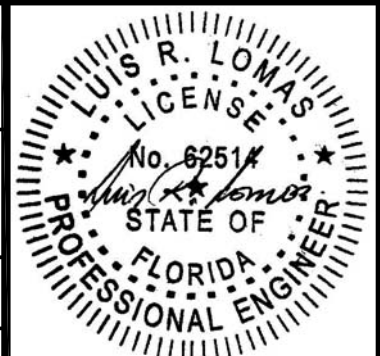


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

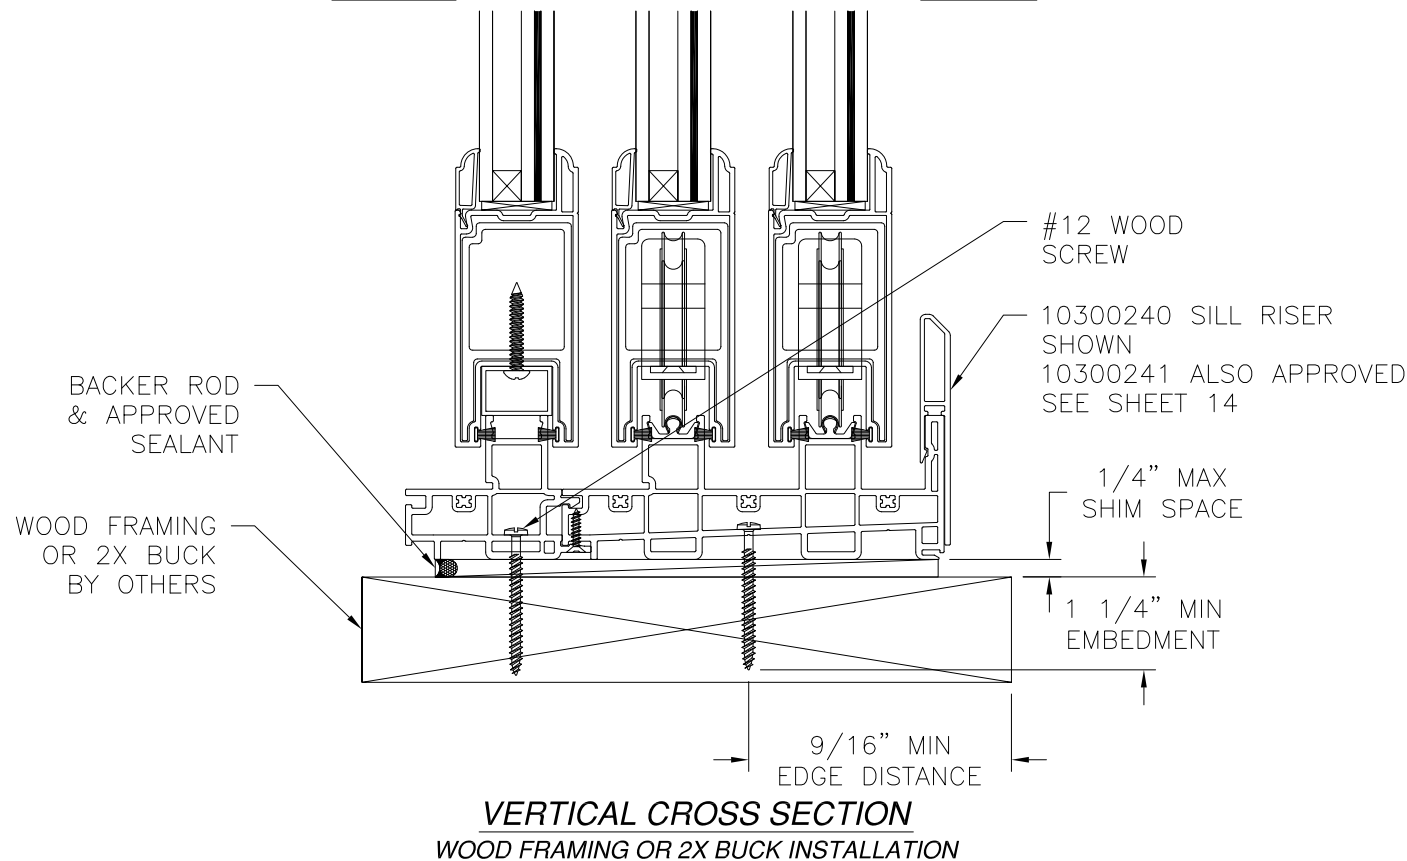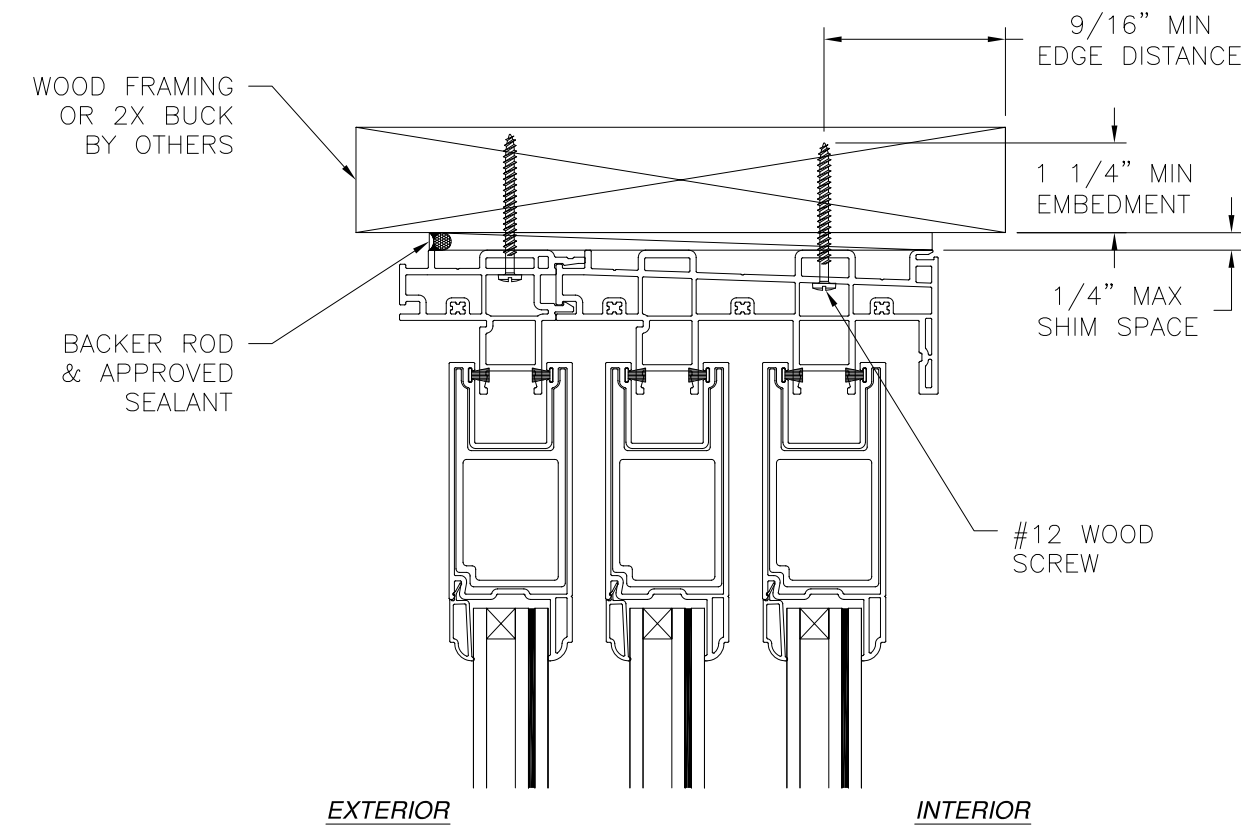

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

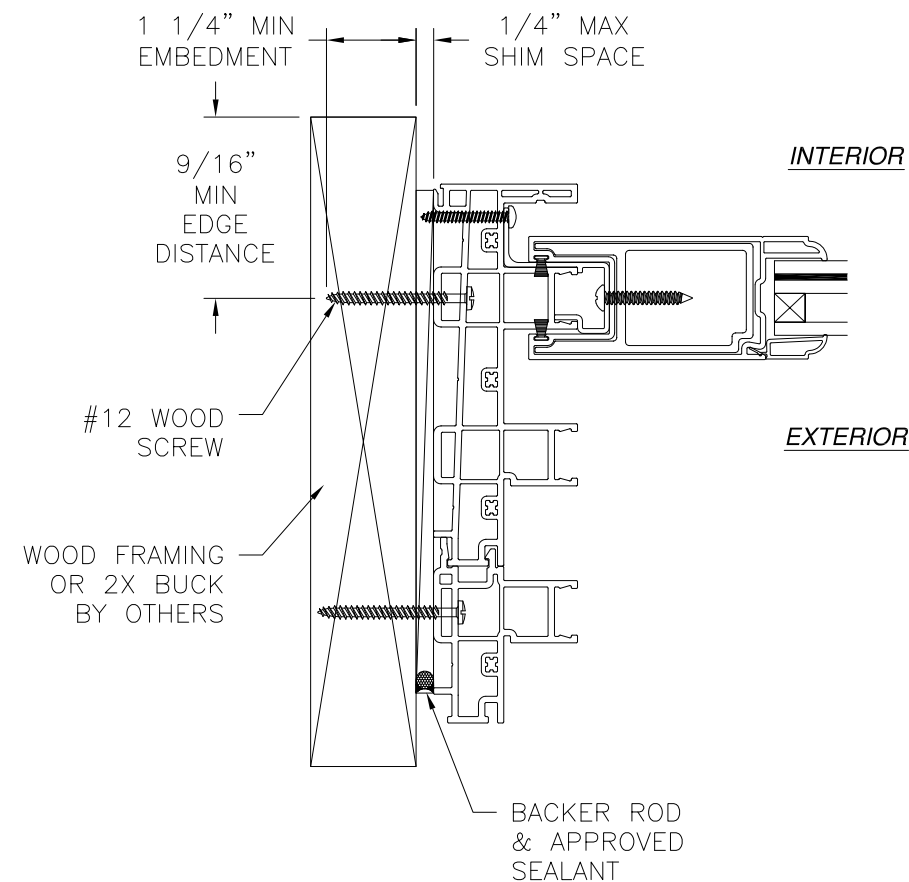


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112



SIGNED: 02/05/2018

VIWIN TECH WINDOWS AND DOORS 2400 IRVIN COBB DRIVE PADUCAH, KY 42003		
GRAND VISTA SLIDING DOOR IMPACT 3TRACK INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03195	REV -
SCALE NTS	DATE 11/07/17	SHEET 8 OF 14
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		

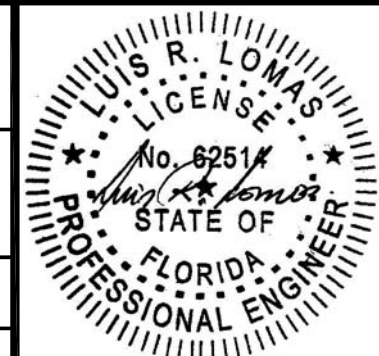

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

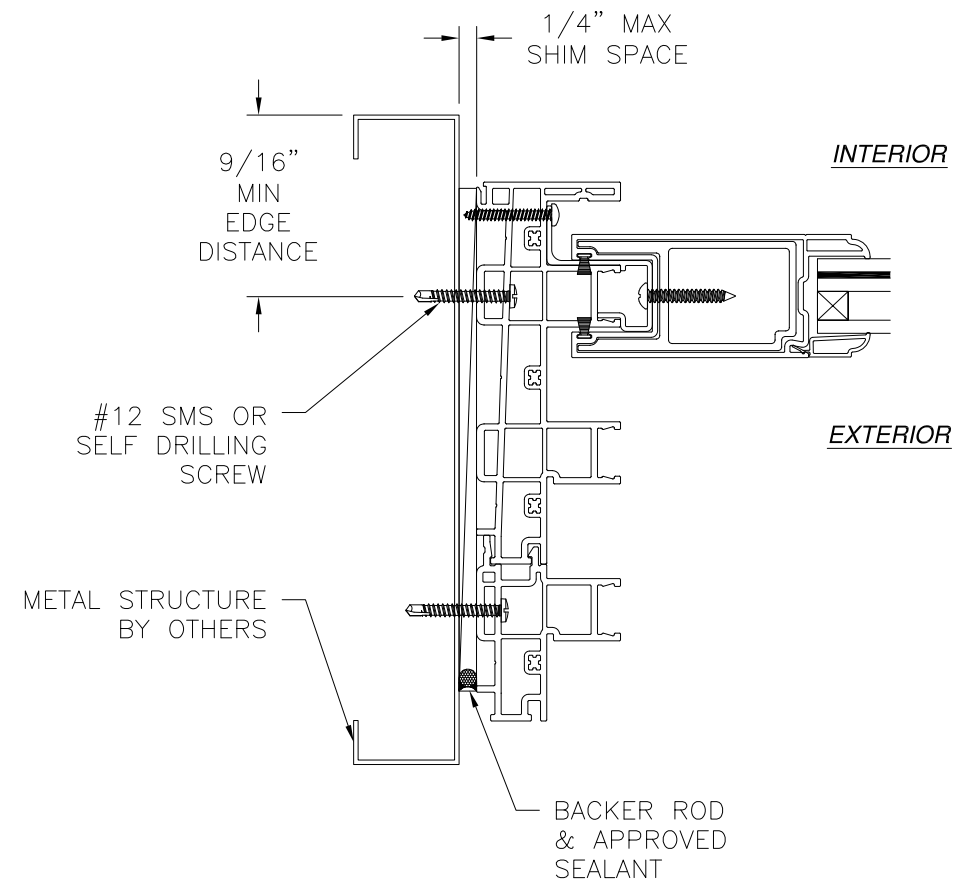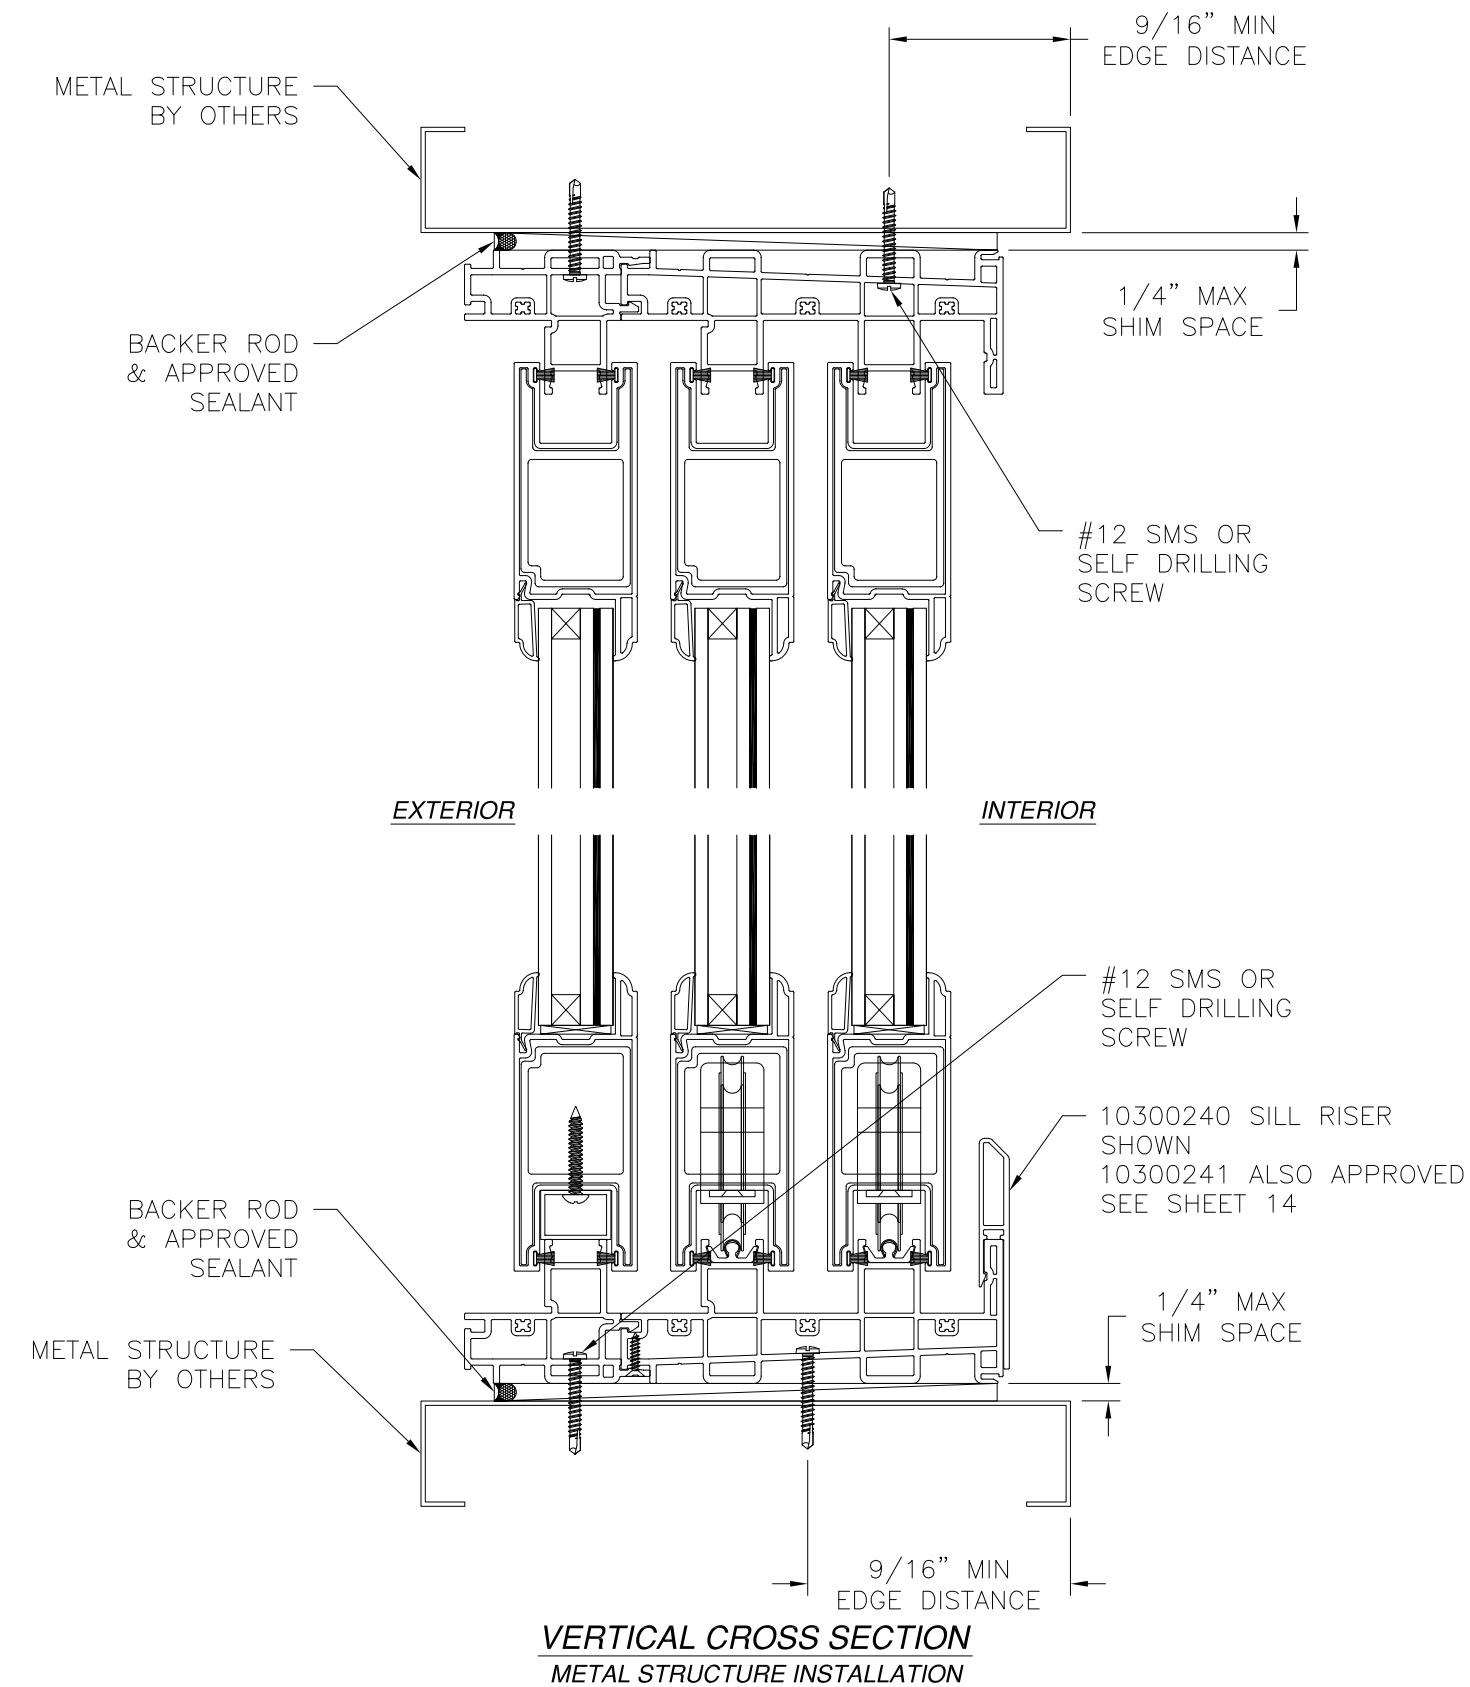

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 02/05/2018

VIWIN TECH WINDOWS AND DOORS
2400 IRVIN COBB DRIVE
PADUCAH, KY 42003



GRAND VISTA SLIDING DOOR
IMPACT
3TRACK INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-03195	REV -
SCALE NTS	DATE 11/07/17	SHEET 9 OF 14

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@rlomaspe.com

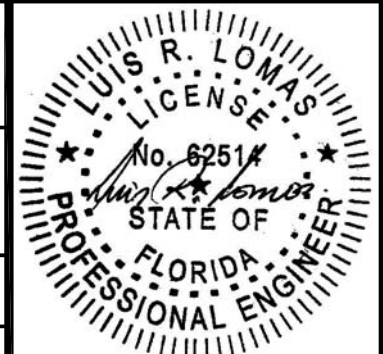


Luis R. Lomas P.E.
FL No.: 62514

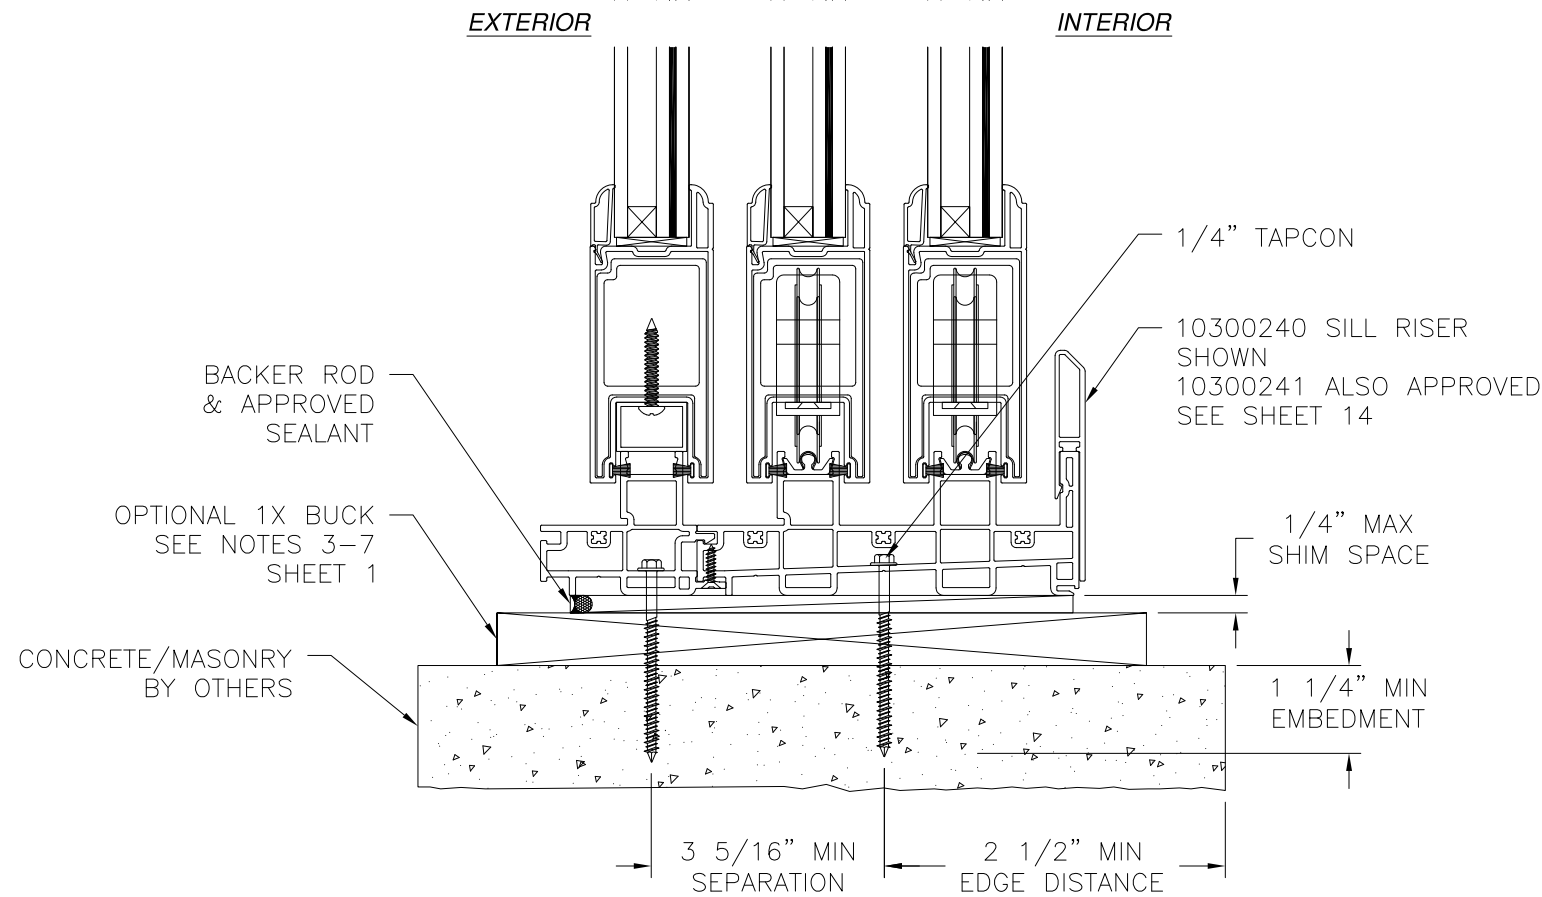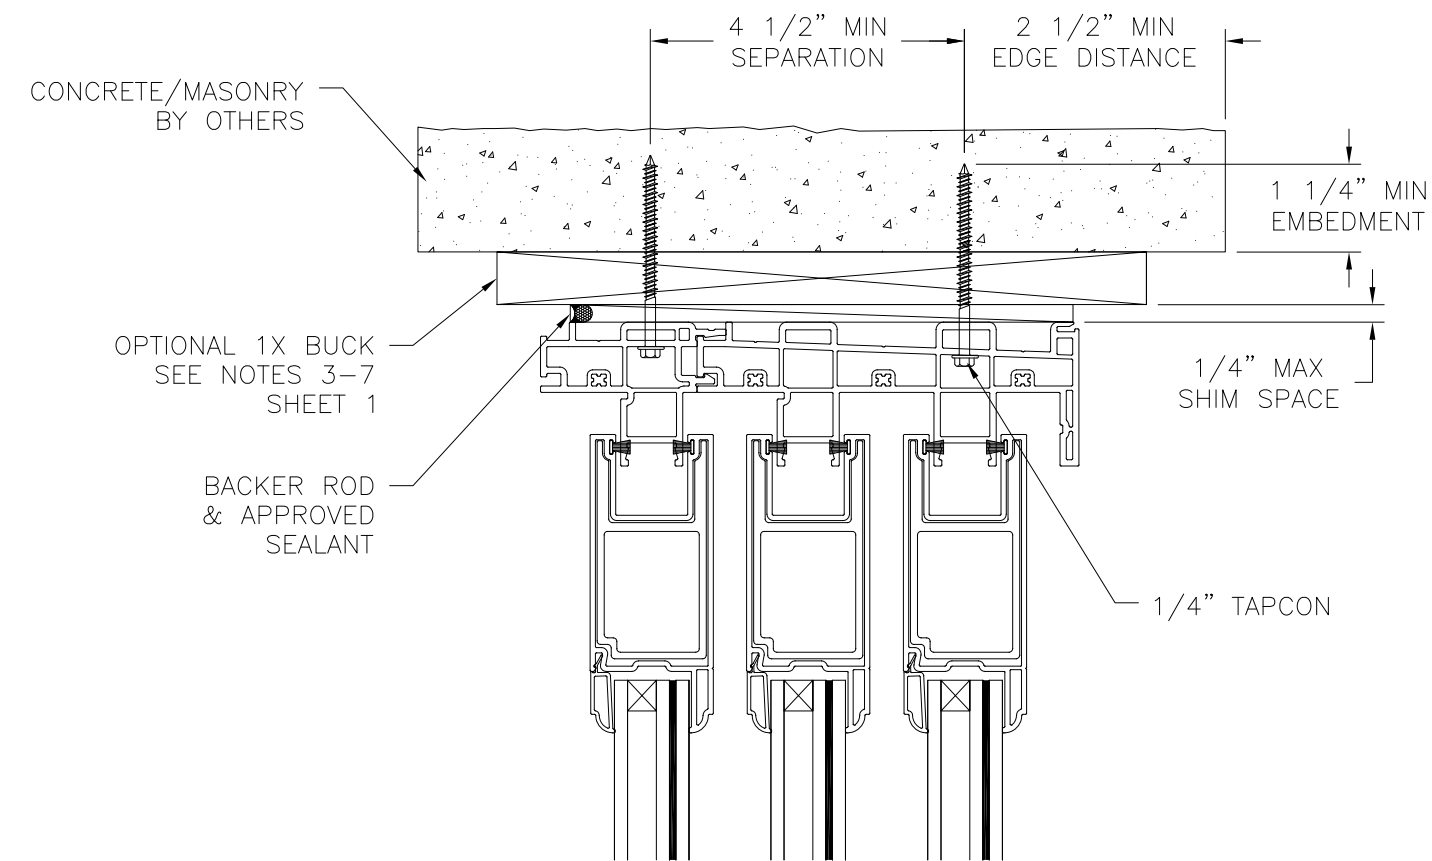

VERTICAL CROSS SECTION
CONCRETE/MASONRY INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

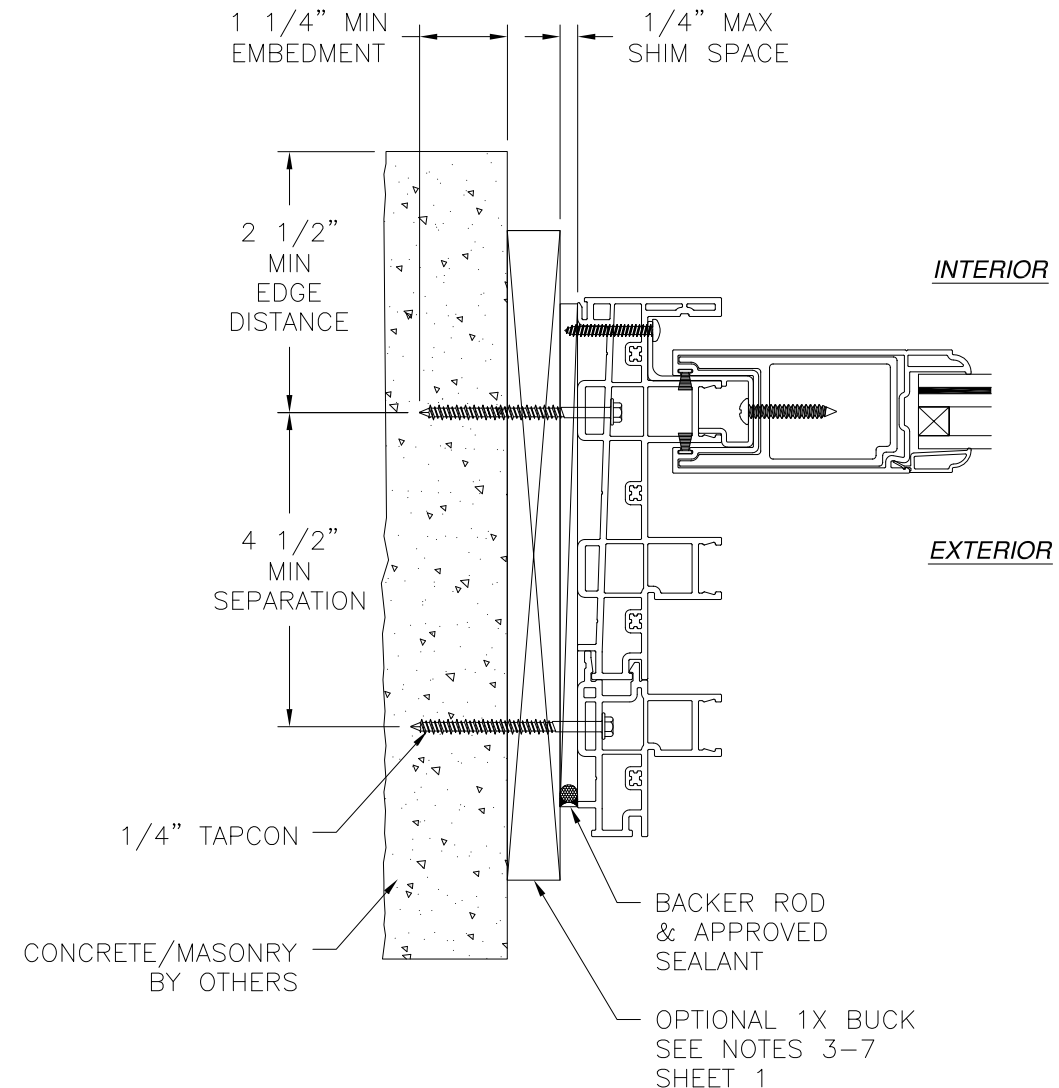

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY INSTALLATION

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

VIWIN TECH WINDOWS AND DOORS


2400 IRVIN COBB DRIVE
PADUCAH, KY 42003

GRAND VISTA SLIDING DOOR
IMPACT
3TRACK INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-03195	REV -
SCALE NTS	DATE 11/07/17	SHEET 10 OF 14



L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@rlomaspe.com

SIGNED: 02/05/2018

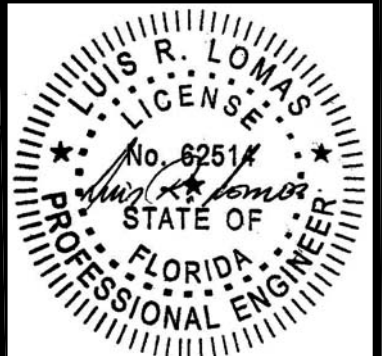


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

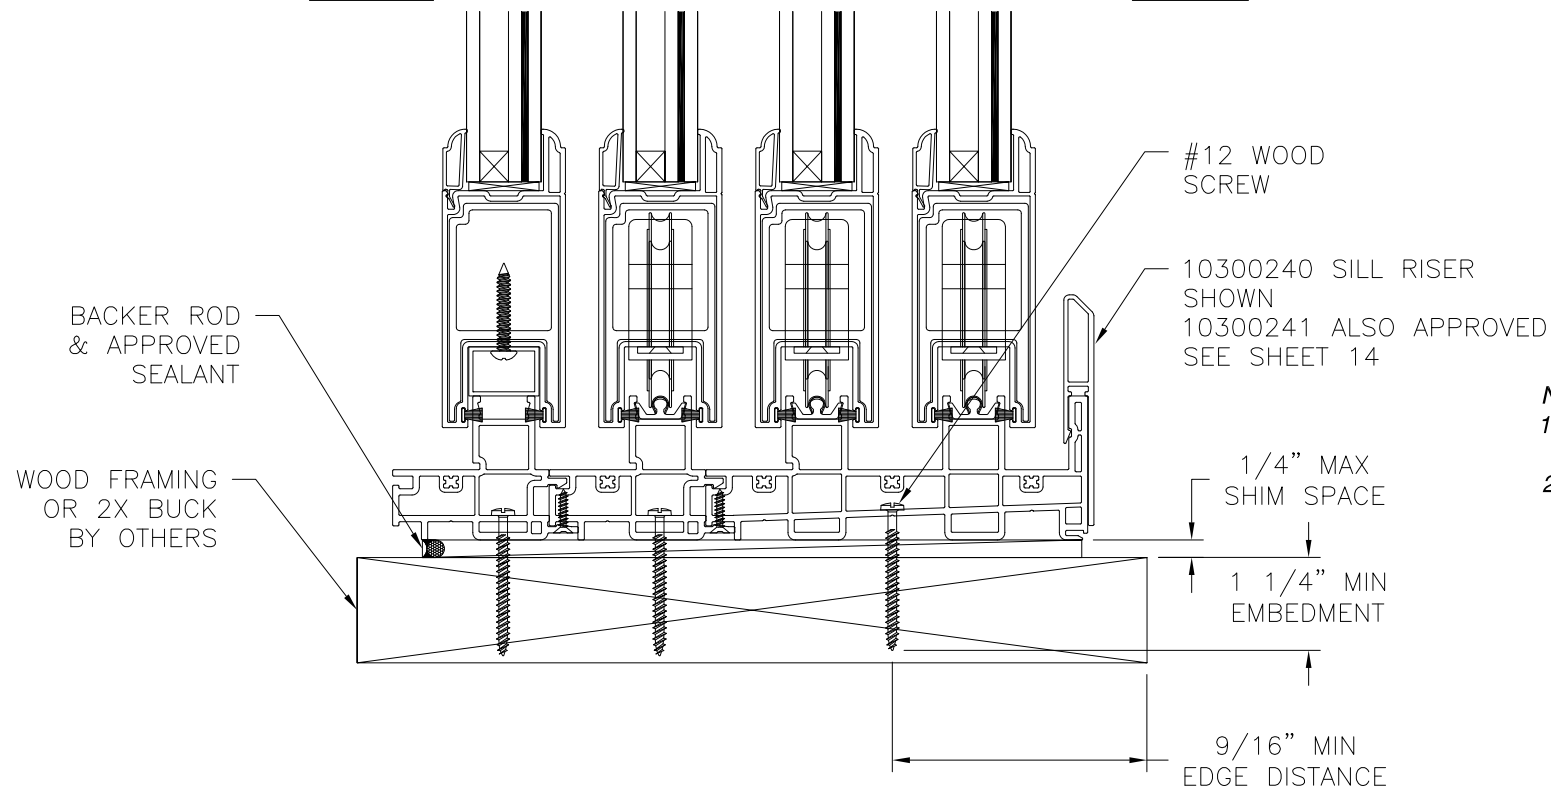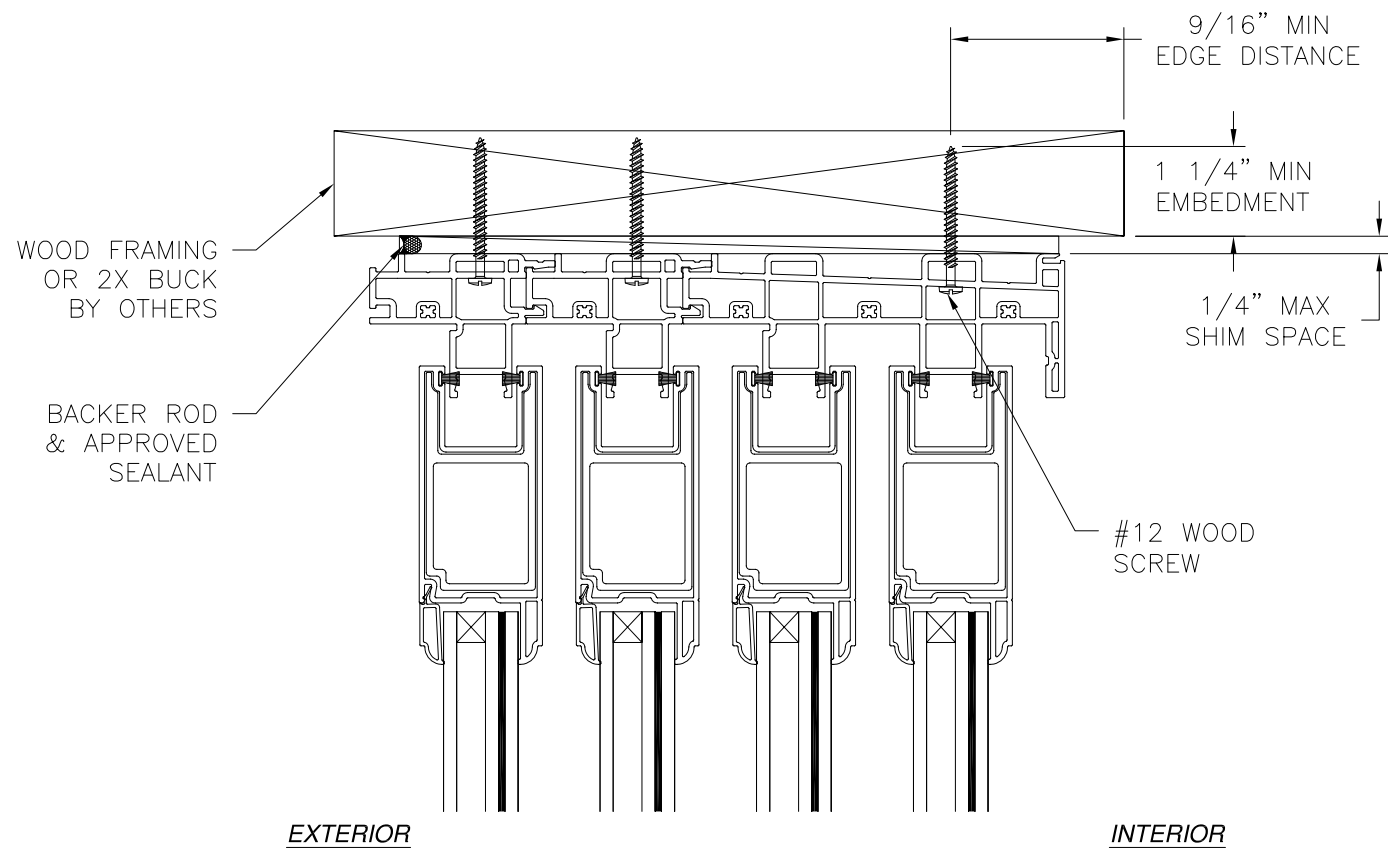

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

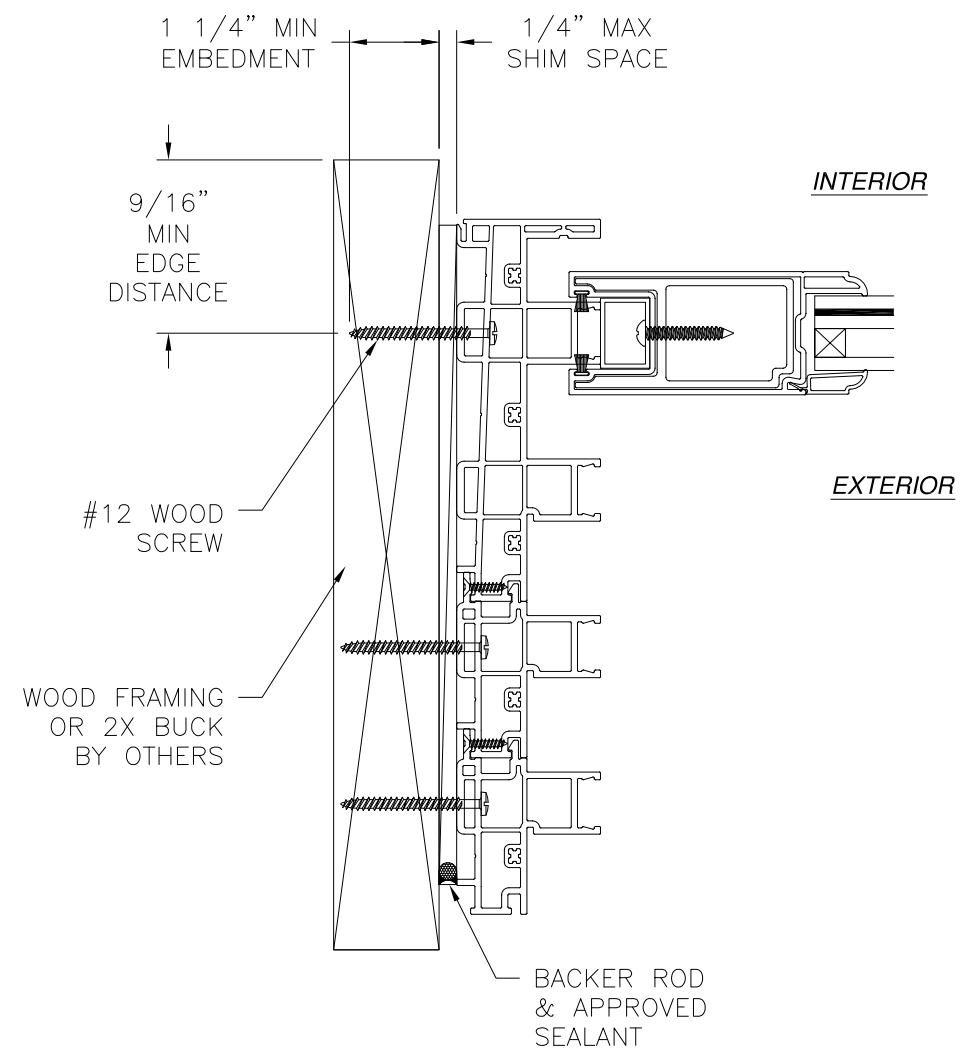

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 02/05/2018


VIWIN TECH WINDOWS AND DOORS

2400 IRVIN COBB DRIVE
PADUCAH, KY 42003

GRAND VISTA SLIDING DOOR
IMPACT
4TRACK INSTALLATION DETAILS



DRAWN: A.R.	DWG NO. 08-03195	REV -
SCALE NTS	DATE 11/07/17	SHEET 11 OF 14

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@rlomaspe.com

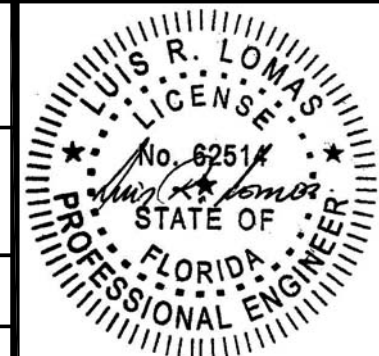


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

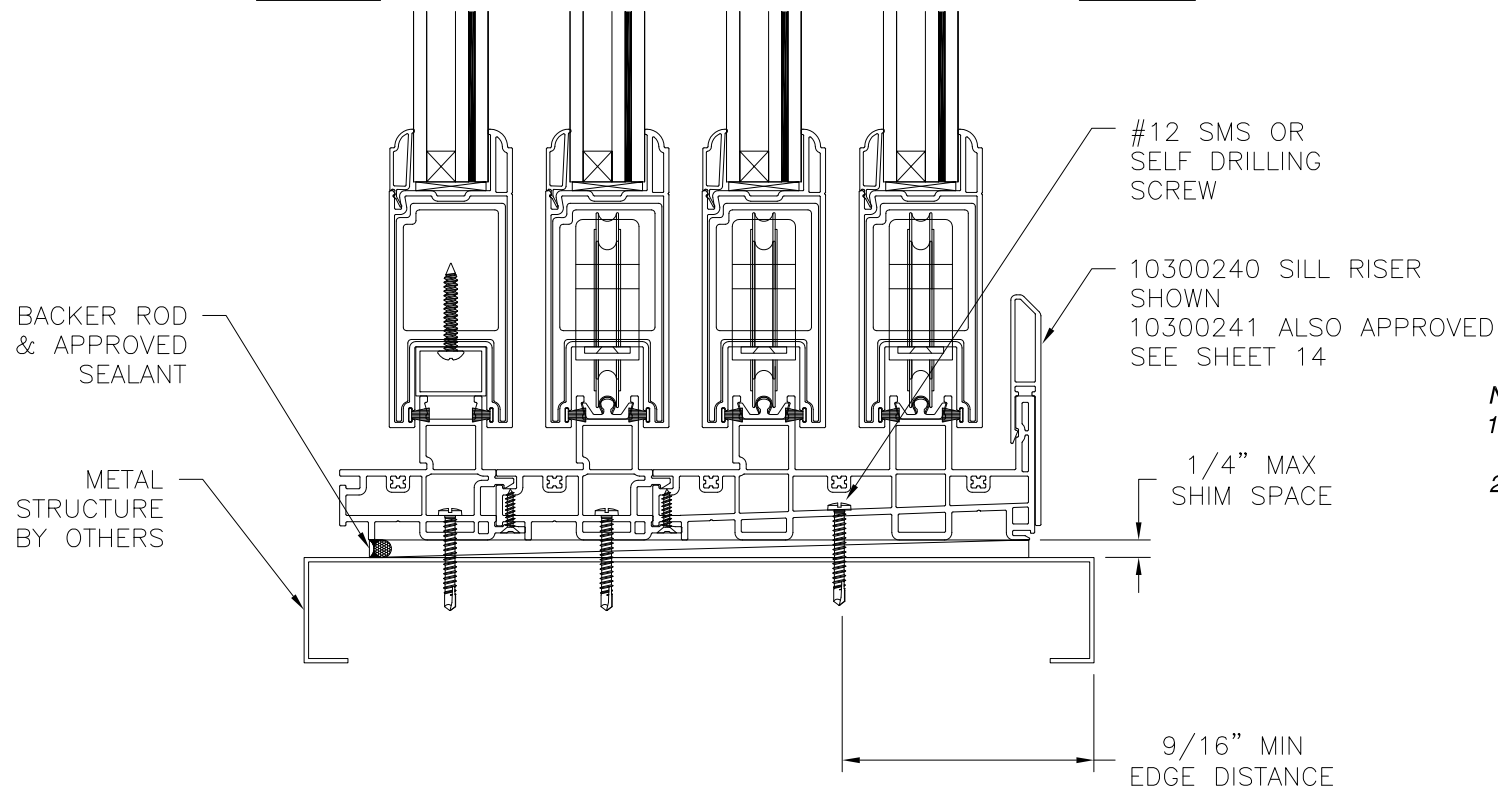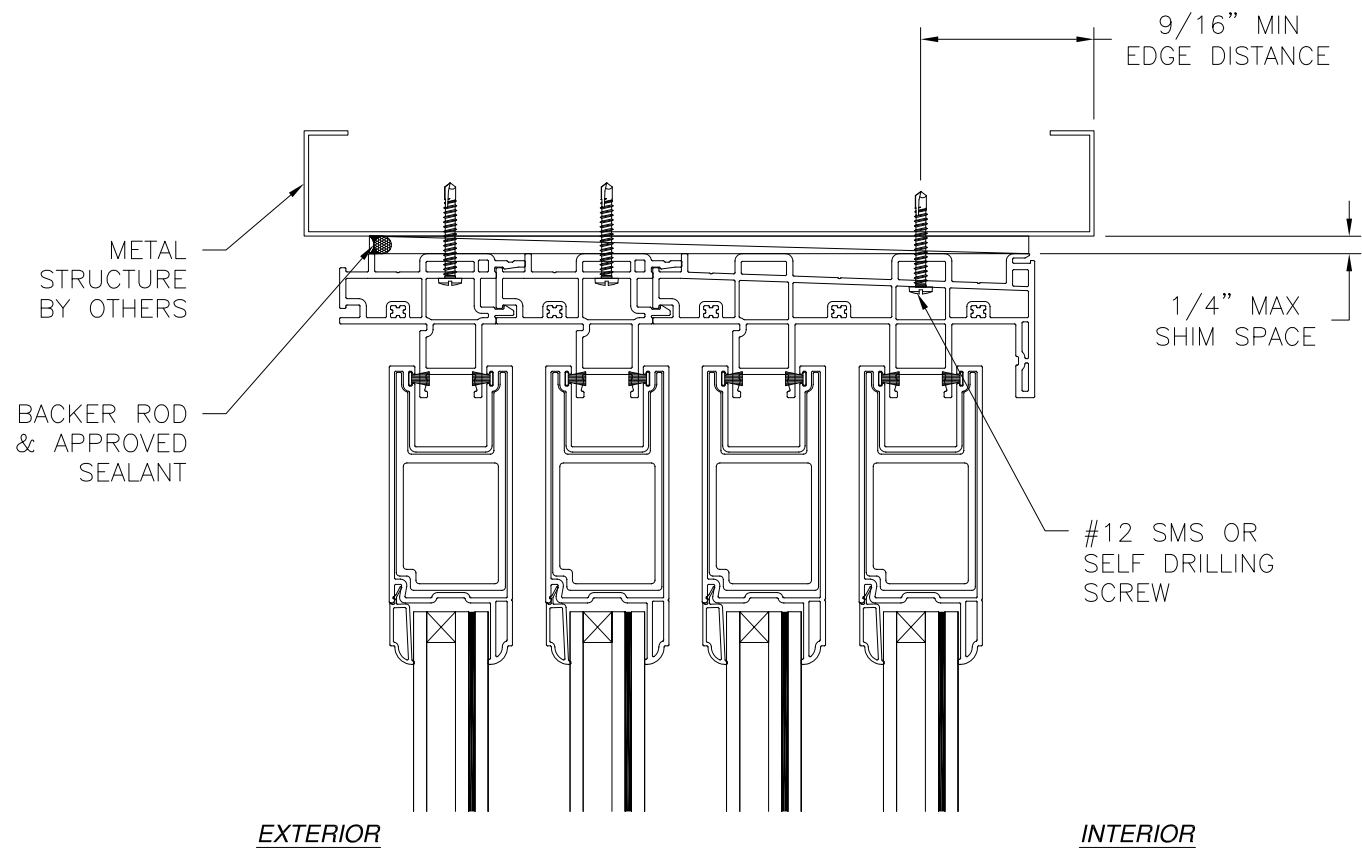

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

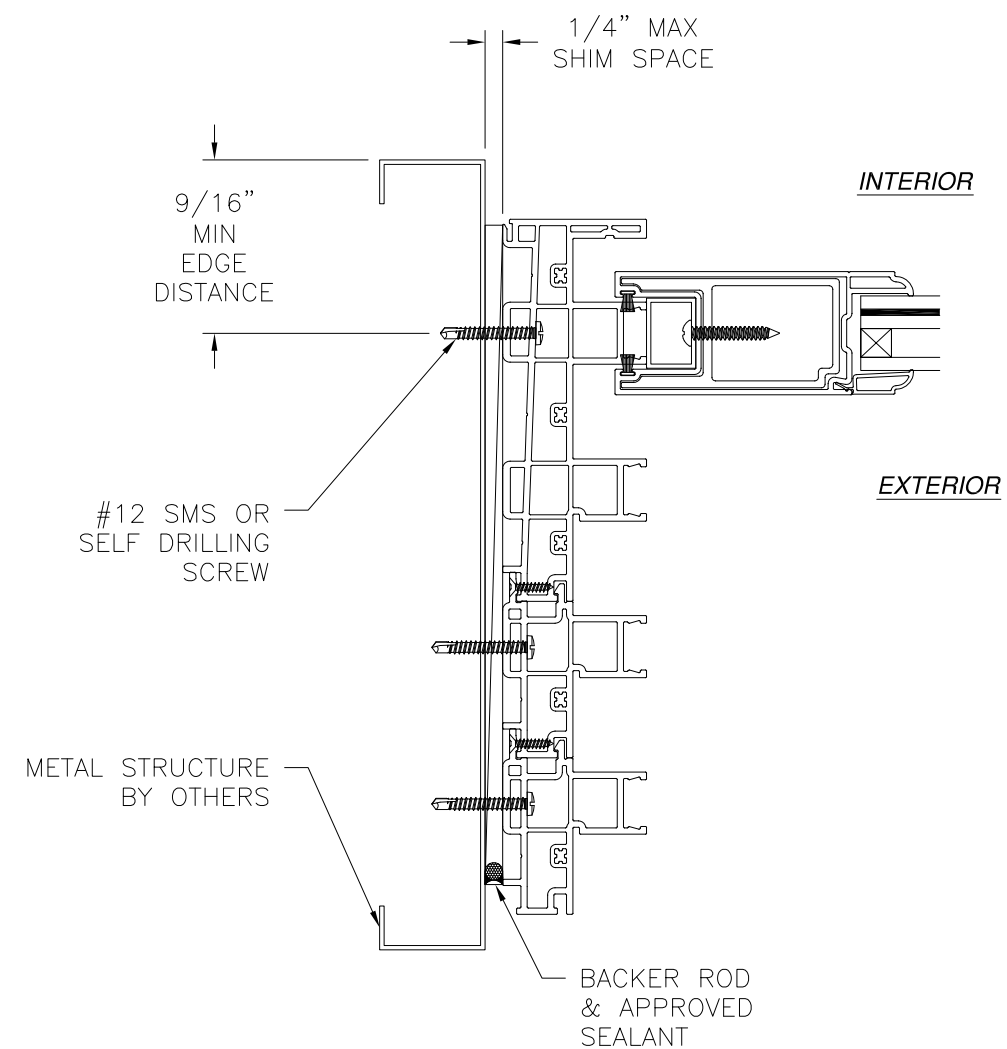

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 02/05/2018


VIWIN TECH WINDOWS AND DOORS

2400 IRVIN COBB DRIVE
PADUCAH, KY 42003


GRAND VISTA SLIDING DOOR
IMPACT
4TRACK INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-03195	REV -
SCALE NTS	DATE 11/07/17	SHEET 12 OF 14

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@rlomaspe.com

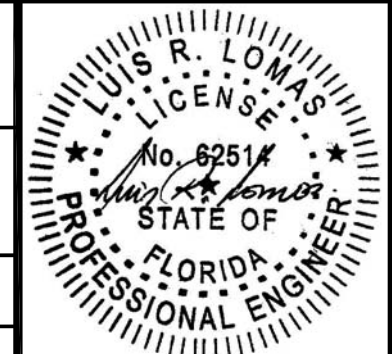

Luis R. Lomas P.E.
FL No.: 62514

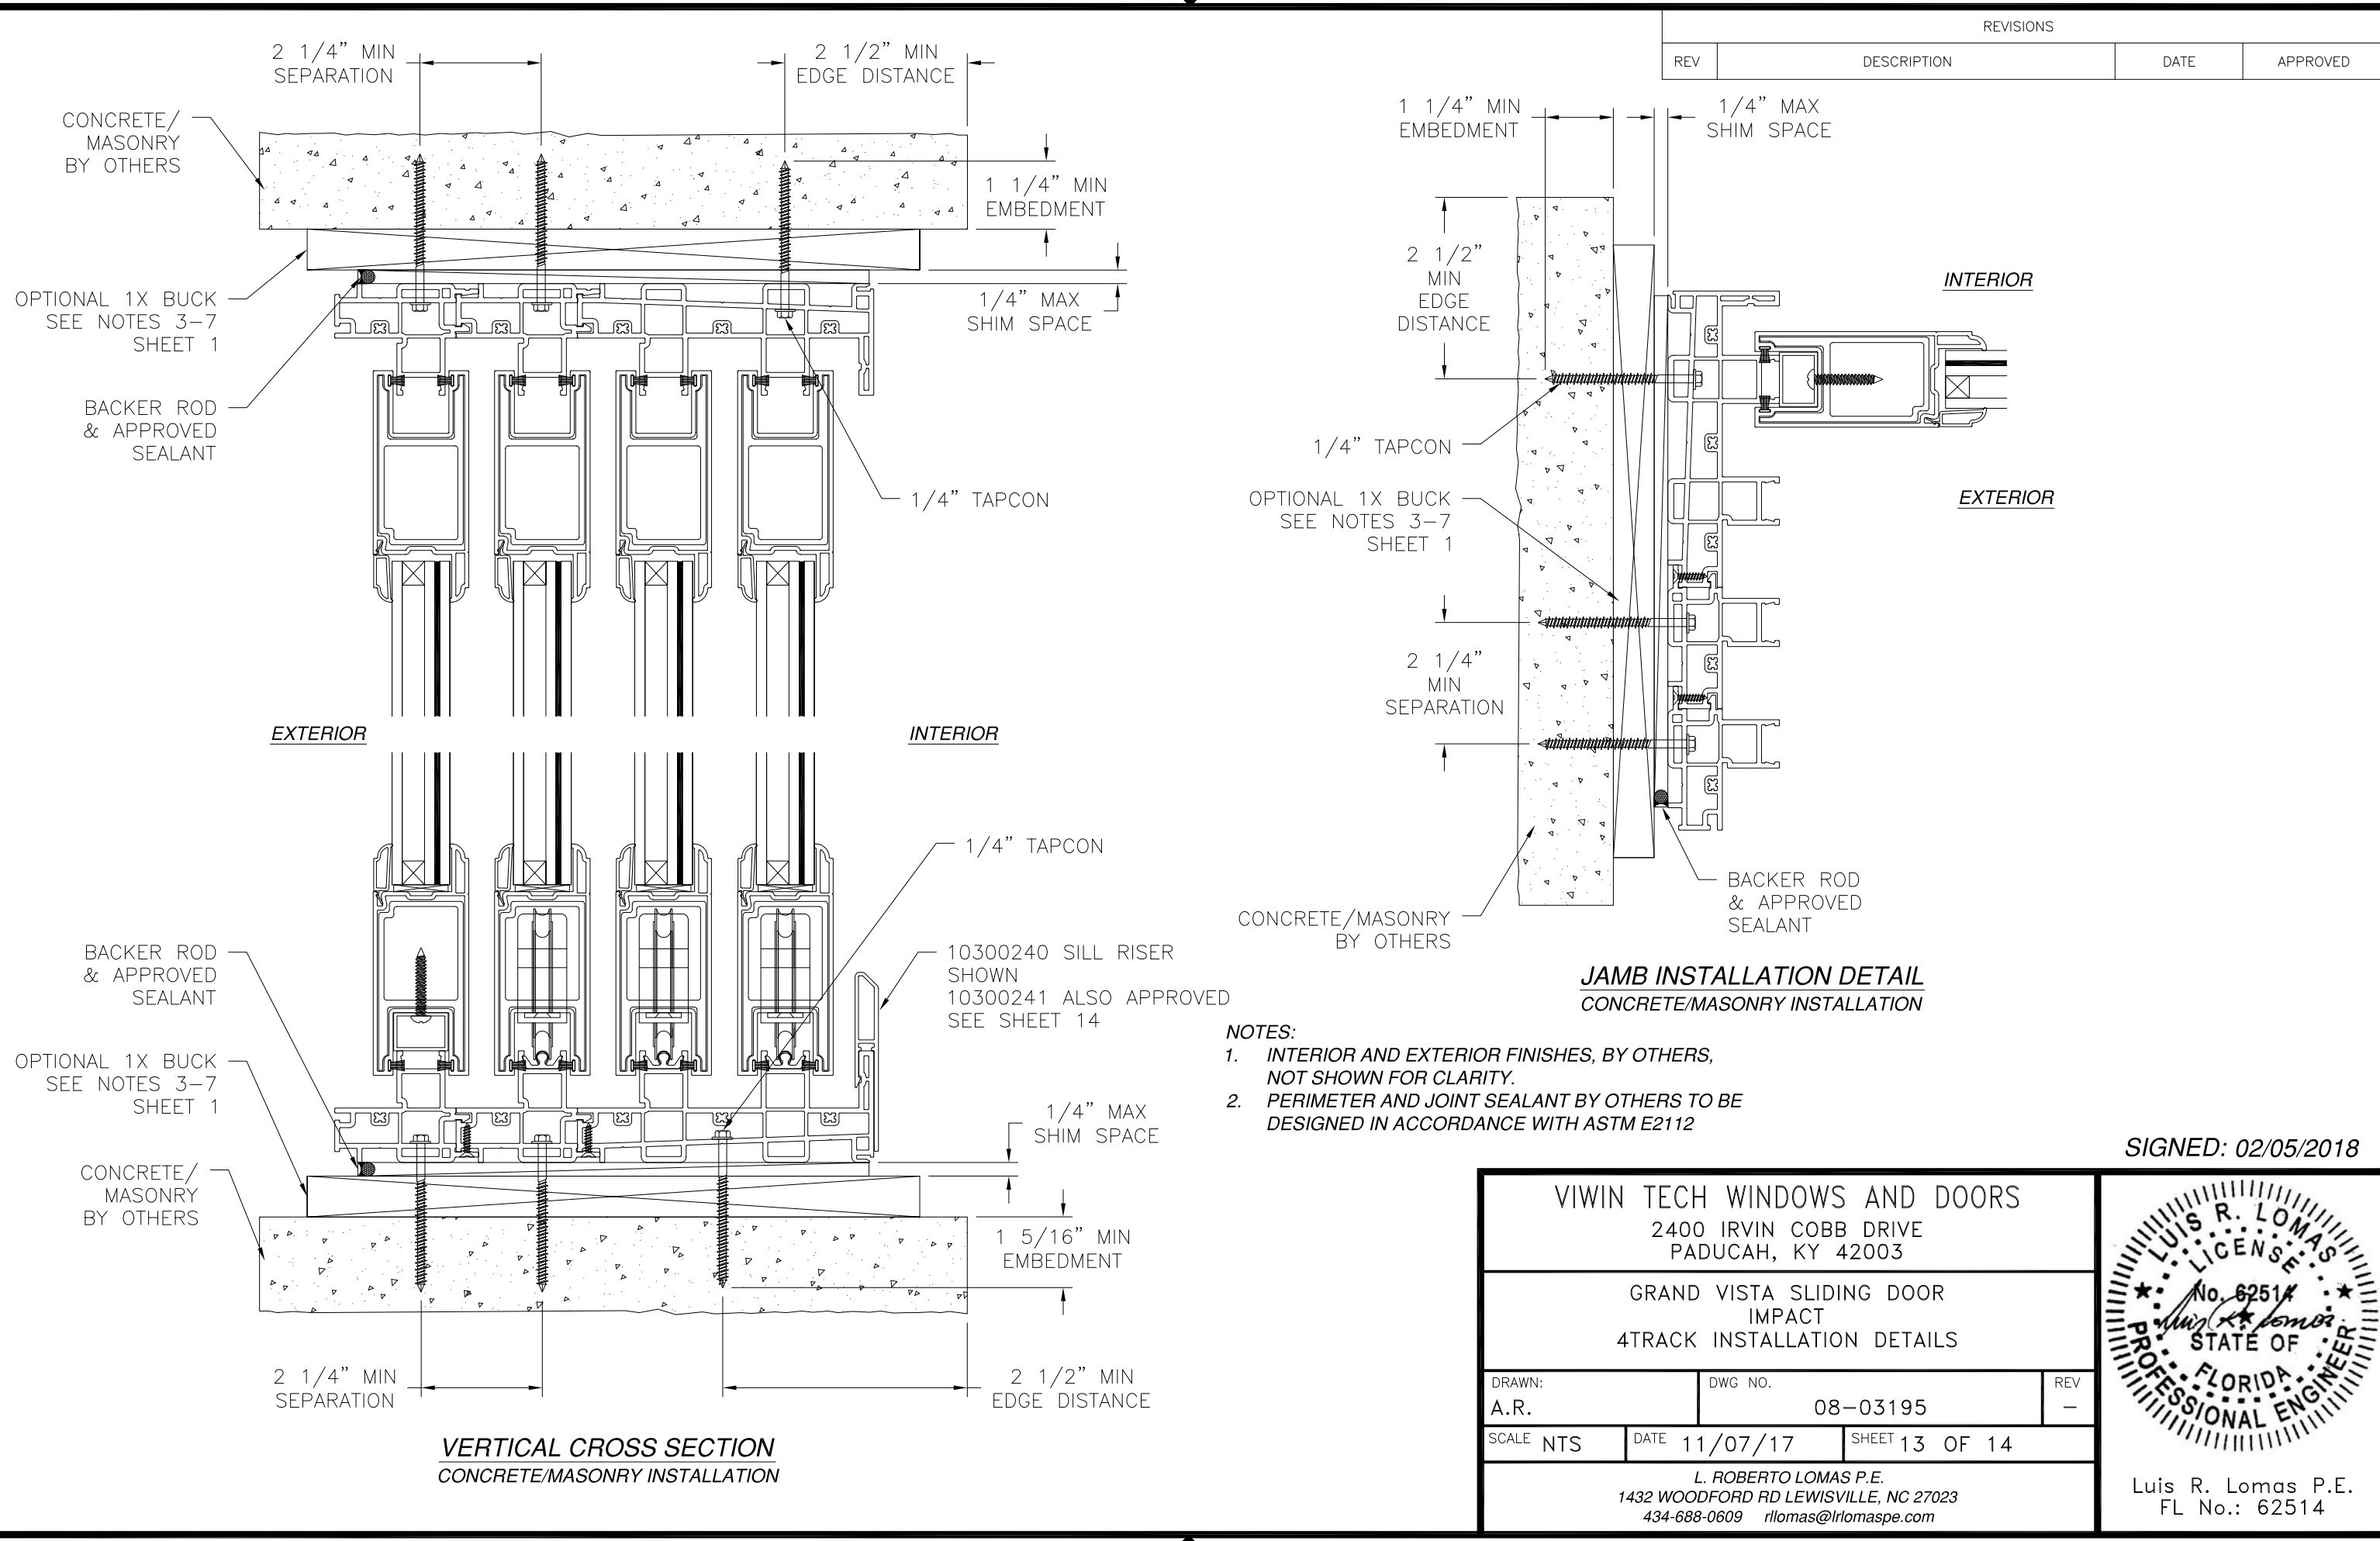

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

VIWIN TECH WINDOWS AND DOORS
2400 IRVIN COBB DRIVE
PADUCAH, KY 42003

GRAND VISTA SLIDING DOOR
IMPACT
4TRACK INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-03195

REV
-

SCALE
NTS


DATE
11/07/17

SHEET
13 OF 14


L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@rlomaspe.com

SIGNED: 02/05/2018


Luis R. Lomas P.E.
FL No.: 62514

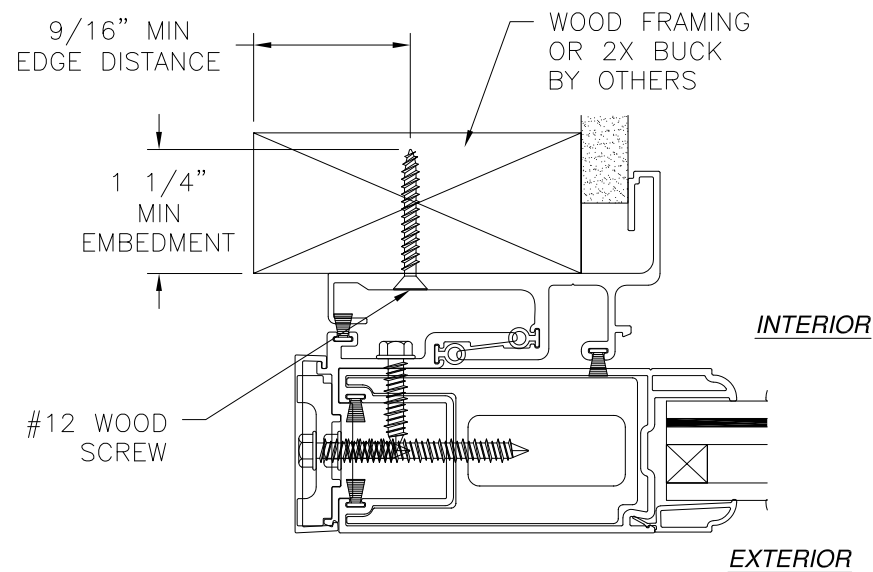


P-HOOK CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

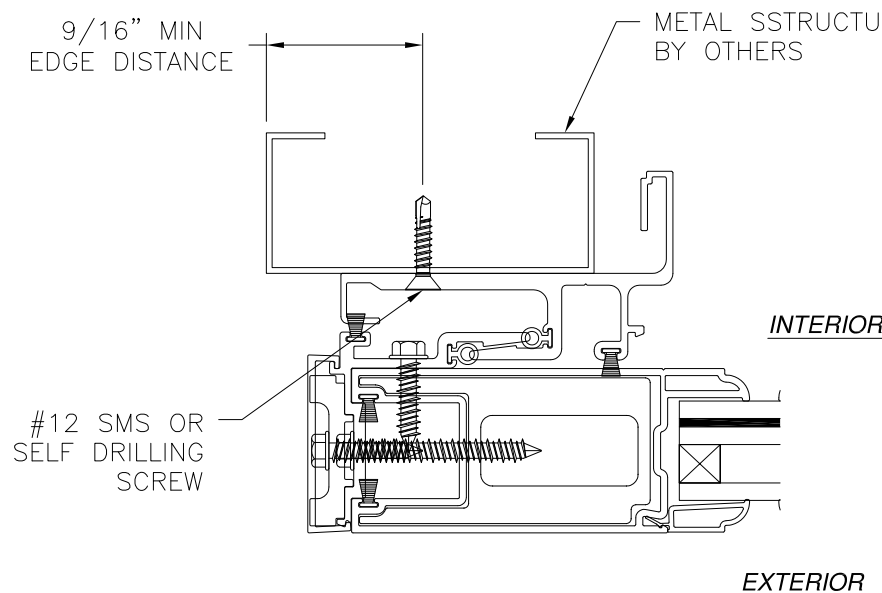


P-HOOK CROSS SECTION
METAL STRUCTURE INSTALLATION

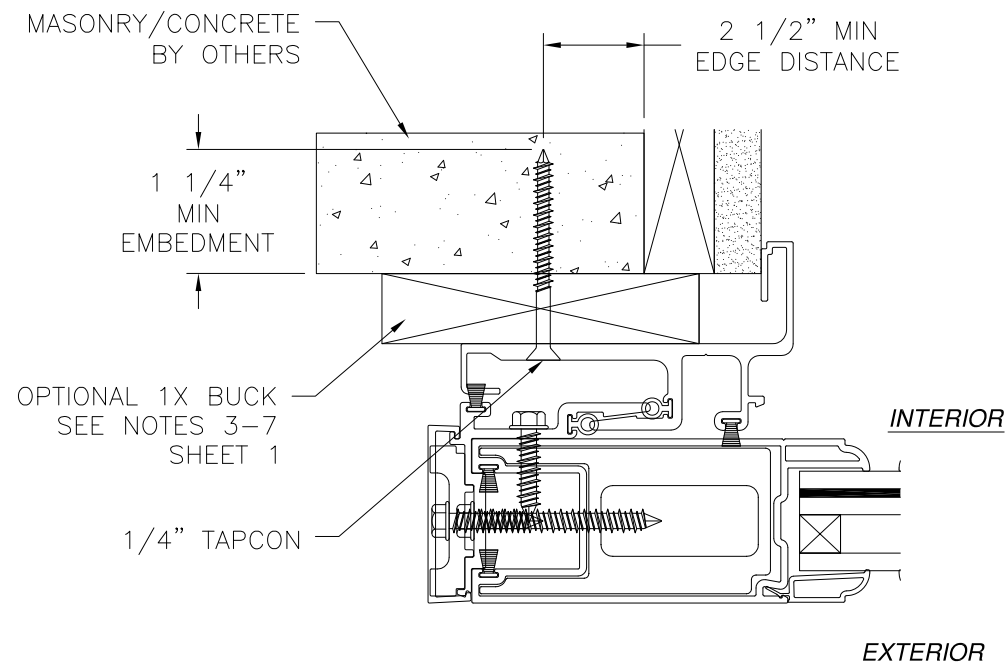

P-HOOK CROSS SECTION
CONCRETE/MASONRY INSTALLATION

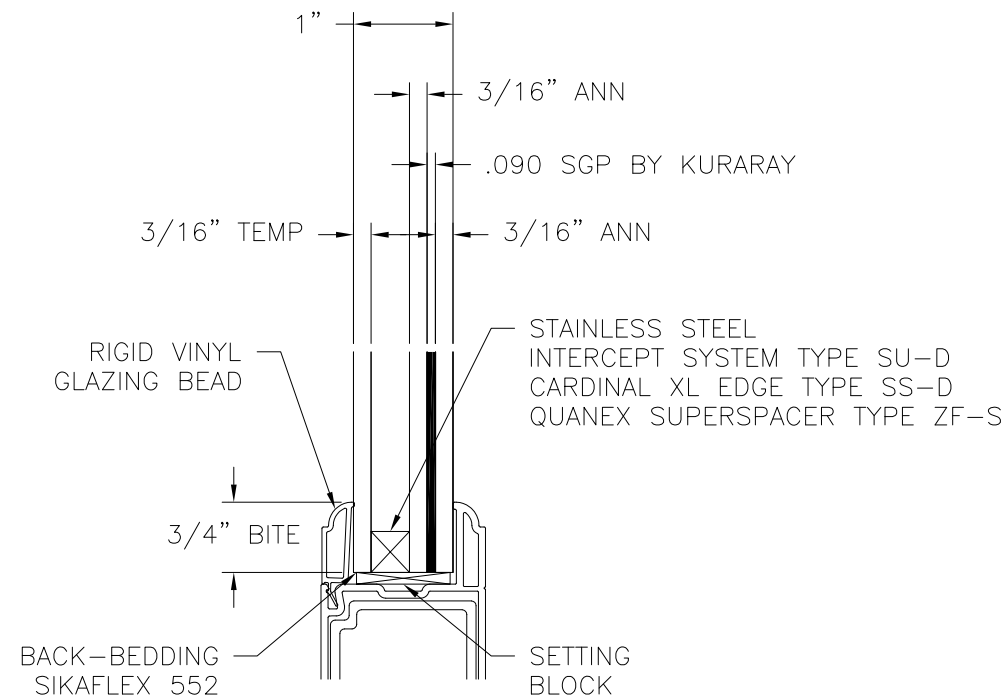

GLAZING DETAIL

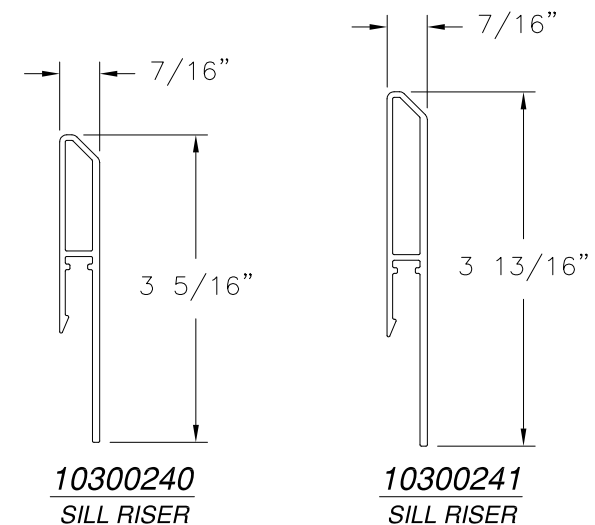

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

VIWIN TECH WINDOWS AND DOORS


2400 IRVIN COBB DRIVE
PADUCAH, KY 42003

GRAND VISTA SLIDING DOOR
IMPACT
P-HOOK INSTALLATION DETAILS AND GLAZING DETAIL

DRAWN: A.R.	DWG NO. 08-03195	REV -
SCALE NTS	DATE 11/07/17	SHEET 14 OF 14

L. ROBERTO LOMAS P.E.
1432 WOODFORD RD LEWISVILLE, NC 27023
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 02/05/2018

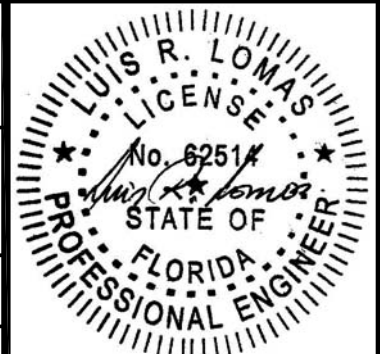

Luis R. Lomas P.E.
FL No.: 62514