




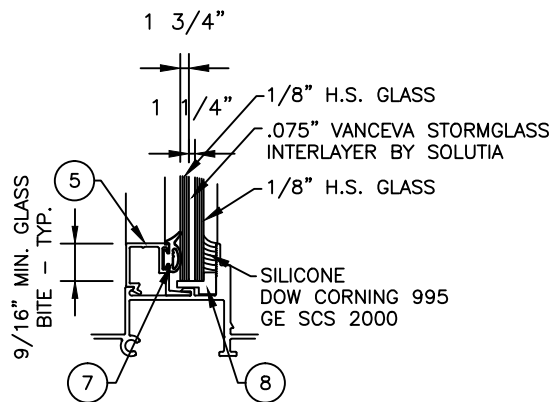


GLASS TYPE 'A'

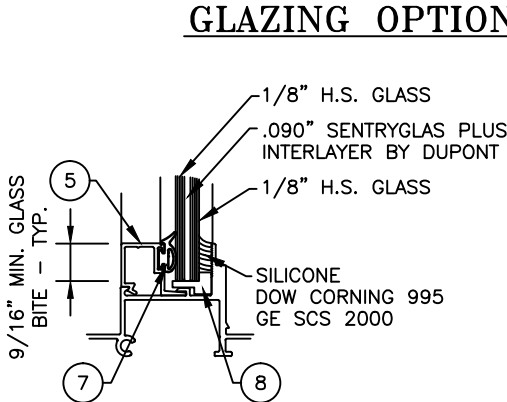


GLASS TYPE 'B'

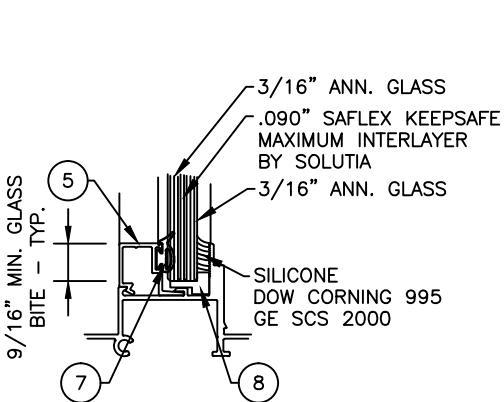


GLASS TYPE 'C'

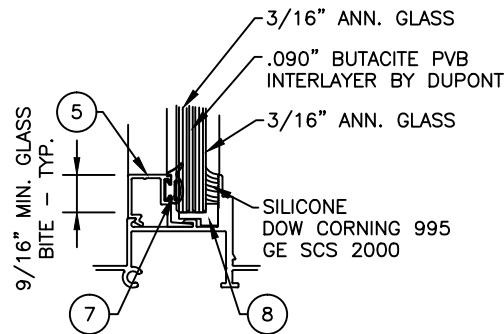


GLASS TYPE 'D'

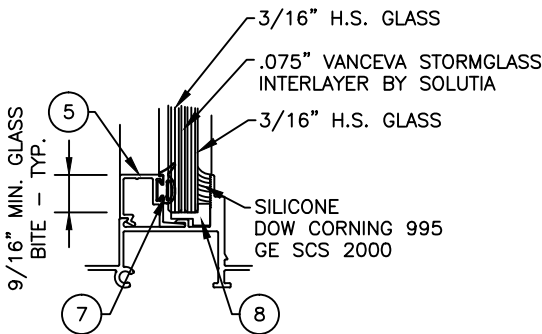

GLASS TYPE 'E'

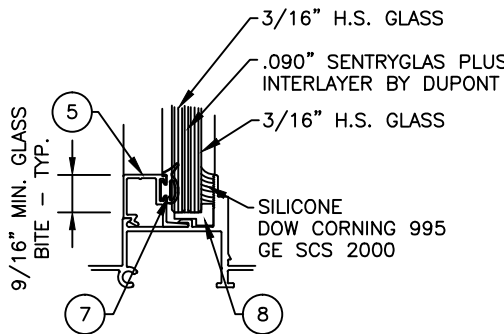

GLASS TYPE 'F'

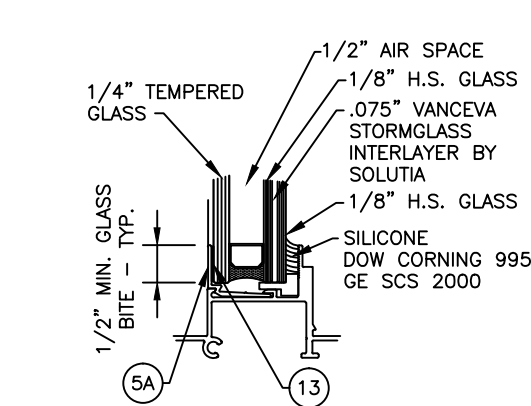

GLASS TYPE 'G'

THESE WINDOWS ARE RATED FOR LARGE MISSILE IMPACT. SHUTTERS ARE NOT REQUIRED.

SERIES 535 ALUMINUM FIXED WINDOW

DESIGN LOAD RATING FOR THESE WINDOWS TO BE AS PER CHARTS SHOWN ON SHEET 5 OF 8.

APPROVAL APPLIES TO SINGLE UNITS OR SIDE BY SIDE COMBINATIONS OF FIXED/FIXED OR FIXED WITH OTHER WINDOW TYPES IN MODULES OF TWO OR MORE WINDOWS USING MIAMI-DADE COUNTY/ FBC APPROVED MULLIONS IN BETWEEN. LOWER DESIGN PRESSURE FROM WINDOWS OR MULLION APPROVAL WILL APPLY TO ENTIRE SYSTEM.

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE 2023 8th EDITION INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).


WOOD BUCKS, BY OTHERS, MUST BE ANCHORED PROPERLY TO TRANSFER LOADS TO THE STRUCTURE.

ANCHORS SHALL BE AS LISTED AND SPACED AS SHOWN ON DETAILS. ANCHOR EMBEDMENT INTO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

ANCHORING OR LOADING CONDITIONS NOT SHOWN IN THESE DETAILS ARE NOT PART OF THIS APPROVAL.

A LOAD DURATION INCREASE IN ALLOWABLE STRESS WAS NOT USED IN DESIGN OF THIS SYSTEM.


MATERIALS INCLUDING BUT NOT LIMITED TO STEEL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF 2023 FLORIDA BLDG. CODE

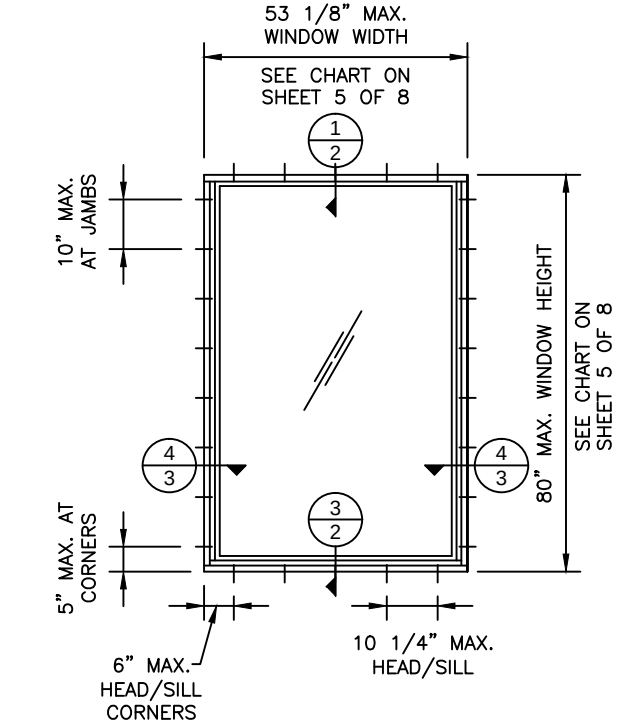

LAMINATED GLASS
LARGE MISSILE IMPACT

TYPICAL ELEVATION
WITHOUT INT. HORIZ.


TESTED UNIT

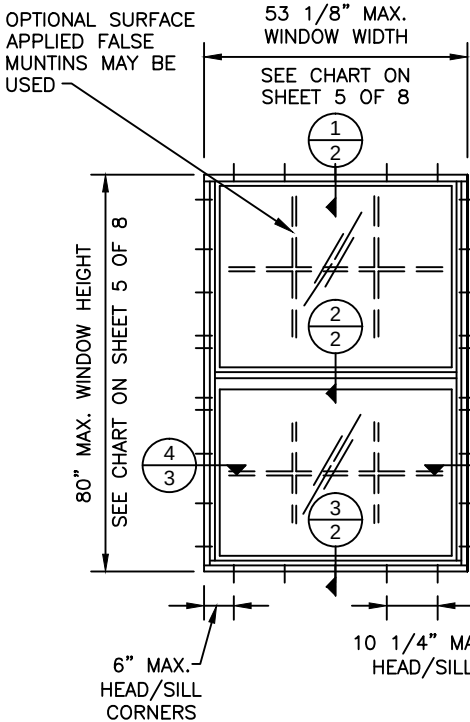


TYPICAL ELEVATION
WITH INT. HORIZ.

TESTED UNIT

NOTE:
(1) ANCHOR REQUIRED EACH SIDE OF INTERMEDIATE HORIZONTAL. FOR ANCHOR TYPES 1, 2 & 6 WHERE D.P. EXCEEDS +/-56.0 PSF, INSTALL (2) ANCHORS EACH SIDE OF INTERMEDIATE HORIZONTAL



Digitally signed by
Christopher Stanton
Date: 2023.11.06
15:11:00 -05'00'



STANTON ENGINEERING, INC.
STRUCTURAL ENGINEERING SERVICES
2701 NW BOCA RATON BLVD. SUITE 204
BOCA RATON, FL 33431
TEL: (561) 393-1003 FAX: (561) 393-1008

SERIES 535 ALUMINUM FIXED WINDOW (L.M.I.)
SOL-A-TROL
aluminum products, Inc.
4101 N.W. 132nd Street
Miami, Florida 33054
Phone: (305) 681-2020
Fax: (305) 681-2035

SCALE: NOTED
DATE: 10/23/23
DRAWN BY: DGI
CHECKED BY: C.S.

535FW
DRAWING NO.

SHEET NO.

1 of 8

NO.	DATE	REVISIONS
1		
2		
3		
4		
5		




TYPICAL ANCHORS
SEE ELEVATIONS
FOR SPACING


$$\frac{3}{2}$$


INTO 2BY WOOD BUCKS OR WOOD SUBSTRATES
1 3/8" MIN. PENETRATION INTO #2 SYP (G=0.55)

2 of 8



STANTON ENGINEERING, INC.
STRUCTURAL ENGINEERING SERVICES
2701 NW BOCA RATON BLVD. SUITE 204
BOCA RATON, FL 33431
TEL: (561) 393-1003 FAX: (561) 393-1008




SERIES 535 ALUMINUM FIXED WINDOW (L.M.I.)

SOL-A-TROL
aluminum products, inc.
4101 N.W. 132nd Street
Miami, Florida 33054
Phone: (305) 681-2020
Fax: (305) 681-2035


SCALE: NOTED
DATE: 10/23/23
DRAWN BY: DGI
CHECKED BY: C.S.

535FW
DRAWING NO.

SHEET NO.
3 of 8

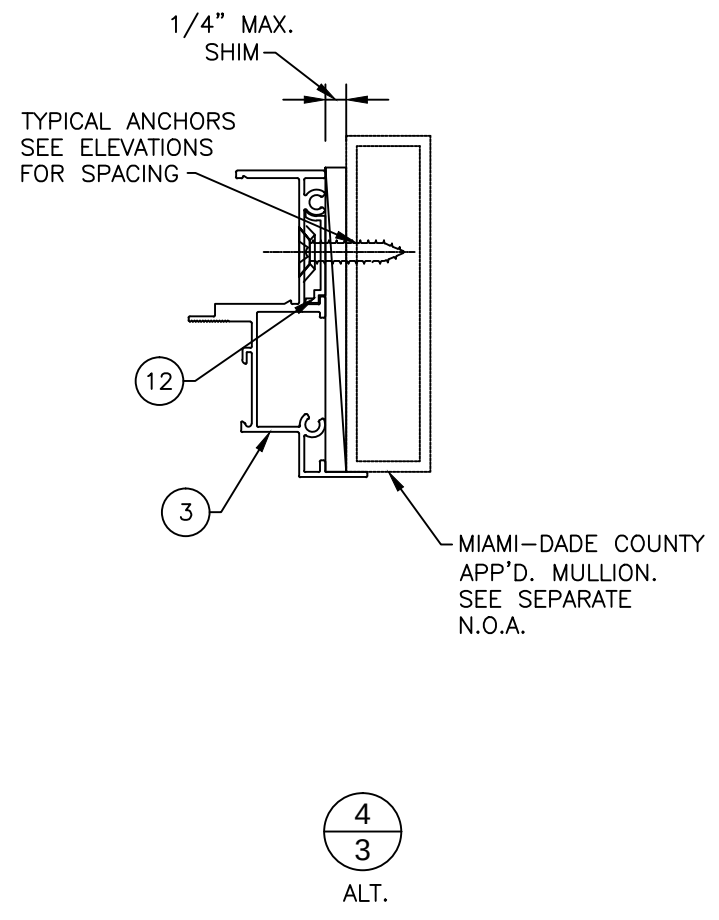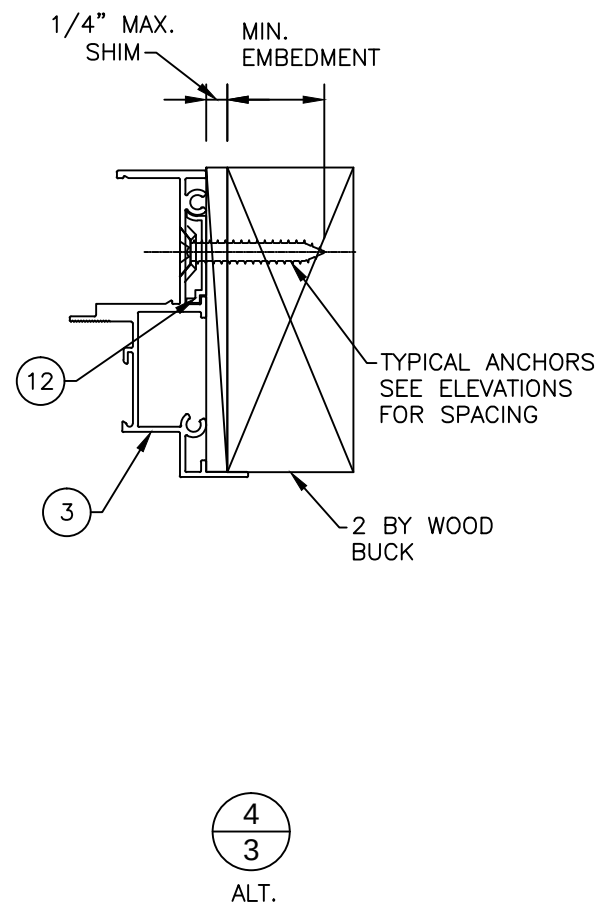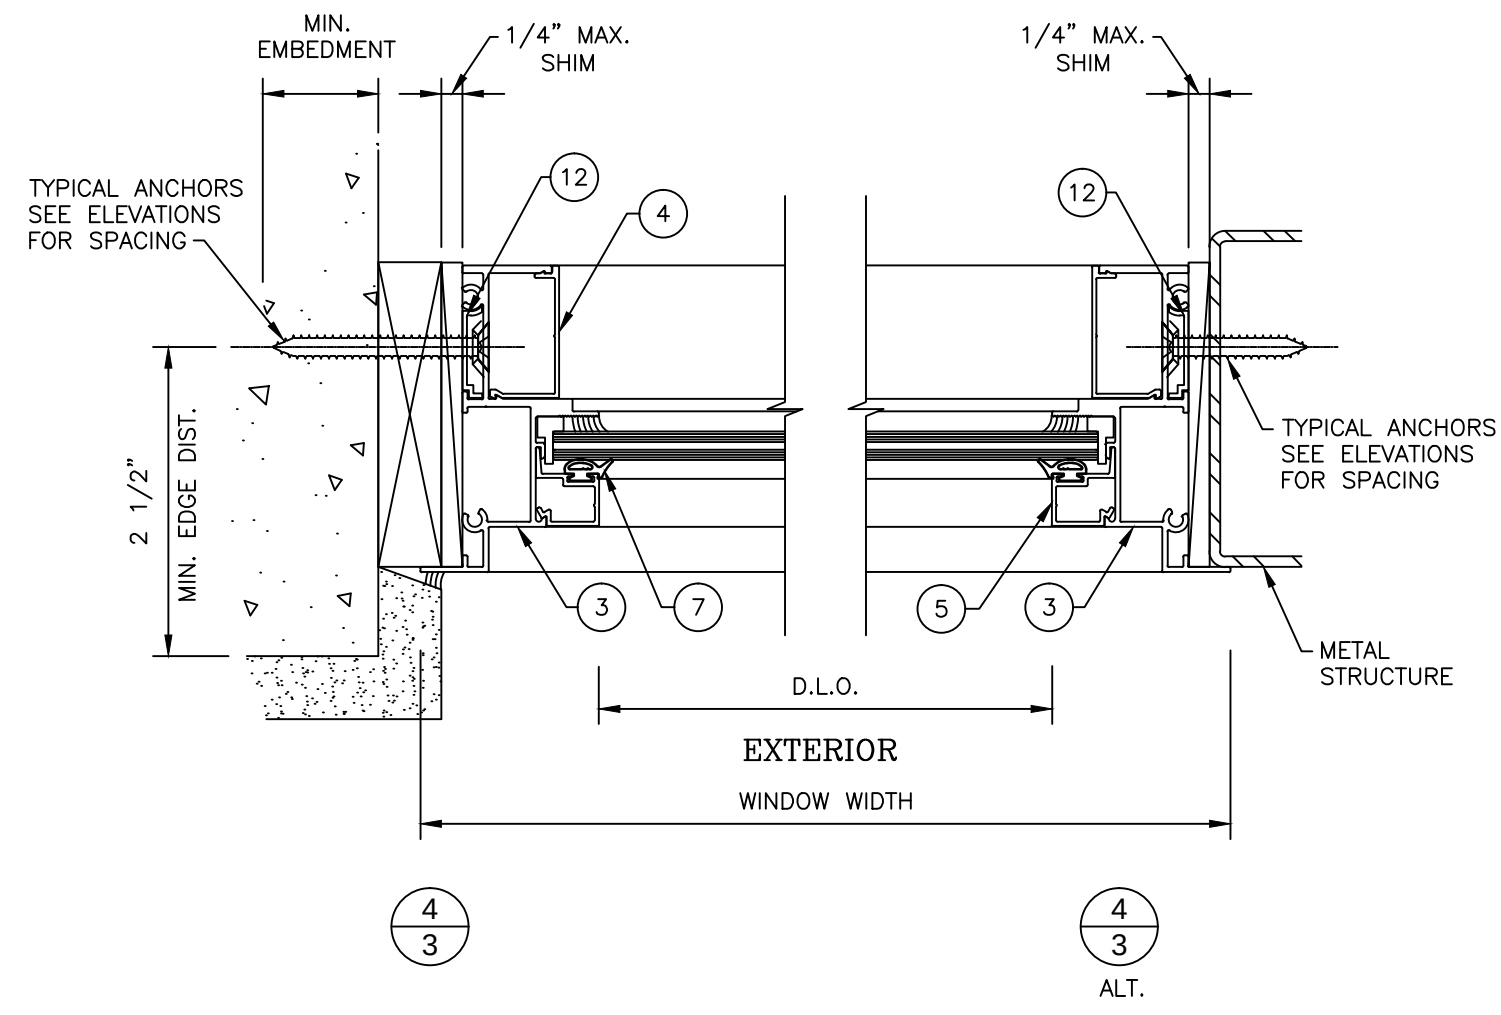

NO.	DATE	REVISIONS
1		
2		
3		
4		
5		



STANTON ENGINEERING, INC.
STRUCTURAL ENGINEERING SERVICES
 2701 NW BOCA RATON BLVD. SUITE 204
 BOCA RATON, FL 33431
 TEL: (561) 393-1003 FAX: (561) 393-1008









SERIES 535 ALUMINUM FIXED WINDOW (L.M.I.)

SOL-A-TROL
 aluminum products, inc.
 4101 N.W. 132nd Street
 Miami, Florida 33054
 Phone: (305) 681-2020
 Fax: (305) 681-2035

SCALE: NOTED
 DATE: 10/23/23
 DRAWN BY: DGI
 CHECKED BY: C.S.

535FW
 DRAWING NO.

SHEET NO.

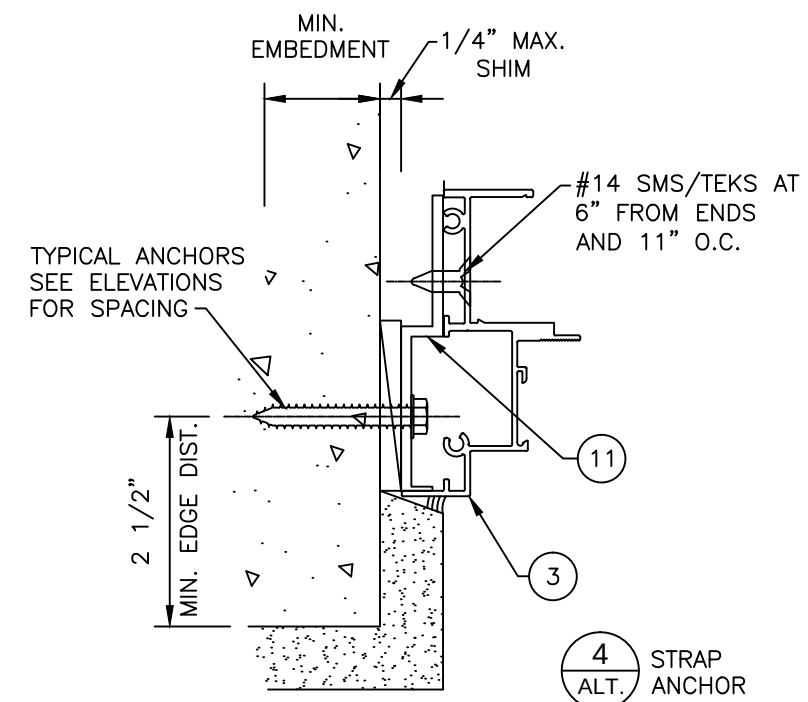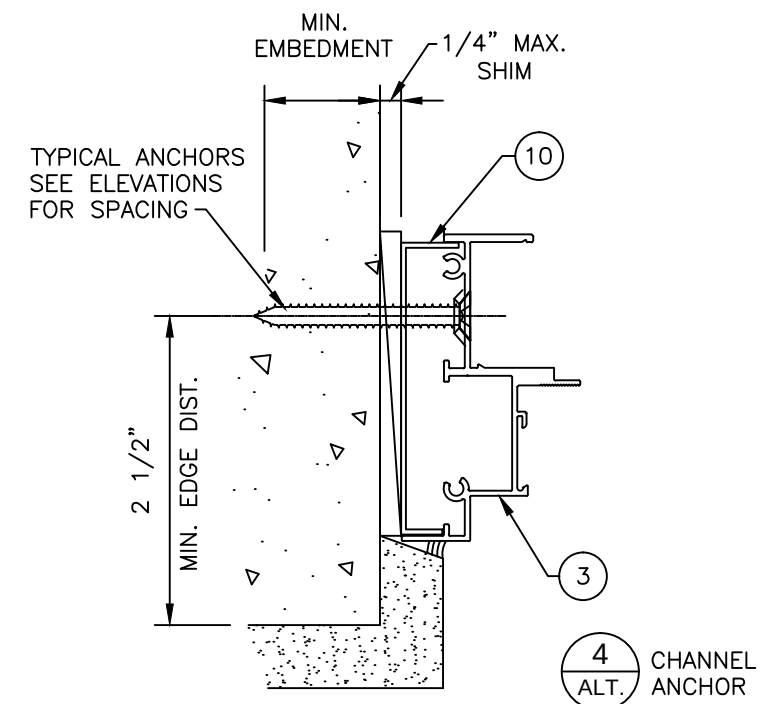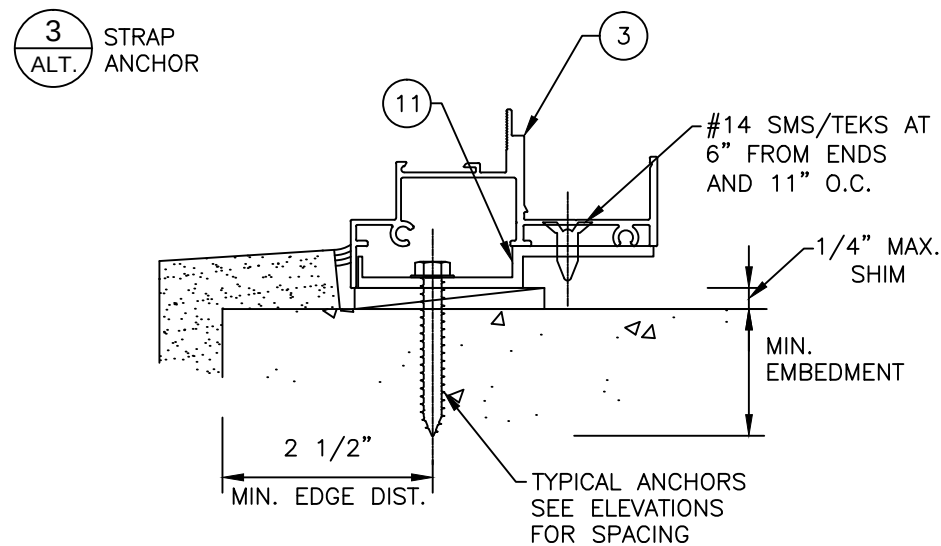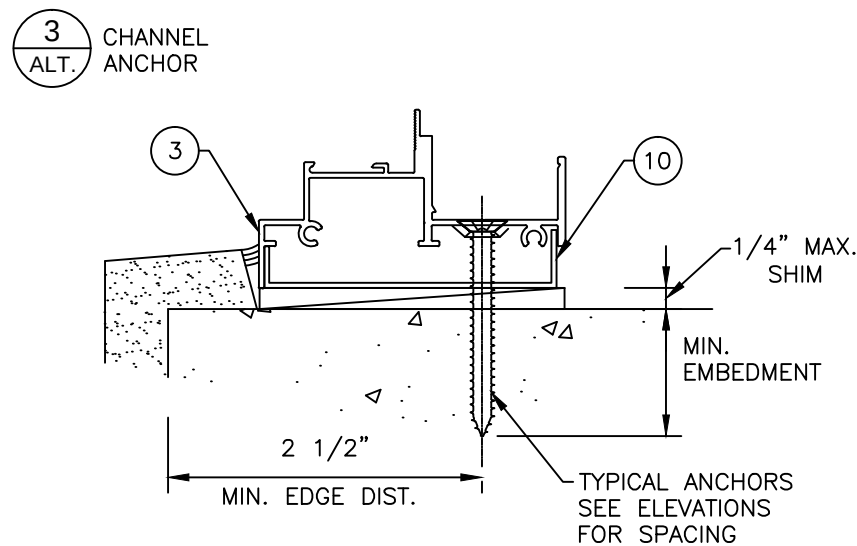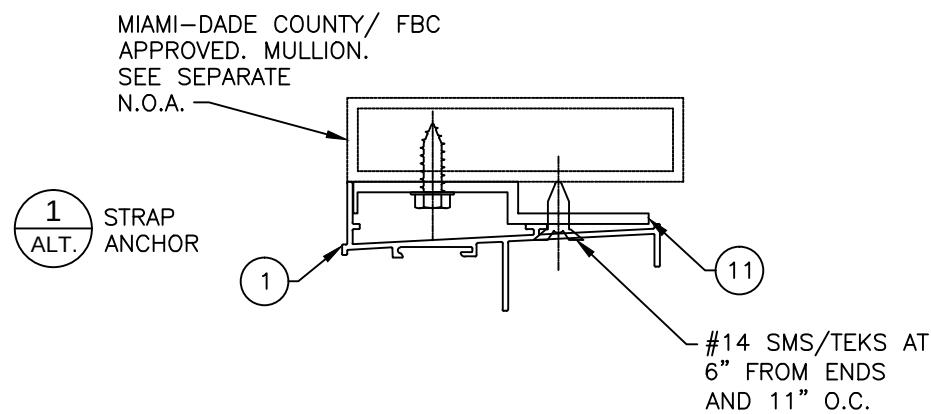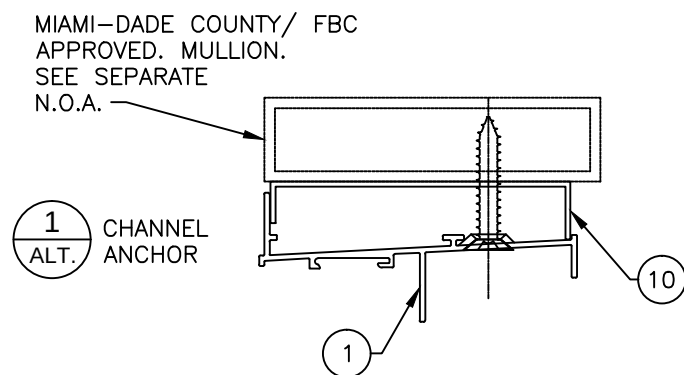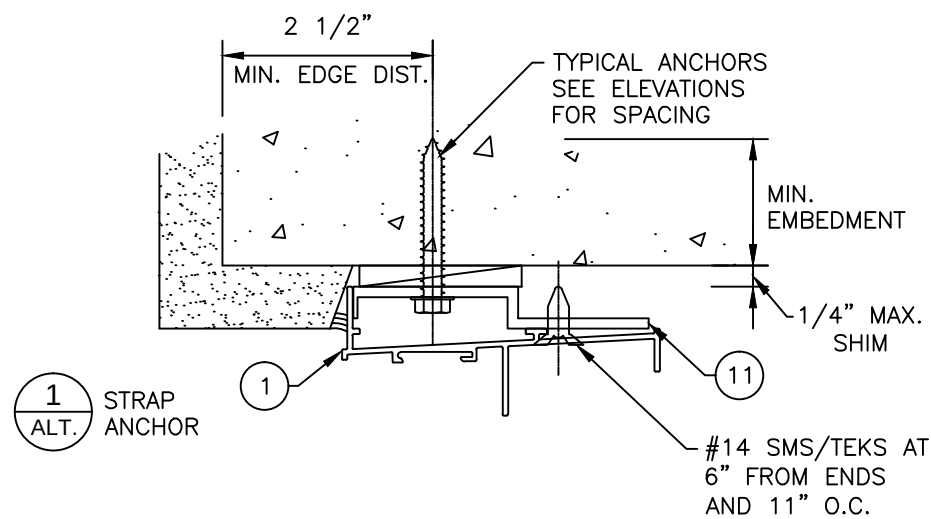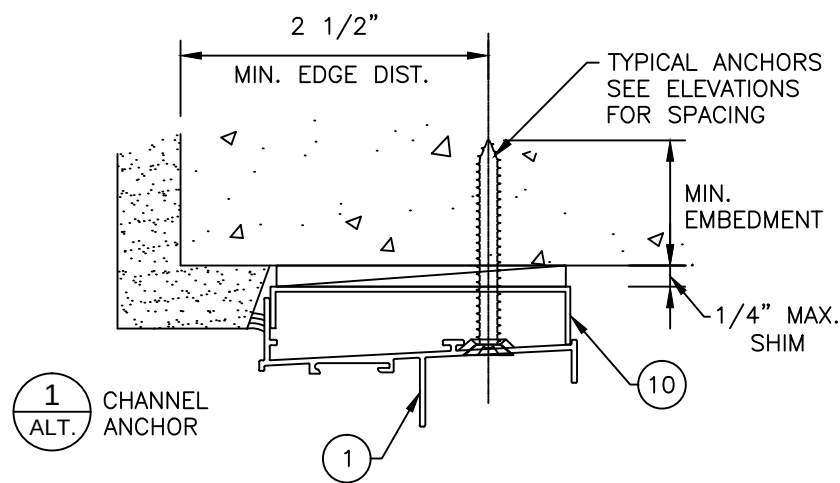


FPA FL#20804.1

NO.	DATE	REVISIONS
1		
2		
3		
4		
5		

INSTALLATION DETAILS FOR ALTERNATE
CHANNEL AND STRAP ANCHORS



NO.	DATE		REVISIONS
1			
2			
3			
4			
5			

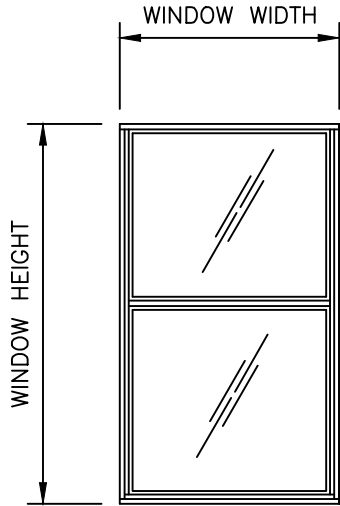

DESIGN LOAD CAPACITY - PSF							
WINDOW DIMS.		GLASS TYPES 'A' & 'B'		GLASS TYPES 'C' & 'D'		GLASS TYPES 'E' & 'F'	
WIDTH	HEIGHT	EXT.(+)	1NT.(−)	EXT.(+)	1NT.(−)	EXT.(+)	1NT.(−)
26−1/2"	38−3/8"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	80.0	80.0	86.7	100.0
48"		86.7	100.0	80.0	80.0	86.7	100.0
53−1/8"		86.7	100.0	80.0	80.0	86.7	100.0
26−1/2"	50−5/8"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	80.0	80.0	86.7	100.0
48"		86.7	100.0	80.0	80.0	86.7	100.0
53−1/8"		86.7	100.0	80.0	80.0	86.7	100.0
26−1/2"	60"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	80.0	80.0	86.7	100.0
48"		86.7	100.0	80.0	80.0	86.7	100.0
53−1/8"		86.7	100.0	80.0	80.0	86.7	100.0
26−1/2"	63"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	80.0	80.0	86.7	100.0
48"		86.7	100.0	80.0	80.0	86.7	100.0
53−1/8"		86.7	100.0	80.0	80.0	86.7	100.0
26−1/2"	72"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	80.0	80.0	86.7	100.0
48"		86.7	100.0	80.0	80.0	86.7	100.0
53−1/8"		86.7	100.0	80.0	80.0	86.7	100.0
26−1/2"	74−1/4"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	80.0	80.0	86.7	100.0
48"		86.7	100.0	80.0	80.0	86.7	100.0
53−1/8"		86.7	100.0	−	−	86.7	100.0
26−1/2"	80"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	80.0	80.0	86.7	100.0
48"		86.7	100.0	80.0	80.0	86.7	100.0
53−1/8"		86.7	100.0	−	−	86.7	100.0
26−1/2"	84"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	80.0	80.0	86.7	100.0
48"		86.7	100.0	−	−	86.7	100.0
26−1/2"	90"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	80.0	80.0	86.7	100.0
26−1/2"	96"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	−	−	86.7	100.0

NOTE:
WIDTH AND HEIGHT CAN BE ORIENTED
VERTICALLY OR HORIZONTALLY. AS SHOWN ABOVE

NOTE:
GLASS CAPACITIES ON THIS SHEET ARE
BASED ON ASTM E1300 (3 SEC. GUSTS)

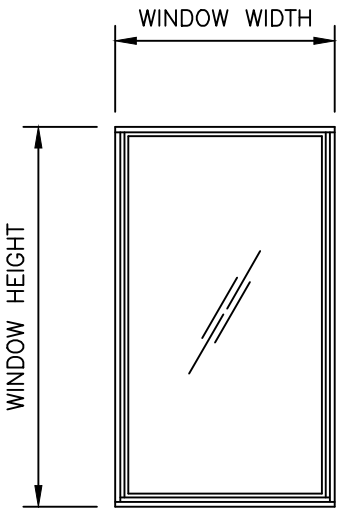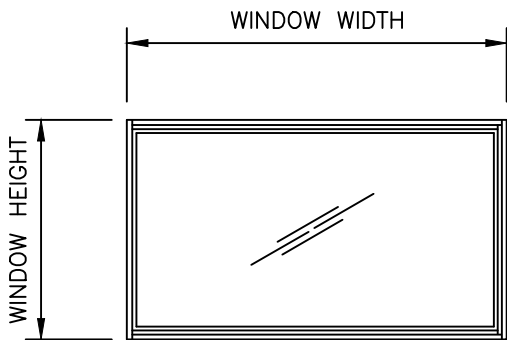

FPA FL#20804.1

DESIGN LOAD CAPACITY - PSF							
WINDOW DIMS.		GLASS TYPES 'A' & 'B'		GLASS TYPES 'C' & 'D'		GLASS TYPES 'E', 'F' & "G"	
WIDTH	HEIGHT	EXT.(+)	1NT.(−)	EXT.(+)	1NT.(−)	EXT.(+)	1NT.(−)
26−1/2"	40"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	80.0	80.0	86.7	100.0
48"		86.7	100.0	80.0	80.0	86.7	100.0
53−1/8"		86.7	100.0	−	−	86.7	100.0
26−1/2"	45"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	80.0	80.0	86.7	100.0
26−1/2"	48"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
26−1/2"	50−5/8"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
37"		86.7	100.0	80.0	80.0	86.7	100.0
42"		86.7	100.0	−	−	86.7	100.0
26−1/2"	60"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
26−1/2"	63"	86.7	100.0	80.0	80.0	86.7	100.0
32"		86.7	100.0	80.0	80.0	86.7	100.0
26−1/2"	74−1/4"	86.7	100.0	80.0	80.0	86.7	100.0
26−1/2"	80"	86.7	100.0	−	−	86.7	100.0
53 1/8"		−	−	−	−	87.0	100.0

FBC2023

SEAL

CHRISTOPHER STANTON

LICENSE

No 69316

STATE OF

FLORIDA

PROFESSIONAL ENGINEER

CHRISTOPHER STANTON, P.E.

FLA #00043316

STANTON ENGINEERING, INC.

STRUCTURAL ENGINEERING SERVICES

2701 NW BOCA RATON BLVD. SUITE 204

BOCA RATON, FL 33431

TEL: (561) 393-1003 FAX: (561) 393-1008

SERIES 535 ALUMINUM FIXED WINDOW (L.M.I.)

SOL-A-TROL

aluminum products, inc.

4101 N.W. 132nd Street

Miami, Florida 33054

Phone: (305) 681-2020

Fax: (305) 681-2035

SCALE: NOTED

DATE: 10/23/23

DRAWN BY: DGI

CHECKED BY: C.S.


535FW

DRAWING NO.

SHEET NO.


5 of 8

MULLION LOAD CAPACITY - PSF			
WINDOW DIMS.		TYPE '1'	TYPE '2'
WIDTH (W)	LENGTH (L)	EXT.(+) INT.(-)	EXT.(+) INT.(-)
26-1/2"	38-3/8"	100.0	100.0
32"		100.0	100.0
37"		100.0	100.0
42"		100.0	100.0
48"		100.0	100.0
53-1/8"		100.0	100.0
26-1/2"	50-5/8"	100.0	100.0
32"		100.0	100.0
37"		100.0	100.0
42"		100.0	100.0
48"		100.0	100.0
53-1/8"		100.0	100.0
26-1/2"	60"	100.0	100.0
32"		100.0	100.0
37"		100.0	100.0
42"		100.0	100.0
48"		100.0	100.0
53-1/8"		100.0	100.0
26-1/2"	63"	100.0	100.0
32"		100.0	100.0
37"		100.0	100.0
42"		100.0	100.0
48"		100.0	100.0
53-1/8"		100.0	100.0
26-1/2"	74"	100.0	100.0
32"		100.0	100.0
37"		100.0	100.0
42"		100.0	100.0
48"		100.0	100.0
53-1/8"		100.0	100.0
26-1/2"	80"	100.0	100.0
32"		100.0	100.0
37"		100.0	100.0
42"		100.0	100.0
48"		95.0	100.0
53-1/8"		86.0	100.0

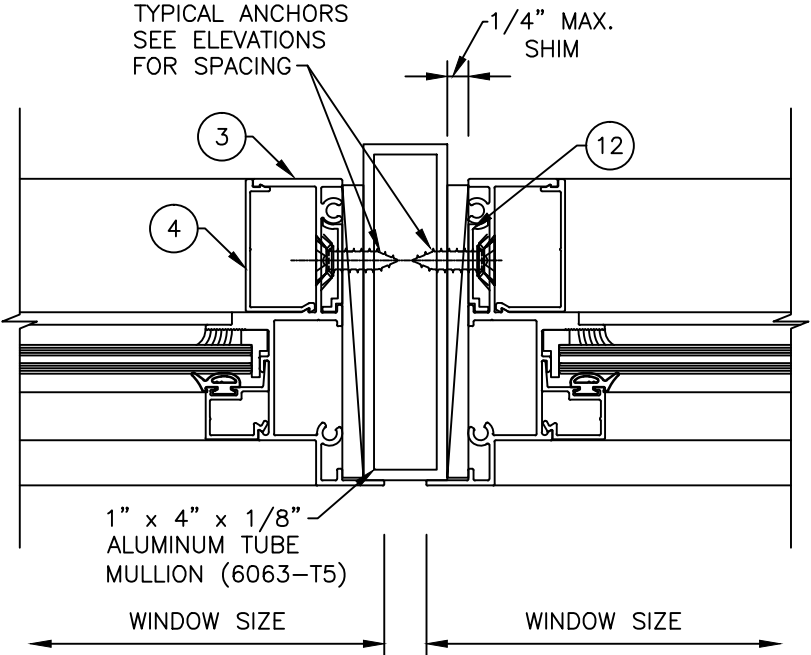

EXTERIOR
UN-REINFORCED MULLION
TYPE 1


5
5

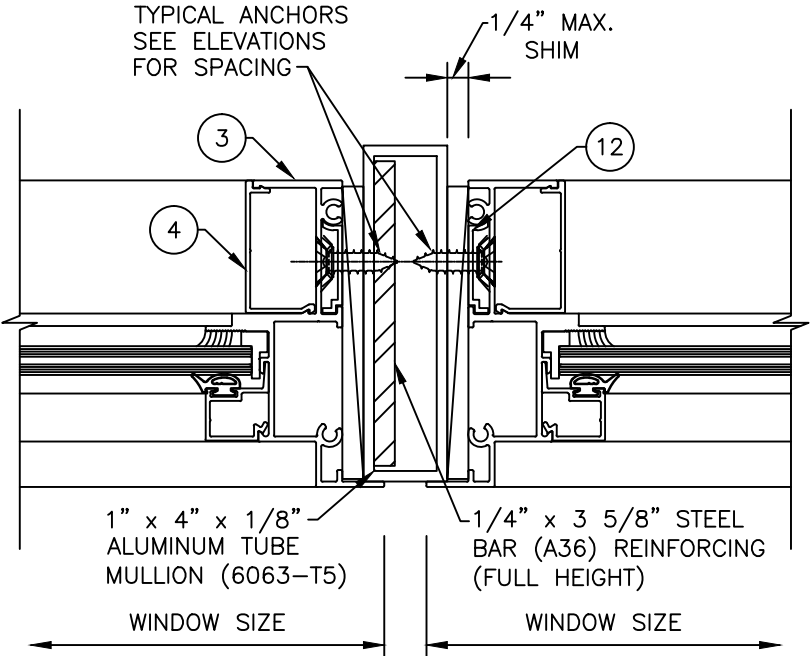

EXTERIOR
REINFORCED MULLION
TYPE 2

5
5

ALT.

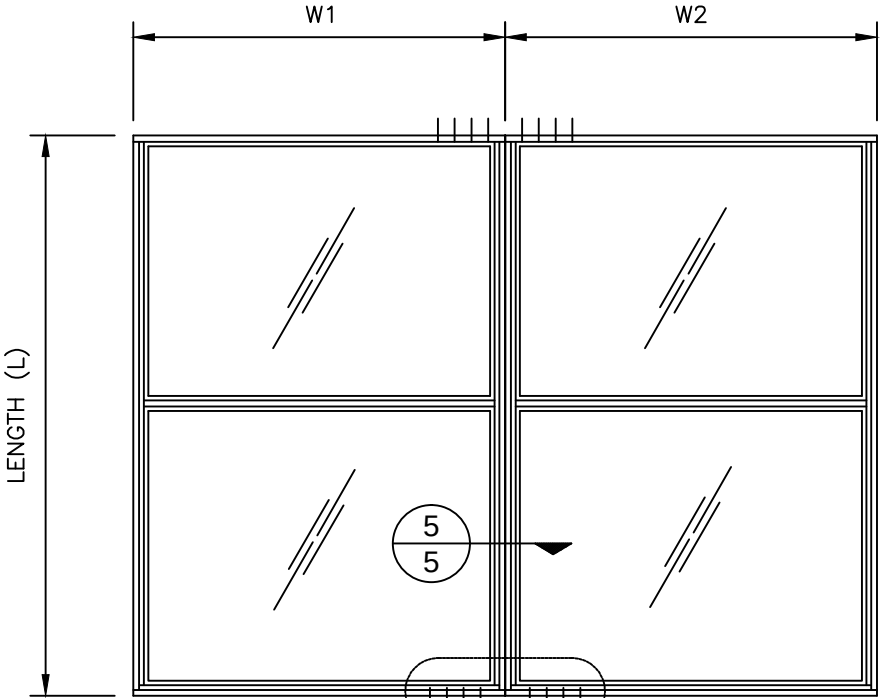

ANCHOR CLUSTER AT MULLION
ENDS. SEE CHART ON
SHEET 7 OF 8

TYPICAL ELEVATION
SIDE BY SIDE WINDOWS
SIDE BY SIDE APPLIES TO 2 OR MORE WINDOWS


ALL OTHER ANCHORS PER
ELEVATION ON SHEET 1 OF 8

WIDTH (W) = $\frac{W1 + W2}{2}$

- NOTES:
1. USE CHART ON THIS SHEET FOR
SIDE BY SIDE CONNECTION
CAPACITY OF WINDOW MULLION.
 2. FOR SINGLE WINDOW CAPACITY SEE
SHEET 5 OF 8.
 3. LOWER VALUES FROM STEPS 1 OR 2
WILL APPLY TO ENTIRE SYSTEM.


FPA FL#20804.1

NO.	DATE	REVISIONS
1		
2		
3		
4		
5		



STANTON ENGINEERING, INC.
STRUCTURAL ENGINEERING SERVICES
2701 NW BOCA RATON BLVD. SUITE 204
BOCA RATON, FL 33431
TEL: (561) 393-1003 FAX: (561) 393-1008

SERIES 535 ALUMINUM FIXED
WINDOW (L.M.I.)




SCALE: NOTED
DATE: 10/23/23
DRAWN BY: DGI
CHECKED BY: C.S.


535FW

DRAWING NO.


SHEET NO.



(2) EA. SIDE



(3) EA. SIDE



(4) EA. SIDE

MULLION ANCHOR LOAD CAPACITY - PSF																	
WINDOW DIMS.		ANCHOR TYPE 1				ANCHOR TYPE 2				ANCHOR TYPE 3		ANCHOR TYPE 4		ANCHOR TYPE 5		ANCHOR TYPE 6	
		(2) EA. SIDE		(3) EA. SIDE		(3) EA. SIDE		(4) EA. SIDE		(2) EA. SIDE		(2) EA. SIDE		(2) EA. SIDE		(3) EA. SIDE	
WIDTH (W)	LENGTH (L)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)
26-1/2"	38-3/8"	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
37"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
40"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
48"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
53-1/8"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
26-1/2"	50-5/8"	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
37"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
40"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
48"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
53-1/8"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
26-1/2"	60"	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
37"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
40"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
48"		90.0	96.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
53-1/8"		86.0	86.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
26-1/2"	63"	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
37"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
40"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
48"		90.0	91.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
53-1/8"		82.0	82.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
26-1/2"	72"	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
37"		90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
40"		90.0	96.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
48"		80.0	80.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
53-1/8"		72.0	72.0	90.0	100.0	90.0	94.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
26-1/2"	76"	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
37"		90.0	98.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
40"		90.0	91.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
48"		75.0	75.0	90.0	100.0	90.0	99.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
53-1/8"		68.0	68.0	90.0	100.0	89.0	89.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
26-1/2"	80"	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
37"		93.0	93.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
40"		86.0	86.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
48"		72.0	72.0	90.0	100.0	90.0	94.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	100.0
53-1/8"		65.0	65.0	90.0	97.0	85.0	85.0	90.0	100.0	90.0	100.0	90.0	100.0	90.0	99.0	90.0	97.0

ALL OTHER ANCHORS PER
ELEVATION ON SHEET 1 OF 8

FPA FL#20804.1

NO.	DATE		REVISIONS
1			
2			
3			
4			
5			

FBC2023

SEAL

CHRISTOPHER STANTON

LICENSE

No 69316

STATE OF

FLORIDA

PROFESSIONAL ENGINEER

CHRISTOPHER STANTON, P.E.

FLA #148316

STANTON ENGINEERING, INC.

STRUCTURAL ENGINEERING SERVICES

2701 NW BOCA RATON BLVD, SUITE 204

BOCA RATON, FL 33431

TEL: (561) 393-1003 FAX: (561) 393-1008

SERIES 535 ALUMINUM FIXED WINDOW (L.M.I.)

SOL-A-TROL

aluminum products, inc.

4101 N.W. 132nd Street

Miami, Florida 33054

Phone: (305) 681-2020

Fax: (305) 681-2035

SCALE: NOTED

DATE: 10/23/23

DRAWN BY: DGI

CHECKED BY: C.S.

535FW

DRAWING NO.

SHEET NO.

7 of 8



FBC2023 	
STANTON ENGINEERING, INC. STRUCTURAL ENGINEERING SERVICES 2701 NW BOCA RATON BLVD. SUITE 204 BOCA RATON, FL 33431 TEL: (561) 393-1003 FAX: (561) 393-1008	
SERIES 535 ALUMINUM FIXED WINDOW (L.M.I.)	 SOL-A-TROL aluminum products, inc. 4101 N.W. 132nd Street Miami, Florida 33054 Phone: (305) 681-2020 Fax: (305) 681-2035
SCALE: NOTED	
DATE: 10/23/23	
DRAWN BY: DGI	
CHECKED BY: C.S.	
535FW	
DRAWING NO.	
SHEET NO.	
8 of 8	