

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/14/2023	R.L.

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: ALUMINUM 6063-T5 AND 6063-T6.
11. UNITS MUST BE GLAZED PER ASTM E1300, SEE SHEET 2 FOR GLASS DETAILS.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS UP TO WIND ZONE 3.

13. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #12 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/8" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 1/4" TAPCON WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #12 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. ALL FASTENERS TO BE CORROSION RESISTANT.
17. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - 17.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - 17.2. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - 17.3. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
 - 17.4. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR ALUMINUM 6063-T5 FU=30KSI .125" THICK MINIMUM

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATION
3 - 6	INSTALLATION DETAILS
7	COMPONENTS

BOYD ALUMINUM MANUFACTURING
3248 EAST DIVISION
SPRINGFIELD, MO 65801

2400 SERIES FIXED OVER CASEMENT
OUTSWING WINDOW - IMPACT
NOTES

DRAWN:
A.R.

DWG NO.
08-03601

REV
A


SCALE NTS

DATE 09/03/2020

SHEET 1 OF 7


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 08/15/2023

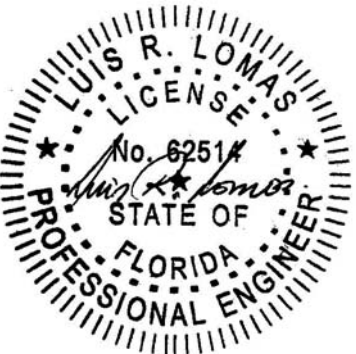


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/14/2023	R.L.

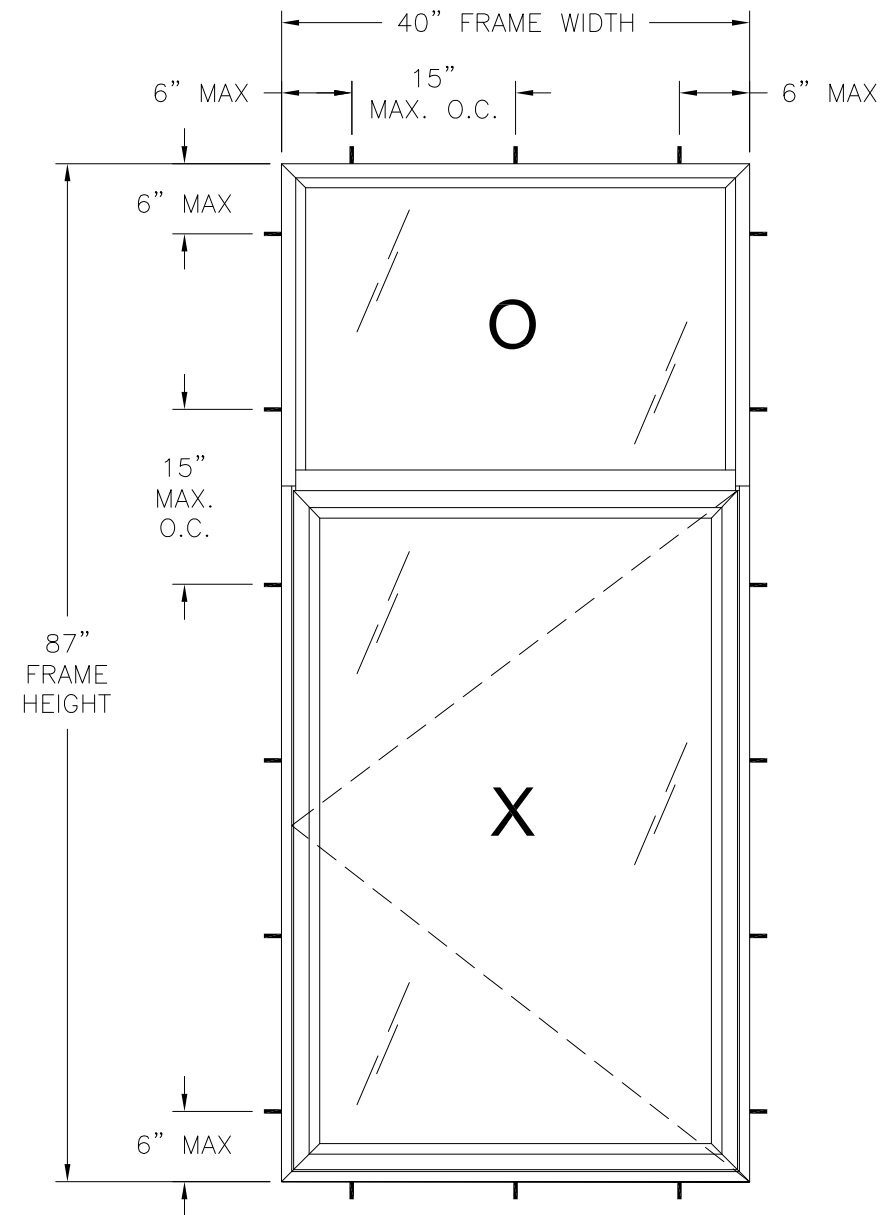

- NOTES:
1. SASH SIZE: 37 7/8" X 58"
 2. UPPER D.L.O.: 35 7/8" X 24 1/8"
 3. LOWER D.L.O.: 33 15/32" X 53 15/32"

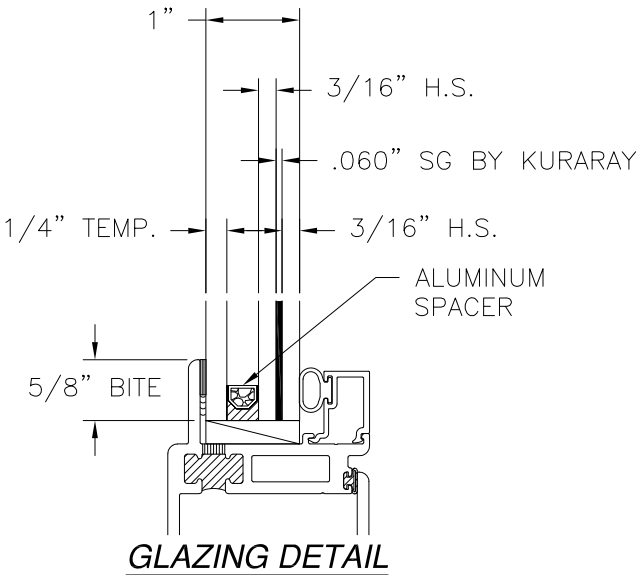

2400 SERIES FIXED OVER CASEMENT OUTSWING WINDOW
NON-IMPACT
EXTERIOR VIEW

DESIGN PRESSURE RATING	IMPACT RATING
$\pm 70.0\text{PSF}$	LARGE AND SMALL MISSILE IMPACT

MISSILE LEVEL D, WIND ZONE 3
40" X 87" UNIT SHOWN. OTHER SIZES APPROVED AS LONG AS
FRAME AREA DOES NOT EXCEED 24.16 FT²

HARDWARE SCHEDULE


A.	(3) BUTT HINGES AT 7" FROM EACH END AND AT MID SPAN OF SASH
B.	(1) 3 POINT EURO-TRACK SYSTEM WITH DRUMS INTERLOCKING WITH KEEPERS @ 22 1/2" O.C. BY ADVANTAGE HARDWARE

BOYD ALUMINUM MANUFACTURING 3248 EAST DIVISION SPRINGFIELD, MO 65801		
2400 SERIES FIXED OVER CASEMENT OUTSWING WINDOW – IMPACT ELEVATION		
DRAWN: A.R.	DWG NO. 08-03601	REV A
SCALE NTS	DATE 09/03/2020	SHEET 2 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		


SIGNED: 08/15/2023



Luis R. Lomas P.E.
FL No.: 62514

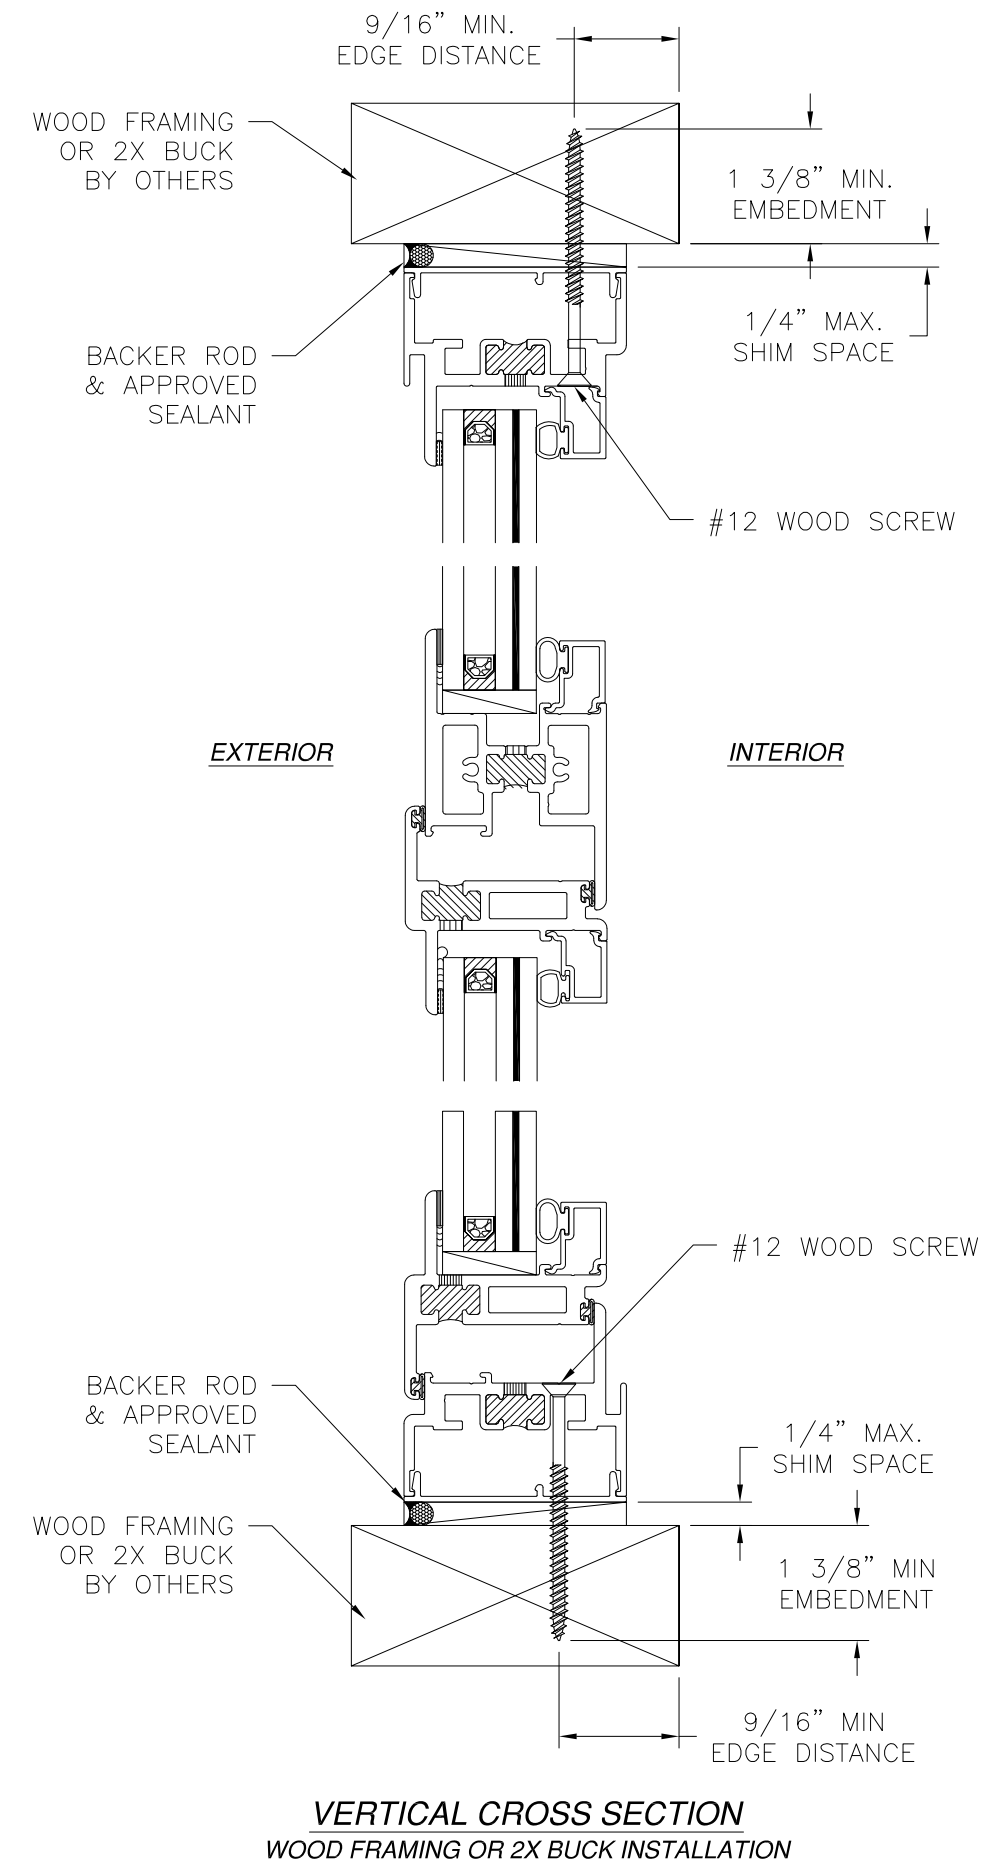

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

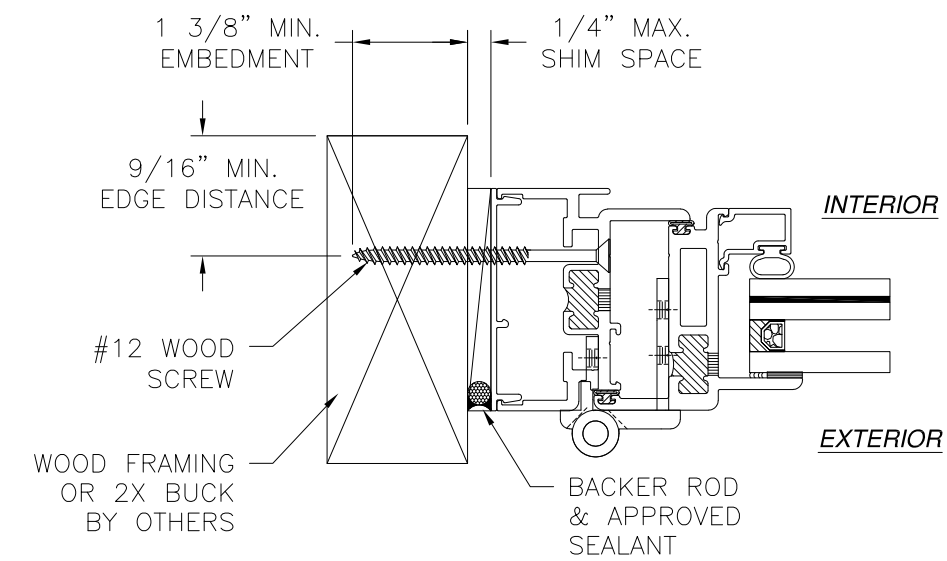

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION
CASEMENT WINDOW SHOWN



- NOTES:**
1. **INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.**
 2. **PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112**

BOYD ALUMINUM MANUFACTURING		
3248 EAST DIVISION SPRINGFIELD, MO 65801		
2400 SERIES FIXED OVER CASEMENT OUTSWING WINDOW – IMPACT INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03601	REV A
SCALE NTS	DATE 09/03/2020	SHEET 3 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		


SIGNED: 08/15/2023

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/14/2023	R.L.

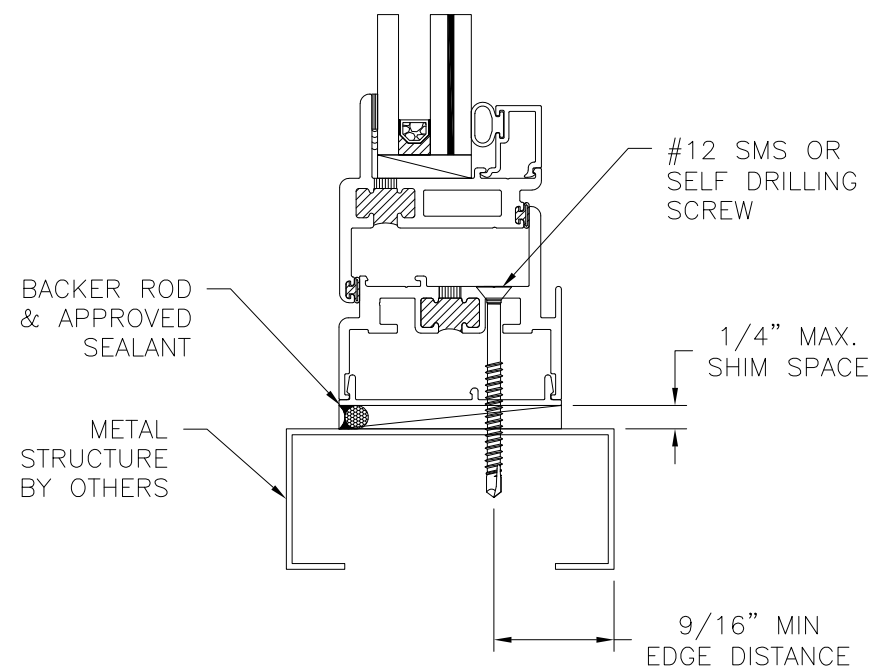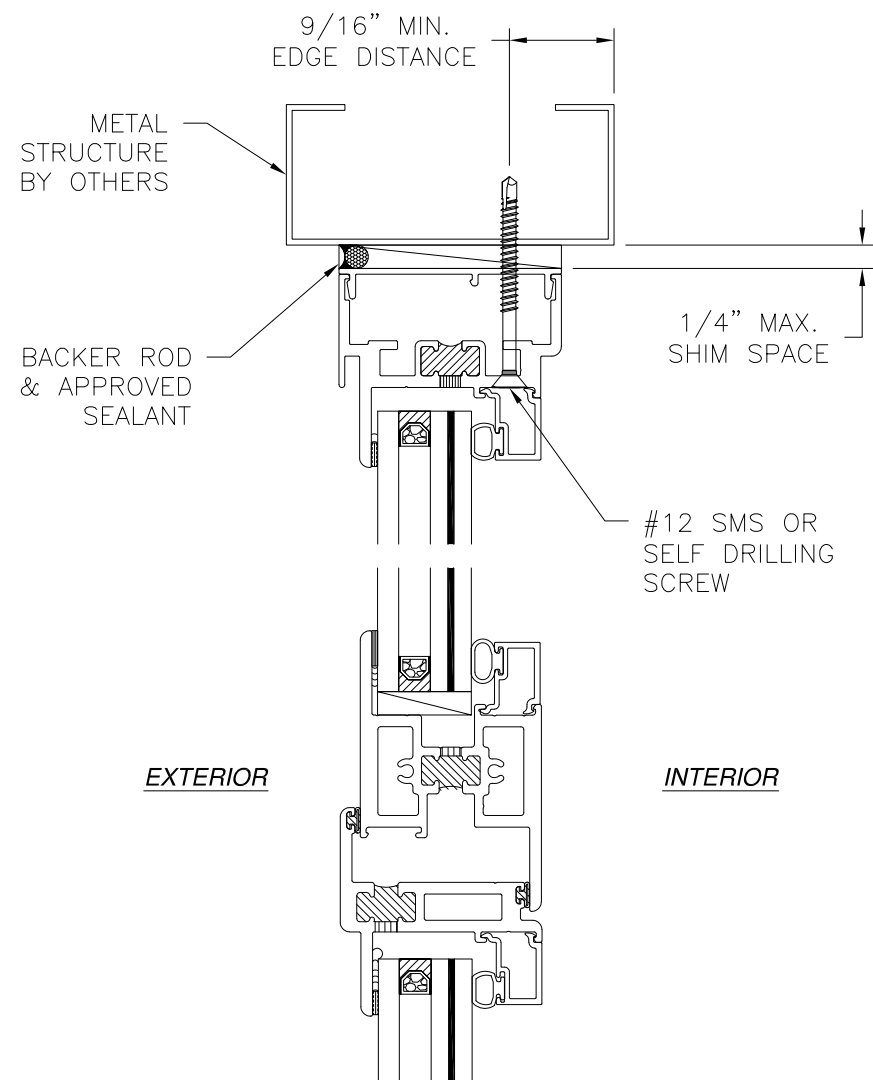

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

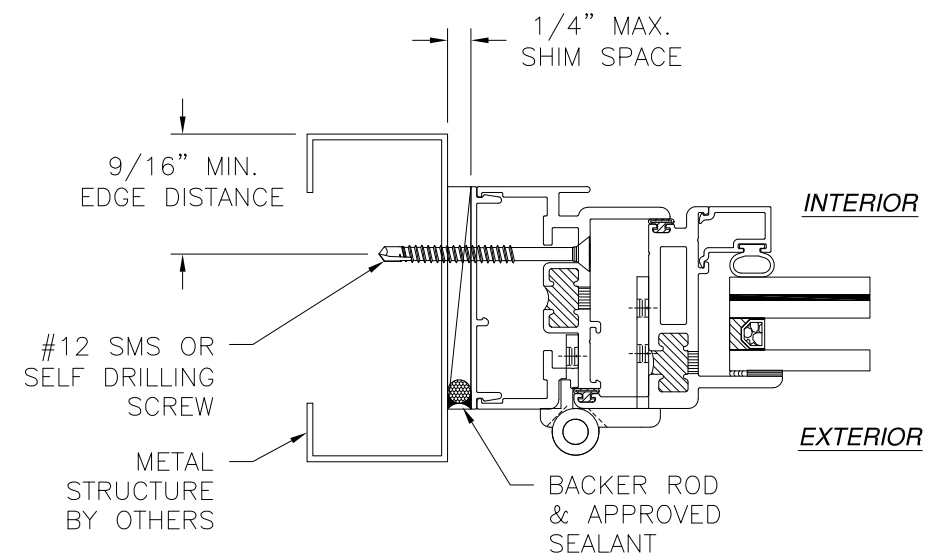

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION
CASEMENT WINDOW SHOWN


NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/14/2023	R.L.



BOYD ALUMINUM MANUFACTURING		
3248 EAST DIVISION SPRINGFIELD, MO 65801		
2400 SERIES FIXED OVER CASEMENT OUTSWING WINDOW – IMPACT INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03601	REV A
SCALE NTS	DATE 09/03/2020	SHEET 4 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 08/15/2023

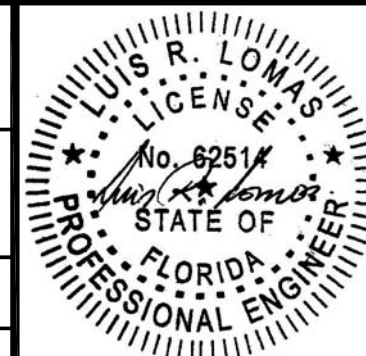


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/14/2023	R.L.

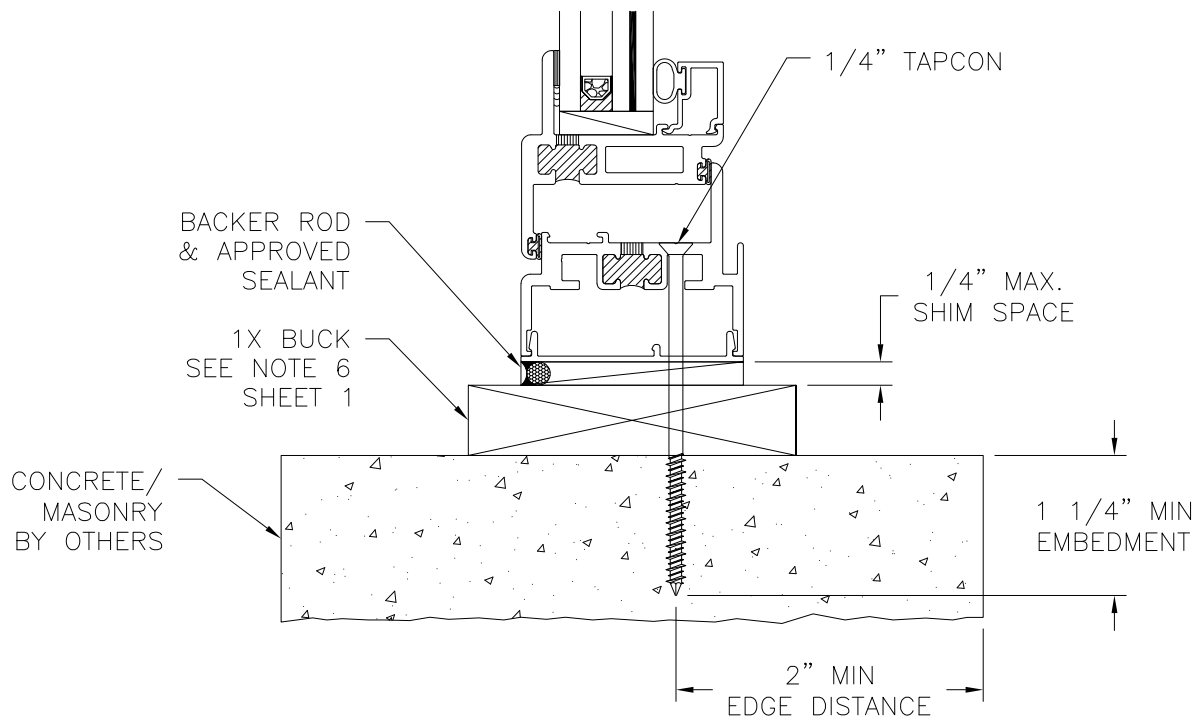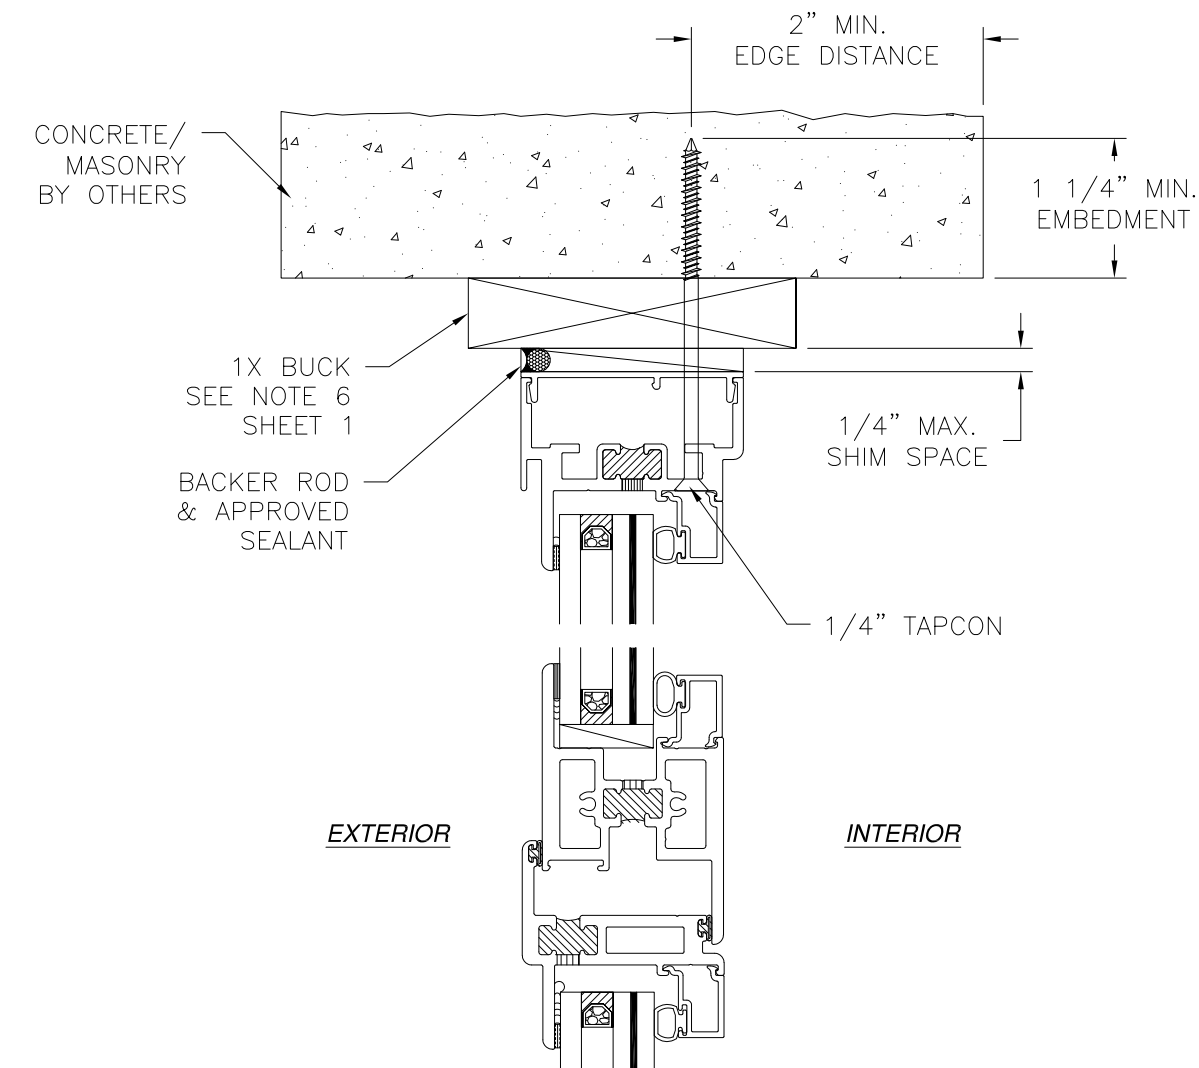

VERTICAL CROSS SECTION
 CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
 FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
 JAMB INSTALLATION DETAIL

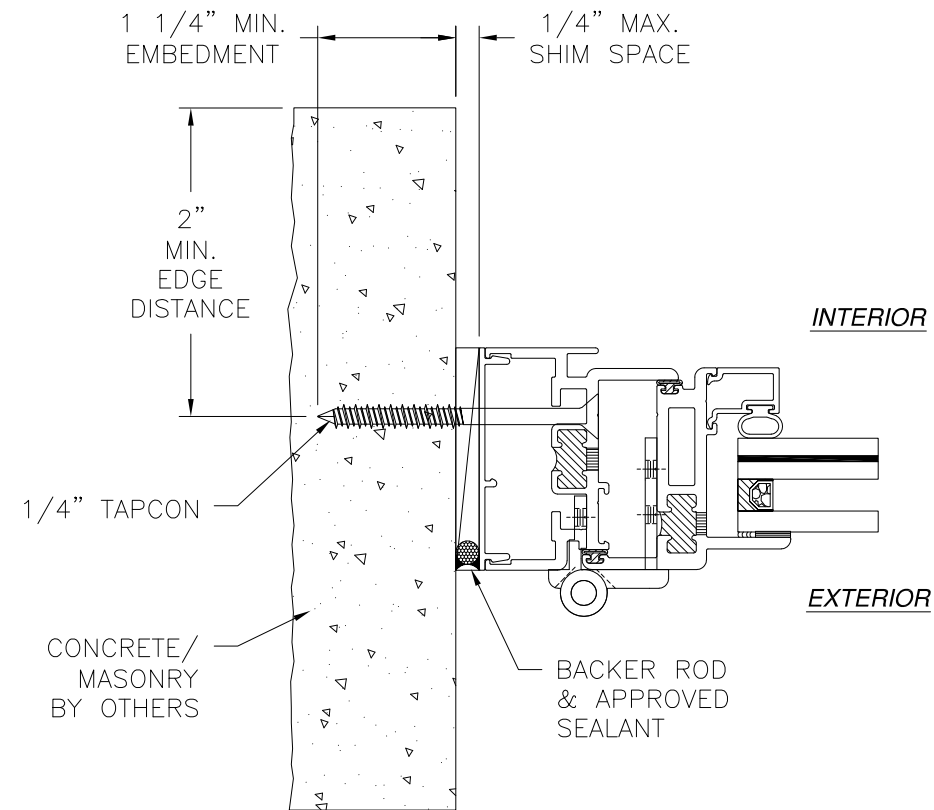

JAMB INSTALLATION DETAIL
 CONCRETE/MASONRY WITHOUT 1X BUCK INSTALLATION
 FOR CONCRETE/MASONRY INSTALLATION WITH 1X BUCK REFER TO
 HEAD AND SILL INSTALLATION DETAILS
 CASEMENT WINDOW SHOWN

- NOTES:**
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 08/15/2023

BOYD ALUMINUM MANUFACTURING

3248 EAST DIVISION
SPRINGFIELD, MO 65801

2400 SERIES FIXED OVER CASEMENT
OUTSWING WINDOW – IMPACT
INSTALLATION DETAILS

DRAWN: A.R.

DWG NO. 08-03601

REV A

SCALE NTS


DATE 09/03/2020

SHEET 5 OF 7

L. ROBERTO LOMAS P.E.


208 7th Ave, INDIALANTIC, FL 32903

434-688-0609 rllomas@lrlomaspe.com

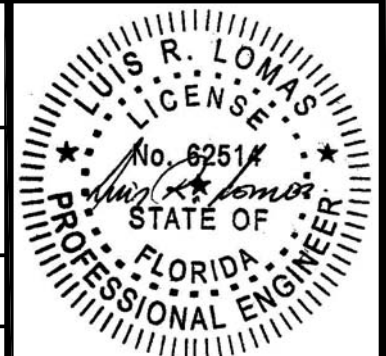


Luis R. Lomas P.E.
 FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/14/2023	R.L.

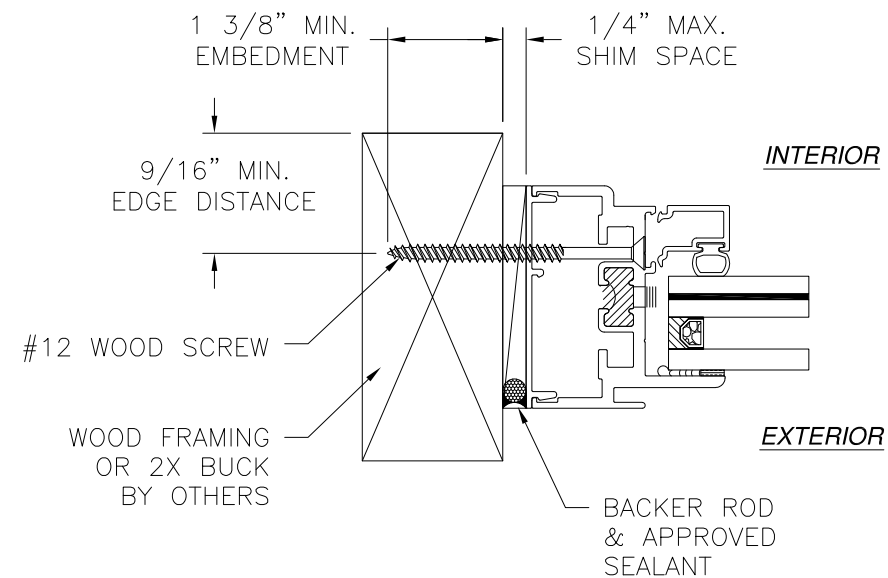

JAMB INSTALLATION DETAIL
FIXED WINDOW
WOOD FRAMING OR 2X BUCK INSTALLATION

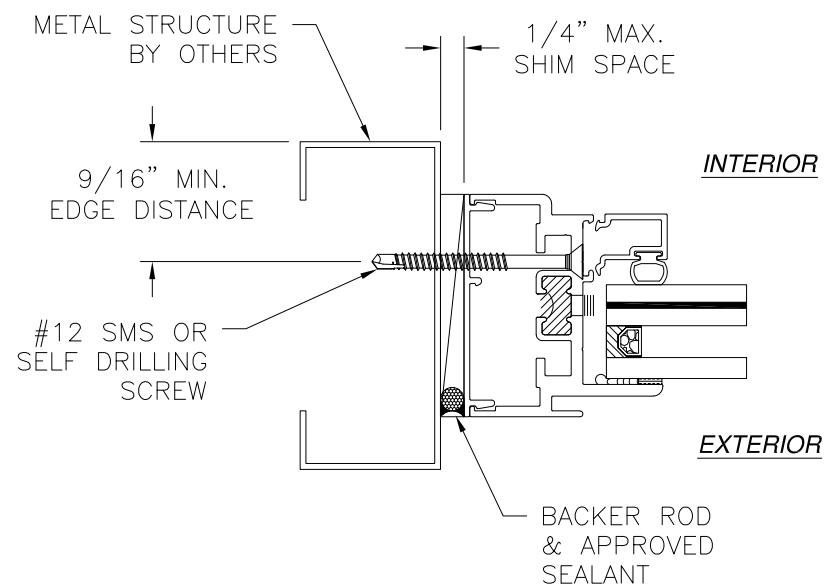

JAMB INSTALLATION DETAIL
FIXED WINDOW
METAL STRUCTURE INSTALLATION

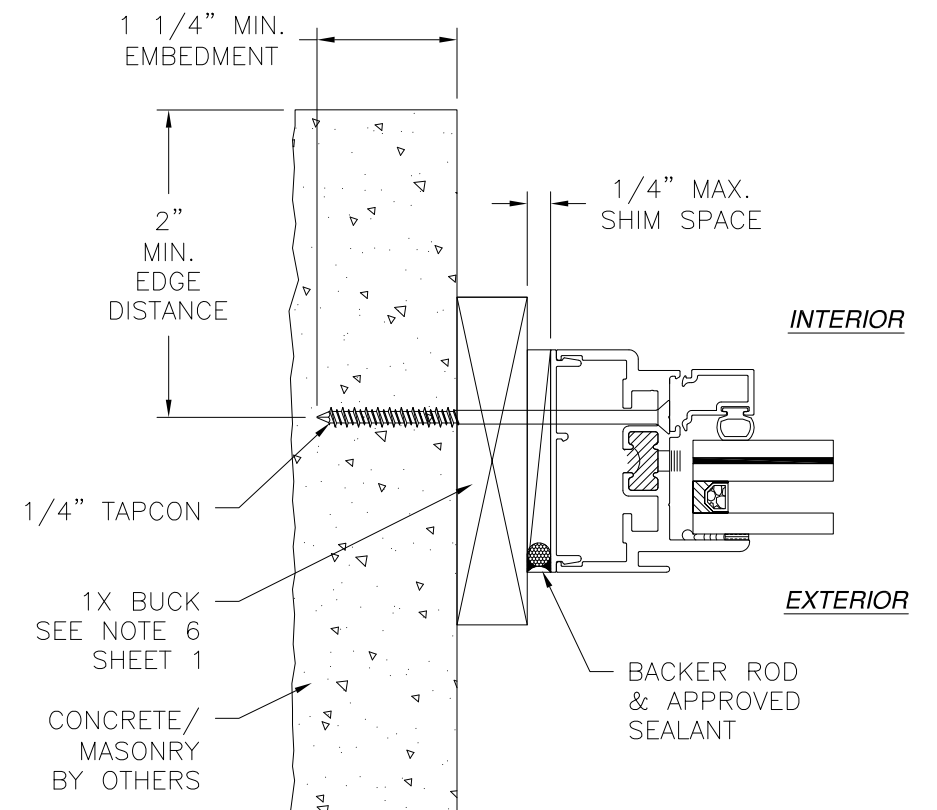


JAMB INSTALLATION DETAIL
FIXED WINDOW
CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
FOR INSTALLATION WITHOUT 1X BUCK REFER TO
JAMB INSTALLATION DETAIL SHEET 5

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 08/15/2023

BOYD ALUMINUM MANUFACTURING		
3248 EAST DIVISION SPRINGFIELD, MO 65801		
2400 SERIES FIXED OVER CASEMENT OUTSWING WINDOW – IMPACT INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03601	REV A
SCALE NTS	DATE 09/03/2020	SHEET 6 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

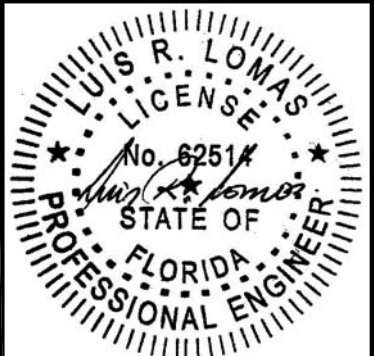


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/14/2023	R.L.

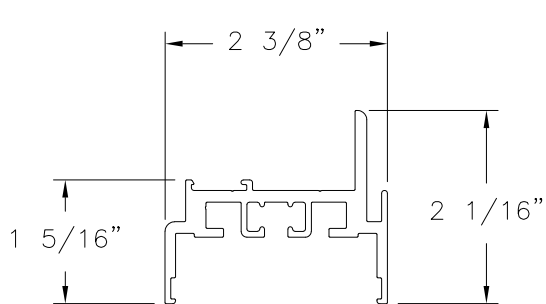


MAIN FRAME (BAM-925)
ALUMINUM 6063-T5

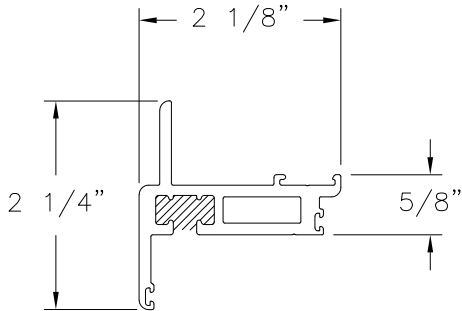

SASH (BAM-914)
ALUMINUM 6063-T5

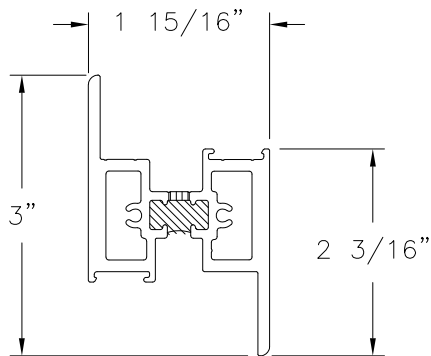

INTERMEDIATE BOTTOM (BAM-905)
ALUMINUM 6063-T6

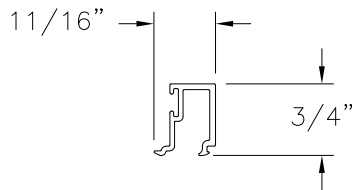

GLAZING BEAD (BAM-922)
ALUMINUM 6063-T5

SIGNED: 08/15/2023

BOYD ALUMINUM MANUFACTURING 3248 EAST DIVISION SPRINGFIELD, MO 65801		
2400 SERIES FIXED OVER CASEMENT OUTSWING WINDOW – IMPACT COMPONENTS		
DRAWN: A.R.	DWG NO. 08-03601	REV A
SCALE NTS	DATE 09/03/2020	SHEET 7 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

Luis R. Lomas P.E.
FL No.: 62514