

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/15/2023	R.L.

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2” UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1–1/2” OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: ALUMINUM 6063–T5.
11. UNITS MUST BE GLAZED PER ASTM E1300.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.

13. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #12 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/8” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 1/4” ELCO CRETE–FLEX WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 1 1/2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #12 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. ALL FASTENERS TO BE CORROSION RESISTANT.
17. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
- 17.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
- 17.2. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
- 17.3. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
- 17.4. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI OR ALUMINUM 6063–T5 FU=30KSI .125” THICK MINIMUM

SIGNED: 08/15/2023

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATION
3 – 6	INSTALLATION DETAILS
7	COMPONENTS

BOYD ALUMINUM MANUFACTURING

3248 EAST DIVISION
SPRINGFIELD, MO 65801

4300 SERIES FIXED OVER PROJECT OUT WINDOW
NON-IMPACT
NOTES

DRAWN:
A.R.

DWG NO.
08-03608


REV
A

SCALE NTS

DATE 08/25/2020


SHEET 1 OF 7

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

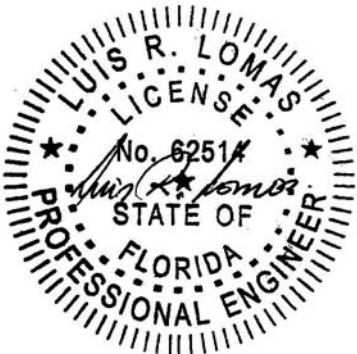

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/15/2023	R.L.

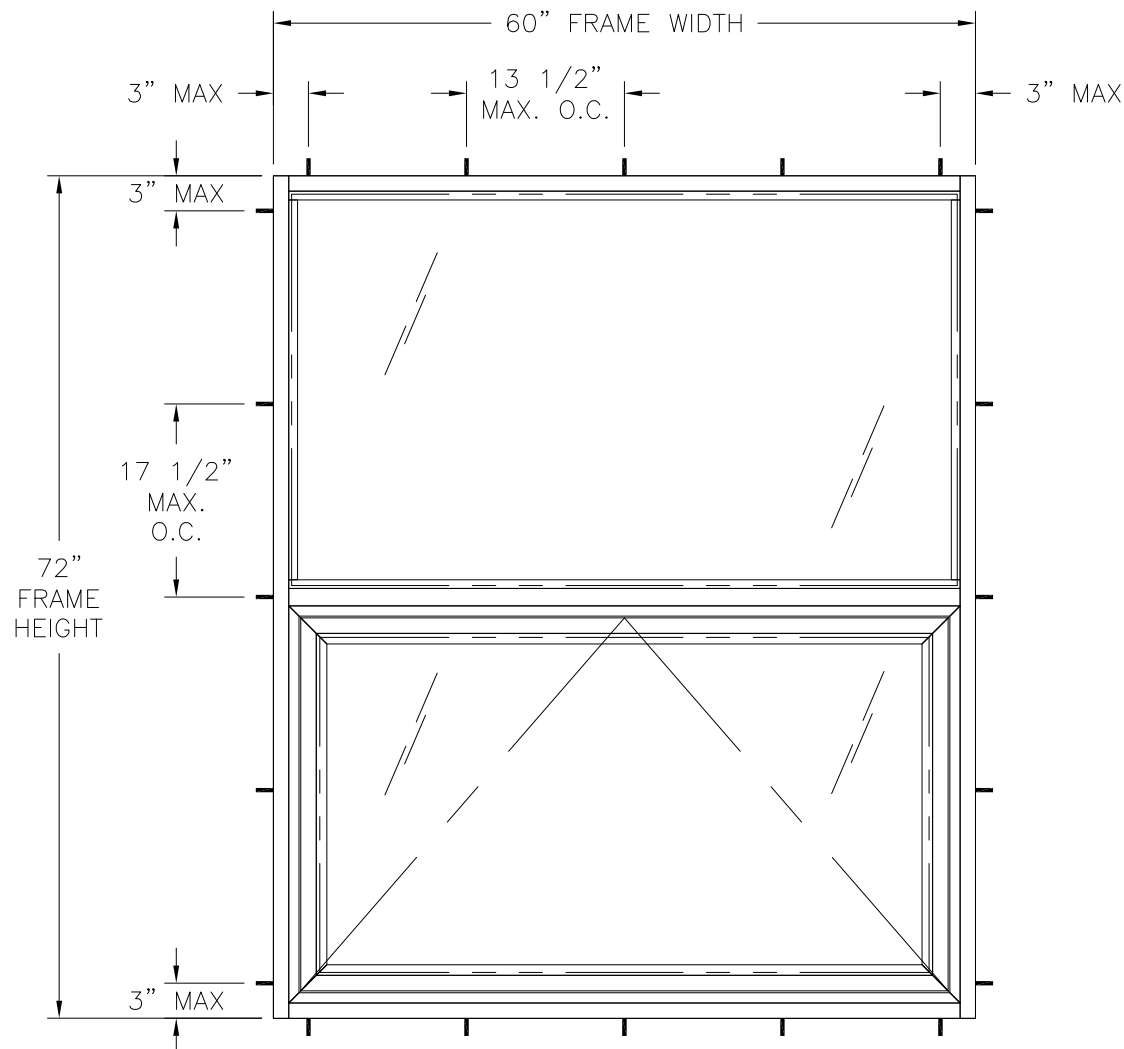

- NOTES:
- PROJECT OUT SASH SIZE: 55 5/16" X 31 15/16"
 - PROJECT OUT D.L.O.: 50 7/8" X 27 7/16"
 - FIXED D.L.O.: 55 7/8" X 32 1/2"

4300 SERIES FIXED PROJECT OUT WINDOW
NON-IMPACT
EXTERIOR VIEW

DESIGN PRESSURE RATING	IMPACT RATING
±100.0PSF	NONE

60" X 72" UNIT SHOWN. OTHER SIZES APPROVED AS LONG AS
FRAME AREA DOES NOT EXCEED 30.0 FT²

HARDWARE SCHEDULE	
A.	4-BAR HINGES AT BOTH JAMBS
B.	PO CAM HANDLES, 9" FROM EACH SASH CORNER AND ONE AT CENTERLINE

BOYD ALUMINUM MANUFACTURING
3248 EAST DIVISION
SPRINGFIELD, MO 65801

4300 SERIES FIXED OVER PROJECT OUT WINDOW
NON-IMPACT
ELEVATION

DRAWN:
A.R.

DWG NO.
08-03608

REV
A

SCALE NTS


DATE 08/25/2020

SHEET 2 OF 7


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 08/15/2023

Luis R. Lomas P.E.
FL No.: 62514

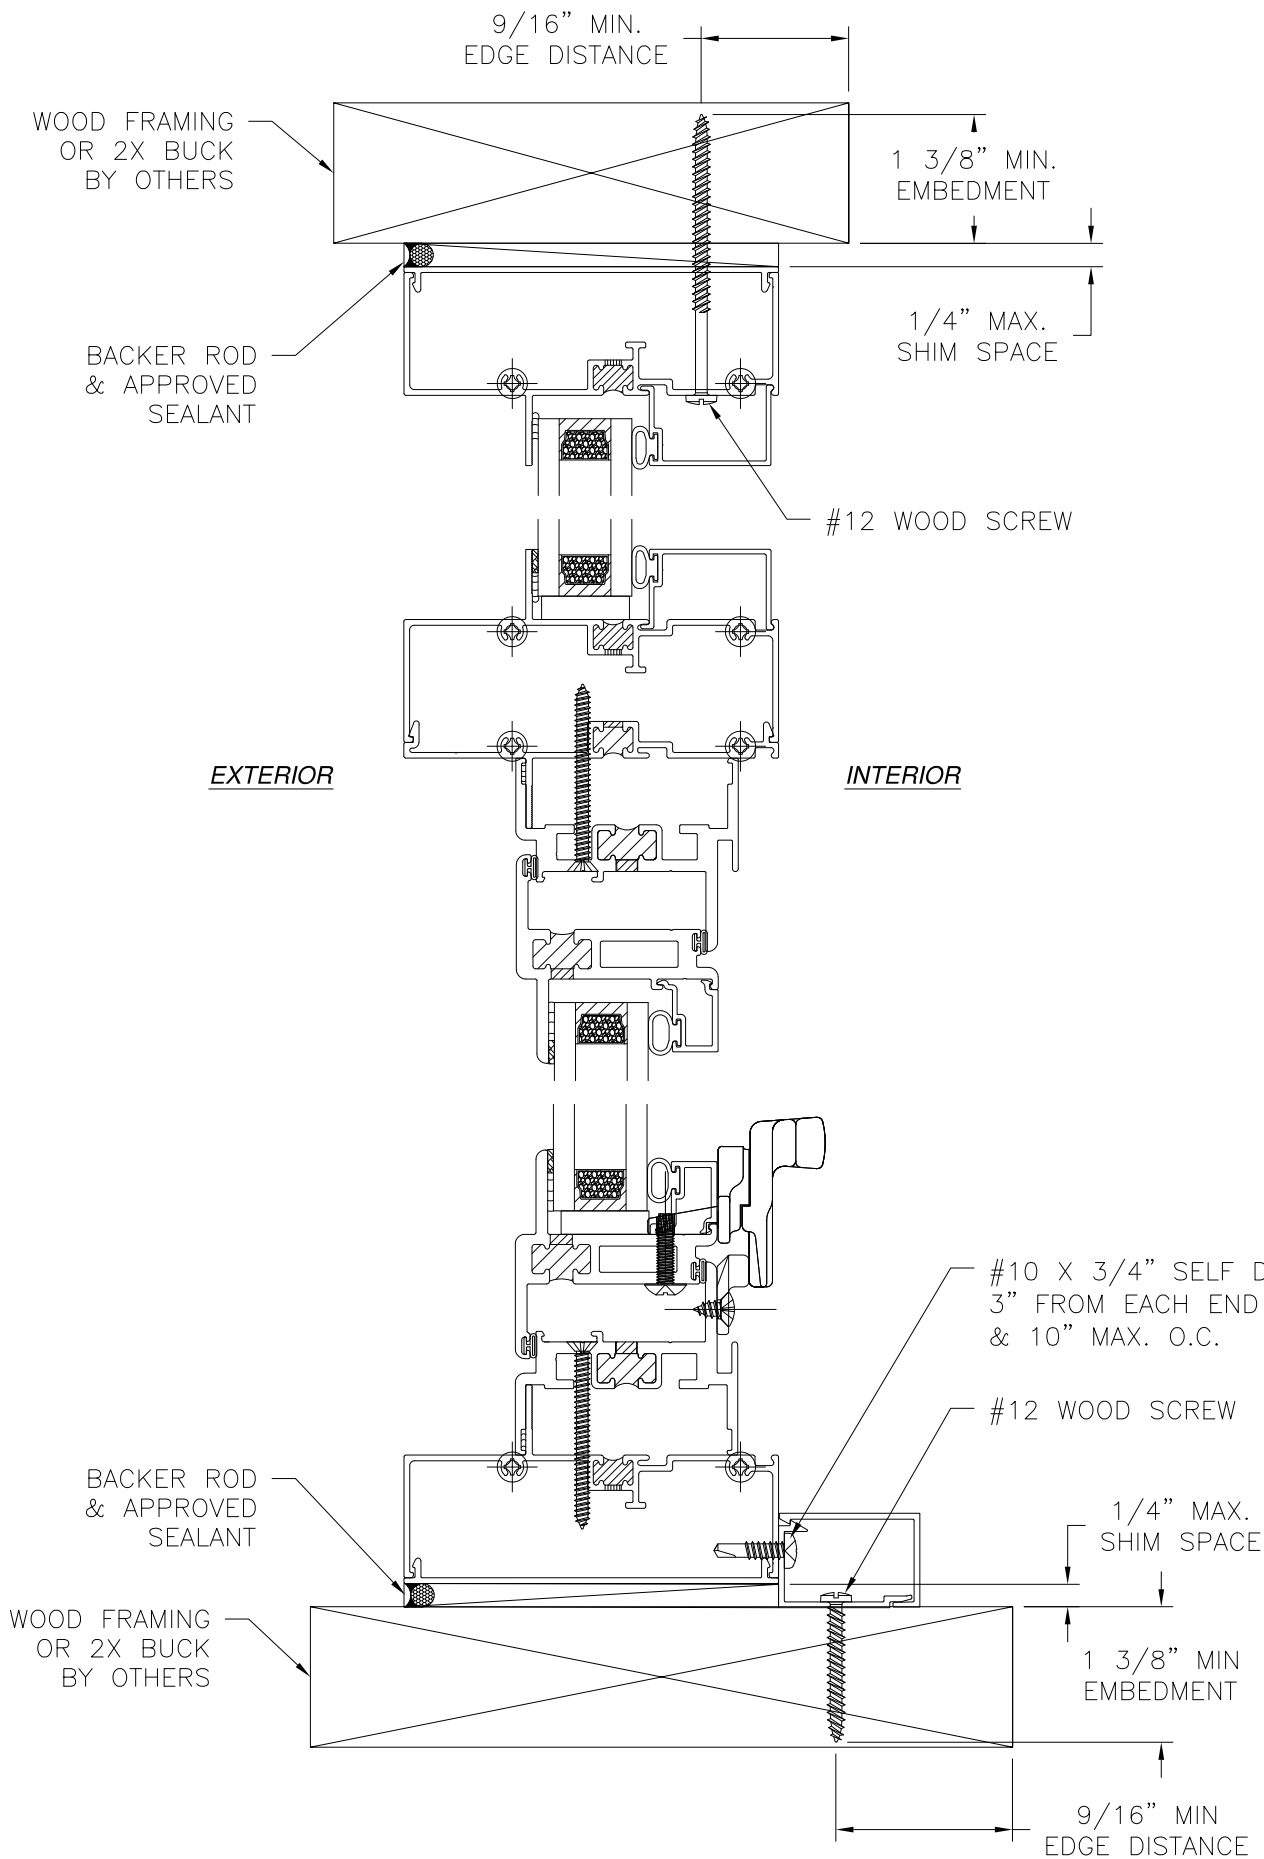

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

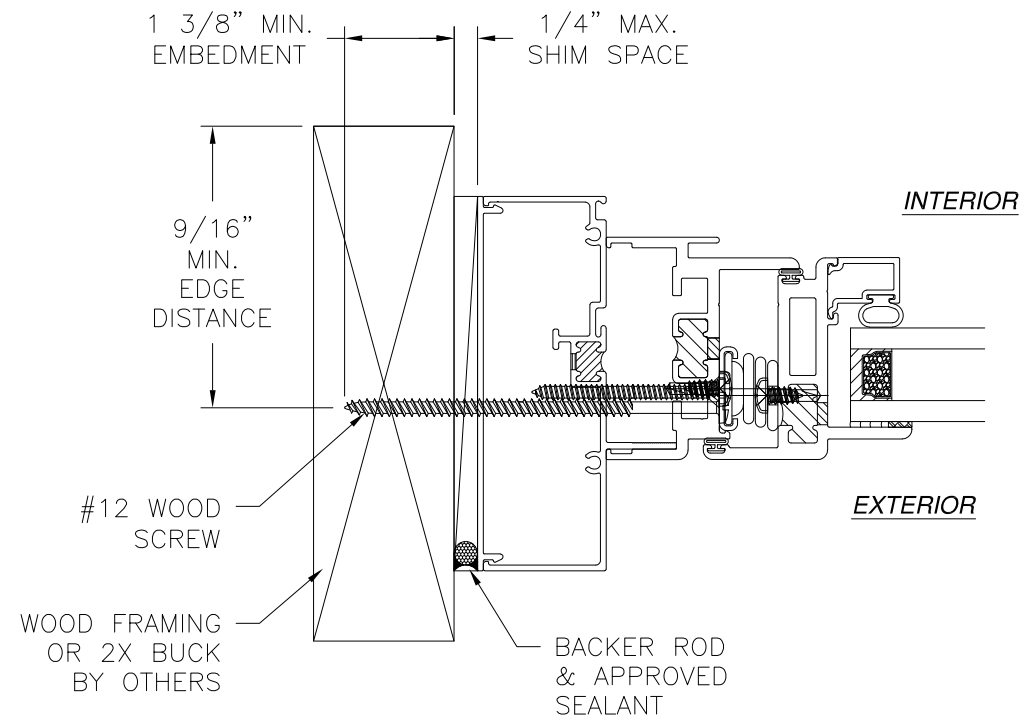


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION
PROJECT OUT WINDOW SHOWN

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/15/2023	R.L.

BOYD ALUMINUM MANUFACTURING		
3248 EAST DIVISION SPRINGFIELD, MO 65801		
4300 SERIES FIXED OVER PROJECT OUT WINDOW NON-IMPACT INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03608	REV A
SCALE NTS	DATE 08/25/2020	SHEET 3 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

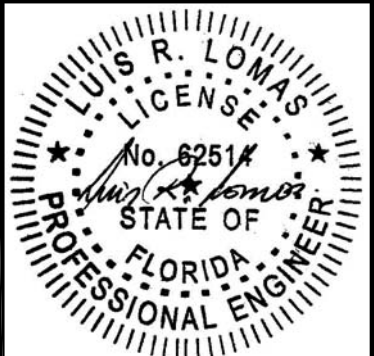


Luis R. Lomas P.E.
FL No.: 62514

SIGNED: 08/15/2023

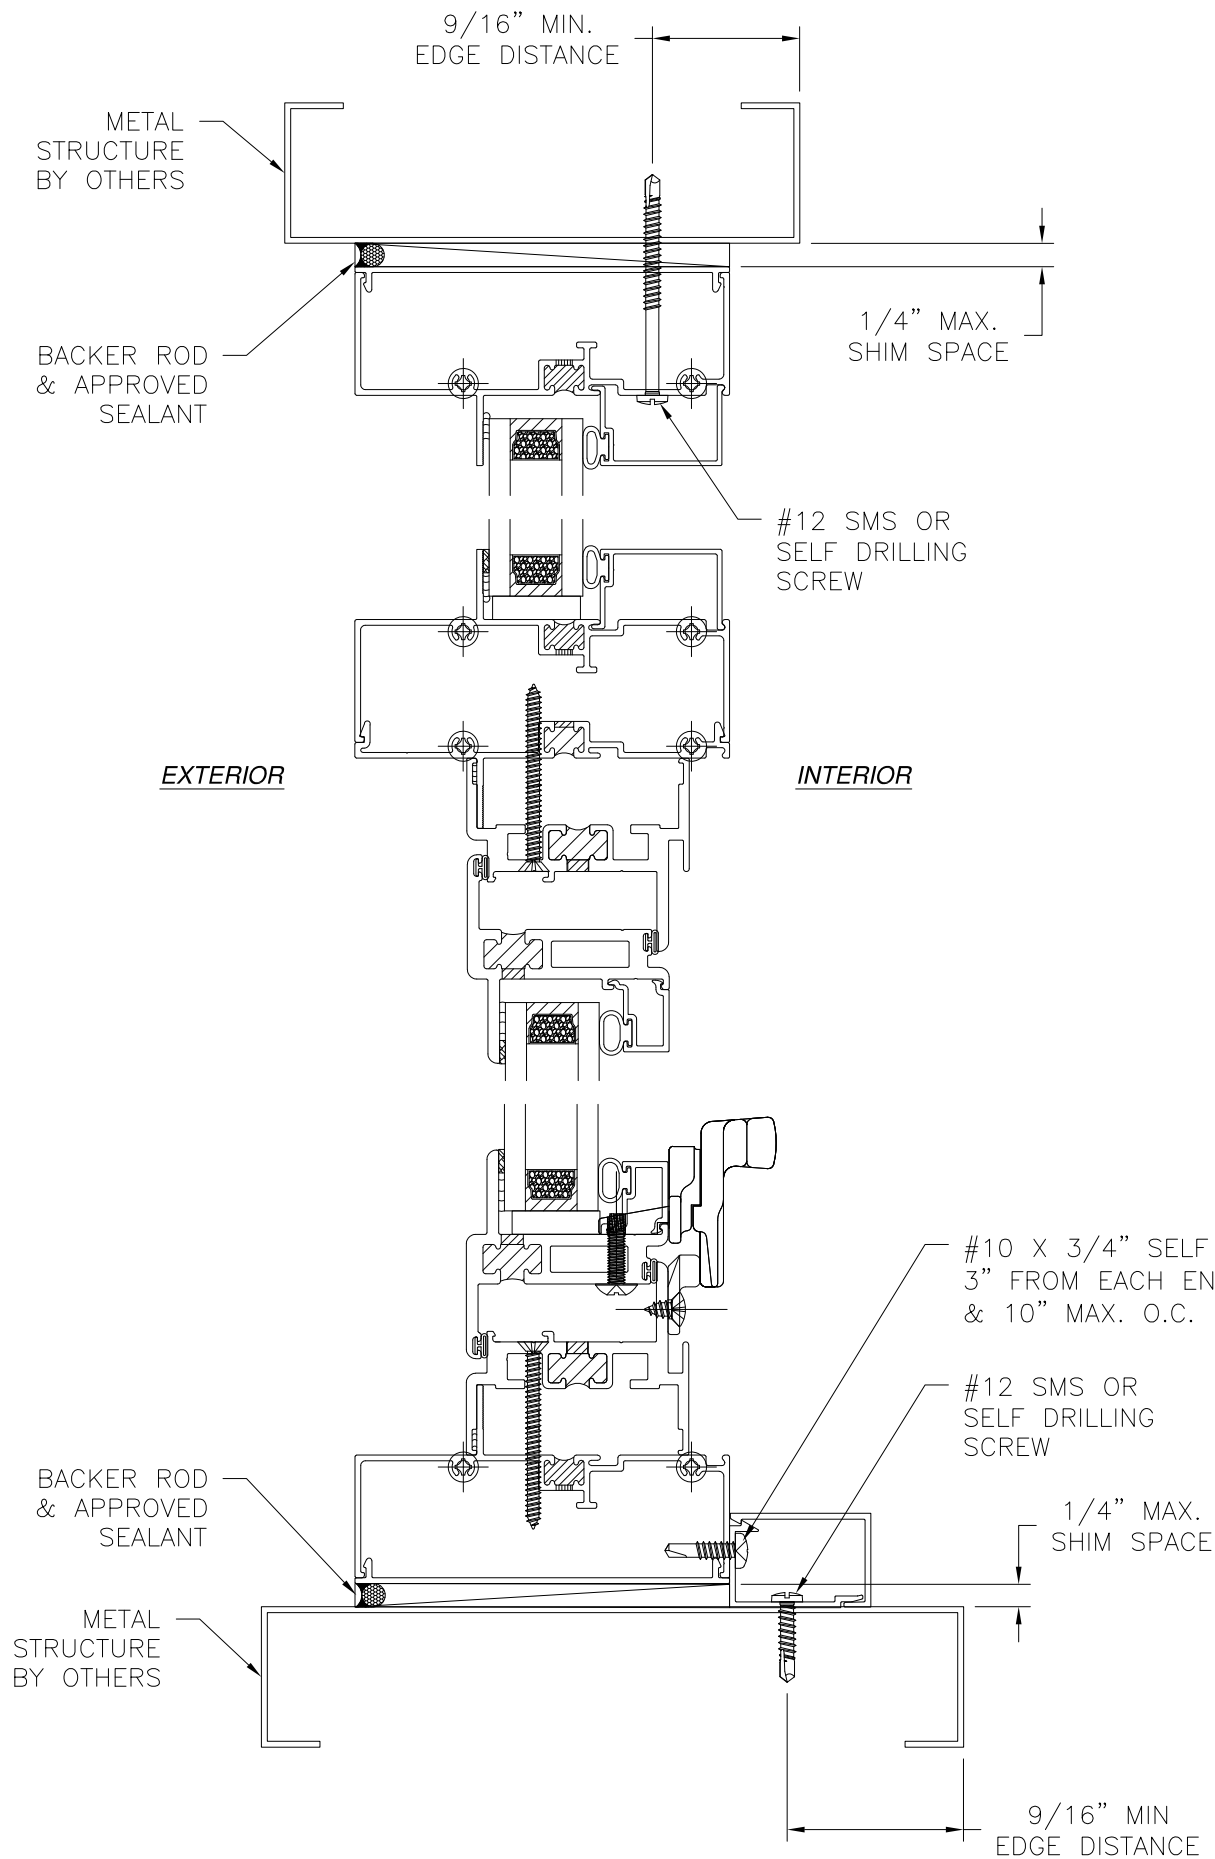

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

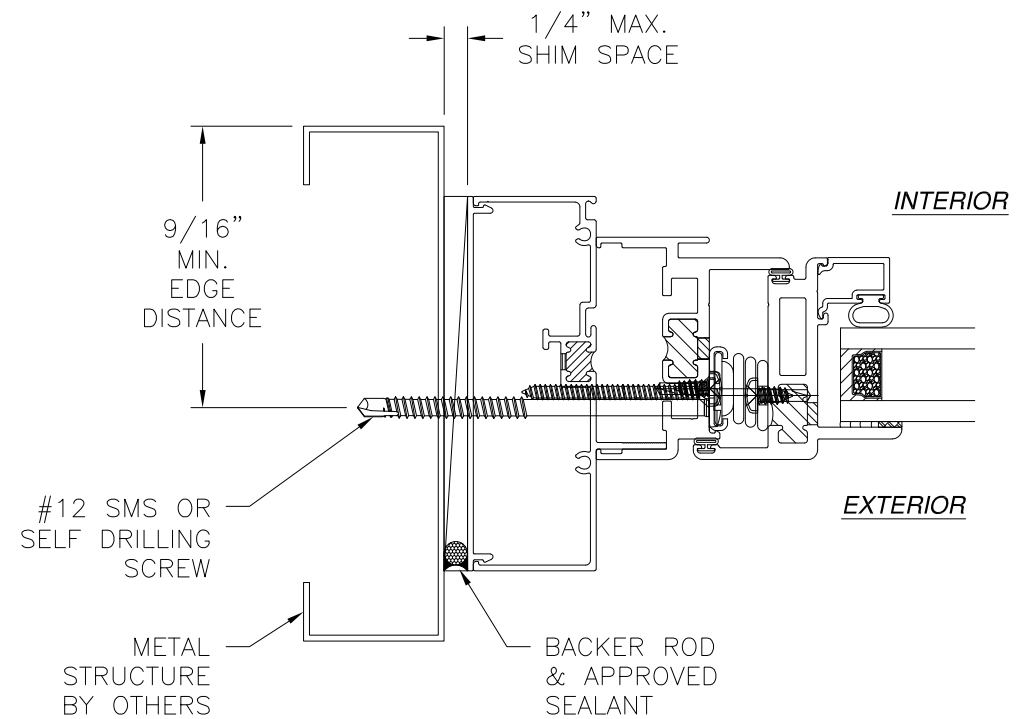

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION
PROJECT OUT WINDOW SHOWN


NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/15/2023	R.L.


BOYD ALUMINUM MANUFACTURING		
3248 EAST DIVISION SPRINGFIELD, MO 65801		
4300 SERIES FIXED OVER PROJECT OUT WINDOW NON-IMPACT INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03608	REV A
SCALE NTS	DATE 08/25/2020	SHEET 4 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 08/15/2023

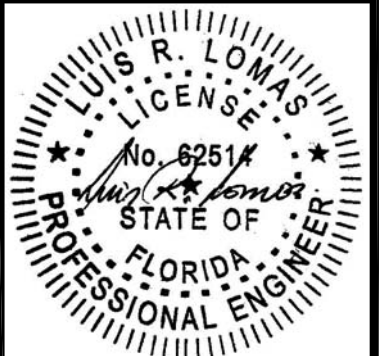


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/15/2023	R.L.

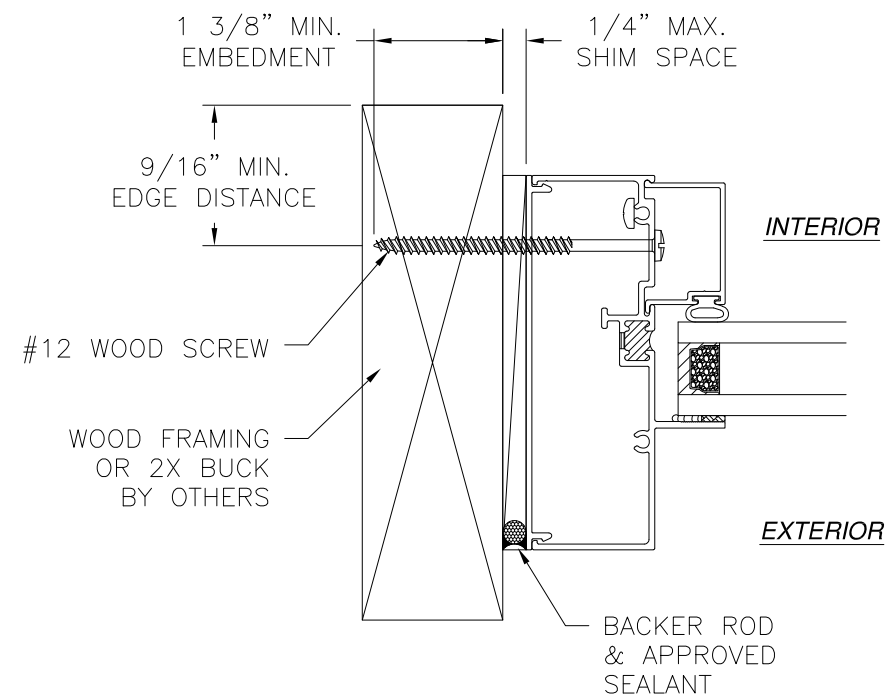

JAMB INSTALLATION DETAIL
FIXED WINDOW
WOOD FRAMING OR 2X BUCK INSTALLATION

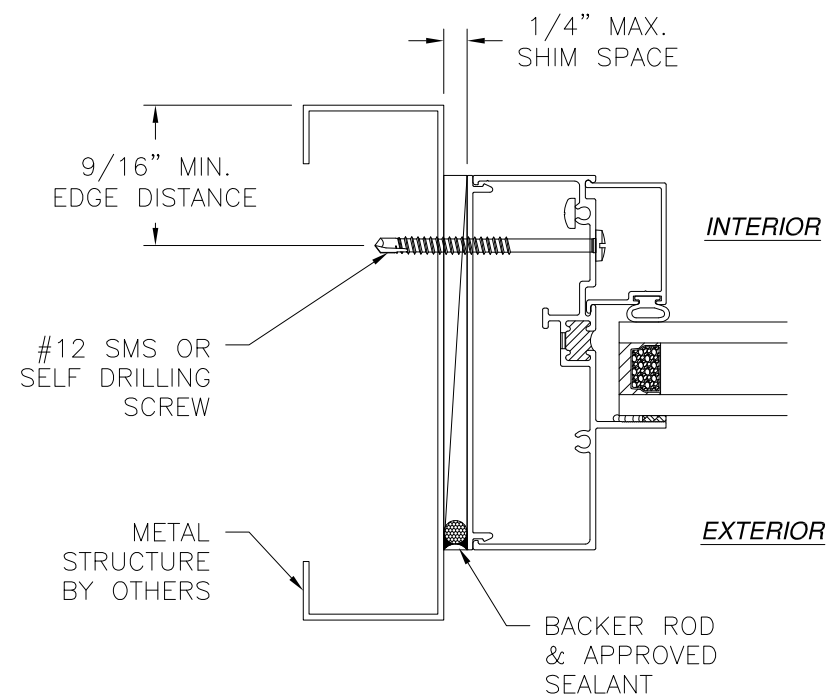

JAMB INSTALLATION DETAIL
FIXED WINDOW
METAL STRUCTURE INSTALLATION

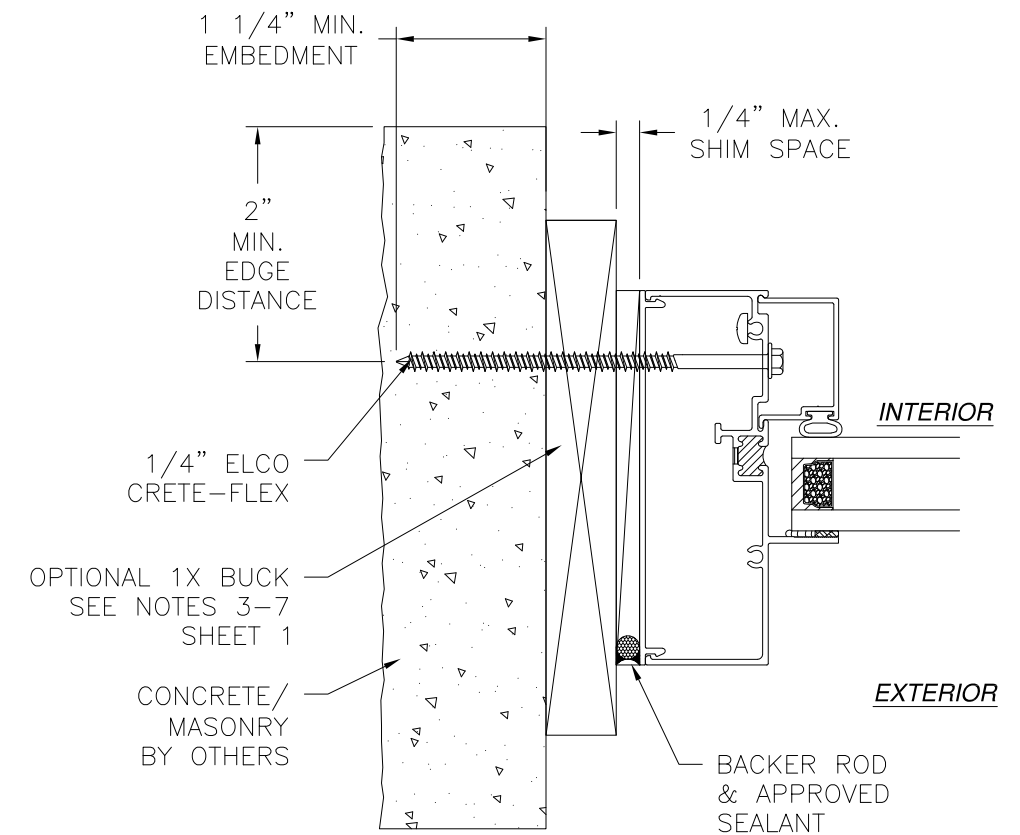


JAMB INSTALLATION DETAIL
FIXED WINDOW
CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
FOR INSTALLATION WITHOUT 1X BUCK REFER TO
JAMB INSTALLATION DETAIL SHEET 5

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 08/15/2023

BOYD ALUMINUM MANUFACTURING		
3248 EAST DIVISION SPRINGFIELD, MO 65801		
4300 SERIES FIXED OVER PROJECT OUT WINDOW NON-IMPACT INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03608	REV A
SCALE NTS	DATE 08/25/2020	SHEET 6 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

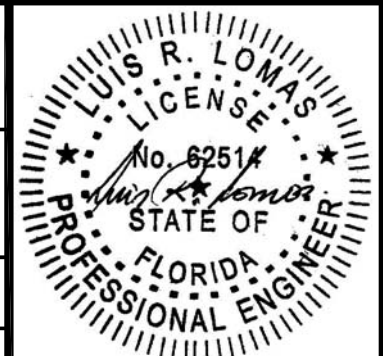


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER NEW CODE	08/15/2023	R.L.

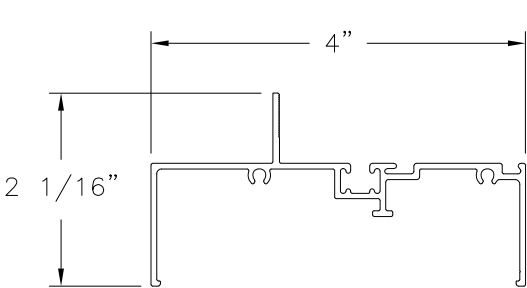


MAIN FRAME (BAM-834)
ALUMINUM 6063-T5

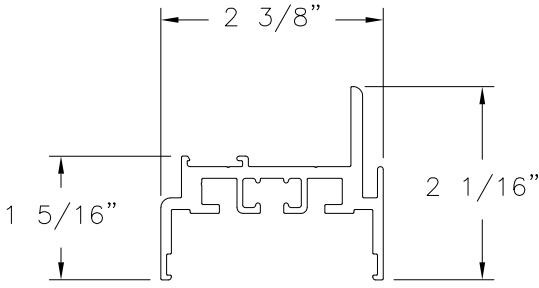


VENT FRAME (BAM-925)
ALUMINUM 6063-T5

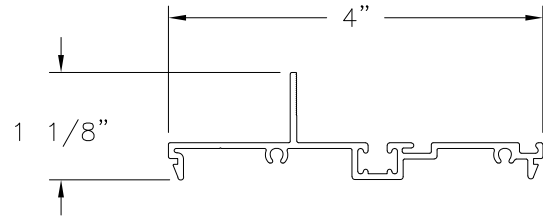


MAIN FRAME MULLION (BAM-845)
ALUMINUM 6063-T5

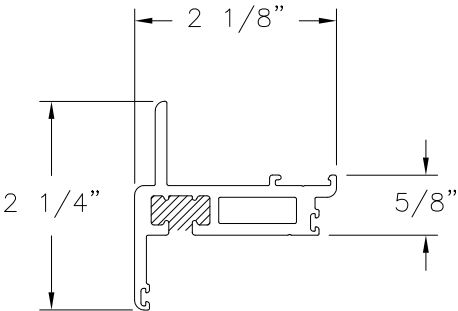


SASH (BAM-914)
ALUMINUM 6063-T5

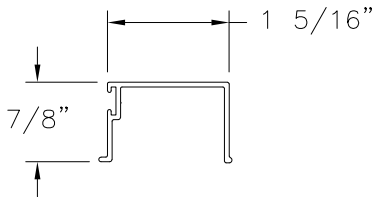


FIXED GLAZING BEAD (BAM-835)
ALUMINUM 6063-T5

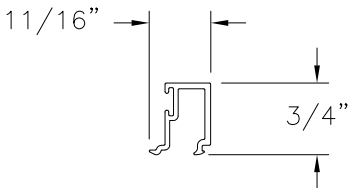

VENT GLAZING BEAD (BAM-922)
ALUMINUM 6063-T5

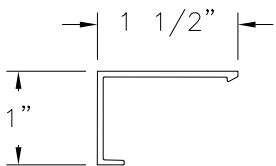

TRIM COVER (WLB-2004)
ALUMINUM 6063-T5

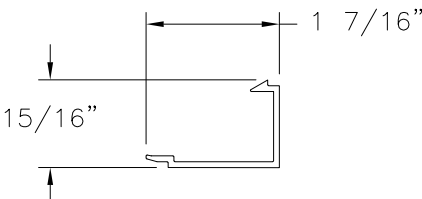

TRIM BASE (WLB-2005)
ALUMINUM 6063-T5

SIGNED: 08/15/2023

BOYD ALUMINUM MANUFACTURING 3248 EAST DIVISION SPRINGFIELD, MO 65801		
4300 SERIES FIXED OVER PROJECT OUT WINDOW NON-IMPACT COMPONENTS		
DRAWN: A.R.	DWG NO. 08-03608	REV A
SCALE NTS	DATE 08/25/2020	SHEET 7 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

Luis R. Lomas P.E.
FL No.: 62514